

CONFORMED SET

DECEMBER 2020

DOCUMENTS FOR THE CONSTRUCTION OF

CITY OF MORRO BAY


WATER RECLAMATION FACILITY LIFT STATION AND
OFFSITE PIPELINES



**VOLUME 2: TECHNICAL SPECIFICATIONS
(DIVISIONS 1-16)**

DECEMBER 2020

CONFORMED SET



ENGINEER:



WATER WORKS ENGINEERS, LLC.

THIS PAGE IS INTENTIONALLY BLANK

**CITY OF MORRO BAY
WATER RECLAMATION FACILITY LIFT STATION AND OFFSITE PIPELINES PROJECT
VOLUME 2 - TECHNICAL SPECIFICATIONS
TABLE OF CONTENTS**

Section	Title
DIVISION 1	
01110	SUMMARY OF WORK
01130	SPECIAL PROJECT CONSTRAINTS
01140	WATER POLLUTION CONTROL
01200	MEASUREMENT AND PAYMENT
01310	PROJECT MEETINGS
01320	PROGRESS SCHEDULE
01322	WEB BASED DOCUMENT CONTROL
01330	SUBMITTAL PROCEDURES
01400	QUALITY CONTROL
01420	REFERENCE STANDARDS AND ABBREVIATIONS
01505	MOBILIZATION
01500	TEMPORARY CONSTRUCTION FACILITIES AND UTILITIES
01550	TEMPORARY BYPASS PUMPING
01610	GENERAL PRODUCT REQUIREMENTS
01750	TESTING TRAINING STARTUP
01800	OPERATIONAL COMPLETION AND PROJECT CLOSEOUT
01810	CLEANING
DIVISION 2	
02140	DEWATERING
02200	SITE PREPARATION
02220	DEMOLITION
02300	EARTHWORK
02350	PIPE BORE AND JACK REQUIREMENTS
02410	SHAFT EXCAVATION AND SUPPORT SYSTEM
02420	TUNNEL PORTAL TREATMENT
02441	MICROTUNNELING TRENCHLESS CONSTRUCTION
02445	CASING PIPE FOR JACKING INSTALLATION
02450	PIPE RAMMING
02495	GEOTECHNICAL INSTRUMENTATION
02770	ASPHALT CONCRETE PAVEMENT
02830	CHAIN LINK FENCES AND GATES
02900	LANDSCAPE PLANTING
02930	FABRICATED STEEL GATES AND OPERATORS
02936	HYDROSEEDING
02970	LANDSCAPE MAINTENANCE
DIVISION 3	
03100	CONCRETE FORMWORK

Section	Title
03200	CONCRETE REINFORCING
03251	CONCRETE JOINTS
03300	CONTACT GROUTING
03300	CAST-IN-PLACE CONCRETE
03400	PRECAST CONCRETE
03420	PRECAST FRP-PVC MANHOLE
03600	GROUT
03700	COMPACTION GROUTING
03740	CRACK REPAIR BY EPOXY INJECTION
03900	CONCRETE RESTORATION
DIVISION 4	
04200	CONCRETE UNIT MASONRY
DIVISION 5	
05051	ANCHORS, INSERTS, AND DOWELS
05500	MISCELLANEOUS METALS
05605	GALVANIZED STEEL HANDRAILS AND RAILINGS
05610	ALUMINUM HANDRAILS AND RAILINGS
05620	GRATING AND CHECKERED PLATE
DIVISION 6	
06100	ROUGH CARPENTRY
06640	PLASTIC LINER FOR CONCRETE PIPE AND STRUCTURES
DIVISION 7	
07211	BUILDING INSULATION
07320	STANDING SEAM METAL ROOF
07600	METAL FLASHING, GUTTERS, DOWNSPOUTS AND OTHER ROOFING SPECIALTIES
07900	JOINT SEALANTS
DIVISION 8	
08100	METAL DOORS
08305	ACCESS HATCHES
08700	DOOR HARDWARE
DIVISION 9	
09250	GYPSUM WALLBOARD

09875	CONCRETE COATINGS FOR WASTEWATER STRUCTURES
09900	PAINTING

DIVISION 10

10400	IDENTIFICATION DEVICES
10520	SAFETY EQUIPMENT

DIVISION 11

11100	FABRICATED SLIDE GATE
11300	SUBMERSIBLE SEWAGE PUMPS

DIVISION 12

12100	MISCELLANEOUS FURNISHINGS
-------	---------------------------

DIVISION 13

13100	ODOR CONTROL UNIT
13110	ODOR CONTROL UNIT (PASSIVE ADSORBENT MEDIA FOUL AIR SCRUBBER)
13122	PRE-ENGINEERED PIPE BRIDGE
13250	SURGE TANK SYSTEM

DIVISION 15

15010	PIPING SUPPORT SYSTEMS
15100	PIPE AND FITTINGS
15100 PS	PIPE SCHEDULE
15100 PSDS COP	PIPING SYSTEM DATA SHEET – COPPER PIPE
15100 PSDS DIP	PIPING SYSTEM DATA SHEET – DUCTILE IRON PIPE
15100 PSDS FPVC	PIPING SYSTEM DATA SHEET – FUSIBLE POLYVINYL CHLORIDE PIPE
15100 PSDS HDPE	PIPING SYSTEM DATA SHEET – FUSIBLE HIGH DENSITY POLYETHYLENE PIPE
15100 PSDS HDPE1	PIPING SYSTEM DATA SHEET – HIGH DENSITY POLYETHYLENE DRAINAGE PIPE
15100 PSDS PVC1	PIPING SYSTEM DATA SHEET – SOLVENT WELDED POLYVINYL CHLORIDE PIPE
15100 PSDS PVC2	PIPING SYSTEM DATA SHEET –POLYVINYL CHLORIDE PRESSURE PIPE
15100 PSDS PVC3	PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE DRAIN, WASTE AND VENT PIPE
15100 PSDS PVC4	PIPING SYSTEM DATA SHEET – PVC SEWER PIPE
15100 PSDS PVC6	PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE STORM DRAIN PIPE
15100 PSDS RCP	PIPING SYSTEM DATA SHEET – REINFORCED CONCRETE PRESSURE PIPE
15100 PSDS SSTP	PIPING SYSTEM DATA SHEET – STAINLESS STEEL PIPE

15100	PSDS WSP	PIPING SYSTEM DATA SHEET – WELDED STEEL PIPE
15120		PIPING SPECIALTIES
15200		VALVES AND OPERATORS
15200	VS	VALVE SCHEDULE
15400		PLUMBING FIXTURES
15500		HEATING, VENTILATION AND AIR CONDITIONING EQUIPMENT
15990		PRESSURE TESTING OF PIPING SYSTEMS
15995		DISINFECTION OF POTABLE & RECYCLED WATER SYSTEMS

DIVISION 16

16010		ELECTRICAL GENERAL
16110		CONDUIT AND BOXES
16120		LOW VOLTAGE WIRE & DATA CABLE
16121		FIBER OPTIC COMMUNICATION SYSTEM
16180		SOLAR POWER GENERATION SYSTEM
16210		ENGINE GENERATOR
16250		AUTOMATIC TRANSFER SWITCH
16430		LOW VOLTAGE SWITCHBOARD
16450		GROUNDING
16470		PANELBOARD AND POWER TRANSFORMER
16481		VARIABLE FREQUENCY DRIVE
16600		FACTORY AND FIELD TESTING
16600	TF	TEST FORMS
16905		CONTROL PANEL
16910		PLC & OI HARDWARE
16915		PLC & OI APPLICATIONS PROGRAMMING
16940		INSTRUMENTATION

APPENDICES

A		GEOTECHNICAL INVESTIGATION REPORT AND LOG OF BORINGS (YEH & ASSOCIATES, APRIL 2020)
B		FINAL ENVIRONMENTAL IMPACT REPORT & ADDENDUM (OCT 2019)
C		TRENCHLESS GEOTECHNICAL AND ENGINEERING DESIGN RECOMMENDATION TECHNICAL MEMORANDUM (DCM CONSULTING, APRIL 2020)

SECTION 01110**SUMMARY OF WORK****PART 1 - GENERAL****1.1 LOCATION AND DESCRIPTION OF WORK**

- A. The Work covers the construction of the Water Reclamation Facility (WRF) Lift Stations and Offsite Pipelines and performing related required work, located as shown on these Drawings and Specifications.
- B. The Work is in City-owned property, public Right-of-Way, State Right-of-Way, and City-owned permanent easement and temporary construction easement in Morro Bay, CA.
- C. The Work will be constructed under one contract. The Contract Documents include the following:
 - 1. Volume 1 – Bid Documents and Specifications.
 - 2. Volume 2 – Drawings
 - 3. Appendices:
 - a. Appendix A: Geotechnical Investigation Report and Log of Borings (Yeh & Associates 2020)
 - b. Appendix B: Final Environmental Impact Report & Addendum
 - c. Appendix C: Trenchless Geotechnical and Engineering Design Recommendation Technical Memorandum (DCM Consulting, April 2020)

1.2 COORDINATION

- A. The CONTRACTOR shall be solely responsible for coordination of all of the Work of this Contract.
- B. The CONTRACTOR shall supervise, direct and cooperate fully with all Subcontractors, manufacturers, fabricators, suppliers, distributors, installers, testing agencies and all others whose services, materials or equipment are required to ensure completion of the Work within the Contract Time.
- C. Work of Others:
 - 1. The CONTRACTOR shall cooperate with and coordinate CONTRACTOR's Work with the work of any other contractor, utility service companies, or OWNER's employees performing work at the site.
 - 2. The CONTRACTOR shall also coordinate their Work with the work of others to assure compliance with schedules.
 - 3. The CONTRACTOR shall attend and participate in all project coordination or progress meetings and report on the progress of all Work and compliance with schedules.
 - 4. If any part of the work depends upon the work of others for proper execution or results, the CONTRACTOR shall inspect and promptly report to the ENGINEER any apparent discrepancies or defects in such work of others that render it unsuitable for such proper execution and results.

01110-1

5. Failure of the CONTRACTOR to so inspect and report shall constitute an acceptance of the work of others as fit and proper except as to defects which may develop in the work of others after execution of the work by the CONTRACTOR.
- D. Interference with work on utilities:
 1. The CONTRACTOR shall cooperate fully with all utility forces of the OWNER or forces of other public or private agencies engaged in the relocation, altering, or otherwise rearranging of any facilities which interfere with the progress of the work.
 2. The CONTRACTOR shall schedule the work so as to minimize interference with said relocation, altering, or other rearranging of facilities.
- E. Responsibility for Damage:
 1. The CONTRACTOR shall not be responsible for damage done by CONTRACTORS not under their jurisdiction.
 2. The CONTRACTOR will not be liable for any such loss or damage, unless it is through the negligence of the CONTRACTOR.

1.3 WORK BY OTHERS

- A. OWNER will perform the following work:
 1. Operation of all existing system valves and equipment, unless specified otherwise.
- B. Other contracts as follows:
 1. Water Reclamation Facility Project

1.4 SITE CONDITIONS

- A. Site Investigation and Representation
 1. The CONTRACTOR acknowledges that it has satisfied itself as to the nature and location of the work, the general and local conditions, particularly those bearing upon availability of transportation, disposal, handling and storage of materials, availability of labor, water, electric power, roads, and uncertainties of weather, tide stages, or similar physical conditions at the site, the conformation and conditions of the ground, the character of equipment and facilities needed preliminary to and during the prosecution of the work and all other matters which can in any way affect the work or the cost thereof under this Contract.
 2. The CONTRACTOR further acknowledges that it has satisfied itself as to the character, quality, and quantity of surface and subsurface materials to be encountered from inspecting the site and from evaluating information derived from exploratory work that may have been done by the OWNER or included in these Contract Documents. Any failure by the CONTRACTOR to become acquainted with all the available information will not relieve the CONTRACTOR from responsibility for properly estimating the difficulty or cost of successfully performing the work.
 3. Field Verification:
 - a. Before undertaking each part of the work, the CONTRACTOR shall carefully study and compare the Contract Documents and check and verify pertinent figures shown thereon and all applicable field measurements.
 - b. As the work proceeds, the CONTRACTOR shall field verify the depth and location of all buried utilities, and existing systems, and location of hazardous waste and contaminants.
 - c. The CONTRACTOR shall promptly report in writing to the ENGINEER any conflict, error, or discrepancy which the CONTRACTOR may discover and shall obtain a

01110-2

written interpretation or clarification from the ENGINEER before proceeding with any work affected thereby.

B. Existing Utilities and Improvements

1. Location of Underground Utilities:

- a. Known existing underground conduits, pipelines and other utilities have been shown on the contract drawings in their approximate locations (within 3 feet of actual location). However, the accuracy or completeness of utilities indicated on the drawings is not guaranteed.
- b. It shall be the responsibility of the CONTRACTOR to determine the exact location of all utilities and their service connections.
- c. All potholing or other procedures for verifying utility location shall be performed by the CONTRACTOR as necessary to prepare for excavation at least 4 working days in advance of scheduled excavation.
- d. The CONTRACTOR shall immediately notify the ENGINEER as to any utility located by him which has been incorrectly shown or omitted from the drawings.
- e. If the CONTRACTOR cannot locate an underground utility whose presence is indicated on the Drawings, the ENGINEER shall be notified in writing.
- f. The CONTRACTOR shall ascertain the exact locations of underground utilities whose presence is indicated on the Drawings, the locations of their service laterals work and of service laterals or appurtenances of any other underground utilities which can be inferred from the presence of visible facilities such as buildings, meters and junction boxes prior to doing work that may damage such utilities or interfere with their service.
- g. Utilities Not Shown on Drawings:
 - 1) Attention is directed to the possible existence of underground utilities not indicated on the Drawings and to the possibility that underground utilities may be in a location different from that indicated on the Drawings.
 - 2) If the ENGINEER determines that the underground utility for which such notice has been given has not been depicted on the Drawings with reasonable accuracy (within 3 feet of actual location), the additional cost incurred in locating the utility will be paid for as extra work as provided in the General Conditions.
 - 3) If the CONTRACTOR discovers underground an utility not indicated on the Drawings, the CONTRACTOR shall immediately give the ENGINEER and the Utility Company written notification of the existence of such utility.
 - 4) Such utilities shall be located and protected from damages as directed by the ENGINEER and the cost of such work will be paid for as extra work as provided in the General Conditions.

2. Utility Coordination:

- a. The CONTRACTOR shall notify Underground Service Alert (USA) at least 4 days prior to excavation, telephone (800) 642-2444.
- b. The CONTRACTOR shall also contact all utility owners not registered with USA but known to have utilities in the project area to field locate underground utilities at least 4 days prior to excavation.
- c. The CONTRACTOR shall notify all owners of utilities when the Work is in progress and shall make arrangements as are necessary to make any emergency repairs.
- d. Existing utilities that are shown or that are made known and located to the CONTRACTOR prior to excavation, and that are to be retained; and all utilities that are constructed during excavation operations shall be properly supported and protected from damage during the progress of the work.

3. Utility Protection and Damage:

01110-3

- a. Existing utilities that are shown or that are made known and located to the CONTRACTOR prior to excavation, and that are to be retained, and all utilities that are constructed during excavation operations shall be properly supported and protected from damage during the progress of the work.
 - b. Should any damage to a utility occur during the progress of the work, the CONTRACTOR shall notify the OWNER or the utility at once and render all assistance possible to repair the damage and restore the service.
 - c. No extra compensation will be made for the repair of any services or utility damaged by the CONTRACTOR nor for any damage incurred through neglect or failure to provide adequate protection to existing utilities.
 - d. The provisions of this Section shall not be abated even in the event such damage occurs after backfilling or is not discovered until after completion of the backfilling.
 - e. Damaged water pipelines will be repaired by the OWNER at the CONTRACTOR's expense. If the CONTRACTOR fails to pay the cost of repairs to water pipelines within thirty days of receipt of the invoice, the OWNER reserves the right to withhold the amount owed from the CONTRACTOR's Progress Payment.
 - f. Damage Report:
 - 1) In the event that the CONTRACTOR damages any underground utilities not shown on the Drawings or not depicted on the Drawings with reasonable accuracy (within 3 feet of actual location) or any lateral service the location of which could not be inferred by the CONTRACTOR, a written report thereof shall be made immediately to the ENGINEER.
 - 2) The CONTRACTOR's report shall also advise the ENGINEER of any schedule delays. Compensation for such delays will be determined in accordance with the General Conditions. The CONTRACTOR shall be entitled to no other compensation for any such damage.
 4. All utilities encountered along the line of the work shall remain continuously in service during all work under the Contract, unless otherwise shown on the drawings, or unless other arrangements satisfactory to the ENGINEER are made with the owner of said utilities.
- C. CONTRACTOR's Responsibility for Utility Facilities and Service
1. Where the CONTRACTOR's operations could cause damage or inconvenience to railway, telephone, television, power, oil, gas, water, sewer, or irrigation systems, the CONTRACTOR shall make all arrangements necessary for the protection of these utilities and services.
 2. The CONTRACTOR shall be solely and directly responsible to the owner and operators of such properties for any damage, injury, expense, loss, inconvenience, delay, suits, actions, or claims of any character brought because of any injuries or damage which may result from the construction operations under this Contract.
 3. Neither the OWNER nor its officers or agents shall be responsible to the CONTRACTOR for damages as a result of the CONTRACTOR's failure to protect utilities encountered in the work.
 4. In no event shall interruption of any utility service be allowed outside working hours unless granted by the owner of the utility.
 5. No sand, mud, rocks or other construction debris shall be disposed of in the sanitary sewers or storm sewers.
 6. Where bypassing of sewage is required to perform sewer repairs or service relocations and where temporary pumps are required to bypass any sewage across traffic lanes, the discharge lines crossing the traffic lanes shall be buried a minimum of 4 inches below the pavement surface and backfilled with temporary asphalt

01110-4

concrete surfacing. The CONTRACTOR shall take all necessary steps to assure continuous flow of sewage. Bypassing of untreated wastewater to surface waters or courses will not be permitted.

7. The CONTRACTOR shall replace, at its own expense, any and all existing utilities or structures removed or damaged during construction, to their existing condition unless otherwise provided for in these Contract Documents.
8. The CONTRACTOR shall repair or replace, at its own expense, all pavement damaged during the construction, to its existing condition unless otherwise provided for in these Contract Documents.

D. Names of Known Utilities Serving the Area

1. The following is a list of the known public utilities serving the area:
 - a. Water – City of Morro Bay
 - b. Sewer – City of Morro Bay
 - c. Sewer – Cayucos Sanitary District
 - d. Telephone/Cable/Fiber –
 - 1) Charter Communication
 - 2) AT&T
 - 3) Zayo
 - e. Electric – PG&E
 - f. Gas – SoCal Gas
 - g. Gas – PG&E
 - h. Raw Water – Morro Bay Mutual Water Company (Vistra and PG&E)
 - i. Petroleum - Vistra

E. Interfering Structures

1. The CONTRACTOR shall take necessary precautions to prevent damage to existing structures whether on the surface, aboveground, or underground. An attempt has been made to show major structures on the Drawings. While the information has been compiled from the best available sources, its completeness and accuracy cannot be guaranteed, and it is presented as a guide to avoid possible difficulties.
2. The CONTRACTOR shall protect all existing structures, trees, shrubs, and other items on the project site that are to be preserved, by substantial barricades or other devices commensurate with the hazard, from injury or destruction by vehicles, equipment, workmen, or other agents.
3. Where existing fences, gates, buildings, or any other structure must be removed to properly carry out the work, or are damaged during the work, they shall be restored at the CONTRACTOR's expense to their original condition or better.
4. Without additional compensation, the CONTRACTOR may remove and replace in a condition as good as or better than original, any small structures such as fences, and signposts that interfere with the CONTRACTOR's operations.

F. Field Relocation

1. During the progress of construction, it is expected that minor relocations of the work will be necessary.
2. Such relocations shall be made only by direction of the ENGINEER.
3. If existing structures are encountered that will prevent construction as shown, notify the ENGINEER before continuing with the work in order that the ENGINEER may make such field revisions as necessary to avoid conflict with the existing structures.
4. If the CONTRACTOR shall fail to notify the ENGINEER when an existing structure is encountered, and shall proceed with the work despite this interference, CONTRACTOR shall do so at their own risk.

01110-5

5. Any CONTRACTOR request(s) for additional compensation or contract time resulting from necessary field relocations will be considered as set forth in the General Conditions.
6. If the CONTRACTOR fails to notify the ENGINEER when a structure which interferes with construction is encountered, and proceeds with the work despite this obstruction, the CONTRACTOR shall do so at their own risk and at no additional cost to the OWNER.

1.5 REFERENCE POINTS AND SURVEYS

- A. Location and elevation of bench-marks are shown on Drawings.
- B. Dimensions for lines and elevations for grades of structures, appurtenances, and utilities are indicated on Drawings, together with other pertinent information required for laying out Work. If conditions vary from those indicated, notify OWNER immediately, who will make minor adjustments required.
- C. OWNER may perform checks to verify accuracy of CONTRACTOR's layout Work and that completed Work complies with Contract Documents.
- D. Any existing survey points or other control markers destroyed without proper authorization will be replaced by owner of the survey points or control markers at CONTRACTOR's expense.
- E. CONTRACTOR's Responsibilities:
 1. Provide all survey and layout required.
 2. Locate and protect reference points prior to starting site preparation.
 3. Notify OWNER at least 3 working days in advance of time when grade and line to be provided by others will be needed.
 4. Check and establish exact location of existing facilities prior to construction of new facilities and any connections thereto.
 5. In event of discrepancy in data provided by OWNER, request clarification before proceeding with Work.
 6. Provide cut sheets for all staking.
 7. Preserve and leave undisturbed control staking until ENGINEER has completed checks it deems necessary.
 8. Re-establish reference points resulting from destruction by CONTRACTOR's operations.
 9. Cooperate with ENGINEER so that checking and measuring may be accomplished with least interference to CONTRACTOR's operations.

1.6 SEQUENCE AND PROGRESS OF WORK

- A. The CONTRACTOR shall submit a Construction Schedule covering the entire Work in accordance with Section 01320, Progress Schedule.
- B. The CONTRACTOR shall incorporate the requirements of Section 01130, Special Project Constraints, into the Construction Schedule.
- C. Alternate Sequence:
 1. The CONTRACTOR's schedule may use a different sequence from that shown or specified, if techniques and methods known to the CONTRACTOR will result in cost

01110-6

- and time savings to the OWNER, still achieve the required objective and maintain the same or greater level of treatment.
2. The ENGINEER's determination on the acceptability of any alternative sequence from that shown or specified shall be final.

1.7 CONTRACTOR'S USE OF PREMISES

- A. The CONTRACTOR shall coordinate use of the premises, for the CONTRACTOR's storage and the operations of the CONTRACTOR's workmen, with OWNER and utility service companies.
- B. Restriction of Work Area:
 1. The full use of the premises for storage, the operations of workmen and for all other construction activities will not be available to the CONTRACTOR.
 2. The CONTRACTOR must operate entirely within the space allowed to the CONTRACTOR.
 3. The Drawings defines the area allocated to the CONTRACTOR.
- C. The CONTRACTOR shall be solely responsible for obtaining and paying all costs in connection with any additional work area, storage sites, access to the site or temporary right-of-way, which may be required for proper completion of the Work.
- D. Limitations on Use of Work Area:
 1. It shall be understood that responsibility for protection and safe-keeping of equipment and materials on or near the site will be entirely that of the CONTRACTOR and that no claim shall be made against the OWNER or their authorized representatives by reason of any act.
 2. It shall be further understood that should any occasion arise necessitating access to the sites occupied by these stored materials or equipment, the ENGINEER shall direct the CONTRACTOR owning or responsible for the stored materials and equipment to immediately move the same.
 3. No materials or equipment may be placed upon the property of the OWNER, other than in the designated areas as shown on the Drawings, unless the ENGINEER has agreed to the location contemplated by the CONTRACTOR to be used for storage.
 4. All stored materials shall be labeled according to the appropriate contractor or Subcontractor with the manufacturer's label as well.
 5. Appropriate material safety data sheets (e.g., MSDS) shall be provided.
- E. The CONTRACTOR shall be required to share use of the premises with other Contractors whose services the OWNER has obtained or will obtain for construction of other facilities on the site.

1.8 USE OF OWNER'S FACILITIES

- A. The CONTRACTOR may use existing facilities or equipment in the Work for construction purposes, only if the OWNER's written permission is obtained.
- B. Restore existing facilities and equipment used for temporary purposes to original condition in a manner satisfactory to OWNER.

01110-7

1.9 USE OF CADD DRAWING FILES

- A. These project CADD drawing files have been provided by the Engineer to the Contractor for the Contractor's convenience, and the Engineer shall assume no responsibility for any information which is extrapolated from the files that is not shown, or shown differently, than the Contract Documents. The Engineer assumes no liability for the Contractor's utilization of the CADD files, and Contractor is responsible for verification of any subcontractor's use or interpretation of CADD files against the Contract Documents. The drawing files may include miscellaneous or superseded engineering linework, layers, dimensions, references, and data that is not depicted in the Contract Drawings, is not to scale, or is not geo-referenced. It is the responsibility of the Contractor to interpret the data relative to the final printed condition of the Contract Drawings. Additionally, Contractor is solely responsible for ensuring the completeness and accuracy of the data as Contract Documents are revised, modified, and/or updated through Construction progress.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION (NOT USED)**

++ END OF SECTION ++

01110-8

SECTION 01130**SPECIAL PROJECT CONSTRAINTS****PART 1 - GENERAL****1.1 LIMIT OF CONSTRUCTION ACTIVITIES ON WORK SITE**

- A. Construction Work Area:
 - 1. The CONTRACTOR shall coordinate use of work area designated as Construction Activities/Access (CA), Temporary Construction Easement (TCE), Permanent Easement (PE), or Encroachment with the CONSTRUCTION MANAGER, OWNER, private property owners, and Caltrans.
- B. Traffic Control
 - 1. The CONTRACTOR shall acquire encroachment permits from The City of Morro Bay and the California Department of Transportation.
 - 2. The CONTRACTOR shall submit traffic control plans prepared by a licensed traffic engineer or a qualified traffic control contractor to the City of Morro Bay and the California Department of Transportation to acquire encroachment permits and implement traffic control in City and State R/W that conform, at a minimum, with current edition MUTCD, California Supplement to the MUTCD, and Section 12 of the Caltrans Standard Specifications, and California ADA compliance standards.
 - 3. The CONTRACTOR shall provide for the convenience of the public and public traffic as described in Caltrans Standard Specifications, Division 1 General Provisions, Section 7. Legal Relations and Responsibilities to the Public, 7-1.03 Public Convenience and 7-1.03 Public Safety.
 - 4. The CONTRACTOR shall provide Caltrans Closure System (LCS) Compliance.
 - 5. The CONTRACTOR shall reference the project-specific traffic handling sheets in the Contract Drawings for additional information and requirements.

1.2 SEQUENCE OF WORK

- A. General:
 - a. The CONTRACTOR shall schedule and sequence their work in order to complete the Work by the specified completion date.

1.3 CONTRACT DOCUMENT PRECEDENCE

- A. Any work shown on the Contract Drawings and not in the Contract Specifications, or vice versa, is to be executed as if indicated in both. In the event that any conflict between any provisions of the Construction Agreement and Contract Documents shall develop, the OWNER shall determine which provision shall prevail and their decision shall be final and binding upon the parties and shall not be subject to arbitration or review. The OWNER shall utilize the following order of precedence to govern the interpretation of the Contract:
 - 1. Contract Agreement
 - 2. Bid Proposal
 - 3. Permits
 - 4. Special Provisions

01130-1

5. General Conditions & Supplementary Conditions
 6. Contract Specifications (Technical Specifications)
 7. Contract Drawings
 8. Field Instructions or other written directives
 9. Caltrans 2010 Standard Specifications
- B. Written amendments, Change Orders, Work Change Directives, Field Orders, ENGINEERS written interpretations and clarifications, Notice to Proceed and Addenda, in precedence listed, will take precedence over all other Contract Document components referenced therein. Figure dimensions on Drawings will take precedence over scale dimensions. Detailed Drawings will take precedence over General Drawings.

1.4 CONSTRUCTION WORK PLANS

- A. CONTRACTOR shall develop, submit to ENGINEER for approval, and implement all work plans required by the Contract Documents.

1.5 REGULATORY PERMIT COMPLIANCE

- A. CONTRACTOR shall provide all labor, equipment, and materials to comply with regulatory permitting provisions required by the Contract Documents.

1.6 PROJECT CONSTRAINTS

- A. Maintenance of OWNER's Operations:
 1. Constraints listed herein involve limits on activities during construction. These limits relate to the critical nature of the existing water system.
 2. Continuous operation of OWNER's facilities is of critical importance. Schedule and conduct activities to enable existing facilities to operate continuously, unless otherwise specified.
 3. Work Plan:
 - a. The CONTRACTOR shall submit a detailed Work Plan and time schedule for all construction activities that will make it necessary to remove a tank, pipeline, electrical circuit, equipment, structure, road or other facilities from service, including the critical outages identified herein.
 - b. The Work Plan shall, at a minimum, identifying:
 - 1) the date and time when each activity will occur;
 - 2) what equipment will be present including standby equipment;
 - 3) what assistance will be required by OWNER's operating personnel;
 - 4) an emergency backup plan identifying what action will be taken if Work cannot be completed within the allotted time; and
 - 5) what individual will be in charge of the activity.
 - c. Submit Work Plan 10 days prior to the scheduled activity.
 4. Perform Work continuously during critical connections and changeovers, and as required to prevent interruption of OWNER's operations.
 5. Shutdowns and Tie-Ins:
 - a. Coordinate proposed Work with OWNER and facility operations personnel before affecting unit shutdowns. The CONTRACTOR shall provide written confirmation of the shutdown date and time two (2) working days prior to the actual shutdown.
 - b. Under no circumstances shall the CONTRACTOR cease Work at the end of a normal working day or at the end of a working week if such actions may

inadvertently cause a cessation of any facility operating process, in which case, remain onsite until necessary repairs are complete.

- c. Do not close lines, open valves or gates, shut down equipment, or take other action which would affect the operation of existing systems, except as specifically required by the Contract Documents and after approval of OWNER.
- d. Do not proceed with Work affecting a facility's operation without obtaining OWNER's advance approval of the need for and duration of such Work.
- e. Reference and comply with the General Civil Notes of the Contract Drawings for shutdown and tie requirements.

B. Relocation of Existing Facilities:

1. During construction, it is expected that minor relocations of Work will be necessary.
2. Provide complete relocation of existing structures and Underground Facilities, including piping, utilities, equipment, structures, electrical conduit wiring, electrical duct bank, and other necessary items.
3. Use only new materials for relocated facility. Match materials of existing facility, unless otherwise shown or specified.
4. Perform relocations to minimize downtime of existing facilities.
5. Install new portions of existing facilities in their relocated position prior to removal of existing facilities, unless otherwise accepted by OWNER.

C. Overtime:

1. Conduct Work outside regular working hours on prior written consent of OWNER to meet Project schedule and avoid undesirable conditions.
2. All overtime Work by the CONTRACTOR necessary to conform to the requirements of this Section and related Sections shall be performed by the CONTRACTOR, at no cost to the OWNER and shall be performed in accordance with the General Conditions. The CONTRACTOR shall make no claims for extra compensation as a result thereof.

1.7 CONSTRUCTION SEQUENCING CONSTRAINTS

- A. Critical work sequencing constraints are described in this paragraph. Work not specifically covered in this Section may, in general, be done anytime during the contract period.
- B. Key work sequencing constraints are as follows:
 1. CONTRACTOR shall work in one traffic handling work zone at a time and shall be limited to one (1) week transition between contiguous traffic handling work zones.
 2. CONTRACTOR shall install final paving within three (3) weeks of providing temporary drivable pavement.
 3. Pipeline construction on Main St and Quintana between Main St and Morro Bay Blvd from November 1st and January 15th in public Right of Way shall not be permitted. This is defined as the segment between STA 56+75 and STA 94+46.
 4. Pipeline construction from Unnamed Road to Main St, to PS-B, shall be phased so as 2-way traffic on Main St can be maintained.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

01130-4

SECTION 01140

WATER POLLUTION CONTROL

PART 1 - GENERAL**1.1 DESCRIPTION**

A. Scope:

1. Provide all labor, equipment, and materials to fully comply with applicable Local, State and Federal regulations and requirements for water pollution prevention and control.

1.2 PROJECT PERMITS

- A. The CONTRACTOR shall comply with the terms of the following permits and documents for this Project.
- B. CONTRACTOR shall comply with the State of California General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Construction Storm Water General Permit) Order Number 2009-0009-DWQ, amended by 2010-0014-DWQ and 2012 -0006-DWQ, NPDES Number CAS000002. Construction activity subject to this permit includes clearing, grading, grubbing, excavation, or any other activity that results in a land disturbance of equal or greater than one acre.
- C. CONTRACTOR shall meet all project specific NPDES construction permit requirements issued by the Regional Water Quality Control Board.
 1. CONTRACTOR shall prepare a Preliminary Storm Water Pollution Prevention Plan (SWPPP) specifically for this project in compliance with State of California NPDES Order Number 2009-0009-DWQ, amended by 2010-0014-DWQ and 2012 -0006-DWQ, NPDES Number CAS000002. CONTRACTOR shall comply with all SWPPP requirements for the project.
 2. CONTRACTOR shall provide a Qualified SWPPP Developer (QSD), Qualified SWPPP Practitioner (QSP), and complete applicable water pollution control work as directed by the QSP.
 3. OWNER will provide Legally Responsible Person (LRP).
- D. Dewatering:
 1. The CONTRACTOR may propose to dispose of construction dewatering groundwater in compliance with the project SWPPP via land application (i.e., spray systems, infiltration ponds, etc.). The CONTRACTOR shall develop a Dewatering Land Application Control Plan, which provides the following details, at a minimum:
 - a. A site map, including one-foot contours, of the area where dewatering water will be land applied.
 - 1) The map shall include an identification of all drainage features within 250 feet of the application area.
 - b. A description of anticipated dewatering water application rates, and corresponding infiltration and evaporation rates to show that no runoff is generated by the land application activity.
 - c. An estimate of daily and total water volumes to be applied for the project.
 - d. The time schedule for land application activities.

- e. A description and schematic detailing the controls to be put in place to prevent runoff from the land application area.
 - f. CONTRACTOR shall contact the LRP or OWNER, QSP and QSD for the preparation of this amendment
2. The CONTRACTOR may propose to dispose of construction dewatering groundwater into the local sanitary sewer or storm water system in compliance with OWNER requirements.
 - a. The OWNER shall require CONTRACTOR achieve specific water quality parameters (such as but not limited to pH and total suspended solids) that must be continuously maintained and tested during dewatering/discharge operations. A series of holding tanks or temporary lined ponds may be likely method to provide treatment to dewatering groundwater, but the CONTRACTOR shall submit a dewatering and treatment plan for OWNER approval that meets OWNER requirements. In addition, the OWNER may impose volumetric dewatering limits that may change depending on season.
 3. If the CONTRACTOR cannot achieve or does not anticipate being able to achieve reliable dewatering through other potential means as described above, the CONTRACTOR may apply for a Limited Threat Discharge Permit with the RWQCB Region 3 to discharge controlled and treated dewatered groundwater into surface waters (which may include storm drain systems). https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2017/npdes_general_order_r3-2017-0042.pdf. It is the responsibility of the CONTRACTOR to provide all planning, review responses, fees, monitoring, testing, and approval from RWQCB. Approval from RWQCB may not be attained in a timely manner and shall be accommodated in the project schedule.
 - a. If CONTRACTOR proposes to dispose of construction dewatering water such that it will reach a surface water, the CONTRACTOR shall obtain permits as required by law for this activity:
 - b. Apply for coverage under General NPDES Permit No. CAG995002, Order No. R3-2017-0042 Waste Discharge Requirements for Limited Threat Discharges to Surface Waters in the RWQCB Region 3.
 - 1) As required by General NPDES Permit No. CAG995002, the CONTRACTOR shall evaluate potential alternatives to disposing of construction dewatering water to a surface water, including but not limited to discharge to a municipal wastewater treatment plant, land disposal/reclamation, reuse (i.e. dust control), etc.
 - 2) The CONTRACTOR shall be responsible for preparing and submitting the required permit application documents, attaining a qualified Professional Engineer for the application, and paying all applicable permit fees for coverage under General NPDES Permit No. CAG995002.
 - 3) The CONTRACTOR shall be responsible for developing the required Best Management Practices for this permit to manage discharges to surface waters. CONTRACTOR shall contact the Legally Responsible Person (LRP) or OWNER, QSP, and QSD for the preparation of this amendment.
 - 4) The CONTRACTOR shall build the required permit review, approval, and public comment time for this permit into the Construction Schedule.

1.3 SUBMITTALS

A. BMPs:

1. CONTRACTOR shall use BMP materials as per project SWPPP and provide submittals to the ENGINEER as required per 01330 Submittal Procedure specifications.

1.4 CONTRACTOR'S RESPONSIBILITY

- A. Throughout the duration of the project, the CONTRACTOR shall revise and amend the SWPPP as needed to comply with Construction General Permit requirements and all other pertinent laws, rules and regulations. Only a certified Qualified SWPPP Developer (QSD) can revise or amend the SWPPP. All Revisions and Amendments must be accepted by the OWNER and ENGINEER.
- B. QSP is responsible for implementing the SWPPP (inspections, sampling, REAPs, etc.) and prepare Ad Hoc reports, exceedance reports, notice of intent and any change of information applications on SMARTS system.
- C. QSP and QSD shall be registered on SMARTS to be linked to the project as Data Submitters.
- D. CONTRACTOR shall provide all SWPPP implementation training at no additional cost to the OWNER.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. BMPs:
 1. CONTRACTOR shall follow the project SWPPP and manufacturer's requirements for product delivery, storage and handling.

1.6 REGULATORY REQUIREMENTS

- A. Laws, Regulations and Permits:
 1. The CONTRACTOR is responsible for complying with the Clean Water Act Section 402, the NPDES General Permit for Stormwater Discharges Associated with Construction Activity, the project SWPPP, and all permits applicable to this Project, for all anticipated construction activities.
 2. Perform construction operations to comply, and ensure subcontractors comply, with applicable Federal, State, and Local laws, orders, regulations and water quality standards concerning control and abatement of water pollution, and terms and conditions of applicable permits and the SWPPP. If conflict occurs between Federal, State, and Local laws, regulations, and requirements, the most stringent shall apply.
 3. The CONTRACTOR shall know and fully comply with applicable provisions of the Permits and all modifications thereto, and Federal, State, and Local regulations and requirements that govern the CONTRACTOR's operations and stormwater and non-stormwater discharges from both the project site and areas of disturbance outside the Project Limits during construction.
 4. The Permits shall apply to stormwater and certain permitted non-stormwater discharges from areas outside the project site which are directly related to construction activities for this Contract including, but not limited to, material borrow areas, concrete plants, staging areas, storage yards and access roads. The CONTRACTOR shall comply with the Permits for those areas and shall implement, inspect and maintain the required water pollution control practices. Installing, inspecting and maintaining water pollution control practices on areas outside the

Project Limits not specifically arranged for by the OWNER for the execution of this Contract will not be paid for.

B. Contractor Violations:

1. If noncompliance occurs, immediately (verbally) report noncompliance to the ENGINEER. Submit specific information within 2 days. This requirement is in addition to all violation reporting requirements for applicable project permits.
2. Consistent violations of applicable Federal, State, or Local laws, orders, regulations, or Water Quality Standards may result in the ENGINEER stopping all site activity until compliance is ensured.
3. The CONTRACTOR shall not be entitled to extension of time, claim for damage, or additional compensation by reason of such a work stoppage.
4. Corrective measures required to bring activities into compliance, or fines imposed by a regulating authority, which are a result of the CONTRACTOR's errors and/or negligence shall be at the CONTRACTOR's expense.

PART 2 - PRODUCTS

2.1 SILT FENCE

- A. Silt fence, support fence, posts in accordance with ASTM 6461.

2.2 STRAW BALES

- A. Average dry weight not less than 50 pounds each.
- B. Bind with biodegradable ties.
- C. Certified weed and seed free.

2.3 OTHER BMPS

- A. See project SWPPP document.

PART 3 - EXECUTION

3.1 SWPPP IMPLEMENTATION:

- A. The CONTRACTOR shall fully implement the BMPs prescribed in the Project SWPPP under the direction of the project QSP. The CONTRACTOR shall be responsible in implementing all of the requirements in the Project SWPPP. If CONTRACTOR fails to meet all requirements prescribed in the Project SWPPP, the OWNER may choose to retain 20% of the total contract amount until satisfied with the Work.
- B. The CONTRACTOR shall be responsible for providing the services of a QSP to oversee all construction site inspection and water quality sampling and testing required by the SWPPP and the NPDES General Permit for Stormwater Discharges Associated with Construction Activity, as described in the SWPPP Construction Site Monitoring Program and the State of California General Construction Permit referenced above.

- C. CONTRACTOR shall retain and submit all records and data as required by the SWPPP for mandated time period to the OWNER. The CONTRACTOR shall assist the QSP with data that may be required for preparing an Annual Report as required by the SWPPP on SMARTS system. The OWNER shall be responsible for submitting an Annual Report as required by the SWPPP.
- D. Maintain copies of the NPDES General Permit for Stormwater Discharges Associated with Construction Activity and SWPPP at the project site and make permits and SWPPP available during construction.

3.2 DEWATERING OPERATIONS:

- A. The CONTRACTOR shall appropriately manage dewatering operations in compliance with all permits obtained for the Project or approved Control Plans applicable to this activity.
- B. The CONTRACTOR shall also implement any Monitoring and Reporting Programs as required by applicable permits.
- C. CONTRACTOR shall prepare a dewatering plan and submit to the ENGINEER for acceptance.

3.3 ENVIRONMENTAL REQUIREMENTS AND POLLUTION CONTROLS

- A. Prior to working within 100 feet of a waterbody, closely examine excavation equipment for oil and fuel leaks.
- B. At least on a daily basis, check and maintain equipment operated within or adjacent to a waterbody to prevent leaks of materials that if introduced to water could be harmful to aquatic life.
- C. Petroleum products and other substances which could be hazardous to aquatic life, resulting from project related activities shall be prevented from contaminating the soil and entering a water body. Do not store any of these materials at locations subject to inundation by high river or creek flows.
- D. Immediately notify California Department of Fish and Wildlife (CDFW) and the Central Valley Region Water Quality Control Board (CVRWQCB) of any spills. Consult with CDFW and the CVRWQCB regarding clean-up procedures.
- E. Staging, storage, and parking areas for equipment, materials, fuels, lubricants and solvents shall be located, where space is available, a minimum of 50 feet horizontally from the edge of live streams, and at an elevation high enough to prevent damage or inundation during flood events.

3.4 SEDIMENT AND EROSION CONTROLS

- A. Execute all methods and measures for controlling sediment and erosion as specified in the Project SWPPP.

3.5 WASTEWATER AND STORMWATER MANAGEMENT CONTROLS

- A. Execute all methods and measures to control stormwater runoff and discharges from the site that will prevent silting and erosion as specified in the Project SWPPP.
- B. Prevent wastewater from general construction activities such as storm water collection or other construction operations, from entering flowing or dry watercourses without the use of approved turbidity control methods as specified in the Project SWPPP.
- C. Divert stormwater runoff from upslope areas away from disturbed areas.

3.6 TURBIDITY CONTROL MEASURES

- A. Prevent excess turbidity from entering flowing waters by using the methods and measures specified in the Project SWPPP.

3.7 CONSTRUCTION SITE MANAGEMENT

- A. Contractor Construction Operations:
 - 1. Perform construction activities by methods that will prevent entrance, or accidental spillage, of solid matter, contaminants, debris, or other pollutants or wastes into streams, flowing or dry watercourses, wetlands, or underground water sources.
 - 2. Pollutants and wastes include, but are not restricted to: refuse, garbage, cement, sanitary waste, industrial waste, hazardous materials, radioactive substances, oil and other petroleum products, aggregate processing tailings, mineral salts, and thermal pollution.
 - 3. Discharge of cement fines, drilling fluids, contaminated water, and other construction byproducts will not be allowed on site.
- B. Stockpiled or Deposited Materials:
 - 1. Do not stockpile or deposit excavated materials or other construction materials, near or on, stream banks or other watercourse perimeters where they can be washed away by high water or storm runoff, or can in any way encroach upon the watercourse.
- C. Oil Storage Tanks Management:
 - 1. Manage in accordance with the Project SWPPP and applicable local, state and federal requirements.
 - 2. Place oil or other petroleum product storage tanks away from the project site.
 - 3. Do not use underground storage tanks.
- D. Refueling Operations:
 - 1. The CONTRACTOR shall not conduct refueling operations within project area.
- E. Vehicle Parking:
 - 1. Vehicles shall be stored greater than 50 ft from the edge of any waterbody at the end of each work-shift except as noted below.
 - 2. Vehicles stored less than 50 ft from a waterbody shall be parked on impermeable liner at least 10 mils thick buried under 2 to 4 inches of soil.

3.8 REMOVAL

- A. Remove temporary works in accordance with Specification Section 01810 - Cleaning.

3.9 OVERFLOW EMERGENCY RESPONSE PLAN

1. Prepare an overflow and emergency response plan (OERP) to be followed in the event of a Sanitary Sewer Overflow (SSO).
2. CONTRACTOR shall coordinate with OWNER to ensure that CONTRACTOR's OERP for the project meets the requirements of the OWNER's OERP.
3. CONTRACTOR shall develop and implement an OERP that identifies measures to protect public health and the environment. At a minimum, this plan must include the following:
 - a. Notification procedures so that the primary responders and regulatory agencies are informed of all SSOs in a timely manner.
 - b. Program to ensure an appropriate response to all overflows.
 - c. Procedures to ensure prompt notification to appropriate regulatory agencies and other potentially affected entities (e.g. OWNER officials, health agencies, Regional Water Boards, water suppliers, etc.) of all SSOs that potentially affect public health or reach the waters of the State. The OERP should identify the officials who will receive immediate notification.
 - d. Procedures to ensure that appropriate staff and CONTRACTOR personnel are aware of and follow the Emergency Response Plan and are appropriately trained.
 - e. Procedures to address emergency operations, such as traffic and crowd control and other necessary response activities.
 - f. Program to ensure that all reasonable steps are taken to contain and prevent the discharge of untreated and partially treated wastewater to waters of the United States and to minimize or correct any adverse impact on the environment resulting from the SSOs, including such accelerated or additional monitoring as may be necessary to determine the nature and impact of the discharge.

+ + END OF SECTION + +

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01200**MEASUREMENT AND PAYMENT****PART 1 - GENERAL****1.1 GENERAL**

- A. Payment will be made at the price bid for each item listed on the bidding form or as extra work as provided in the General Conditions.
- B. No initial progress payment (other than a single mobilization payment as described in Article 1.3 below) will be made prior to acceptance by the ENGINEER of the CPM Construction Schedule, the associated Schedule of Costs, and the list of anticipated submittals.
- C. No subsequent progress payment will be made prior to receipt by the ENGINEER of the monthly update of the Construction Progress Schedule, as specified in Sections 01310, Project Meetings and 01320, Progress Schedule.
- D. No subsequent progress payment will be made prior to receipt by the ENGINEER of Certified Payrolls for the previous month.
- E. All Work required by the Contract, Drawings, and Specifications not otherwise used as a separate bid item, shall be considered as included in the prices of the bid, and no additional compensation will be made.

1.2 SCHEDULE OF COSTS FOR PAYMENTS

- A. Submit to the ENGINEER, within 5 days of acceptance of the Construction Schedule, five (5) copies of a Schedule of Costs. The Schedule of Costs shall be a form showing a detailed breakdown of quantities and prices of work and materials required to perform and complete the contract.
- B. The Schedule of Costs shall provide a cost breakdown for each element detailed in the approved Construction Schedule. The total of the price breakdown must agree with the lump-sum price bid. The elements listed and price breakdown shall not be front end loaded or unbalanced, shall be subject to adjustment between the ENGINEER and the CONTRACTOR, and will be used as a basis for progress payments.
- C. The Schedule of Costs will be used as a basis for determining the amount of the monthly progress payments.
- D. Acceptance of the Schedule of Costs by the ENGINEER shall not relieve the CONTRACTOR of the responsibility of performing all the work needed to complete the project at the lump-sum price bid.

1.3 DEFINITION OF BID ITEMS AND STANDARD MEASUREMENT AND PAYMENT

- A. Definition of Bid Item Quantities:

01200-1

1. Lump Sum (LS) – The bid amount for performing all related and/or required work to complete item in question.
 2. Linear Foot (LF) – The bid amount for distance measured horizontally along the ground surface to determine the length of work performed.
 3. Square Foot (SF) – The bid amount for the surface area of an item of work measured in its final placed condition.
 4. Each (EA) – The bid amount for performing all related or required work to construct one complete work item as specified and shown on plans.
 5. Cubic Yard (CY) – The bid amount for the volumetric area of an item of work measured in its final placed condition.
 6. Allowance (ALLOW) – Cash allowance.
- B. Standard Measurement and Payment
1. Standard measurement and payment for each unit price type shall be per the following unless otherwise noted:
 - a. Lump Sum (LS) – The CONTRACTOR of the Work shall be paid a percentage of lump sum amount equal to percent completion, installed and tested as approved and accepted by the OWNER and ENGINEER during the construction of the Work.
 - b. Linear Foot (LF) – The CONTRACTOR of the Work shall be paid by actual installed linear foot, calculated on a reference alignment or along center line of the pipe, installed and tested as approved and accepted by the OWNER and ENGINEER during the construction of the Work.
 - c. Square Foot (SF) – The CONTRACTOR of the Work shall be paid by actual installed square footage, installed and tested as approved and accepted by the OWNER and ENGINEER during the construction of the Work.
 - d. Each (EA) – The CONTRACTOR of the Work shall be paid by actual number of work items, installed and tested as approved and accepted by the OWNER and ENGINEER during the construction of the Work.
 - e. Cubic Yard (CY) – The CONTRACTOR of the Work shall be paid by actual installed volume in cubic yards, installed and tested as approved and accepted by the OWNER and ENGINEER during the construction of the Work.
 - f. Allowance (ALLOW) – The cash allowances include the cost to CONTRACTOR of the Work (less any applicable trade discounts) of materials and equipment required by the allowances to be delivered at the Site, and all applicable taxes. CONTRACTOR's costs for unloading and handling on the Site, labor, installation, overhead, profit, and other expenses contemplated for the cash allowances shall be included in in other Unit Price Work, and not in the allowance. Under no condition shall the total cost for work under this Bid Item exceed the Allowance value, without prior written approval of the OWNER.

1.4 DESCRIPTION OF BID ITEMS

- A. All labor, materials, equipment and supplies required for provision of complete and operational pipelines and pump station systems in accordance with the Contract Documents shall be the responsibility of the Contractor to provide as part of the project work regardless of that individual item being specifically called out within the Bid Item descriptions provided herein. Contractor shall include these costs as part of the project unit price work within the Bid Items.

1	<u>Mobilization/Demobilization (LS):</u> This item consists of preparatory work and operational implementation, including, but not limited to, those necessary for the
----------	---

01200-2

	<p>movement of personnel, equipment, supplies, and incidentals to the Site; and for all other work and operations which must be performed, or costs incurred, prior to beginning the Work, and as described in Specification Section 01505</p> <ol style="list-style-type: none"> 1. Measurement and Payment: <ol style="list-style-type: none"> a. Payment for mobilization/demobilization will be as follows: <ol style="list-style-type: none"> 1) When the Contract, proposed Description of Bid Items includes a separate item for mobilization/demobilization, payment for mobilization/demobilization will include full compensation for the furnishing of all labor, materials, tools, equipment, administrative costs, and incidentals for mobilization/demobilization. 2) The OWNER anticipates no greater than three percent (3%) of the total Contract Sum as a separate pay item for mobilization/demobilization. 3) In the event the CONTRACTOR submits a mobilization/demobilization pay item greater than three percent (3%) of the total Contract Sum, the OWNER will pay any excess mobilization/demobilization amount with the final Progress Payment. b. Payment for mobilization/demobilization will be prorated as follows: <ol style="list-style-type: none"> 1) When the Progress Payment request is three percent (3%) or more of the original total Contract Sum (excluding mobilization/demobilization), fifty percent (50%) of the contract item price for mobilization/demobilization or one and one-half percent (1.5%) of the total Contract Sum, whichever is less, will be paid for mobilization/demobilization. 2) When the Progress Payment request is ten percent (10%) or more of the original total Contract Sum (excluding mobilization/demobilization), seventy percent (70%) of the contract item price for mobilization/demobilization or two percent (2%) of the total Contract Sum, whichever is less, will be paid for mobilization/demobilization. 3) When the Progress Payment request is twenty percent (20%) or more of the original total Contract Sum (excluding mobilization/demobilization), ninety percent (90%) of the contract item price for mobilization/demobilization or two and one-half percent (2.5%) of the total Contract Sum, whichever is less, will be paid for mobilization/demobilization. 4) When the Progress Payment request is fifty percent (50%) or more of the original total Contract Sum (excluding mobilization/demobilization), one hundred percent (100%) of the contract item price for mobilization/demobilization or three percent (3%) of the total Contract Sum, whichever is less, will be paid for mobilization/demobilization. 5) After final acceptance of the Contract, the amount, if any, of the Contract item price for mobilization/demobilization in excess of three percent (3%) of the original total Contract Sum will be included for payment in the final estimate. c. The OWNER will not pay additional mobilization/demobilization compensation for work under a Contract Change Order. Payment for mobilization/demobilization shall be subject to retention.
2	<p><u>Special Constraints, Work Plans, General Requirements, Special Inspection and Permits (LS):</u> This item consists of all labor, materials, equipment and supplies and preparatory work and operational implementation of the special project constraints, work plans, general requirements, special inspection and permits as described in the Contract Documents, including but not limited to Specification Section 01130, Contract Drawing</p>

01200-3

	<p>Civil and Permitting General Notes. Additional miscellaneous items for the construction of the Work, which is not included in the specific bid items, shall be included in this bid item.</p> <p>1. Measurement and Payment:</p> <p>a. Payment for development and implementation of special requirements described in the sequence of work shall be on a lump sum basis. OWNER will pay not more than one and one-half percent (1.0%) of the total Contract Sum as a separate pay item for all required plans and permits.</p> <p>b. CONTRACTOR may submit for payment of one quarter (1/4) of this pay item after submittal of the plan to the OWNER for review.</p> <p>c. CONTRACTOR may submit for the second one quarter (1/4) of this pay item upon receipt of approved submittal by the OWNER.</p> <p>d. CONTRACTOR may submit for the remaining one half (1/2) of this pay item after all measures described in the plan have been implemented to the satisfaction of the OWNER and construction has commenced</p>
3	<p><u>Excavation Sheeting, Shoring, and Bracing (LS):</u> This item consists of all labor, materials, equipment and supplies required to provide sheeting, shoring, and bracing pursuant to health and safety requirements set forth by OSHA and as described in Specification Section 02300 for all open cut excavation exclusive of the Willow Camp Creek and Roundabout trenchless construction jacking and receiving shafts, which are incorporated in a separate bid item.</p>
4	<p><u>Traffic Control, Outreach, & Signage (LS):</u> This item consists of all labor, materials, equipment and supplies, to prepare and implement an approved traffic control plan, public outreach, active electronic or printed signage, banners, printed notifications and flyers in accordance with Caltrans and OWNER encroachment permit provisions, Contract Drawing Traffic Handling sheets, Contract Drawing Civil and Permitting General Notes, and in Specification Section 01130., and any other applicable County, State, and Federal requirements. The traffic control plan shall comply with current edition MUTCD and MUTCD California Supplement requirements and Section 12 of Caltrans Standard Specifications.</p>
5	<p><u>Additional Signage Allowance (ALLOW):</u> This item consists of all labor, materials, equipment and supplies to provide and place active electronic or printed signage, banners, printed notifications and flyers where requested by the Construction Manager or OWNER to augment public outreach and communication efforts in excess of the CONTRACTOR's traffic control, outreach, and signage. CONTRACTOR shall include an Allowance of \$5,000 (five thousand dollars) for this bid item.</p>
6	<p><u>LS-3 SSFM Temporary Bypass, Demo & Abandonment (LS):</u> This item consists of all labor, materials, equipment and supplies required to prepare a plan and provide sewage bypassing and temporary facilities of the existing Lift Station 3 (LS-3) sanitary sewer forcemain (SSFM) and sanitary sewer gravity main in accordance with Specification Section 01550.</p>
7	<p><u>PS-A SSFM Temporary Bypass Pumping (LS):</u> This item consists of all labor, materials, equipment and supplies required to prepare plans and provide sewage bypass pumping and temporary facilities of the existing sewer gravity mains in Atascadero Rd in front of Pump Station A (PS-A) in accordance with Specification Section 01550.</p>
8	<p><u>PS-B SSFM Temporary Bypass Pumping (LS):</u> This item consists of all labor, materials, equipment and supplies required to prepare plans and provide sewage bypass pumping and temporary facilities of the existing sewer gravity mains in Main St in front of Pump Station B (PS-B) in accordance with Specification Section 01550.</p>
9	<p><u>Temporary Facilities & Miscellaneous Bypass Pumping (LS):</u> This item consists of all labor, materials, equipment and supplies required to prepare plans and provide miscellaneous potable water bypassing, sewage bypassing, sewage bypass pumping and temporary facilities of the OWNER's sewer collection system and water distribution system not included in other specific bid items, in accordance with Specification Section 01550</p>

01200-4

	and Contract Drawing Civil General Notes.
10	<u>Water Pollution Control, SWPPP Preparation, BMP Implementation, and Monitoring (LS):</u> This item consists of all labor, materials, equipment and supplies for general project water pollution control for areas disturbed by the CONTRACTOR during the course of the Work, Stormwater Pollution Prevention Plan (SWPPP) preparation, CASQA best management practice (BMP) implementation, and monitoring, as described in Specification Section 01140. This item shall include additional application of 500-LF of silt fencing or straw wattles across locations delineated by the Construction Manager and/or Project Biologist identified during the course of construction and not currently depicted within the Contract Drawings.
11	<u>Landscaping, Hydroseeding, and Misc. Surface Restoration (LS):</u> This item consists of all labor, materials, equipment and supplies to install landscaping, hydroseeding with approved mix in easement or City/State Right of Way, placement of permanent rolled erosion control products, and miscellaneous surface restoration exclusive of concrete and asphaltic concrete pavement replacement/rehabilitation. This item shall include an additional 0.5-acre application of hydroseeding across locations delineated by the Construction Manager identified during the course of construction and not currently depicted within the Contract Drawings.
12	<u>Utility Verification During Construction (LS):</u> This item consists of all labor, materials, equipment and supplies for utility verification of utilities within 3.0-LF of excavation limits a minimum of two (2) weeks prior to excavation and within 200-LF of advancing linear construction activities, as further described in Contract Drawing Civil General Notes. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, backfilling/compaction, and surface restoration or pavement replacement.
13	<u>High Priority Utility Verification Before Construction (EA):</u> This item consists of all labor, materials, equipment and supplies for utilities marked "high priority utility verification required" in the Contract Drawings and shall be surveyed and results submitted within 60 days of project commencement. THE UNIT PRICE includes demolition, excavation, spoils & deleterious materials removal/off-haul, backfilling/compaction, and surface restoration or pavement replacement.
14	<u>Utility Crossings, Special Inspection, and Utility Coordination Support (LS):</u> This item consists of all labor, materials, equipment and supplies for high pressure gas or petroleum utility crossing support plans and implementation, utility pole holds, special inspection fees, utility owner plan review fees, and utility coordination support with the utility operations staff. This item shall include all preparatory work and submittals.
15	<u>Tree Removal (EA):</u> This item consists of all labor, materials, equipment and supplies for removal of trees & stumps 6" diameter-at-breast-height (DBH) and greater marked for removal within the Contract Drawings. This item shall include an additional removal of ten (10) trees/stumps at locations delineated by the Construction Manager during the course of construction and not currently depicted in the Contract Drawings.
16	<u>Well Destruction, Miscellaneous Demolition & Abandonment (LS):</u> This item consists of all labor, materials, equipment and supplies for acquiring and implementing a County well-destruction permit for one (1) groundwater well destruction near Morro Creek, well house demolition, miscellaneous demolition, pipeline demolition, capping, plugging, and/or abandonment not included in other specific bid items. The lump sum price includes clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, and annulus fill where delineated. The lump sum price shall include provisions for hazardous asbestos cement pipe handling, removal and disposal to an approved waste facility.
17	<u>Administration and Maintenance Building Drains (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Maintenance and Administration

01200-5

	Building drain lines, including appurtenances and connection points. The lump sum price includes the extension or modification of existing utilities in order to connect to the new structures, demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
18	PS-A: 15" SS & Junction MHs (LS): This item consists of all labor, materials, equipment and supplies for installation of the 15" SS gravity pipeline terminating at the PS-A Junction Manhole, and two (2) sanitary sewer junction manholes. The lump sum price includes the extension or modification of existing utilities in order to connect to the new structures, demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement where not included in other bid items, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
19	PS-A: Diversion MH & 24" SS (LS): This item consists of all labor, materials, equipment and supplies for installation Diversion Manhole and 24" SS gravity pipeline, terminating at the PS-A Junction Manhole. The lump sum price includes the extension or modification of existing utilities in order to connect to the new structures, demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement where not included in other bid items, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
20	PS-A: PS-A Junction MH (LS): This item consists of all labor, materials, equipment and supplies for installation of the PS-A Junction Manhole. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement where not included in other bid items, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
21	PS-A: 24" SS Inlet & 8" RO MH (LS): This item consists of all labor, materials, equipment and supplies for installation of the 24" SS inlet pipe, from the PS-A Junction MH to the PS-A wet well, and the RO Manhole. The lump sum price includes the extension or modification of existing utilities in order to connect to the new structures, demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement where not included in other bid items, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
22	PS-A: Miscellaneous Demolition and Abandonment (LS): This item consists of all labor, materials, equipment and supplies for the demolition and removal of the Consolidated Maintenance Building and its contents and the miscellaneous pipeline demolition, capping, plugging, and/or abandonment, surface restoration and pavement replacement where not included in other bid items. The extent of demolition and abandonment shall be consistent with the Pump Station A Demolition Plan in the Contract Drawings. This item shall include provisions for hazardous asbestos material and asbestos cement pipe handling, removal and disposal to an approved waste facility if encountered.
23	PS-A: Soil Improvements (LS): This item consists of all labor, materials, equipment and supplies for the selected soil improvement method at the PS-A site as described on the Pump Station A Overall Plan in the Contract Drawings. This item shall include demolition,

01200-6

	excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, and testing.
24	<u>PS-A: Emergency Storage Structures & 18" OF (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Emergency Storage Structures and 18" OF. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
25	<u>PS-A: Site Improvements, Pump Station Wet Well, Mechanical & Structural Improvements, and Odor Control System (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Pump Station A Site Improvements, Pump Station Wet Well, Mechanical and Structural Improvements and Odor Control System. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, connection, realignment and replacement required. Site Improvements shall include all civil work described in Pump Station A Civil plans, such as pavement, sidewalk, curb, gutter, fencing, grading, site drainage, sidewalks, stairs, equipment pads, grating, etc. The Pump Station Wet Well, Mechanical and Structural Improvements shall be as described in the Pump Station A Mechanical, Structural, Architectural, HVAC and Yard Piping plans (unless covered under other bid items such as FM1 and FM2 beyond the transition from ductile iron pipe), such as the pump station wet well structure, electrical building, pumps, piping and associated appurtenances, HVAC system, etc. The Odor Control System shall include the odor control unit and associated piping and appurtenances included in the Pump Station A Civil, Mechanical and Yard Piping plans.
26	<u>PS-A: Electrical Improvements, Emergency Generator & Antenna (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Pump Station B Electrical Improvements, Emergency Generator & Antenna. The lump sum price includes testing and connection. Electrical Improvements shall include all electrical work described in Pump Station B Electrical plans and Division 16 of the Specifications, meter/main, ATS Distribution, VFDs, panels, instrumentation, etc. The Emergency Generator shall include a filled fuel tank as described in the Mechanical and Electrical plans in the Contract Drawings and per Division 16 of the Specifications. The Antenna shall be a deferred submittal and designed by an Electrical Systems Engineer in conjunction with a Civil or Structural Engineer as described in the Contract Drawings and Specifications.
27	<u>STA 56+75 FM Junction MH & 24"SS (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the FM Junction Manhole and 24" SS, terminating at the PS-B Junction Manhole. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, The lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
28	<u>PS-B: PS-B Junction MH (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the PS-B Junction Manhole. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair,

01200-7

	realignment and replacement required.
29	<u>PS-B: 24" SS Inlet (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the 24" SS gravity pipeline, terminating at the PS-B wet well. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
30	<u>PS-B: 8"SS Diversion MH & 8"SS (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the PS-B Diversion MH and 8" SS and casing installed via pipe ramming trenchless construction. The lump sum price includes the extension or modification of existing utilities in order to connect to the new structures. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration and pavement replacement where not included in other bid items, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.
31	<u>PS-B: Miscellaneous Demolition and Clearing & Grubbing (LS):</u> This item consists of all labor, materials, equipment and supplies for the demolition, clearing and grubbing and removal of material at the existing PS-B site, consistent with the Pump Station B Demolition Plan in the Contract Drawings. This item shall include provisions for hazardous asbestos cement pipe handling, removal and disposal to an approved waste facility if encountered.
32	<u>PS-B: Site Improvements, Pump Station Wet Well, Mechanical, Structural & Architectural Improvements, Surge Tank System, and Odor Control (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Pump Station B Site Improvements, Pump Station Wet Well, Mechanical, Structural & Architectural Improvements, Surge Tank System and Odor Control System. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, connection, realignment and replacement required. Site Improvements shall include all civil work described in Pump Station B Civil plans, such as pavement, sidewalk, curb, gutter, fencing, grading, site drainage, sidewalks, stairs, equipment pads, grating, etc. The Pump Station Wet Well, Mechanical & Structural Improvements shall be as described in the Pump Station B Mechanical, Structural, Architectural, HVAC and Yard Piping plans (unless covered under other bid items), such as the pump station wet well structure, electrical building, pumps, piping and associated appurtenances, HVAC system, etc. The Surge Tank System shall include the surge tank, air compressor and associated piping and appurtenances included in the Pump Station B Civil, Mechanical and Yard Piping plans. The Odor Control System shall include the odor control unit and associated piping and appurtenances included in the Pump Station B Civil, Mechanical and Yard Piping plans.
33	<u>PS-B: Electrical Improvements & Emergency Generator (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of the Pump Station B Electrical Improvements, Emergency Generator. The lump sum price includes testing and connection. Electrical Improvements shall include all electrical work described in Pump Station B Electrical Plans and Division 16 of the Specifications, meter/main, ATS Distribution, VFDs, panels, instrumentation, etc. The Emergency Generator shall include a filled fuel tank as described in the Mechanical and Electrical plans in the Contract Drawings and per Division 16 of the Specifications.

01200-8

34	<u>Air Relief Structure Demolition & Rehabilitation (LS):</u> This item consists of all labor, materials, equipment and supplies for demolition and rehabilitation of the existing air relief structure for the ocean outfall and Brine termination at the existing City WWTP.
35	<u>RO Discharge to Brine Connection (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipelines, valves, and appurtenances for the RO Discharge to Brine Connection in Atascadero Rd. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration where not included in other bid items, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
36	<u>Miscellaneous SB HWY-1 On-Ramp Embankment Improvements (LS):</u> This item consists of all labor, materials, equipment and supplies required to complete miscellaneous SB HWY-1 On-Ramp embankment improvements in State R/W, including but not limited to protecting in place delineated items, replacing sidewalk and curb and gutter, chain link fence, AC curbs, signage, setting the grade hinge point, and embankment grading.
37	<u>Utility Bridge Abutments & Dewatering (LS):</u> This item consists of all labor, materials, equipment and supplies required to install the utility bridge concrete abutments and appurtenances. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction up to underside of road base material or pavement/existing grade where delineated.
38	<u>Prefabricated Utility Bridge (LS):</u> This item consists of all labor, materials, equipment and supplies required to install the prefabricated utility bridge.
39	<u>Utility Bridge Mechanical Improvements, Pipe Supports, and Appurtenances (LS):</u> This item consists of all labor, materials, equipment and supplies required to install the utility bridge mechanical improvements, carrier and casing pipes to the limits delineated, casing spacers, valves, vents, pipe supports, and appurtenances. The lump sum price includes excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, surveying, and disinfection if required.
40	<u>Utility Bridge North Site and Electrical Improvements & South Site Improvements (LS):</u> This item consists of all labor, materials, equipment and supplies required to install site and electrical improvements for the north and south utility bridge sites per the Contract Drawings and Division 16 of the Specifications. The lump sum price includes but is not limited to surface restoration and porous gravel paving, fencing, gates, and bollards.
41	<u>Passive Odor Control Station, Pad, Drain, and Vents (EA):</u> This item consists of all labor, materials, equipment and supplies required to install a fully operational passive odor control station, concrete pads, drain lines, vent lines, bollards, bedding/backfilling/compaction, cleaning, testing, surveying, and subgrade preparation. CONTRACTOR shall provide one (1) complete passive odor control media replacement backup.
42	<u>Bike Path Chain Link Fence Replacement (LF):</u> This item consists of all labor, materials, equipment and supplies required to replace the chain link fence, existing gates, and barbed wire along the bike path. THE UNIT PRICE includes demolition, spoils & deleterious materials removal/off-haul
43	<u>Main St Retaining Wall & Railing Replacement (LS):</u> This item consists of all labor, materials, equipment and supplies required to replace Main St to Quintana retaining wall structure, footing, backing, and railing. The lump sum price includes demolition, excavation, spoils & deleterious materials removal/off-haul, dewatering, and

01200-9

	bedding/backfilling/compaction.
44	STA 95+00 36" Storm Drain Replacement & MHs (LS): This item consists of all labor, materials, equipment and supplies for the installation of the 36" Storm Drain replacement, three (3) Storm Drain Manholes, and the connection to or termination into the existing storm drain pipe or inlet structure. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, surface restoration, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
45	STA 106+64 Storm Drain Crossing Replacement (LS): This item consists of all labor, materials, equipment and supplies for the replacement of an existing storm drain and the connection to or termination into the existing storm drain pipe or inlet structure. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
46	STA 121+62 Storm Drain Crossing Replacement (LS): This item consists of all labor, materials, equipment and supplies for the replacement of an existing storm drain and the connection to or termination into the existing storm drain pipe or inlet structure. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
47	STA 94+50 ARV Installation, Vaults, Appurtenances, and Vents (LS): This item consists of all labor, materials, equipment and supplies for the installation of pre-cast concrete vaults, valves, appurtenances, drains, sewer lateral connection to gravity mains, cleanouts, bollards, vent piping and casings. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
48	STA 114+50 CARV Installation, Vaults, Appurtenances, and Vents (LS): This item consists of all labor, materials, equipment and supplies for the installation of pre-cast concrete vaults, valves, appurtenances, drains, sewer lateral connection to gravity mains, cleanouts, bollards, vent piping and casings. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
49	STA 126+80 CARV Installation, Appurtenances, and Vents (LS): This item consists of all labor, materials, equipment and supplies for the installation of pre-cast or cast-in-place concrete pad, valves, appurtenances, vent piping, casings. The lump sum price

01200-10

	includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item.
50	<u>STA 149+50 LS-3 Connection (LS):</u> This item consists of all labor, materials, equipment and supplies for the installation of LS-3 to dual FM1 and FM2 connection piping, valves, and appurtenances. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item
51	<u>Quintana 10" Relocated Water Hydrant Connections (EA):</u> This item consists of all labor, materials, equipment and supplies for hydrant reinstatements and all piping, valves, and appurtenances to connect to the 10"W relocated pipeline. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes thrust blocks, all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item
52	<u>Willow Camp Creek Jacking and Receiving Shafts & Dewatering (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of jacking and receiving shaft systems and geotechnical instrumentation for the Willow Camp Creek trenchless construction. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, sheeting/shoring/bracing, site security, water pollution control, safety fencing/railing, and surveying. In addition, the lump sum price shall include portal stabilization if required.
53	<u>Willow Camp Creek 60" Steel Casing Auger Bore and Jack Trenchless Construction & Appurtenances (LF):</u> This item consists of all labor, materials, equipment and supplies to install the Willow Camp Creek 60" steel casing via auger bore and jack trenchless construction, pipe spacer system, annular fill, spare fiber optic conduit, contact grouting, and other miscellaneous appurtenances. THE UNIT PRICE shall not include installation of the carrier and casing pipelines, which are delineated and described as part of a separate bid item.
54	<u>Roundabout Microtunneling Jacking and Receiving Shafts & Dewatering (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of jacking and receiving shaft systems and geotechnical instrumentation for the Roundabout trenchless construction. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, sheeting/shoring/bracing, site security, water pollution control, safety fencing/railing, and surveying. In addition, the lump sum price shall include portal stabilization.
55	<u>Roundabout 60" Steel Casing Microtunneling Trenchless Construction & Appurtenances (LF):</u> This item consists of all labor, materials, equipment and supplies to install the Willow Camp Creek 60" steel casing via microtunneling trenchless construction, pipe spacer system, annular fill, spare fiber optic conduit, contact grouting, and other

01200-11

	miscellaneous appurtenances. THE UNIT PRICE shall not include installation of the carrier and casing pipelines, which are delineated and described as part of a separate bid item.
56	<u>Tracer Wire, Tracing Stations, and Termination Ground Rods (LF):</u> This item consists of all labor, materials, equipment and supplies to install tracer wire, tracing stations, termination ground rods, and appurtenances in a joint trench shared with pipeline construction which is delineated and described as part of separate bid items.
57	<u>Fiber Optic Pullboxes (EA):</u> This item consists of all labor, materials, equipment and supplies to install precast concrete fiber optic pullbox systems & appurtenances. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, cleaning, testing, and surveying.
58	<u>Fiber Optic Conduit, Inner Ducts, and FO Cable In Joint Trench (LF):</u> This item consists of all labor, materials, equipment and supplies to install fiber optic conduit, inner ducts, and fiber optic cable in in a joint trench shared with pipeline construction which is delineated and described as part of separate bid items. THE UNIT PRICE shall include pipe testing and cleaning. CONTRACTOR shall select a single conduit material for this bid item from the alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER.
59	<u>Fiber Optic Conduit in Single Trench (LF):</u> This item consists of all labor, materials, equipment and supplies to install fiber optic conduit, inner ducts, and fiber optic cable in an individual trench. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, cleaning, testing, and surveying. In addition, THE UNIT PRICE includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. CONTRACTOR shall select a single conduit material for this bid item from the alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER.
60	<u>Pavement Replacement In T-Trench Limits with no Contiguous Rehabilitation (CY):</u> This item consists of all labor, materials, equipment, and supplies to replace A.C. hot mix pavement and A.B. road base material or prepared subgrade at the required thickness pursuant to Contract Drawing trench details, pavement sheets, and Specification Section 02770, within "T"-trench limits which are defined as trench excavation limits plus 12" on either side. THE UNIT PRICE shall include a minimum 2-week placement of temporary paved drivable surface and temporary striping to the satisfaction of the Construction Manager.
61	<u>Pavement Replacement In T-Trench Limits with Contiguous Rehabilitation (CY):</u> This item consists of all labor, materials, equipment, and supplies to replace A.C. hot mix pavement and A.B. road base material or prepared subgrade at the required total thickness, pursuant to Contract Drawing trench details, pavement sheets, and Specification Section 02770, within "T"-trench limits which are defined as trench excavation limits plus 12" on either side. THE UNIT PRICE shall incorporate milling and overlay within the total required A.C. thickness when contiguous to mill and overlay pavement rehabilitation and shall include a minimum 2 week placement of temporary paved drivable surface and temporary striping to the satisfaction of the Construction Manager.
62	<u>Pavement Rehabilitation Beyond T-Trench Limits (CY):</u> This item consists of all labor, materials, equipment, and supplies to mill and overlay A.C. hot mix pavement beyond T-trench limits to a longitudinal pavement limit line, in accordance with Contract Drawing trench details, pavement sheets, and Specification Section 02770. Application of this item shall be limited to when existing pavement qualifies for Mill and Overlay

01200-12

	rehabilitation, which is defined as existing pavement that is at least 2.0" deeper than the proposed mill depth and if the milled surface can be properly prepared per Specification Section 02770. The ENGINEER has assumed that 70% of total surface area requiring pavement rehabilitation to pavement limit lines shall qualify for Mill and Overlay rehabilitation. The remaining 30% of the total surface area is assumed to not qualify for Mill and Overlay rehabilitation and shall be paid for in a separate bid item. THE UNIT PRICE shall include a minimum 2 week placement of temporary paved drivable surface and temporary striping to the satisfaction of the Construction Manager. THE UNIT PRICE shall include demolition, spoils & deleterious materials removal/off-haul not included in other bid items.
63	<u>Pavement Replacement Beyond T-Trench Limits (CY):</u> This item consists of all labor, materials, equipment, and supplies to replace A.C. hot mix pavement and A.B. road base material or prepared subgrade beyond T-trench limits to a longitudinal pavement limit line, pursuant to Contract Drawing trench details, pavement sheets, and Specification Section 02770. Application of this item shall be limited to when existing pavement does not qualify for Mill and Overlay rehabilitation, which is defined as existing pavement that is less than 2.0" deeper than the proposed mill depth or if the milled surface cannot be properly prepared per Specification Section 02770. THE UNIT PRICE shall incorporate milling and overlay within the total required A.C. thickness when contiguous to mill and overlay pavement rehabilitation. The ENGINEER has assumed that 30% of total surface area requiring pavement rehabilitation shall require use of this bid item. The remaining 70% of the total surface area is assumed to qualify for Mill and Overlay rehabilitation and shall be paid for in a separate bid item. THE UNIT PRICE shall include demolition, spoils & deleterious materials removal/off-haul not included in other bid items.
64	<u>Caltrans Encroachment Pavement Replacement & Rehabilitation (CY):</u> ^{AD4} This item consists of all labor, materials, equipment, and supplies to replace and rehabilitate HMA pavement, trench cap pavement, and road base material or prepared subgrade within trench limits and beyond trench limits to a longitudinal pavement limit line, pursuant to Contract Drawing trench details, pavement sheets, and Specification Section 02770. The unit price shall incorporate milling and overlay within the total required HMA thickness. THE UNIT PRICE shall include demolition, spoils & deleterious materials removal/off-haul not included in other bid items. Application of this item shall be limited to Caltrans encroachment in Atascadero, SB HWY-1 On-Ramp shoulder, and South Bay Blvd through Teresa Rd.
65	<u>Bike Path Pavement Replacement (LF):</u> These items consist of all labor, materials, equipment, and supplies to replace the cast-in-place concrete or A.C. pavement and A.B. road base material or prepared subgrade of the bike path. THE UNIT PRICE shall include demolition, spoils & deleterious materials removal/off-haul not included in other bid items.
66	<u>Bike Path Subgrade Drain Rock Reinforcement (LF):</u> This item consists of all labor, materials, equipment, and supplies to install geotextile fabric wrapped drain rock to reinforce the bike path subgrade. THE UNIT PRICE shall include demolition, spoils & deleterious materials removal/off-haul not included in other bid items.
67	<u>Striping, Stenciling, & Curb Painting (LS):</u> This item consists of all labor, materials, equipment, and supplies to install permanent striping and stenciling over finished pavement and to paint curbs to match pre-construction conditions.
68	<u>Flatwork, Curbs, & Gutter Replacement (LF):</u> This item consists of all labor, materials, equipment, and supplies to replace existing concrete flatwork, sidewalks, curbs, curb & gutters, valley gutters, cross gutter and spandrels, ramps, and driveways and match pre-construction conditions unless otherwise noted in accordance with the Contract Drawing paving sheets. THE UNIT PRICE shall include demolition, deleterious material removal/off-haul, and preparing a proper subgrade.
69	<u>Brine Pipeline (LF):</u> These items consist of all labor, materials, equipment and supplies

01200-13

	for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the Brine pipeline specific to the alignment stationing or limits delineated in the item. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. CONTRACTOR shall select a single carrier pipeline material for this bid item from the HDPE or FPVC alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER in accordance with project-specific hydraulic design parameters.
70	<u>FM1 & FM2 Pipelines (PS-A) (LF):</u> These items consists of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the dual FM1 and FM2 pipelines from PS-A specific to the alignment stationing or limits delineated in the item. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. CONTRACTOR shall select a single carrier pipeline material for this bid item from the HDPE or FPVC alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER in accordance with project-specific hydraulic design parameters.
71	<u>FM1 & FM2 Pipelines (PS-B) (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the dual FM1 and FM2 pipelines from PS-A specific to the alignment stationing or limits delineated in the item. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, up to underside of road base material or pavement/existing grade where delineated, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes non-HPG/petroleum utility crossing mitigation/support where required and utility service line reinstatements where delineated. CONTRACTOR shall select a single carrier pipeline material for this bid item from the HDPE or FPVC alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER in accordance with project-specific hydraulic design parameters.
72	<u>IPR Pipeline (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the IPR pipeline specific to the alignment stationing or limits delineated in the item. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. CONTRACTOR shall select a single carrier pipeline material for this bid item from the

01200-14

	HDPE or FPVC alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER in accordance with project-specific hydraulic design parameters.
73	<u>LS-2 FM (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the LS-2 pipeline from Lift Station 2. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. CONTRACTOR shall select a single carrier pipeline material for this bid item from the HDPE or FPVC alternatives delineated in the Contract Drawings, which are delineated as functionally equivalent alternatives by the ENGINEER in accordance with project-specific hydraulic design parameters.
74	<u>Relocated 12" Water Pipeline, Temporary Bypass, Demo & Abandonment (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the relocated 12"W pipeline. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes thrust blocks, all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. In addition, THE UNIT PRICE includes pipeline demolition or abandonment, and bypassing and temporary facilities per Contract Drawing General Civil Notes and Specification Section 01550.
75	<u>Relocated 10" Water Pipelines, Temporary Bypass, Demo & Abandonment (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for the relocated 12"W pipeline. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes thrust blocks, all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. In addition, THE UNIT PRICE includes pipeline demolition or abandonment, and bypassing and temporary facilities per Contract Drawing General Civil Notes and Specification Section 01550 and shall include provisions for hazardous asbestos cement pipe handling, removal and disposal to an approved waste facility.
76	<u>Miscellaneous Water Relocation, Temporary Bypass, Demo & Abandonment (LF):</u> These items consist of all labor, materials, equipment and supplies for installation of carrier pipeline, casing pipeline, valves, and appurtenances for miscellaneous relocated water pipelines. THE UNIT PRICE includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, THE UNIT PRICE includes thrust blocks, and all utility crossing mitigation/support and service line protection, repair, realignment and replacement

01200-15

	required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. In addition, THE UNIT PRICE includes pipeline demolition or abandonment, and bypassing and temporary facilities per Contract Drawing General Civil Notes and Specification Section 01550 and shall include provisions for hazardous asbestos cement pipe handling, removal and disposal to an approved waste facility.
77	<u>Relocated Raw Water & Electrical Conduit, Temporary Bypass, Demo & Abandonment (LS):</u> This item consists of all labor, materials, equipment and supplies for installation of relocated raw water pipeline, electrical conduit, and electrical cable. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes thrust blocks, and all utility crossing mitigation/support and service line protection, repair, realignment and replacement required, except HPG/petroleum utility crossing mitigation/support which is delineated and described as part of a separate bid item. In addition, the lump sum price includes pipeline demolition or abandonment, and bypassing and temporary facilities per Contract Drawing General Civil Notes and Specification Section 01550 and shall include provisions for hazardous asbestos cement pipe handling, removal and disposal to an approved waste facility.
78	<u>Brine Extension at STA 60+70 (LS):</u> ^{AD5} This item consists of all labor, materials, equipment and supplies for installation of Keynotes 8, 9, 10, 11, 12, and 13 on 05-PP-13. The lump sum price includes demolition, clearing of vegetation and trees up to 6" DBH, grubbing, excavation, spoils & deleterious materials removal/off-haul, dewatering, bedding/backfilling/compaction, trench restoration where located outside of pavement, annulus fill where delineated, cleaning, testing, surveying, and disinfection if required. In addition, the lump sum price includes thrust blocks, and all utility crossing mitigation/support and service line protection, repair, realignment and replacement required.

1.5 PAYMENT FOR MOBILIZATION

A. Mobilization Cost Breakdown:

1. As soon as practicable after receipt of the Notice to Proceed, the CONTRACTOR shall submit a breakdown to the ENGINEER for approval, which shall show the estimated value of each major component of mobilization.
2. When approved by the ENGINEER, the breakdown will be the basis for initial progress payments in which mobilization is included.
3. Said breakdown shall not be "front end loaded" or unbalanced.

B. One CONTRACTOR payment may be made prior to acceptance of the Construction Schedule, Schedule of Costs, and list of anticipated submittals.

1. Payment shall be limited to mobilization items only.
2. The Construction Schedule is described in Section 01320, Construction Schedule.
3. Mobilization items are described in Section 01505, Mobilization.
4. The Schedule of Costs is described in Article 1.2 of this Section.
5. The list of anticipated submittals is described in Section 01330, Submittal Procedures.

01200-16

1.6 PROGRESS PAYMENTS

- A. Progress Payment Request Submittal:
1. Unless otherwise mutually agreed, by the 25th of each month, the CONTRACTOR shall prepare and submit monthly progress payment requests for work completed through the 25th day of the month.
 2. Said payment request shall be based on the breakdown of activities as specified in the Schedule of Costs described in Article 1.2 above.
 3. The monthly schedule update shall be submitted as part of the monthly progress payment report.
- B. The ENGINEER will review progress payment requests and make a determination of the percent completion of all activities (rounded to the nearest whole percent) based on an approximate measurement of all materials supplied and work performed.
- C. In the event that the CONTRACTOR fails to provide the OWNER with an acceptable Monthly Contract Record Drawing Submittal in accordance with Section 01330, the OWNER shall deduct compensation for such monthly submittal as provided in Section 01320. Said deduction shall become the sole property of the OWNER.
- D. Retention:
1. From the amount thus determined, five percent thereof will be deducted as retention by OWNER for performance security.
 2. Acceptance of separate components shall not operate to release performance retention.
 3. The amount of all payments previously made to the CONTRACTOR and any amounts due the OWNER from the CONTRACTOR for supplies, materials, services, damages, or otherwise deductible under the terms of the contract will be deducted from the remainder.
 4. The remaining amount will be paid as a progress payment by the OWNER to the CONTRACTOR on the third Friday of the succeeding month or as soon thereafter as is practical.
- E. In addition to the retention under Paragraph D above, the whole or part of any payment of the estimated amount due the CONTRACTOR may be withheld as an additional retention if such course be deemed necessary to protect the OWNER from loss due to the CONTRACTOR's failure to perform any of the following: (1) meet CONTRACTOR's payment obligations; (2) execute the work; (3) correct defective work; (4) settle damages as provided; or (5) produce substantial evidence that no stop notices will or have been filed, and/or if it has been determined that unpaid balances may be insufficient to complete the work.
- F. All material and work covered by progress payments thereupon become the sole property of the OWNER, but this provision shall not be construed as relieving the CONTRACTOR from sole responsibility for all materials and work upon which payments have been made or the restoration of any damaged work or as a waiver of the OWNER's right to require fulfillment of all of the contract terms. Said CONTRACTOR's obligation extends through the close of the warranty period.
- G. Payment for Materials:
1. No payment shall be made for materials stored offsite.

01200-17

2. Payment may be made for those materials delivered to the site but not incorporated in the work to the extent that the materials are included in the Construction Schedule as cost-loaded material delivery activities.
3. Only material items manufactured specifically for this project and that cost individually in excess of \$20,000 will be considered for partial payment as stored materials.
4. Partial payment for materials delivered will not be made before the respective shop drawings, installation instructions and O&M manuals have been submitted, reviewed, and accepted in accordance with Section 01330, Submittal Procedures.
5. To receive partial payment for materials delivered to the site, but not incorporated in the work, it shall be necessary for the CONTRACTOR to submit to the ENGINEER, at least 7 days prior to the end of said month, a list of such materials.
6. At their sole discretion, the ENGINEER will approve items for which partial payment is to be made.
7. The list of materials and invoices shall be clearly identified by referencing the associated activity or item on the price breakdown.
8. Partial payment for materials delivered to the site or a bonded warehouse will be made in an amount equal to 75% of the respective suppliers' invoices(s) for the actual net cost for the item(s) delivered plus delivery charges.
9. The CONTRACTOR's actual net cost for the materials must be supported by invoices of suppliers.
10. Proper storage and protection of materials shall be provided by the CONTRACTOR. Final payment shall be made only for materials actually incorporated in the work and, upon acceptance of the work, all materials remaining for which advance payments had been made shall revert to the CONTRACTOR, unless otherwise agreed, and partial payments made for these items shall be deducted from the final payment for the work.

1.7 FINAL PAYMENT AND RELEASE OF CLAIMS

1. Upon the completion of the work as determined by the ENGINEER, a Notice of Acceptance will be issued and recorded with the County.
2. The OWNER will pay to the CONTRACTOR within 35 days after filing of the Notice of Acceptance, or as soon thereafter as practicable, the remaining amount due the CONTRACTOR including retainage, less all prior payments and advances whatsoever to or for the account of the CONTRACTOR for supplies, materials, services, damages, stop notices, or otherwise deductible under the terms of the contract.
3. All prior estimates and payments including those relating to extra work shall be subject to correction by this payment, which throughout this contract is called "Final Payment".

1.8 RELEASE OF CLAIMS:

- A. Neither the final payment nor any part of the retained percentage shall become due until the CONTRACTOR shall have delivered to the OWNER a complete release of all claims against the OWNER arising under and by virtue of this contract and related to undisputed amounts, including claims of Subcontractors and suppliers of either materials or labor.
- B. If disputed contract claims in stated amounts are unresolved 35 days after issuance of the Notice of Acceptance, a progress payment of undisputed amounts and retained funds will be made by OWNER upon receipt of a release specifically excluding the disputed contract claims.

01200-18

- C. Claims by the OWNER against the CONTRACTOR for liquidated damages or actual damages or other causes will be a valid basis for withholding of funds by the OWNER.
- D. Upon resolution of disputed claims the CONTRACTOR shall execute a supplemental release and, upon delivery the OWNER will make final payment.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

SECTION 01320**PROGRESS SCHEDULE****PART 1 - GENERAL****1.1 WORK INCLUDED**

- A. The work specified in this Section includes the preparation and submittal of a computerized Critical Path Method (CPM) Construction Schedule and of updates and revisions to the Construction Schedule.
- B. The computerized CPM schedule shall be completed using Primavera P6 scheduling system and software.
- C. The requirements specified under Section 01330, Submittal Procedures, also apply to the Construction Schedule initial submittal(s) and subsequent updates and revisions.

1.2 REFERENCE

- A. General:
 - 1. Applicable Reference shall be the Associated General Contractors of America (AGC) Publication No. 1107.1, "Construction Planning and Scheduling", latest edition.
 - 2. The preparation of the Construction Schedule, its principles, definitions and terms shall be as set forth in that reference.
 - 3. In case of conflict, the provisions specified in this Section shall govern and supersede conflicting provisions in such reference.

1.3 PREPARATION AND SUBMITTAL PROCEDURE

- A. Responsible Person:
 - 1. Within five days after Notice to Proceed, the CONTRACTOR shall designate, in writing, the person responsible for the preparation of the Construction Schedule.
 - 2. Such person shall have the authority to act on behalf of the CONTRACTOR and be knowledgeable in the preparation of CPM schedules of similar complexity.
 - 3. This person shall meet with the Engineer, within 10 days of the Notice to Proceed for a joint review and approval of the CONTRACTOR's approach.
- B. Initial Schedule Submittal:
 - 1. The Construction Schedule shall be completed and submitted to the Engineer within 30 days after Notice to Proceed.
 - 2. If the initial Construction Schedule submittal is not acceptable to the Engineer, it shall be revised in coordination with observations and comments from the Engineer and resubmitted within 7 days of the return of the schedule to the CONTRACTOR.
- C. By preparing and submitting the Construction Schedule the CONTRACTOR represents that the CONTRACTOR can and intends to execute the work and portions thereof within the specified times and constraints and that the CONTRACTOR's bid covers the costs associated with the execution of work in accordance with the Construction Schedule.
- D. Submittal package.

01320-1

1. Submittal of the Baseline Construction Schedule shall include the following:
 - a. Network Diagram:
 - 1) A graphic network diagram with legible letters with individual sheets sized approximately 24" by 48".
 - 2) Each activity shall be shown on the diagram with the activity number, description and duration in working days.
 - 3) Five copies and one reproducible shall accompany the submittal.
 - b. Five sets of supporting data, if not indicated on the graphic network diagram, including:
 - 1) Number of work days per week.
 - 2) Holidays that will be observed during construction.
 - 3) Number of shifts per day.
 - 4) Major construction equipment used identifying the time period and activity of use.
 - 5) Average manpower for each week and for each trade.
 - 6) Lost time allowance for weather or other conditions that can be anticipated.
 - c. Five computer printouts as follows:
 - 1) Listing of all activities sorted by total float including early start (ES), late start (LS), early finish (EF), late finish (LF) and Total Float duration for each activity or work item. Each activity or work item will not take more than two lines.
 - 2) Lists of all activities sorted numerically including ES, LS, EF, LF, Total Float.
 - 3) List of all activities sorted numerically with Predecessor/Successor information of precedence network.
 2. Submittals of updated Construction Schedules shall include, in addition to the items specified in the preceding subparagraph 1a, 1c, and 1d, the following:
 - a. Changes in the schedule due to approved Change Order or Change Directives or Force Account work.
 - b. CONTRACTOR elected changes in schedule logic, activity duration, or activity start or stop dates.
 - c. A narrative report as needed to define:
 - 1) Changes in logic, activity duration, and manpower and equipment utilization.
 - 2) Problem areas, anticipated delays, and the impact on the schedule.
 - 3) Corrective action recommended and its effect.
 - 4) The effect of changes on schedules of other contractors involved with the work.
 - 5) Coordination of work with others.
 - d. Percentage completion for each activity as agreed to for the monthly progress payments.
- E. If the Construction Schedule, its updates or its revisions, reflect anything not accepted by the Engineer, such Construction Schedule, update, or revision shall be considered as not having been accepted by the Engineer.

1.4 CONSTRUCTION SCHEDULE CONTENT

- A. The Construction Schedule shall be calendar-based, time-scaled, manpower and cost-loaded, using a precedence method diagram in the Critical Path Method (CPM) format indicating the critical path for the execution of the work utilizing the entire contract time.
 1. In the preparation of the Construction Schedule, the CONTRACTOR shall take into account all constraints and requirements specified.

2. Allowance in the Construction Schedule shall be made for normal rainfall, as defined in the General Conditions, and modified by the Supplementary General Conditions.
3. The diagram shall be clear, legible, and accurate, and show complete sequence of construction by activity and interdependence of activities. Separate discrete lines shall connect linked activities.
4. Activities related to the same physical areas of the work shall be grouped in the same area of the diagram.
5. Activities within each area of the work shall be numbered in separate sequential series, with no overlap of activity numbers between different areas of the work.
6. The diagram shall clearly show a continuous critical path, all constraints, and all required project milestones.
7. The schedule shall describe work activities in appropriate segments so that work in specific areas can be assessed for progress and completion. Activities labeled "start", "continue", or "completion" without measurable increments of work will not be acceptable.
8. The individual work activities in the schedule shall:
 - a. Identify major submittals and submittals for long-lead time Critical Path items and associated review times. Twenty (20) working days shall be used for OWNER review times, unless otherwise specified.
 - b. For equipment with a cost in excess of \$20,000 and all control systems the CONTRACTOR shall allow adequate time for an initial submittal and OWNER review plus (at a minimum) a second (re) submittal and associated OWNER review.
 - c. Identify at a minimum, the execution of the following as separate items for each area of work.
 - 1) Notice to Proceed.
 - 2) Mobilization.
 - 3) Dewatering.
 - 4) Shoring.
 - 5) Excavation.
 - 6) Pile Driving.
 - 7) Backfill.
 - 8) Grading, subbase, base, paving, and curb and gutters.
 - 9) Other site work.
 - 10) Concrete, including installation of forms and reinforcement, placement of concrete, curing, stripping, patching and finishing.
 - 11) Masonry.
 - 12) Metal fastenings, framing structures, and fabrications.
 - 13) Wood structures, finish carpentry, architectural woodwork, and plastic fabrications.
 - 14) Waterproofing and dampproofing, insulation, roofing and flashing, and sealants.
 - 15) Doors and windows (including glass walls), including hardware and glazing.
 - 16) Finishes including coating and painting, flooring, ceiling, and wall covering.
 - 17) Building specialties including furnishings, equipment, and toilet and bath accessories.
 - 18) Process equipment, including separate activities for manufacturing, delivery, and installation.
 - 19) Pumps and drives, including separate activities for manufacturing, delivery, and installation.

01320-3

- 20) Conveying equipment including hoists and cranes, conveyor systems, and materials handling equipment, including separate activities for manufacturing, delivery and installation.
- 21) Other mechanical equipment including fans and heating, ventilating, and air conditioning equipment, with separate activities for manufacturing, delivery and installation.
- 22) Case work, including separate activities for fabrication, delivery and installation.
- 23) Storage shelving, including separate activities for fabrication, delivery and installation.
- 24) Trenching and pipe laying.
- 25) Piping, including a separate activity for ordering lead time.
- 26) Valves and gates, including a separate activity for ordering lead time.
- 27) Plumbing specialties.
- 28) Electrical transmission, service, and distribution equipment, including separate activities for ordering, manufacturing, delivery, installation.
- 29) Other electrical work including lighting, heating and cooling, and special systems, including separate activities for ordering, manufacturing, delivery and installation.
- 30) Instrumentation and controls, including separate activities for ordering lead time, manufacturing, delivery and installation.
- 31) Separate activities for functional, performance, and operational testing, for each major system.
- 32) Separate activities for operation and maintenance training for each major system.
- 33) Site cleanup.
- 34) Demobilization.
- 35) Procurement of critical (long lead time) equipment.
- 36) Separate activities for design, ordering, delivery and installation of turn key systems.
- 37) Separate activities for Operational Completion, Contract Completion and other contractually required milestones.
- 38) Any items to be OWNER-furnished which are to be incorporated into the work as part of these Contract Documents.
- d. Provide a monthly activity for preparation of Contract Record Drawings, in accordance with Section 01330, Submittal Procedures with a minimum monthly cost of \$5,000.
- e. Have a duration of not more than 15 working days.
9. Information on each activity shall include:
 - a. Concise description of the activity.
 - b. Duration in working days.
 - c. The dates for the beginning and completion of each activity.
 - d. Total float.
 - e. Numerical designation of work items.
 - f. Cost with a breakdown by labor (by man-hours by trade), materials (by type and quantity), equipment (by type and hours) and overhead and profit.
10. The schedule shall be referenced to calendar dates, and the beginning of the contract time shall be the date of receipt of the Notice to Proceed.
11. The schedule shall indicate for every month the total dollar amount of work planned in such month. The sum of monthly amounts shall equal the total bid amount.

01320-4

- B. Failure to include an activity required for the execution of the work shall not excuse the CONTRACTOR from completing the work and portions thereof within the specified times and at the price specified in the Agreement, and from meeting the constraints specified for sequence of work and control dates.

1.5 UPDATING THE CONSTRUCTION SCHEDULE

- A. The CONTRACTOR shall update the Construction Schedule prior to the progress and schedule review at the monthly progress meetings, as specified in Section 01310, Project Meetings.
- B. The schedule update shall reflect progress to date. The schedule update shall incorporate all revisions to logic and duration, as described below.
- C. The updated Construction Schedule shall be submitted by the CONTRACTOR as specified herein and under Subparagraph 1.3.D.2 in this Section.
 - 1. Logic changes to the schedule shall be approved by the Engineer prior to incorporating them into the schedule.
 - 2. The schedule update submittal shall be provided to the Engineer three working days prior to the monthly progress meeting.
 - 3. If at the progress meeting the Engineer determines that the updated schedule does not accurately reflect the progress of the work to date or project the anticipated progress to date or is otherwise unacceptable to the OWNER, the CONTRACTOR shall revise the schedule within 5 working days thereafter.
 - 4. If the CONTRACTOR fails to submit to the Engineer the updated Construction Schedule, in accordance with the findings at the progress meeting, as described above, or if it is submitted and found unacceptable by the Engineer, no monthly progress payment will be made.
- D. Updates shall be performed on the most recent accepted version of the Construction Schedule.

1.6 REVISIONS TO CONSTRUCTION SCHEDULE

- A. The cost of revision to the Construction Schedule not resulting from contract change orders shall be borne by the CONTRACTOR.
- B. Except as specified in the preceding Subparagraph A, the cost of revisions to the Construction Schedule resulting from contract change orders in the work shall be included in the cost for the contract change orders.
- C. Corrections resulting from the Engineer's review and comments shall be carried out as specified for Construction Schedule update.
- D. Revisions shall be made on the most recent accepted version of the Construction Schedule.

1.7 ADJUSTMENT OF THE CONTRACT TIME AND CHANGE ORDERS

- A. Adjustments of the contract time due to delays, additional work, or any other cause will only be issued through a contract change order in accordance with the General Conditions.

01320-5

1. In the event the CONTRACTOR requests an adjustment of the contract time, the CONTRACTOR shall furnish such justification, Construction Schedule data, and supporting evidence as the Engineer may deem necessary, for a determination as to whether or not the CONTRACTOR is entitled to an adjustment of time under the provisions of the Contract.
 - a. The CONTRACTOR shall submit proof based on revised activity logic, durations, and costs with each request.
 2. The Construction Schedule shall clearly indicate that the CONTRACTOR has used, in full, all the float time available for the work involved in the request.
 3. Total and free float is not for the exclusive use or benefit of either the OWNER or the CONTRACTOR, but is a resource available to both parties for the benefit of the project on a first needed basis.
 4. The CONTRACTOR shall not be entitled to additional compensation due to schedule impacts for change order work that extends the contract beyond the scheduled completion date, but not beyond the contract completion date.
 5. The Engineer's determination as to the adjustment of the contract time will be based upon the latest version of the Construction Schedule accepted at the time of the alleged delay, and all other relevant information.
 6. Actual delays in activities which, according to the Construction Schedule, do not affect the critical path work, will not be the basis of for an adjustment to the contract time.
 7. If the Construction Schedule shows that the project is behind schedule (i.e., has negative float) then no time extensions will be allowed for contract change orders unless they create a critical path delay in excess of that already occurring. In that case, the time extension allowed will only be that amount which exceeds the already occurring delay.
- B. Change Order Requests:
1. The CONTRACTOR shall include, as part of each change order request for which the Contractor is requesting an adjustment in the contract duration, a subnetwork showing logic revisions, duration changes, and cost changes, for the work in question and its relationship to other activities on the Construction Schedule.
 2. The CONTRACTOR shall incorporate each Change Order into the Project Schedule.
- C. The Engineer will, within 15 working days after receipt of such request and supporting evidence, review the facts and advise the CONTRACTOR in writing thereof.
- D. The new Construction Schedule data, if accepted by the Engineer, shall be included in the next monthly updating of the schedule.
- E. Where the Engineer has not yet made a final determination as to the adjustment of the contract time, and the parties are unable to agree as to the amount of the adjustment to be reflected in the Construction Schedule, the CONTRACTOR shall reflect that amount of time adjustment in the Construction Schedule as the Engineer may determine as appropriate for such interim purpose.
1. It is understood and agreed that any such interim determination by the Engineer shall not be binding and shall be made only for the purpose of continuing to schedule the work, until such time as final determination as to any adjustment of the contract time acceptable to the Engineer has been made.
 2. The CONTRACTOR shall revise the Construction Schedule prepared thereafter in accordance with the final decision.

01320-6

PART 2 - NOT USED

PART 3 - EXECUTION

3.1 IDENTIFICATION OF SUBMITTALS

- A. Completely identify each Construction Schedule submittal and resubmittal by showing at least the following information:
1. Name and address of submitter, plus name and telephone number of the individual who may be contacted for further information.
 2. Name of project as it appears in this Specification and specification number.
 3. Whether this is an original or updated submittal or resubmittal.
 4. Number all submittals sequentially in accordance with Section 01330, Submittal Procedures.

+ + END OF SECTION + +

01320-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01322**WEB BASED DOCUMENT CONTROL****PART 1 - GENERAL****1.1 SUMMARY**

- A. The project team will use and maintain a web-based database as the primary means of communication related to the Project's correspondence, submittals, requests for information (RFIs), advisory notices, and non-compliance issues. Correspondence from the Contractor shall be sent to the Construction Manager via the Web Based Document Control Software.
- B. The Construction Manager and Contractor shall utilize Web Based Document Control Software's system for electronic submittal of all data and documents (unless specified otherwise by the Construction Manager) throughout the duration of the Contract. The joint use of this system is to facilitate; electronic exchange of information, automation of key processes, and overall management of the Contract. The Web Based Document Control Software shall be the primary means of project information submission and management. When required by the Construction Manager, paper documents will also be required. In the event of discrepancy between the electronic version and paper documents, the paper documents will govern.

1.2 USER ACCESS LIMITATIONS

- A. The Construction Manager will control the Contractor's access to the Web Based Document Control Software by allowing access and assigning user profiles to accepted Contractor personnel. User profiles will define levels of access into the system; determine assigned function-based authorizations (determines what can be seen) and user privileges (determines what they can do).

1.3 AUTOMATED SYSTEM NOTIFICATION AND AUDIT LOG TRACKING

- A. Review comments made (or lack thereof) by the Construction Manager and Design Consultant on Contractor submitted documentation shall not relieve the Contractor from compliance with requirements of the Contract Documents. The Contractor is responsible for managing, tracking, and documenting the Work to comply with the requirements of the Contract Documents. The Construction Manager's acceptance via automated system notifications or audit logs extends only to the face value of the submitted documentation and does not constitute validation of the Contractor's submitted information.

1.4 CONTRACTOR RESPONSIBILITY

- A. The Contractor shall be responsible for the validity of their information placed in the Web Based Document Control Software and for the abilities of their personnel. Accepted users shall be knowledgeable in the use of computers, including Internet Browsers, email programs, CAD drawing applications, and Adobe Portable Document Format (PDF) document distribution program. Adobe PDF documents will be created through

01322-1

electronic conversion rather than optically scanned whenever possible. The Contractor is responsible for the training of their personnel in the use of the Web Based Document Control Software (outside what is provided by the Construction Manager) and the other programs indicated above as needed.

1.5 USER ACCESS ADMINISTRATION

- A. Provide a list of Contractor's key Web Based Document Control Software personnel for the Construction Manager's acceptance. The Construction Manager is responsible for adding and removing users from the system. The Construction Manager reserves the right to perform a security check on all potential users.

1.6 CONNECTIVITY PROBLEMS

- A. Web Based Document Control Software is a web-based environment and therefore subject to the inherent speed and connectivity problems of the Internet. The Contractor is responsible for its own connectivity to the Internet. Web Based Document Control Software response time is dependent on the Contractor's equipment, including processor speed, Internet access speed, etc. and current traffic on the Internet. The Owner and Construction Manager will not be liable for any delays associated from the usage of Web Based Document Control Software including, but not limited to: slow response time, down time periods, connectivity problems, or loss of information. The Contractor will ensure that its connectivity to the Web Based Document Control Software system (whether at the home office or job site) is accomplished through some form of high-speed communications with 128 kb/s as the minimum bandwidth requirements for using the system. It is recommended a faster connection be used when uploading pictures and files into the system. Under no circumstances shall the usage of Web Based Document Control Software be grounds for a time extension or cost adjustment to the Contract. If there are problems that persist with the Web Based Document Control Software site for more than 24 consecutive hours that prevent the electronic submission of data by the Contractor, the Contractor may submit documents in paper form to the Construction Manager until such time that the Construction Manager notifies the Contractor that the Web Based Document Control Software site is operable and available for use. Construction Manager shall likewise send documents to Contractor in paper form during such disruption of the Web Based Document Control Software system.

1.7 TRAINING

- A. The Construction Manager has arranged for the following training to be provided to the Contractor. The Construction Manager will provide a one-hour training class to the Contractor within ten (10) days of NTP at a time mutually agreeable to Contractor and Construction Manager. Thereafter the Construction Manager will provide up to one hour of additional training via telephone during the project per month of the project life.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. In order to process correspondence, submittals, and RFIs, the Contractor must provide and have in place for its own use the required basic components outlined below.
 - 1. Hardware
 - a. A computer with internet access and sufficient capabilities to perform all project duties; a scanner at least large enough to scan 11" x 17" sheets with sufficient resolution to maintain clarity and legibility of the document at its native size; and a color printer of sufficient size and capacity to accept incoming correspondence as described in this section.
 - 2. Software
 - a. Adobe Acrobat 9 or higher; Microsoft's Internet Explorer v7 or higher; Microsoft Office 2010 or higher, including but not limited to Microsoft Word and Microsoft Excel.
 - b. Web Based Document Control Software currently supports Mozilla's Firefox v3.5 and newer, Apple's Safari v4 and newer, Google Chrome, and Microsoft's Internet Explorer v7 and v8 web browsers for accessing the application. Certain functions may not be available when using any program other than the newest version of Microsoft's Internet Explorer.
 - 3. Facilities
 - a. The Contractor shall make its own arrangements to provide high-speed (minimum speed: download 1Mbps/upload 256Kbps) internet connection for its own use as soon as practicable.

PART 3 - EXECUTION**3.1 SUMMARY**

- A. Items to be uploaded to Web Based Document Control Software by the Construction Manager include but are not limited to: RFI responses, Submittal comments, Clarification letters, Design Clarifications, Field Orders, et al. These items will be emailed via Web Based Document Control Software as attachments in PDF file format. These attachments may include files that need to be viewed and/or printed in color. Formal letters, stop notices, Field Orders, Progress Payment Requests, and Contract Change Orders will always include a wet-signed hard copy.
- B. Items to be uploaded to Web Based Document Control Software by the Constructor include but are not limited to: RFI, Submittals, Request for Clarification letters, Request for Design Clarification letters, et al. These items will be emailed via Web Based Document Control Software as attachments in PDF file format. These attachments may include files that need to be viewed and/or printed in color. Contractor shall provide wet-signed hard copies of documents required by Contract Documents, as well as any documents requested by the Construction Manager, including but not limited to: Formal letters, Progress Payment Requests, and Contract Change Orders, et al.

01322-3

3.2 PROCURE UTILIZATION

- A. All project related correspondence (RFIs, submittals, etc.) originated by the Contractor or Subcontractor, Supplier, et al. shall be directed to the Construction Manager, unless otherwise indicated in the Specifications.

3.3 SUBMITTALS

- A. The use of the electronic communication does not waive the requirement for the provision of hard copies of all formal correspondence and submittals. The hard copies of all documents must match the electronic copies of all correspondence and submittals.
- B. Submittals shall be in accordance with Section 01300. The provisions of Section 01300 shall apply both to electronic copies and hard copies of submittals.
- C. In addition to above, Web Based Document Control Software shall be utilized in connection with submittal preparation and information management required by but not limited to Sections:
 - 1. Section 01320, **PROGRESS SCHEDULES.**
 - 2. Section 01300, **SUBMITTALS.**
- D. Web Based Document Control Software will be utilized by all other Sections not listed above and as required by the Construction Manager.
- E. If a submittal package has multiple items that are not directly related, each item shall be considered a separate submittal and shall be sent separately. For example, "Concrete Mix Design," and "Concrete Curing Compound" shall be submitted as separate items to the Construction Manager.

3.4 TERMINATION IN USE

- A. The Owner may request a termination of the use of Web Based Document Control Software for the electronic submission of data, and alternatively the use of paper documents submitted in accordance with the Contract Documents by providing notification in writing with ten (10) days' notice that it intends to discontinue use of Web Based Document Control Software.

3.5 ADOBE PDF

- A. All information, comments, questions, and statements shall be scanned and/or converted to the PDF file format and attached to the email via Web Based Document Control Software. Items to be sent via email via Web Based Document Control Software include but are not limited to large-format plan sheets (22" x 34" or larger), small-format plan sheets, pages within tabbed binders, RFIs, transmittal sheets, et al. The PDF attachments supplied to the Construction Manager shall be in a sufficient resolution to be fully legible at its native size.
- B. All separate files within a given piece of correspondence shall be combined into a single PDF document (e.g. An RFI that contains a text file and two photo files shall be combined into a single PDF document prior to delivery to the Construction Manager.)

01322-4

3.6 LABELING FORMAT

- A. The subject line of each email via Web Based Document Control Software, and the file name of any attached files, shall be in accordance with Section 01330-1.3.A.2 for submittals and as directed by Construction Manager other correspondence (RFIs, Letters, Transmittals, Proposed Change Orders, et al.)
- B. Label shall include the type of correspondence (i.e. RFI, etc.), a unique number, sequentially assigned for the given piece of correspondence. The Contractor will indicate the subject at the end of the numbering scheme with a description (key words) of the item. Each piece of correspondence shall be sent in a separate email via Web Based Document Control Software.

3.7 ORIGINAL DOCUMENTS

- A. Where possible, the Contractor will obtain the electronic document from its original source to maintain the integrity, legibility, and searchability of the document.

3.8 ORGANIZATION

- A. The information included in the attachments shall be organized in a logical and thoughtful manner. Where the information originated in a tabbed format (a binder, for example), the scanned and/or converted PDF file shall be electronically bookmarked accordingly using the "bookmark" function of Adobe Acrobat 9 Std.

3.9 PRINTING

- A. Except where otherwise indicated, the Contractor will receive no hard copies of the above outlined correspondence. The Contractor will be required to print for its use, in color if necessary, any record copies, field copies, sub-Contractor copies, etc., if such copies are desired.

3.10 PROJECT FORMS

- A. The Contractor may use its own correspondence forms to be attached to correspondence emails via Web Based Document Control Software as long as the Contractor's forms comply with this and all submittal sections.

***** END OF SECTION *****

01322-5

THIS PAGE LEFT BLANK INTENTIONALLY

01322-6

CITY OF MORRO BAY
WRF LIFT STATION & OFFSITE PIPELINES
17-082

BID SET
MAY 2020

SECTION 01330

SUBMITTAL PROCEDURES

PART 1 - GENERAL**1.1 GENERAL**

A. General:

1. This Section outlines in general the items that the CONTRACTOR must prepare or assemble for submittal during the progress of the work.
2. There is no attempt herein to state in detail all of the procedures and requirements for each submittal.
3. The CONTRACTOR's attention is directed to the individual Specification Sections in these Contract Documents, which may contain additional and special submittal requirements.
4. The OWNER reserves the right to direct and modify the procedures and requirements for submittals as necessary to accomplish the specific purpose of each submittal.
5. The CONTRACTOR shall anticipate resubmitting submittals for major pieces of equipment and for control systems.
6. Should the CONTRACTOR be in doubt as to the procedure, purpose, or extent of any submittal, inquiries shall be directed to the ENGINEER.

B. Schedule of Submittals:

1. Within 15 working days of the Notice to Proceed, the CONTRACTOR shall submit a complete list of anticipated submittals with specification/drawing references and proposed times for submitting, reviewing and processing of submittals.
2. This list shall be updated with "late start" submittal dates within 15 working days of submittal of the CONTRACTOR's Construction Schedule.
3. The submittal dates shall be updated upon approval of the Construction Schedule and periodically thereafter.
4. Any additional submittals shall also be included in updates.
5. Additional submittals and resubmittals shall be provided in a timely manner without delaying the project.
6. Within 30 working days after the Notice to Proceed, CONTRACTOR shall submit all submittals to start construction including, but not limited to, any priority submittals identified during the Design-Assist process.

1.2 ADMINISTRATIVE SUBMITTALS

- A. The CONTRACTOR is reminded of their obligation as required by law to make required submittals promptly to the applicable federal, state, or local agency. Failure to comply with this requirement may result in the withholding of progress payments and make the CONTRACTOR liable for other prescribed action and sanctions.
- B. The CONTRACTOR shall submit to the ENGINEER a copy of all letters relative to the Contract, transmitting notifications, reports, certifications, certified payrolls, and the like, that the CONTRACTOR submits directly to a federal, state, or other governing agency.
- C. During the performance of the Contract, the CONTRACTOR shall maintain on a daily basis, and submit to the ENGINEER as requested, full and correct information as to the

01330-1

number of persons employed in connection with each subdivision of the work, the classification, rate of pay, citizenship status, and address of each person, and the cost, source, and amount of each class of materials delivered, equipment received, and major construction equipment used in each subdivision of the work.

D. Certified Payroll:

1. No later than the 25th day of each month, the CONTRACTOR shall submit to the ENGINEER a copy of the CONTRACTOR's certified payroll for the previous month, and if requested, copies of certified payrolls for Subcontractors.
2. The payrolls shall include for each employee the full name, address and social security number; the correct classification and rate of pay (including rates of contributions for, or costs assumed to provide various fringe benefits); daily and weekly hours worked; itemized deductions and actual wages paid.
3. The certified payrolls shall be on State of California forms.

1.3 TECHNICAL SUBMITTALS

A. General:

1. Requirements in this Section are in addition to any specific requirements for submittals specified in other divisions and Sections of these Contract Documents.
2. Submittal Contents and Numbering:
 - a. Each submittal shall have the specification Section and applicable paragraph number clearly identified on the front of the submittal transmittal form for each item submitted. The number shown on the transmittal form for each item shall be labeled in the content of the submittal. For example, if Item 1 is a ball Valve and Item 2 is a gate valve then the cut sheets for each respective valve shall be labeled Item 1 and Item 2.
 - b. Each submittal shall be sequentially numbered starting with the first one delivered for each spec section. For example, the first submittal for Section 02300 should be 02300-1-0.
 - c. Resubmittals shall include the number of the original submittal plus the suffix "-1" for the first resubmittal, "-2" for the second resubmittal. For example, a second resubmittal would be shown as 02300-1-1. Each resubmittal shall be the whole version of the corrected submittal, and shall not reference past versions. Each resubmittal shall include all items including items previously marked as NET.
 - d. Submittals not conforming to these requirements will be rejected.
 - e. If several items (i.e. different types of valves) are combined into the same submittal, none of the items will be approved for installation until the entire submittal is accepted.
3. Submitted data shall be fully sufficient in detail for determination of compliance with the provisions and intent of the Contract Documents.
4. Coordination Responsibilities:
 - a. Shop drawing submittal and coordination are the responsibility of the CONTRACTOR; this responsibility shall not be delegated in whole or in part to Subcontractors or suppliers.
 - b. Designation of work "by others," if shown on shop drawings, shall mean that the work will be the responsibility of the CONTRACTOR rather than the Subcontractor or supplier who has prepared the shop drawings.
5. No equipment or material for which listings, drawings, or descriptive material is required shall be fabricated, purchased, or installed until the ENGINEER has reviewed and accepted such lists, final shop drawings, or other descriptive material.

01330-2

- Installation of such equipment or material without accepted submittals will be considered defective work.
6. Submittal Review Time:
 - a. Submittals will be acted upon by the ENGINEER as promptly as possible and returned to the CONTRACTOR not later than the time allowed for review in Paragraph B.4 below.
 - b. The CONTRACTOR shall provide in their Construction Schedule the time for OWNER review of each submittal (and resubmittal for major equipment and control systems) in accordance with the allowable time specified herein and in Section 01320, Progress Schedule.
 - c. This required time for OWNER review shall not be a cause for delay in contract completion nor shall it be a reason for an extension of contract time.
 - d. If the CONTRACTOR is required by the OWNER to resubmit data, then neither the time required for the CONTRACTOR to prepare and resubmit such data, nor the required time for OWNER review, shall be a cause for delay in contract completion or for an extension of contract time.
 - e. Responsibility for time required for preparing and submitting required data shall be assigned solely to the CONTRACTOR.
 7. Excessive Submittal Review:
 - a. It is considered reasonable that the CONTRACTOR shall make a complete and acceptable submittal to the ENGINEER by the second submission of a submittal item.
 - b. Additional costs of the ENGINEER's review beyond the second submission shall be the responsibility of the CONTRACTOR and may be deducted from the monthly progress payments.
 - c. This applies to all submittals including shop drawings.
 8. Changes After Review:
 - a. After a submittal has been reviewed and accepted, no changes or substitutions in that submittal will be allowed without the ENGINEER's approval.
 - b. If allowed, the CONTRACTOR will be responsible for the additional costs for engineering, administrative, clerical or other work required for additional review.
 9. Intent of Review:
 - a. Shop drawings will be reviewed for general conformance with the drawings and specifications.
 - b. The intent of the review is to determine if the CONTRACTOR is submitting materials and equipment which are in general conformance with the Contract Documents.
 - c. Detailed review of dimensions, sizes, space requirements, coordination with other equipment, and other construction details is not performed.
 - d. Additional work and costs, resulting from errors in the shop drawings shall be the CONTRACTOR's responsibility and liability.
 - e. Accuracy, coordination, and completeness of shop drawings shall be the sole responsibility of the CONTRACTOR, including responsibility to backcheck comments, corrections, and modifications from the ENGINEER's review before fabrication.
 10. The CONTRACTOR shall indicate on the submittal transmittal form if and how the submittal deviates from the contract requirements. In addition, CONTRACTOR shall include a copy of the relevant specification section in its entirety marked with ACCEPT/DEVIATE next to each paragraph. Failure to include this documentation is grounds for ENGINEER to reject and return the Submittal to the CONTRACTOR for resubmission.
 11. Rebar Shop Drawings:

01330-3

- a. The CONTRACTOR shall supply the ENGINEER with a copy of all reinforcing steel detail drawings.
- b. Changes to the Contract Documents made by the CONTRACTOR in reinforcing steel shop drawings shall be called out in the letter of submittal.
- c. Such changes will not be acceptable unless the ENGINEER has expressed consent to such changes in writing.
Submittals of shop drawings, layout diagrams, catalog cuts and data, test reports, and information in sufficient detail to show complete compliance with all specified requirements shall be furnished to the ENGINEER

B. Submittal Procedure:

1. Unless otherwise required in this specification section, the CONTRACTOR shall submit to the ENGINEER for review one electronic copy in PDF format of each submittal (shop drawings, electrical diagrams, and catalog cuts for fabricated items and manufactured items furnished under this Contract, etc.) All electronic submittals from the Contractor shall be sent to the Construction Manager via the project Web Based Document Control Software per Section 01322.
2. Electronic PDF copies shall include electronic bookmarks for each section of the submittal to aid in navigation.
3. Hard copies of submittals shall only be provided where it is not feasible to provide submittals in electronic format.
4. Submittals shall be submitted in sufficient time to allow the ENGINEER not less than twenty (20) working days for examination and response, except for:
 - a. Designs for turnkey items for which thirty (30) working days will be allowed, and
 - b. Substitutions for which (40) working days will be allowed.
5. Shop drawings shall be accurate, distinct, and complete, and shall contain all required information, including satisfactory identification of items, units, and assemblies in relation to the Contract Drawings and Specifications.
6. CONTRACTOR Certification:
 - a. Shop drawings shall be submitted only by the CONTRACTOR, who shall indicate by a signed stamp on the shop drawings, or other approved means, that the CONTRACTOR has checked and approved the shop drawings, and that the work shown is in accordance with Contract requirements and has been checked for dimensions and relationship with work of all other trades involved.
 - b. Submitting incomplete or unchecked shop drawings for the ENGINEER to correct or finish will not be acceptable, and shop drawings that, in the opinion of the ENGINEER, indicate that they have not been checked by the CONTRACTOR will be rejected and returned to the CONTRACTOR for resubmission in the proper form.
7. Return of Reviewed Submittals:
 - a. When the shop drawings have been reviewed by the ENGINEER, the appropriate number of submittals will be returned to the CONTRACTOR appropriately stamped.
 - b. If major changes or corrections are necessary, the shop drawing will be rejected and returned to the CONTRACTOR with the need for such changes or corrections indicated.
 - c. The CONTRACTOR shall correct and resubmit rejected shop drawings in the same manner and quantity as specified for the original submittal.
 - d. If changes are made by the CONTRACTOR (in addition to those requested by the ENGINEER) on the resubmitted shop drawings, such changes shall be clearly explained in a transmittal letter accompanying the resubmitted shop drawings.
8. The review of such shop drawings and catalog cuts by the ENGINEER shall not relieve the CONTRACTOR from responsibility for correctness of dimensions, fabrication

details, coordination with other work, and space requirements, or for deviations from the Contract Drawings or Specifications, unless the CONTRACTOR has called attention to such deviations in writing by a letter accompanying the shop drawings and the ENGINEER approves the change or deviation in writing at the time of submission; nor shall review by the ENGINEER relieve the CONTRACTOR from the responsibility for errors in the shop drawings.

9. The CONTRACTOR agrees that shop drawing submittals processed by the ENGINEER do not become Contract Documents and are not Change Orders; that the purpose of the shop drawing review is to establish a reporting procedure and to permit the ENGINEER to monitor the CONTRACTOR's progress and understanding of the design.
- C. Shop Drawing Requirements: Shop drawings referred to herein shall include shop drawings, catalog cuts and information schematic diagrams, and other submittals for both shop and field-fabricated items. The CONTRACTOR shall submit, as applicable, the following for all prefabricated or manufactured structural items, material, and equipment:
 1. General:
 - a. For structures, submit all shop, setting, equipment, miscellaneous iron and reinforcement drawings and schedules necessary for construction. The foregoing shall include detailed "pour drawings" which shall show the sequence of concrete placement, and the type, quantity and location of all embedment items (sleeves, anchor bolts, door frames, etc.)
 - b. For pipelines, submit a detailed layout of the pipeline with details of clearances for crossings, bends, closure pieces and fabricated specials and furnish any other details necessary.
 - c. For trench excavation, submit detailed plan showing the design of shoring, bracing, sloping or other provisions necessary for safety.
 - d. For boring and jacking, submit a detailed description of the process to be used.
 - e. For equipment which requires electrical service, submit detailed information to show power supply requirements, MCC and control panel, elevations, wiring diagrams, control and protection schematics, shop test data, operation and maintenance procedures, outline drawings, and manufacturer's recommendation of the interface/interlock among the equipment.
 - f. For mechanical equipment submit all data pertinent to the installation and maintenance of the equipment including shop drawings, anchorage requirements, manufacturer's recommended installation procedure, detailed installation drawings, test data and curves, operation and maintenance manuals, and other details necessary.
 - g. For architectural fabrication submit all data pertinent to the installation of the fabrications, including shop drawings, manufacturer's recommended installation procedure, detailed installation drawings, and other details necessary.
 - h. For shop drawings or equipment drawings, including dimensions, size and location of connections to other work, and weight of equipment.
 - i. Installation or placing drawings for equipment, drives, and bases.
 - j. Supporting calculations for equipment and associated supports, or hangers required or specified to be designed by equipment manufacturers, including seismic restraint information and details.
 - k. Complete coating manufacturer's specifications, including materials description and paint system.
 - l. Performance data and head vs. flow curves for compressor and pumps.
 - m. Suggested spare parts list with current price information.

01330-5

- n. List of special tools required for checking, testing, parts replacement, and maintenance. (Special tools are those which have been specially designed or adapted for use on parts of the equipment, and which are not customarily and routinely carried by maintenance mechanics.)
 - o. List of special tools furnished with the equipment.
 - p. List of materials and supplies required for the equipment prior to and during startup.
 - q. Installation instructions.
 - r. List of materials and supplies furnished with the equipment.
 - s. Samples of finish colors for selection.
 - t. Special handling instructions.
 - u. Requirements for storage and protection prior to installation.
 - v. Requirements for routine maintenance required prior to plant startup.
 - w. Startup and operating instructions.
 - x. Seismic design calculations and restraint details for equipment and piping supports. Calculations shall be stamped by a Civil or Structural Engineer registered in the State of California.
2. Electrical:
- a. Wiring and control diagrams of systems and equipment. Local control panel details.
 - b. List of special motor features being provided (e.g., space heaters, altitude corrections, thermal protectors, mounting arrangement, etc.).
 - c. Complete motor rating for all motors, including motor no-load, starting, and full-load current at rated voltage; full-load speed and full-load current at 110 percent voltage; motor service factor; motor efficiency and power factor at 1/2, 3/4, and full-load at rated voltage; recommended maximum kVAR of power factor correction capacitors when capacitors are switched with motor.
 - d. See Division 16, ELECTRICAL, for additional specific submittal requirements.
3. Instrumentation and Control:
- a. See Technical Sections for additional specific submittal requirements.
 - b. The submittals shall include satisfactory identification of items, units, and assemblies in relation to the Specification Section number, and the system or equipment identification or tag number shown on the Drawings, the Process and Instrumentation Diagram (P&ID), or as provided in applicable Specification Section.
- D. Submittals required for foreign-manufactured items:
- 1. In addition to the submittal requirements stated above, suppliers of foreign-manufactured items shall submit the names and addresses of companies within the United States that maintain technical service representatives and a complete inventory of spare parts and accessories for each foreign-made item proposed for incorporation into the work. Failure to provide the foregoing capabilities shall be just cause for rejection of the foreign-manufactured items.
- E. Final shop drawings to be submitted to OWNER:
- 1. Complete sets of reproducible (full size mylar or vellum base) final shop drawings shall be submitted to the OWNER before, or at the time of, delivery of equipment onto the site.
- F. Seismic loading design provisions:

01330-6

1. All equipment supports that are not specifically detailed on the Drawings or specified herein shall be the responsibility of the equipment manufacturers and shall be designed by a Civil or Structural Engineer registered in the State of California.
 2. The design shall be in accordance with the seismic provisions of the latest edition of the 2016 edition of the California Building Code (CBC) and of the seismic design requirements listed in Section 01610, General Equipment Requirements, in addition to all other loading conditions.
- G. Submittal of interface information (connection and correlation with other work):
1. Where called for in the Specifications, and as determined necessary by the ENGINEER to provide proper correlation with other equipment, complete interface information shall be submitted.
 2. This interface information shall be accurate and contain all information necessary to allow the completion of detailed design and construction of the interfacing or connecting work.
 3. The CONTRACTOR shall include in their negotiation for subcontract work, such agreements as may be necessary to ensure the accuracy of Subcontractor's interface submittal information.
 4. In the event additional costs are incurred due to subsequent changes to information given in said interface information, such additional costs shall be borne by the CONTRACTOR.
- H. Contract As-Built Drawings:
1. The CONTRACTOR shall deliver to the OWNER one complete set of final Contract As-Built Drawings for OWNER records before the contract will be accepted by the OWNER. The Contract As-Built Drawings will consist of a set of reproducible drawings of all CONTRACTOR supplied equipment (including control systems) and a marked-up set of Contract As-Built Drawings.
 2. As-Built Drawings of CONTRACTOR-Supplied Equipment
 - a. The drawings shall be silver imaged, positive, reverse-reading duplicates (image reversed when viewed from emulsion side), and at the same dimensional scale as the originals. They shall be on a polyester translucent base material with a matte surface on the side opposite the emulsion side. The image emulsion side shall be without a matte surface. The matte surface shall have a sufficient tooth to take a solid opaque line from a 4H pencil and be compatible to the use of ink. Minimum sheet thickness shall be (.08 mm) .003 inch.
 - b. The legibility and contrast of each drawing submitted to the OWNER shall be such that every line, number, letter, and character is clearly readable in a full size blow back from a 35 mm microfilm negative of the drawing.
 - c. The overall dimensions of each drawing submitted to the ENGINEER shall be equal to one of the OWNER's standard sheet sizes. The title block area in the lower right hand corner of each drawing shall be clear of all linework, dimensions, details, and notes, except for the CONTRACTOR's title block. The dimensions of the title block area are minimum and are measured from the edges of the drawing sheet.

DRAWING FORMAT	
Sheet Sizes Height x Width	Title Block Area Height x Width

01330-7

11" x 8-1/2"	2-1/2" x 3-3/4"
11" x 17"	3" x 4"
22" x 34"	3-1/2" x 8"

3. Contract As-Built Drawings

- a. The CONTRACTOR shall keep an up-to-date set of marked-up Contract Drawings on an OWNER-supplied set of Drawings.
- b. The OWNER-supplied set of Drawings will consist of one set of full-size sepia reproductions of the Contract Drawings, supplied to the CONTRACTOR at the start of the work.
- c. During the progress of the work, the CONTRACTOR shall record on the Contract As-Built Drawings any changes from or additions to the work described in the Plans and Specifications.
- d. All information recorded on the Contract As-Built Drawings shall be clearly legible.
- e. Information to be recorded on the Contract As-Built Drawings shall include, but not be limited to, the following:
 - 1) Actual routing of electrical conduits, whose routing is only indicated in general on the Drawings.
 - 2) Actual location of manhole structures.
 - 3) Actual alignment of all installed pipe.
 - 4) Specific details of pipe connections, and manhole structures.
 - 5) Specific details on the installation and connection of mechanical and electrical equipment.
 - 6) Field dimensions where they differ from those shown on the Drawings.
 - 7) Additions to and/or deletions from the work, including all contract change orders.
 - 8) Other details showing as-built conditions, which are shown differently or only in general on the Drawings.
 - 9) Addenda.
 - 10) Location of buried features located during construction except utility service connections.
- f. It is the CONTRACTOR's responsibility to ensure that any changes, deletions, specific construction details, etc., performed by a Subcontractor are recorded on the Contract As-Built Drawings.
- g. Location Survey:
 - 1) The CONTRACTOR shall professionally survey the lateral and vertical position of anything buried underground as part of this Contract to within one inch accuracy of the benchmark and baseline provided by the OWNER.
 - 2) The survey information shall be included on the record drawings and the CONTRACTOR shall not be allowed to cover the buried materials until after the OWNER's inspector has verified the information as accurate and complete, and is shown on the Contract As-Built Drawings.
- h. Once every month, starting from the completion of mobilization as defined in Section 01505, Mobilization, the CONTRACTOR shall provide the OWNER with a copy of the then up-to-date set of marked-up Contract As-Built Drawings in accordance with the provisions under and Section 01320, Project Schedule.
- i. At the end of the work, prior to Project Closeout, the CONTRACTOR shall provide the OWNER with the Contract As-Built Drawings, showing all "as-built" conditions.

01330-8

- j. See also Section 01800, Operational Completion and Project Closeout.
- I. Operation and Maintenance (O&M) Manuals:
1. The CONTRACTOR shall furnish three (3) hard-copies and one (1) electronic copy (PDF format) of a complete instruction manual for installation, operation, maintenance, and lubrication requirements for each component of mechanical and electrical equipment or system.
 2. All equipment manufacturers shall be made aware of these requirements and all associated costs shall be included in the costs for furnishing the equipment or system.
 3. O&M Submittal Review Checklist:
 - a. The CONTRACTOR shall include a completed O&M Manual Submittal Review Checklist (copy included at the end of this Section) with each O&M manual submittal.
 - b. The checklist shall indicate that the O&M manual as submitted complies in all respects to the contract requirements.
 - c. Any O&M manual submitted without a completed checklist will be rejected.
 4. The manuals shall be furnished to the ENGINEER upon the delivery of the respective equipment.
 5. No payment will be made for equipment or materials or equipment installation before the respective O&M manuals have been approved by the ENGINEER.
 6. Each O&M manual shall be complete in all respects for all equipment, controls, accessories, and associated appurtenances.
 - a. All information on pre-printed documents (text, drawings, figures, tables, etc.) that does not apply to the deliverables on this project shall be crossed out. This must be done in a clear, unambiguous manner, so that persons using this material can easily distinguish between applicable and non-applicable information.
 7. Each O&M manual shall include, but not be limited to, the following:
 - a. Equipment Summary Form
 - 1) OWNER requires that a Maintenance Summary Form, shown in O&M Manual Submittal Review Checklist, be filled out for each type of equipment on a project and that they be included in every O&M manual. OWNER requires that this specific form be used, and that it be placed at the front of each equipment item's O&M manual or immediately behind the item's binder tab, when multiple items are included in a binder. O&M manuals submitted without this form, or not filled out as specified may be rejected. Manufacturer's standard forms, or any other forms, will be considered on a case-by-case basis provided the form includes all of the same information that is included on Maintenance Summary Form. Contractor shall obtain approval for an alternate format prior to submission of their submittal. An electronic version of this form, in Microsoft Word format, is available from OWNER to allow required fields to be expanded or compressed as needed to accurately record the information.
 - b. Diagrams and illustrations, including pump curves indicating operating points.
 - c. Detailed description of the function of each principal component of the system.
 - d. Performance and nameplate data.
 - e. Installation instructions.
 - f. Starting procedure
 - g. Proper adjustment procedure.
 - h. Test procedures.
 - i. Operating procedure.

01330-9

- j. Shutdown instructions.
 - k. Emergency operating instructions and troubleshooting guide.
 - l. Safety instructions.
 - m. Maintenance and overhaul instructions which shall include detailed assembly drawings with part numbers, parts list, instructions for ordering spare parts, and complete preventive maintenance instructions required to ensure satisfactory performance and longevity of the equipment.
 - n. Lubrication instructions which shall list points to be greased or oiled, shall recommend type, grade, and temperature range of lubricants, and shall recommend frequency of lubrication.
 - o. List of electrical relay settings and control and alarm contact settings.
 - p. Electrical interconnection wiring diagram for equipment furnished, including all control and lighting systems.
 - q. Recommendations for spare parts and special tools.
8. Hard-Copy O&M Manuals:
- a. Each copy of the manual shall be assembled in one or more hard-back type three-ring binders, each with title page, typed table of contents, and heavy section dividers with numbered plastic index tabs.
 - b. Cover label and title page shall be clearly labeled to designate the project title, project number, Specification Section where the item is specified, system or equipment for which it is intended with reference to the facility, equipment number, and equipment manufacturer name.
 - c. Typed table of contents for the entire set, identified by volume number, shall appear in each binder.
 - d. Each manual shall be divided into sections paralleling the equipment specifications.
 - e. All data shall be hole-punched for binding and composition and printing shall be arranged so that punching does not obliterate any data.
 - f. Pages larger than 8-1/2" x 11" shall be folded, showing title block or optionally included in binder pockets.
 - g. Where more than one binder is required, they shall be labeled "Vol. 1", "Vol. 2", and so on.
 - h. Submit manual organization and format to the ENGINEER for approval prior to manual preparation.
9. Electronic O&M Manuals:
- a. In addition to the designated number of hard-copies for each required Manufacturer's O&M manual, provide an electronic copy, each on its own separate USB flash drive.
 - b. The USB flash drive shall contain one full version of the O&M manual in Adobe's Portable Document File (PDF) format.
 - 1) Text of O&M manual shall be provided in searchable PDF format, making proper use of PDF for headings and heading levels, paragraphs, tables, and lists. The submitted O&M manual shall be a collected, organized, and indexed with a set of bookmarked PDF documents comprising each O&M document that corresponds to a hardcopy binder.
 - c. In addition, the USB flash drive shall contain the separate text and drawing files used to create the PDF O&M manual.
 - d. An index shall be provided on the USB flash drive as a separate text file with the name "index" and shall include the file name and detailed description of each individual file included on the USB flash drive.
 - e. The USB flash drive exterior shall be labeled with the submittal number.

- f. In addition to being included in PDF O&M manuals, Drawings shall also be provided separately in AutoCAD format.
 - 1) All O&M manual drawings of final approved equipment, including electrical, instrumentation and control system drawings, shall be provided in latest version of AutoCAD.
- 10. Manuals shall be transmitted to the ENGINEER upon delivery of the equipment and all equipment shall be serviced in accordance with the manufacturer's recommendations prior to operation. A service record shall be maintained on each item of equipment and shall be delivered to the ENGINEER prior to final acceptance of the project.
- J. Manufacturers' certificates and proper installation:
 - 1. The CONTRACTOR shall submit manufacturers' certificates of proper installation for items of equipment as specified under Section 01750, Testing, Training and Startup.
- K. Samples and test specimens:
 - 1. Where required in the Specifications, and as determined necessary by the ENGINEER, test specimens or samples of materials, appliances, and fittings to be used or offered for use in connection with the work shall be submitted to the ENGINEER at the CONTRACTOR's expense, with information as to their sources, with all cartage charges prepaid, and in such quantities and sizes as may be required for proper examination and tests to establish the quality or equality thereof, as applicable.
 - 2. All samples and test specimens shall be submitted in ample time to enable the ENGINEER to make any tests or examinations necessary, without delay to the work. The CONTRACTOR will be held responsible for any loss of time due to their neglect or failure to deliver the required samples to the ENGINEER, as specified.
 - 3. The CONTRACTOR shall submit additional samples as required by the ENGINEER to ensure equality with the original approved sample and/or for determination of Specification compliance.
 - 4. Laboratory tests and examinations that the OWNER elects to make in its own laboratory will be made at no cost to the CONTRACTOR, except that, if a sample of any material or equipment proposed for use by the CONTRACTOR fails to meet the Specifications, the cost of testing subsequent samples shall be borne by the CONTRACTOR.
 - 5. All tests required by the Specifications to be performed by an independent laboratory shall be made by a laboratory approved by the ENGINEER. Certified test results of all specified tests shall be submitted in duplicate to the ENGINEER. The samples furnished and the cost for the laboratory services shall be at the expense of the CONTRACTOR and included in the prices bid for the associated work.
 - 6. Approved sample items (fixtures, hardware, etc.) may be incorporated into the work upon approval, and when no longer needed by the ENGINEER for reference.
- L. Material and equipment colors:
 - 1. The ENGINEER will provide a schedule of selected colors within 30 working days after approval of materials and equipment, and after receiving samples of the manufacturers' standard colors for those items requiring OWNER's selection.
- M. Certificates of Compliance:
 - 1. A Certificate of Compliance shall be furnished for materials specified to a recognized standard or code prior to the use of any such materials in the work.
 - 2. The ENGINEER may permit the use of certain materials or assemblies prior to sampling and testing if accompanied by a Certificate of Compliance.

3. The certificate shall be signed by the manufacturer of the material or the manufacturer of assembled materials and shall state that the materials involved comply in all respects with the requirements of the Specifications.
4. A Certificate of Compliance shall be furnished with each lot of material delivered to the work and the lot so certified shall be clearly identified in the certificate.

N. Quality Assurance

1. Source limitations: To the greatest extent possible for each unit of work, the CONTRACTOR shall provide products, materials, or equipment of a singular generic kind from a single source.
2. Compatibility of options:
 - a. Where more than one choice is available as options for CONTRACTOR's selection of a product, material, or equipment, the CONTRACTOR shall select an option which is compatible with other products, materials, or equipment already selected.
 - b. Compatibility is a basic general requirement of product/material selections.

O. Review by ENGINEER

1. After review by the ENGINEER of each of the CONTRACTOR's submissions, the material will be returned to the CONTRACTOR with actions defined as follows:
 - a. NO EXCEPTIONS TAKEN: Accepted subject to its compatibility with further submittals and additional partial submittals for portions of the work not covered in this submittal. Does not constitute approval or deletion of specified or required items not shown in the partial submittal.
 - b. MAKE CORRECTIONS NOTED: Same as 1.a., except that minor corrections as noted shall be made by the CONTRACTOR.
 - c. REVISE AND RESUBMIT: Rejected because of major inconsistencies or errors which shall be resolved or corrected by the CONTRACTOR prior to subsequent review by the ENGINEER.
 - d. REJECTED - RESUBMIT: Submitted material does not conform to Plans and Specifications in major respect, e.g., wrong item, wrong size, model, capacity, or material.
2. Items 1 and 2 above (no resubmittal required) are considered "Favorable Review." Items 3 and 4 above (correction and resubmittal required) are considered "unfavorable review."
 - a. ENGINEER's "Favorable Review" of submittals shall be obtained prior to the fabrication, delivery and construction of items requiring submittal review.
 - b. "Favorable Review" of submittals does not constitute a Change Order to the Contract requirements.
 - c. "Favorable Review" of all submittals by ENGINEER shall apply in general design only and shall in no way relieve the Contractor from responsibility for errors or omissions contained therein.
 - d. "Favorable Review" by the ENGINEER shall not relieve the Contractor of its obligation to meet safety requirements and all other requirements of laws, nor constitute a Contract Change Order.
 - e. "Favorable Review" will not constitute acceptance of any responsibility for the accuracy, coordination, and completeness of the submittals or the items of equipment represented on the submittals.

P. Requests for Information

1. Requests for Information about the Contract Documents shall be directed by the CONTRACTOR to the ENGINEER using a Request for Information (RFI) form as agreed

01330-12

to by the OWNER and the ENGINEER. Such requests shall not be transmitted directly to the ENGINEER from a Subcontractor or Supplier.

2. A separate form shall be used for each specific item for which information is required. Requests for Information for more than one item using a single RFI form will be permitted only when the items are so functionally related that expediency indicates review of the group of items as a whole.
3. The ENGINEER will reply to the CONTRACTOR's Request for Information as soon thereafter as practicable.

Q. Construction Photographs

1. Provide photographs showing the preconstruction site, construction progress, and the post-construction site.
2. Format: Photographs shall be digital format
 - a. Digital Format:
 - 1) Digital photos shall be taken with a minimum 8 mega pixel density and provided in JPG format.
 - b. Photos should be properly labeled with the following (at a minimum):
 - 1) Time and date stamped
 - 2) Photograph orientation and location
 - 3) Brief description of photo subject
3. Preconstruction and Post-Construction Photographs
 - a. Take a minimum of 72 photos of the preconstruction site and the property adjacent to the perimeter of the construction site. Particular emphasis shall be directed to utilities and structures both inside and outside the site, or as directed by OWNER.
 - b. Take a minimum of 72 photos of the post-construction site and the property adjacent to the perimeter of the site. Particular emphasis shall be directed to structures both inside and outside the plant boundary, or as indicated by OWNER.
 - c. Preconstruction and post-construction digital photo files shall be submitted on a USB flash drive accompanied by a text file that lists the file name, date photo was taken, and brief description of the photograph and location where the photograph was taken.
 - d. Preconstruction and post-construction digital photo files will be uploaded by Contractor to the project Web Based Document Control Software.
4. Construction Progress Photographs
 - a. Take daily photos, a minimum of 30 per week, showing the process of the construction.
 - 1) Photos should be of enough quality and quantity such that the OWNER can interpret the progress of work and utilize the photographs to physically locate work items depicted.
 - 2) Photos should encompass all areas and scopes of work performed in that week.
 - 3) Daily construction progress digital photo files will be uploaded by Contractor to the project Web Based Document Control Software on a minimum once weekly basis within five (5) days of the Friday of the week they were taken.
 - b. Submit a minimum of 48 of the construction progress photos monthly showing the progress of construction. Locations shall be selected by the contractor to best depict the progress of the work, or as indicated by OWNER.
 - 1) Monthly digital photo files shall be submitted on a USB flash drive accompanied by a text file that lists the file name, date photo was taken, and brief description of the photograph and location where the photograph was taken.

01330-13

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

01330-14

**CONFORMED SET
REQUEST FOR CHANGE**



<PROJECT NAME>

RFC NO.: [RFC No.]
SUBJECT: [Subject]
FROM: [From]
AUTHOR: [Author]

DATE REQUESTED: [Date]

TO: [Company]
Attn: [X]
[Address]

[Phone]

WORK CHANGE REQUESTED:

[To be filled in by Engineer or Contractor]

JUSTIFICATION OR NEED FOR THE CHANGE:

[To be filled in by Engineer or Contractor]

PROJECT IMPACT:

	PROPOSED	ACCEPTED
COST CHANGE, \$		
TIME CHANGE, days		

CONTRACTOR:
<CONTRACTOR NAME>

ENGINEER:
Water Works Engineers, LLC

By: _____

By: _____

Date: _____

Date: _____

CONFORMED SET
REQUEST FOR INFORMATION FORM



<PROJECT NAME>

RFI NO.: [Enter RFI No.]
SUBJECT: [Subject]
FROM: x
AUTHOR: x

DATE REQUESTED: [Date]

DISCIPLINE: [Discipline]

TO: [Company]
Attn: [X]
[Address]

[Phone]

QUESTION:

[To be filled in by Contractor]

PROPOSED SOLUTION:

[To be filled in by Contractor]

ANSWER:

[By Engineer]

DATE ANSWERED: XX/XX/XXXX

CONFORMED SET
SUBMITTAL REVIEW FORM



<PROJECT NAME>

Project Name	
Contractor	
Submittal Number	
Description	
Specification Section	
Reviewer Name	
Review Date	

Review Status Codes:

NET	NO EXCEPTIONS TAKEN
MCN	MAKE CORRECTIONS NOTED
R & R	REVISE AND RESUBMIT
REJ	REJECTED - RESUBMIT
REC	RECORD COPY
NR	NOT REVIEWED

ITEM	DESCRIPTION	STATUS
1		
2		
3		
4		

Comments:

1.

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01400**QUALITY CONTROL****PART 1 - GENERAL****1.1 OBSERVATION AND SUPERVISION**

- A. The ENGINEER or ENGINEER's appointed representative will review the Work and the CONTRACTOR shall provide facilities and access to the Work at all times as required to facilitate this review.
- B. Responsibility:
 - 1. The CONTRACTOR shall be solely responsible to supervise and direct the entire Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to complete the Work in accordance with the Contract Documents.
 - 2. The CONTRACTOR shall be solely responsible for the means, methods, techniques, sequences, quality control, and procedures of construction and safety precautions and programs incidental thereto.
 - 3. The foregoing includes work performed by the CONTRACTOR's Subcontractors.
 - 4. The CONTRACTOR shall be responsible to see that the finished Work complies accurately with the Contract Documents.
- C. Superintendent:
 - 1. The CONTRACTOR shall designate in writing and keep on the work site at all times during its progress a technically qualified, English-speaking superintendent, who shall not be replaced without written acceptance of the ENGINEER.
 - 2. The superintendent shall be the CONTRACTOR's representative at the job site and shall have authority to act on behalf of the CONTRACTOR.
 - 3. All communications given to the superintendent shall be as binding as if given to the CONTRACTOR.
 - 4. The CONTRACTOR's superintendent shall be present at the site of the Work at all times while work is in progress. Failure to observe this requirement shall be considered as suspension of the Work by the CONTRACTOR until such time as such superintendent is again present at the site.

1.2 RESPONSIBILITY

- A. The CONTRACTOR is responsible for conducting all testing and inspection specifically required by the Specifications and otherwise necessary to ensure compliance with the Contract Documents.
 - 1. Approval of Testing Laboratories:
 - a. All laboratory work under this contract shall be performed by a laboratory approved by the ENGINEER, whether the laboratory is employed by the CONTRACTOR, or is owned and operated by the CONTRACTOR.
 - b. The basis of approval includes the following:
 - 1) Testing laboratories performing work in connection with concrete, steel, and bituminous materials shall comply with ASTM E 329 and ASTM D 3666, respectively.

01400-1

- 2) Testing laboratories performing work not in connection with concrete, steel, bituminous materials, soils and non-destructive testing shall comply with ASTM E 548.
- B. The ENGINEER may conduct periodic independent testing and inspection to verify compliance with the Contract Documents.
- C. Retesting:
 1. The OWNER reserves the right to back-charge the CONTRACTOR for retesting of deficient or defective work or products upon written notification.
 2. Compensation for retesting on behalf of the OWNER will be made through deductions from the Progress Payments.
- D. The CONTRACTOR is responsible for correcting all defective work discovered prior to final acceptance of the Contract, despite the failure of the Inspector(s) to discover it.

1.3 TESTS AND INSPECTIONS

- A. The CONTRACTOR shall be responsible for scheduling all inspections and tests required.
 1. The ENGINEER shall be given a minimum 48 business hours notice prior to any inspections or tests.
- B. The CONTRACTOR shall pay for all tests including, but not limited to:
 1. Inspections and tests necessary to comply with laws, ordinances, rules, regulations and orders of public authorities pursuant to General Conditions.
 2. Mix designs, including tests of trial batches, on concrete mixes.
 3. Tests of materials, inspections, and certifications required by the Specifications.
 4. Testing, adjusting, and balancing of equipment and systems required by the Specifications.
 5. One tension and elongation test for each 5 tons of steel or fractional part thereof for each size will be required, unless the steel can be identified by heat or melt numbers and is accompanied by mill analysis and test reports. Commercial stock may be used, subject to approval of the ENGINEER.
 6. Any testing performed by the CONTRACTOR for their own quality control (e.g., compaction tests).
 7. Retests or re-inspections by the OWNER, if required, and tests or inspections required due to CONTRACTOR error or lack of required identifications of material.
 8. Any and all water used by the CONTRACTOR in any testing.
- C. Two copies of the agency or laboratory report of each test or inspection shall be provided to the ENGINEER. All tests of materials shall be made in accordance with the commonly recognized standards of national technical organizations, and such other special methods and tests as are prescribed in the Contract Documents.
- D. Purchase Orders:
 1. One copy of each of the CONTRACTOR's purchase orders for materials forming a portion of the work shall be furnished to the ENGINEER, if requested.
 2. Each such purchase order shall contain a statement that the materials included in the order are subject to inspection by the OWNER.
 3. Materials purchased locally will be inspected at the point of manufacture or supply, and materials supplied from points more than 50 miles from the job site will be

inspected upon arrival at the job, except when other inspection requirements are provided for specific materials in other Sections of this Specification.

E. Samples:

1. The CONTRACTOR shall furnish samples of materials as are required by the ENGINEER, without charge.
2. No material shall be used until the ENGINEER has had the opportunity to test or examine such materials.
3. Samples will be secured and tested whenever necessary to determine the quality of the material.
4. Samples and test specimens prepared at the job site, such as concrete test cylinders, shall be taken or prepared by the ENGINEER in the presence and with the assistance of the CONTRACTOR.

1.4 AUTHORITY AND DUTIES OF INSPECTOR

- A. Inspectors employed by the OWNER shall be authorized to inspect all work done and materials and equipment furnished to complement the CONTRACTOR furnished independent inspector.
1. Such inspection may extend to all or any part of the work, and to the preparation, fabrication, or manufacture of the materials and equipment to be used.
 2. The Inspector will not alter or waive the provisions of the Contract Documents.
 3. The Inspector will keep the ENGINEER informed as to the progress of the work and the manner in which it is being done.
 4. The Inspector will call the CONTRACTOR's attention to nonconformance with the Contract Documents that the Inspector may have observed.
 5. The Inspector will not be responsible for the adequacy or correctness of the CONTRACTOR's means, methods, techniques, sequences, or procedures for construction.
 6. The Inspector will not approve or accept any portion of the work, issue instructions contrary to the Contract Documents, or act as foreman for the CONTRACTOR.
 7. The Inspector may reject defective materials, equipment, or work when it is not in compliance with the Contract Documents.
 8. The Inspector will not be responsible for:
 - a. The CONTRACTOR's quality control program.
 - b. The CONTRACTOR's safety program.
 - c. Coordinating the work or activities of the CONTRACTOR or their Subcontractor.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

01400-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01420

REFERENCE STANDARDS AND ABBREVIATIONS

PART 1 - GENERAL**1.1 REFERENCE STANDARDS**

- A. The standards referred to, except as modified, shall have full force and effect as though printed in this Specification, and shall be the latest edition or revision thereof in effect on the bid opening date, unless a particular edition or issue is indicated. Copies of these standards are not available from the OWNER.
- B. The ENGINEER will furnish, upon request, information as to how copies may be obtained.
- C. Abbreviations and terms, or pronouns in place of them, shall be interpreted as follows:

AAMA:	Architectural Aluminum Manufacturer's Association
AAN:	American Association of Nurserymen
AAR:	Association of American Railroads
AASHTO:	American Association of State Highway and Transportation Officials, Standard Specifications
AATCC:	American Association of Textile Chemists and Colorists
ACI:	American Concrete Institute, Standards
AFBMA:	Anti-Friction Bearing Manufacturer's Association, Inc.
AGA:	American Gas Association
AGC:	Associated General Contractors
AGMA:	American Gear Manufacturer's Association
AHAM:	Association of Home Appliance Manufacturer's
AI:	The Asphalt Institute
AIA:	American Institute of Architects
AISC:	American Institute of Steel Construction, Specification for the Design, Fabrication, and Erection of Structural Steel for Buildings, and the AISC Code of Standard Practice
AISI:	American Iron and Steel Institute
AITC:	American Institute of Timber Construction
AMCA:	Air Moving and Conditioning Association, Standards
ANS:	American Nuclear Society
ANSI:	American National Standards Institute
APA:	American Plywood Association
API:	American Petroleum Institute
APWA:	American Public Works Association, Standard Specifications for Public Works Construction
ASA:	Acoustical Society of America
ASAE:	American Society of Agriculture Engineers
ASCE:	American Society of Civil Engineers
ASHRAE:	American Society of Heating, Refrigeration and Air Conditioning Engineers
ASLE:	American Society of Lubricating Engineers

01420-1

ASME:	American Society of Mechanical Engineers
ASQC:	American Society of Quality Control
ASSE:	American Society of Sanitary Engineers
ASTM:	American Society for Testing and Materials, Standards
AWG:	American Wire Gauge
AWPA:	American Wood-Preservers' Association, Standards
AWPI:	American Wood Preservers Institute
AWS:	American Welding Society
AWWA:	American Water Works Association, Standards
BBC:	Basic Building Code, Building Officials and Code Administrators International
BHMA:	Builders Hardware Manufacturer's Association
CAL/OSHA:	California/Occupational Safety and Health Administration, Standards
CBM:	Certified Ballast Manufacturer's
CCR:	California Code of Regulations
CEMA:	Conveyors Equipment Manufacturer's Association
CGA:	Compressed Gas Association
CISPI:	Cast Iron Soil Pipe Institute, Standards
CLPCA:	California Lathing and Plastering Contractors Association
CLFMI:	Chain Link Fence Manufacturer's Institute
CMAA:	Crane Manufacturers' Association of America
CMA:	Concrete Masonry Association
CRSI:	Concrete Reinforcing Steel Institute, Standards
CSS:	CalTrans Standard Specifications, State of California, Department of Transportation
DCDMA:	Diamond Core Drill Manufacturer's Association
DOSH:	Division of Occupational Safety and Health, State of California, Department of Industrial Relations
EIA:	Electronic Industries Association
ETL:	Electrical Test Laboratories
FED/OSHA:	Federal Occupational Safety and Health Administration, Standards
FM:	Factory Mutual
ICBO:	International Conference of Building Officials
ICEA:	Insulated Cable Engineers Association
IEEE:	Institute of Electrical and Electronic Engineers
IES:	Illuminating Engineering Society
IME:	Institute of Makers of Explosives
IP:	Institute of Petroleum (London)
IPC:	Institute of Printed Circuits
IPCEA:	Insulated Power Cable Engineers Association
ISA:	Instrument Society of America
ISO:	International Organization of Standardization
ITE:	Institute of Traffic Engineers
MBMA:	Metal Building Manufacturer's Association
MPTA:	Mechanical Power Transmission of Association
MTI:	Marine Testing Institute
MSS:	Manufacturers Standardization Society
NAAM:	National Association of Architectural Metal Manufacturers

01420-2

NACE:	National Association of Corrosion Engineers, Standards
NBS:	National Bureau of Standards
NCCLS:	National Committee for Clinical Laboratory Standards
NEC:	National Electric Code
NEMA:	National Electrical Manufacturers' Association, Standards
NFPA:	National Fire Protection Association
NFPA:	National Forest Products Association
NGLI:	National Lubricating Grease Institute
NMA:	National Microfilm Association
NWMA:	National Woodwork Manufacturers Association
OSHA:	Occupational Safety and Health Administration
PCA:	Portland Cement Association
PCI:	Prestressed Concrete Institute
RIS:	Redwood Inspection Service, Standard Specifications
RVIA:	Recreational Vehicle Industry Association
RWMA:	Resistance Welder Manufacturer's Association
SAE:	Society of Automotive Engineers
SAMA:	Scientific Apparatus Makers Association
SDI:	Steel Door Institute
SIS:	Swedish Standards Association
SMA:	Screen Manufacturer's Association
SMACNA:	Sheet Metal and Air Conditioning Contractors National Association
SPR:	Simplified Practice Recommendation
SSBC:	Southern Standard Building Code, Southern Building Code Congress
SSPC:	Steel Structures Painting Council, Specifications
SSPWC:	Standard Specifications for Public Works Construction
TAPPI:	Technical Association of the Pulp and Paper Industry
TFI:	The Fertilizer Institute
UBC:	Uniform Building Code of the International Conference of Building Officials
UPC:	Uniform Plumbing Code
UL:	Underwriters Laboratories
WCLA:	West Coast Lumbermen's Association, Standard Grading and Dressing Rules
WCLIB:	West Coast Lumber Inspection Bureau
WCRSI:	Western Concrete Reinforcing Steel Institute
WIC:	Woodwork Institute of California
WRI:	Wire Reinforcement Institute, Inc.
WWPA:	Western Wood Products Association

1.2 OTHER ABBREVIATIONS

- A. Other common abbreviations that may be found in the Specifications are, but may not be limited to:

acrylonitrile butadiene styrene	ABS	ampere average	A, amp avg
alternating current	a-c, AC	biochemical oxygen demand	BOD
American wire gauge	AWG	brake horsepower	bhp
ante meridiem	am		

01420-3

British thermal unit	Btu	horsepower	hp
Centigrade	C	inch	in
chlorinated polyvinyl chloride	CPVC	inch-pound	in-lb
company	Co	input/output	I/O
cubic inch	cu in, in ³	inside diameter	ID
cubic foot	cu ft, CF, ft ³	instrumentation and control	I&C
cubic yard	cu yd, CY, yd ³		
cubic feet per minute	cfm, ft ³ /min	kilovolt	kV
cubic feet per second	cfs, ft ³ /s	kilovolt-ampere	kVA
		kilowatt	kW
decibel	dB	kilowatt-hour	kWhr
decibels, A-weighted	dBA		
degree Centigrade (Celsius)	°C, C	length	L
degree Fahrenheit	°F, F	length to least radius of gyration	L/r
diameter	diam, ø	light emitting diode	LED
direct current	d-c, DC	linear	lin
dollars	\$	linear foot	lin ft
ductile iron	DI	liter	l
each	ea, @	manhole	MH
efficiency	eff	maximum	max
elevation	El., Elev	mean sea level	MSL
ethylene propylene rubber	EPDM	mercury	Hg
exhaust fan	EF	miles per hour	mph
		milli-amp	mA
Fahrenheit	F	milliamperere DC	mAdc
feet	ft	milligram	mg
feet per hour	fph, ft/h	milligrams per liter	mg/l
feet per minute	fpm, ft/min	milliliter	ml
feet per second	fps, ft/s	millimeter	mm
fiberglass reinforced plastic	FRP	million gallon	mil
figure	Fig.	million gallons per day	mgd
flange	flg	minimum	min
foot-pound	ft-lb	motor control center	MCC
gallon	gal	net positive suction head available	NPSHA
gallons per hour	gph, gal/hr	net positive suction head required	NPSHR
gallons per minute	gpm, gal/min	number	No., #
gallons per second	gps, gal/s	National Pipe Thread	NPT
gram	g		
ground fault current interrupter	GFCI	Operation and Maintenance	O&M
		ounce	oz
hand/off/automatic heating, ventilating, and air conditioning	HOA HVAC	outside diameter	OD
Hertz	Hz		
hour	hr	parts per million	ppm
		post meridiem	pm

01420-4

plus or minus	+/-, ±	square yard	sq yd, SY, yd ²
polytetrafluorethylene	PTFE	stainless steel	SS
polyvinyl chloride	PVC	standard	std
pound	lb	standard cubic feet	
pounds per square foot	psf, lb/ft ²	per minute	scfm
pounds per square inch	psi, lb/in ²	symmetrical	sym.
pounds per square inch absolute	psia	total dynamic head	tdh
pounds per square inch gage	psig	totally-enclosed, fan- cooled	TEFC
Process and Instrumentation Diagrams	P&ID	totally-enclosed, non- ventilated	TENV
random access memory	RAM	twisted shielded	TWSH
reinforced concrete pipe	RCP	ultraviolet	UV
reinforced concrete cylinder pipe	RCCP	United States	US, USA
relative humidity	RH	variable frequency drive	VFD, AFD
revolutions per minute	rpm	volt	V
second	sec, s	volts alternating current	VAC
specific gravity	sp gr	volts direct current	VDC
square foot	sq ft, SF, ft ²	water to cement	W/C, wc
square inch	sq in, in ²	water column	W.C.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

01420-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01500**TEMPORARY CONSTRUCTION FACILITIES AND UTILITIES****PART 1 - GENERAL****1.1 CONTRACTOR'S STAGING AREA AND WORK ACCESS PLAN**

- A. The CONTRACTOR shall limit the location of the storage of equipment and materials to the staging area(s) designated on the Drawings and as directed by the ENGINEER.
- B. The CONTRACTOR shall make their own arrangements for additional space that may be required and shall bear all associated costs.
- C. The CONTRACTOR shall submit a work access plan showing the planned access route for deliveries of supplies and mobilization of work force for ENGINEER's approval prior to mobilization.
- D. On-Site Project Office:
 - 1. The CONTRACTOR shall maintain near the work in progress a suitable office or other protected area in which shall be kept project copies of the Contract Documents, project progress records, project schedule, shop drawings and other relevant documents which shall be accessible to the OWNER and ENGINEER during normal working hours.
 - 2. The CONTRACTOR shall make their own arrangements for additional space that may be required and bear all associated costs.
- E. Temporary Facilities Plan:
 - 1. The CONTRACTOR shall submit to the ENGINEER for approval, as part of the mobilization effort, the proposed plan and layout for all temporary offices, sanitary facilities, temporary construction roads, storage buildings, storage yards, temporary water service and distribution, temporary telephone and temporary power service and distribution.
 - 2. The plan shall show all temporary fencing and gates and all proposed access to the work areas.
 - 3. Prior to the removal of existing fence, the CONTRACTOR shall provide temporary security fencing at least equal to the existing chain link and barbed wire fencing to protect the existing facilities and structures.
- F. Access Roads:
 - 1. The CONTRACTOR shall "winterize" all access roads to provide a surface reasonably satisfactory for traffic during wet winter months.
 - 2. The roads shall be gravel surfaced, even, free from humps and depressions.
 - 3. All costs of complying with this requirement shall be included in the lump sum bid.

1.2 STORAGE - GENERAL

- A. The CONTRACTOR shall provide any temporary storage required for the protection of equipment and materials as recommended by manufacturers of such materials.

01500-1

1.3 STORAGE BUILDINGS

- A. The CONTRACTOR shall erect or provide temporary storage buildings of the various sizes as required for the protection of mechanical and electrical equipment and materials as recommended by manufacturers of such equipment and materials.
- B. The buildings shall be provided with such environmental control systems that meet recommendations of manufacturers of all equipment and materials stored in the buildings.
- C. The buildings shall be of sufficient size and so arranged or partitioned to provide security for their contents and provide ready access for inspection and inventory.
- D. At or near the completion of the work, and as directed by the ENGINEER, the temporary storage buildings shall be dismantled, removed from the site, and remain the property of the CONTRACTOR.
- E. Combustible materials (paints, solvents, fuels, etc.) shall be safely stored and separated in accordance with the manufacturer's requirements and in compliance with hazardous material storage requirements. CONTRACTOR shall be responsible for providing proper storage buildings for combustible materials.

1.4 STORAGE YARDS

- A. The CONTRACTOR shall provide temporary storage yards as required for the storage of materials that are not subject to damage by weather conditions.
- B. Materials such as pipe, reinforcing and structural steel, shall be stored on pallets or racks, off the ground, and stored in a manner to allow ready access for inspection and inventory.
- C. Temporary gravel surfacing of the storage yards shall meet with the approval of the ENGINEER.

1.5 PARKING AREAS

- A. Control vehicular parking to preclude interference with public traffic or parking, access by emergency vehicles, OWNER's operations, or construction operations.

1.6 VEHICULAR TRAFFIC

- A. Comply with Laws and Regulations regarding closing or restricting use of public streets or highways. No public or private road shall be closed, except by written permission of proper authority. Assure the least possible obstruction to traffic and normal commercial pursuits.
- B. Conduct the Work to interfere as little as possible with public travel, whether vehicular or pedestrian.
- C. Whenever it is necessary to cross, close, or obstruct roads, driveways, and walks, whether public or private, provide and maintain suitable and safe bridges, detours, or other temporary expedients for accommodation of public and private travel.

01500-2

1.7 DELIVERY-STORAGE-HANDLING**A. General:**

1. The CONTRACTOR shall deliver, handle, and store materials and equipment in accordance with supplier's written recommendations and by methods and means which will prevent damage, deterioration, and loss including theft.
2. Delivery schedules shall be controlled to minimize long-term storage at the site and overcrowding of construction spaces.
3. In particular, the CONTRACTOR shall provide delivery/ installation coordination to ensure minimum holding or storage for material or equipment recognized to be flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other sources of loss.

B. Transportation and Handling:

1. Materials and equipment shall be transported by methods to avoid damage and shall be delivered in dry, undamaged condition in supplier's unopened containers or packaging.
2. The CONTRACTOR shall provide equipment and personnel to handle the materials, and equipment by methods that will prevent soiling and damage.
3. The CONTRACTOR shall provide additional protection during handling to prevent marring and otherwise damaging packaging, and surrounding surfaces.

C. Storage and Protection:

1. Materials and equipment shall be stored in accordance with supplier's written instructions, with seals and labels intact and legible. Exposed metal surfaces of valves, fittings and similar materials shall be coated with grease in accordance with manufacturer's recommendations to prevent corrosion. Sensitive materials and equipment shall be stored in weather-tight enclosures and temperature and humidity ranges shall be maintained within tolerances required by supplier's written instructions.
2. For exterior storage of fabricated materials, they shall be placed on sloped support above ground. Materials or equipment subject to deterioration shall be covered with impervious sheet covering; ventilation shall be provided to avoid condensation.
3. Loose granular materials shall be stored on solid surfaces in a well-drained area and shall be prevented from mixing with foreign matter.
4. Inspection:
 - a. Storage shall be arranged to provide access for inspection.
 - b. The CONTRACTOR shall periodically inspect to assure materials and equipment are undamaged and are maintained under required conditions.
5. Storage shall be arranged in a manner to provide access for maintenance of stored items.

1.8 PROJECT SECURITY

- A. The CONTRACTOR shall make adequate provision for the protection of the work area against fire, theft and vandalism, and for the protection of the public and OWNER personnel against exposure to injury, and for the security of any off-site storage areas.
- B. All costs for this protection shall be included within the CONTRACTOR's bid.

1.9 TEMPORARY UTILITIES

- A. The CONTRACTOR shall provide and pay for all necessary temporary telephones, fuel, power, potable water, sanitary, and proper toilet accommodations. CONTRACTOR shall not use OWNER-owned utilities.
- B. The temporary facilities to be provided by the CONTRACTOR as described above shall conform to all requirements in regard to operation, safety, and fire hazards of State and local authorities and of Underwriters.
- C. CONTRACTOR shall return the site and facilities to their original "as-found" condition, unless otherwise specified in the Contract Documents, at the completion of the project.

1.10 SOUND CONTROL

- A. The CONTRACTOR shall comply with all local sound control and noise level rules, regulations and ordinances which apply to any work performed pursuant to the contract.
- B. Each internal combustion engine, used for any purpose on the job or related to the job, shall be equipped with a muffler of a type recommended by the manufacturer, so as to produce a maximum noise level of 85 dBA at 5 feet.
- C. No internal combustion engine shall be operated on the project without said muffler.
- D. Special Precautions for Inhabited Areas:
 - 1. In inhabited areas, particularly residential, operations shall be performed in a manner to minimize unnecessary noise generation.
 - 2. In residential areas, special measures shall be taken to suppress noise generated by repair and service activities during the night hours.

1.11 DUST/AIR POLLUTION CONTROL

- A. The CONTRACTOR shall take whatever steps, procedures, or means as are required to prevent dust conditions being caused by operations in connection with the execution of the Work; and on any road which the CONTRACTOR or any of their Subcontractors are using, excavation or fill areas, demolition operations, or other activities.
- B. Control shall be by sprinkling, use of dust palliatives, modification of operations, or any other means acceptable to agencies having jurisdiction.
- C. Damage to personal property, etc., resulting from the CONTRACTOR's construction operations shall be borne by the CONTRACTOR at no cost to the OWNER.
- D. The CONTRACTOR shall keep the streets and work area clean at all times by means of mechanical sweepers or hand sweeping. Water will be used for dust control only, and not for cleaning streets.
- E. Burning of waste, rubbish, or other debris will not be permitted on or adjacent to site.

1.12 WASTE DISPOSAL

- A. The CONTRACTOR shall dispose of surplus materials, waste products, and debris and shall make necessary arrangements for such disposal. The CONTRACTOR shall obtain written permission from property owner prior to disposing surplus materials, waste products, or debris on private property.
- B. All waste disposal shall be done in accordance with applicable laws and regulations.
- C. Landfill Disposal:
 - 1. If the CONTRACTOR proposes to dispose of construction debris, trench spoils, excavation spoils, etc., at a landfill, the CONTRACTOR shall be responsible to provide and pay for all permits and analyses required by the landfill.
 - 2. If the analyses determine that the material is hazardous, then an equitable adjustment of the Contract for the cost of hazardous waste disposal will be made in accordance with the General Conditions, and the following:
 - a. Time extension or contract costs will not be granted for delays that could have been avoided by the CONTRACTOR redirecting their forces and equipment to perform other work on the contract.
- D. Ditches, washes, or drainageways shall not be filled.
- E. Disposal operations shall not create unsightly or unsanitary nuisances.
- F. The CONTRACTOR shall maintain the disposal site in a condition of good appearance and safety during the construction period.
- G. Prior to final acceptance of the work, the CONTRACTOR shall have completed the leveling and cleanup of the disposal site.

1.13 CLEAN UP

- A. Throughout the period of construction, the CONTRACTOR shall keep the work site free and clean of all rubbish and debris, and shall promptly remove from the site, or from property adjacent to the site of the work, all unused and rejected materials, surplus earth, concrete, plaster, and debris.
- B. Upon completion of the work, and prior to final acceptance, the CONTRACTOR shall remove from the vicinity of the work all plant, surplus material, and equipment belonging to the CONTRACTOR or used under their direction during construction.

1.14 TEMPORARY ENCLOSURES

- A. When sandblasting, spray painting, spraying of insulation, or other activities inconveniencing or dangerous to property or the health of employees, the public or construction workers, are in progress, the area of activity shall be enclosed adequately to contain the dust, over spray, or other hazard.
- B. In the event there are no permanent enclosures of the area, or such enclosures are incomplete or inadequate, the CONTRACTOR shall provide suitable temporary enclosures as required by the ENGINEER to meet field conditions in accordance with the

recommendations of the owner-furnished equipment supplier (if applicable) and the CONTRACTOR's equipment supplier requirements.

- C. Said temporary or permanent enclosures shall be adequately ventilated to ensure the safety of the workers.

1.15 DRAINAGE

- A. The CONTRACTOR shall comply with drainage and discharge requirements listed in 01140 – Water Pollution Control.

1.16 TEMPORARY LIGHTING

- A. The CONTRACTOR shall provide temporary lighting in all work areas sufficient to maintain a lighting level during working hours not less than the lighting level required by OSHA standards.

1.17 CONSTRUCTION FACILITIES

- A. Construction hoists, elevators, scaffolds, stages, shoring, and similar temporary facilities shall be of ample size and capacity to adequately support and move the loads to which they will be subjected. Railings, enclosures, safety devices, and controls required by law or for adequate protection of life and property shall be provided.
- B. Temporary supports shall be designed with an adequate safety factor to assure adequate load bearing capability. Whenever required by safety regulations, the CONTRACTOR shall submit design calculations for staging and shoring prior to application of loads.

1.18 REMOVAL OF TEMPORARY FACILITIES AND UTILITIES

- A. At such time or times as any temporary construction facilities and utilities are no longer required for the work, the CONTRACTOR shall notify the ENGINEER of their intent and schedule for removal of the temporary facilities and utilities, and obtain the ENGINEER's approval before removing the same.
- B. As approved, the CONTRACTOR shall remove the temporary facilities and utilities from the site as CONTRACTOR's property and leave the site in such condition as specified, as directed by the ENGINEER, and/or as shown on the Drawings.
- C. In unfinished areas, such as planted medians, the condition of the site shall be left in a condition that will restore original drainage, evenly graded, seeded or planted as necessary, and left with an appearance equal to, or better than original.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

+ + END OF SECTION + +

01500-6

SECTION 01505**MOBILIZATION****PART 1 - GENERAL****1.1 GENERAL**

- A. Mobilization shall include the obtaining of all bonds, insurance, and licenses; moving onto the site of all plant and equipment; furnishing and erecting plants, temporary buildings, and other construction facilities; all as required for the proper performance and completion of the work.
- B. Mobilization shall include but not be limited to the following principal items:
1. Movement of CONTRACTOR personnel, equipment, supplies and incidentals to the site
 2. Installing temporary construction power, wiring, and lighting facilities.
 3. Establishing fire protection system.
 4. Developing construction water supply.
 5. Furnishing the work access plan as specified in Section 01500, Temporary Construction Facilities and Utilities.
 6. Providing all on-site CONTRACTOR communication facilities, including telephones, and radio pagers and any radio communications facilities required for the CONTRACTOR to coordinate their forces.
 7. Providing on-site sanitary facilities and potable water facilities as specified in Section 01500, Temporary Construction Facilities and Utilities.
 8. Arranging for and erection of the CONTRACTOR's work and storage yard, including site security.
 9. Posting all EPA and OSHA required notices and establishment of safety programs.
 10. Post all required labor and EEOE notices.
 11. Have the CONTRACTOR's superintendent at the job site full time.
 12. Submittal and OWNER acceptance of the Construction Schedule.
 13. Establishing site security, lighting, fencing, and signing.
 14. Obtaining all bonds, insurance and licenses.
 15. Providing an organization chart of the project and for the CONTRACTOR's firm. The project chart shall include the name, title and responsibilities of each position which is involved in the work.
 16. Other mobilization items approved by the ENGINEER required to support the complete work (e.g., Health and Safety Plans for Hazardous Waste).

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION (NOT USED)**

+ + END OF SECTION + +

01505-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01550

TEMPORARY BYPASS PUMPING

PART 1 - GENERAL**1.1 GENERAL**

- A. Scope: This Section covers temporary bypass pumping requirements, required of the CONTRACTOR that shall apply during construction, including but not limited to furnishing all materials, labor, equipment, power, maintenance, etc. to implement a temporary pumping system for the purpose of diverting the existing sanitary sewer flow around the work area for the duration necessary to complete the work.
- B. The CONTRACTOR shall inform all Subcontractors and manufacturers of the requirements herein and include the required services in their costs for the work specified in these Contract Documents.
- C. The design, installation and successful operation of the temporary pumping system shall be the Contractor's responsibility. The bypass system shall meet the requirements of all codes and regulatory agencies having jurisdiction.
- D. The bypass system shall be designed, installed and operated by the Contractor to prevent any and all leakage or discharge of sewage to the environment. If a sewage leak or discharge occurs, Contractor shall be solely responsible for the remedy of the leak, containment and clean-up of the discharge, as well as responsible for any direct or consequential damages, including fines, that are associated with the leak.
- E. Scheduling:
 - 1. Temporary bypass pumping is requisite to satisfactory completion of the Contract and, therefore, shall be completed within the contract time.
 - 2. All temporary bypass pumping activities shall be realistically allowed for and shown on the CONTRACTOR's Construction Schedule.
 - 3. Schedule and perform work in a manner that does not cause or contribute to sanitary sewer overflows, releases or spills of sewage from surrounding collection system or bypass system.
 - 4. All temporary bypass pumping shall be scheduled in conformance with the restrictions specified in Section 01130, Special Project Constraints.

1.2 SUBMITTALS

- A. Temporary Bypass Pumping Plan:
 - 1. Not less than 1 month prior to CONTRACTOR's intended start of temporary bypass pumping, the CONTRACTOR shall submit a detailed Temporary Bypass Pumping Plan to the ENGINEER for review.
 - 2. Temporary Bypass Pumping shall not commence without written approval of the plan from the ENGINEER.
 - 3. The Temporary Bypass Pumping Plan shall include:
 - a. Detailed description of the Temporary Bypass Pumping Plan, including a drawing identifying suction manholes, suction piping, pumps, discharge piping, and discharge connection details.

01550-1

- b. Description of sewer plugging method and types of plugs
- c. Number, size, material, location and method of installation of suction piping
- d. Number, size, material, method of installation and location of installation of discharge piping
- e. Bypass pump information, including make, model, size, curves with operating range clearly delineated, number of each size to be on site and power requirements
- f. Description of backup pump, power and piping equipment
- g. Calculations for static lift, flow velocity, friction and fittings losses
- h. Power generator size, location, fueling plan
- i. Method of protecting discharge manholes or structures from erosion and damage
- j. Thrust and restraint block sizes and locations
- k. Where discharge into downstream manholes is not possible, CONTRACTOR shall provide sections showing discharge pipe depth, embedment, and method of providing leakproof connection
- l. Any temporary pipe supports and anchoring required
- m. Any air release valves (ARV) or combination air vacuum release valves (CARV).
- n. Schedule for installation and maintenance of bypass pumps and piping
- o. Startup, leakage and pressure testing plan
 - 1) Testing shall be conducted using clean water
 - 2) ENGINEER shall be notified a minimum of 24 hours prior to testing.
- p. Identification of any coordination required with the Owners staff
- q. Plan for monitoring upstream mains for backup impacts
- r. Procedures for setup and breakdown of pumping operations
- s. System Monitoring Plan
- t. Emergency plan detailing procedures to be followed in event of pump failures, sewer overflows, service backups, and sewage spillage
- u. Maintain copy of emergency plan on site for duration of project

PART 2 - PRODUCTS

2.1 MATERIALS

- A. All bypass piping shall be fusion bonded High Density Polyethylene
- B. Discharge piping diameter: Minimum of 4 inch diameter
- C. Suction piping diameter: Determined according to pump size, flow calculations, and manhole depth following manufacturer's specifications and recommendations.
- D. Polyethylene Plastic Pipe:
 - 1. High density solid wall and following ASTM F714 Polyethylene (PE) Plastic Pipe (SDR-DR) based on Outside Diameter, ASTM D1248 and ASTM D3550
 - 2. Homogenous throughout, free of visible cracks, discoloration, pitting, varying wall thickness, holes, foreign material, blisters, or other deleterious faults.
- E. High-Density Polyethylene (HDPE).
 - 1. Homogenous throughout, free of visible cracks, discoloration, pitting, varying wall thickness, holes, foreign material, blisters, or other deleterious faults.
 - 2. Defective areas of pipe: Cut out and joint fused as stated herein.

01550-2

3. Assembled and joined at site using couplings, flanges or butt-fusion method to provide leak proof joint. Follow manufacturer's instructions and ASTM D 2657. Threaded or solvent joints and connections will not be permitted.
 - a. Fusing: By personnel certified as fusion technicians by manufacturer of HDPE pipe and/or fusing equipment.
 - b. Butt-fused joint: True alignment and uniform roll-back beads resulting from use of proper temperature and pressure.
 - c. Allow adequate cooling time before removal of pressure.
 - d. Watertight and have tensile strength equal to that of pipe.
4. Flexible Hoses and Associated Couplings and Connectors.
 - a. Abrasion resistant.
 - b. Suitable for intended service.
 - c. Rated for external and internal loads anticipated, including test pressure.
 - 1) External loading design: Incorporate anticipated traffic loadings, including traffic impact loading.
 - d. When subject to traffic loading, compose system, such as traffic ramps or covers.
 - 1) Install system and maintain H-20 loading requirements while in use or as directed by the Engineer.
- F. Valves and Fittings:
 1. Provide all valves and fittings necessary to operate the Bypass Pumping System and to enable quick adjustments or modifications to the system, such as pump switchout.
 2. Selection shall be appropriate for raw municipal wastewater, and shall be based on flow calculations and system operating pressures.
 3. At minimum, the following valves shall be provided:
 - a. Check valves on the discharge of each pump
 - b. Isolation valves that enable either the duty or the standby pump to be brought online or taken offline without delay.
- G. Plugs: Selected and installed according to size of line to be plugged, pipe and manhole configurations, and based on specific site.
 1. Plugs shall be inspected for defects prior to use
 2. Provide redundant plugs available in the event a plug fails
- H. Aluminum irrigation piping or glued PVC piping will not be permitted.
- I. Discharge hose will only be allowed in short sections when approved by Engineer.

2.2 EQUIPMENT

- A. Pumps: Provide fully automatic self-priming units that do not require foot-valves or vacuum pumps for priming.
 1. Leak proof design
 2. Capable of passing minimum 2" diameter solids
 3. Pumps shall have minimum 4" suction and discharge connections
 4. Electric or diesel powered
 5. Able to run dry without damage
 6. Provide start/stop controls for each pump, complete with visual and auditory alarming systems.
 7. Provide a minimum of one full capacity standby pump for each size maintained on-site. Standby pump shall be maintained online, isolated from duty pump by a valve.

01550-3

8. Provide noise attenuation system for pumps producing noise louder than 60 dBA at 30 feet from pump.
9. Bypass System Capacity:
- a. Anticipated Bypass Locations:

LOCATION	REF DWG	BYPASS PUMPING
PS-A 24" Gravity Connection	05-PP-45	Yes
PS-A 15" Gravity Connection	05-PP-45	Yes
PS-B 8" Gravity Connection	05-PP-44	Yes
LS-3	05-PP-36	No, bypass only
LS-2	05-PP-40	No

- b. Bypass system shall have a minimum capacity equal to flow in a "High Winter" scenario at the bypass point per the following tables. The flow values listed herein are approximate and based on flow-monitor calibrated OWNER-provided wastewater collection system hydraulic model.

Existing LS-3	Hourly (mgd)	Hourly (gpm)
High Winter	0.13	89
Average Annual	0.04	29

Existing LS-2	Hourly (mgd)	Hourly (gpm)
High Winter	1.22	847
Average Annual	0.25	177

PS-A 24"SS	Hourly (mgd)	Hourly (gpm)
High Winter	1.55	1,076
Average Annual	0.56	389

PS-A 15"SS	Hourly (mgd)	Hourly (gpm)
High Winter	0.035	24.3
Average Annual	0.014	9.72

PS-B 8"SS	Hourly (mgd)	Hourly (gpm)
High Winter	0.87	604
Average Annual	0.08	56

PART 3 - EXECUTION

3.1 INSTALLATION AND REMOVAL

- A. Provisions and requirements must be approved by Engineer before implementation.

01550-4

- B. OWNER and ENGINEER shall be notified of the schedule and present during installation of Bypass Pumping system.
- C. Access manholes or make connections to existing sewer and construct temporary bypass pumping structures at access location indicated on ENGINEER approved Drawings.
- D. Plugging or blocking of sewage flows shall incorporate a primary and secondary plugging device. When plugging or blocking is no longer needed for performance and acceptance of work, remove in a manner that permits the sewage flow to slowly return to normal without surge, to prevent surcharging or causing other major disturbances downstream.
- E. When working inside manhole or force main, follow all OSHA, Local, State and Federal safety requirements. Take required measures to protect workforce against sewer gases and/or combustible or oxygen-deficient atmosphere.
- F. Installation, Operation and Removal of Bypass Pipelines:
 - 1. Pipeline may be placed along shoulder of roads. Do not place in streets or sidewalks.
 - 2. When bypass pipeline crosses local streets and private driveways, place in roadway ramps.
 - 3. When roadway ramps cannot be used, place bypass in trenches and cover with temporary pavement as approved by Engineer.
 - 4. During bypass pumping operation, protect sewer lines from damage inflicted by equipment.
 - 5. Upon completion of bypass pumping operations, and after the receipt of written permission from Engineer, remove piping, restore property to pre-construction condition and restore pavement. Bypass pipeline shall be flushed with potable water prior to removal to prevent spillage of sewage to the environment.

3.2 INITIAL TESTING

- A. Pressure testing of the bypass pipeline shall be conducted and witnessed by the ENGINEER prior to initial testing. Pressure testing shall be with potable water. The provision of potable water for testing shall be the responsibility of the CONTRACTOR.
- B. An initial test of the complete bypass pumping system shall be conducted in the presence of the ENGINEER, using potable water. The provision of potable water for testing shall be the responsibility of the CONTRACTOR.
- C. Pumps shall be shown to be capable of self-priming after a loss of prime, with a minimum reprime lift greater than the suction lift that will be required during normal operation.
- D. Suction pipe configuration for reprime test shall incorporate a 2 feet minimum horizontal run, a 90° elbow and vertical run at the , minimum specified lift. Pipe size shall be equal to the pump suction diameter.
- E. Repeatability of performance shall be demonstrated by testing three consecutive reprime cycles. Full pump capacity (flow) shall be achieved within five minutes during each cycle. No water should be discharged from the priming system to the environment during priming or operation.

01550-5

3.3 OPERATION OF THE BYPASS SYSTEM

- A. CONTRACTOR shall have sole responsibility for the operation of the bypass system. Neither OWNER nor ENGINEER personnel shall be involved in bypass system operation in any way
 - 1. Full time monitoring is required for active bypass pumping. Part time monitoring is permitted for extended bypass operations (no pumping).
 - a. CONTRACTOR shall be responsible for monitoring bypass pumping operations during work hours using CONTRACTOR personnel who are on site performing other functions. Bypass pumping operations shall be monitored, including examination of the entire length of the bypass pipeline, at least three times per day during work hours to confirm that all systems are fully functional, not leaking, and in good condition.
 - b. When bypass pumping is utilized full time (24 hours per day), CONTRACTOR shall provide a means of remotely monitoring Bypass Pumping operation, and shall have personnel on standby to address any malfunction.

3.4 MAINTAINING SEWER FLOW IN SEWER MAIN LINES:

- A. Sewer service in main lines shall be maintained at all times. Main lines shall be defined as any sewer pipe greater than 4-inches in diameter.
- B. The CONTRACTOR may plug main lines or use by-pass pumps and/or sewer flow diversion to maintain service.
- C. Main lines that are plugged must be monitored at the next manhole upstream of the plug. Wastewater in the next upstream manhole must not be allowed to surcharge above the crown of the outlet pipe more than one foot (1'). If surcharge reaches one foot above the crown of the outlet pipe before work is complete, the CONTRACTOR must relieve the flow by either temporarily reconnection the pipe or by by-pass pumping. At no time shall a manhole be permitted to surcharge such that the distance measured from the rim of the manhole to the water surface is less than two feet (2'). The CONTRACTOR shall be responsible for all research and investigation required to ensure that implementation of by-pass pumping and/or sewer flow diversion plan does not result in a Sanitary Sewer Overflow, including but not limited to verification that any surcharged sewer line does not cause an overflow at an upstream service connection.

+ + END OF SECTION + +

01550-6

SECTION 01610

GENERAL PRODUCT REQUIREMENTS

PART 1 - GENERAL**1.1 SCOPE**

- A. All products furnished and installed under this contract shall conform to the general stipulations set forth in this Section except as otherwise specified in other Sections.

1.2 COORDINATION

- A. The CONTRACTOR shall coordinate all details of the products and equipment with other related parts of the work, including verification that all structures, piping, wiring, and equipment components are compatible. The CONTRACTOR shall be responsible for all structural and other alterations in the work required to accommodate products or equipment differing in dimensions or other characteristics from that contemplated in the Contract Drawings or Specifications.

1.3 DESIGN REQUIREMENTS

- A. Where CONTRACTOR design is specified, design and installation of systems, equipment, and components, including supports and anchorage, shall be in accordance with provisions of 2016 edition of the California Building Code (CBC).

1. Basic Wind Speed: 115 mph, Exposure C.
2. Seismic:

Seismic Parameter	Pump Station A	Pump Station B	Morro Creek Pipe Bridge
S_s	1.158	1.152	1.153
S_1	0.427	0.426	0.426
S_{DS}	0.800	0.798	0.798
S_{D1}	0.448	0.447	0.447
I_e	1.25	1.25	1.25
Risk Category	III	III	III

3. Maximum Rain Intensity: 3-inches/hour

- B. Proof of Compliance:

1. Structural integrity and anchorage shall be certified by an approved calculation that demonstrates the adequacy of the anchorage system for seismic forces. This calculation may be based on principles of structural analysis and engineering mechanics, or based on similarity to approved shake-table tests.
2. The CONTRACTOR shall submit for review and approval test data or calculations certified by a Civil or Structural Engineer registered in the State of California to show compliance with the above requirements.

1.4 ENVIRONMENTAL REQUIREMENTS

- A. Altitude: Provide materials and equipment suitable for installation and operation under rated conditions at 750 feet above sea level.

01610-1

- B. Provide equipment and devices installed outdoors or in unheated enclosures capable of continuous operation within an ambient temperature range of 20 degrees F to 120 degrees F.

1.5 WORKMANSHIP AND MATERIALS

- A. The CONTRACTOR shall guarantee all equipment against faulty or inadequate design, improper assembly or erection, defective workmanship or materials, and leakage, breakage, or other failure. Materials shall be suitable for service conditions.
- B. All equipment shall be designed, fabricated, and assembled in accordance with recognized and acceptable engineering and shop practice. Individual parts shall be manufactured to standard sizes and gages so that repair parts, furnished at any time, can be installed in the field. Like parts of duplicate units shall be interchangeable. Equipment shall not have been in service at any time prior to delivery, except as required by tests.
- C. Except where otherwise specified, structural and miscellaneous fabricated steel used in equipment shall conform to AISC standards. All structural members shall be designed for shock or vibratory loads. Unless otherwise specified, all steel which will be submerged, all or in part, during normal operation of the equipment shall be at least 1/4 inch thick.
- D. Except where otherwise specified, all metal which will be exposed to weather, submerged or otherwise exposed to moisture shall be either non-ferrous or stainless steel, as the application may require.

1.6 LUBRICATION

- A. Equipment shall be adequately lubricated by systems which require attention no more frequently than weekly during continuous operation. Lubrication systems shall not require attention during startup or shutdown and shall not waste lubricants.
- B. Lubricants of the type recommended by the equipment manufacturer shall be provided in sufficient quantity to fill all lubricant reservoirs and to replace all consumption during testing, startup, and operation prior to acceptance of equipment by OWNER. Unless otherwise specified or permitted, the use of synthetic lubricants will not be acceptable.
- C. Lubrication facilities shall be convenient and accessible. Oil drains and fill openings shall be easily accessible from the normal operating area or platform. Drains shall allow for convenient collection of waste oil in containers from the normal operating area or platform without removing the unit from its normal installed position.

1.7 ELECTRIC MOTORS

- A. Unless otherwise specified, motors furnished with equipment shall meet the following requirements:
 - 1. Designed and applied in accordance with NEMA, ANSI, IEEE, AFBMA, and NEC for the duty service imposed by the driven equipment, such as frequent starting, intermittent overload, high inertia, mounting configuration, or service environment.
 - 2. Rated for continuous duty at 40oC ambient, unless the application is well recognized for intermittent duty service as a standard industry practice.

3. Insulated with Class F insulation and designed for a service factor of 1.15, or greater.
4. Three phase motors used in conjunction with variable speed drives shall have Class F insulation with a Class B temperature rise at rated nameplate horsepower, and 1.15 service factor.
5. When operating at service factor load, maximum observable temperature rise of insulation and motor parts, as determined by resistance or thermometer methods, shall not exceed the NEMA allowable limits for the type of motor, the type of enclosure, and the particular application with regard to continuous or intermittent duty.
6. To ensure long motor life, nameplate horsepower, regardless of service factor, shall be at least 115 percent of the maximum load imposed by the driven equipment.
7. Designed for full voltage starting.
8. Designed to operate from an electrical system that may have a maximum of 5 percent voltage distortion per IEEE Standard 519.
9. Derated, if required, for the altitude at which the equipment is installed.
10. Clamp-type grounding terminal shall be inside motor conduit box.
11. External conduit boxes shall be oversized at least one size larger than NEMA standard.
12. Totally enclosed motors shall have a continuous moisture drain which also excludes insects.
13. Bearings shall be either oil or grease lubricated.
14. Manufacturer's standard motor may be supplied on integrally constructed, packaged assemblies such as appliances, tools, unit heaters, and similar equipment specified by model number, in which case a redesign of the unit would be required to furnish motors of other than the manufacturer's standard design. However, in all cases, totally enclosed motors are preferred and shall be furnished if offered by the manufacturer as a standard option.
15. Totally enclosed motors shall be furnished on:
 - a. Equipment for installation below grade.
 - b. Equipment operating in wet or dust-laden locations.
16. Drip-proof motors, or totally enclosed motors at the supplier's option, shall be furnished on equipment in indoor, above-grade, clean, and dry locations.
17. Explosion-proof or submersible motors shall be furnished as required by applicable codes, as specified in other Sections, or at the supplier's option.
18. Motors shall be rated and constructed as follows:
 - a. Below 1/2 hp:
 - 1) 115 volts, 60 Hz, single phase.
 - 2) Built-in manual-reset thermal protector, or integrally mounted stainless steel enclosed manual motor starter.
 - b. 1/2 hp and above:
 - 1) 460 volts, 60 Hz, 3 phase.
 - 2) Where specified or required by the drawings, motors used on 240 volt systems shall be 230 volts, 60 Hz, 3 phase.

1.8 DRIVE UNITS

- A. The nominal input horsepower rating of each gear or speed reducer shall be at least equal to the nameplate horsepower of the drive motor. Drive units shall be designed for 24 hours continuous service.
- B. Unless otherwise specified, the use of gearmotors will not be acceptable.

01610-3

C. Gear reducers:

1. Each gear reducer shall be a totally enclosed unit with oil or grease lubricated antifriction, rolling element bearings throughout.
2. Helical, spiral bevel, combination bevel-helical, and worm gear reducers shall have a service factor of at least 1.50 based on the nameplate horsepower of the drive motor. Shaft-mounted and flange-mounted gear reducers shall be rated AGMA Class II. Helical gear reducers shall have a gear strength rating to catalog rating of 1.5. Each gear reducer shall bear an AGMA nameplate.
3. The thermal horsepower rating of each unit shall equal or exceed the nameplate horsepower of the drive motor. During continuous operation, the maximum sump oil temperature shall not rise more than 100°F above the ambient air temperature in the vicinity of the unit and shall not exceed 200°F.
4. Bearings:
 - a. Each grease lubricated bearing shall be installed in a bearing housing designed to facilitate periodic regreasing of the bearing by means of a manually operated grease gun.
 - b. Each bearing housing shall be designed to evenly distribute new grease, to properly dispose of old grease, and to prevent overgreasing of the bearing.
 - c. The use of permanently sealed, grease lubricated bearings will not be acceptable.
 - d. An internal or external oil pump and appurtenances shall be provided if required to properly lubricate oil lubricated bearings.
 - e. A dipstick or sight glass arranged to permit visual inspection of lubricant level shall be provided on each unit.
5. Gear reducers that require the removal of parts or periodic disassembly of the unit for cleaning and manual regreasing of bearings will not be acceptable.
6. Certification shall be furnished by the gear reducer manufacturer indicating that the intended application of each unit has been reviewed in detail by the manufacturer and that the unit provided is fully compatible with the conditions of installation and service.

D. V-belt drives:

1. Each V-belt drive shall include a sliding base or other suitable tension adjustment. V-belt drives shall have a service factor of at least 1.6 at maximum speed based on the nameplate horsepower of the drive motor.

1.9 SAFETY GUARDS

- A. All belt or chain drives, fan blades, couplings, and other moving or rotating parts shall be covered on all sides by a safety guard.
- B. Safety guards shall be fabricated from 16 USS gauge or heavier galvanized or aluminum-clad sheet steel or 1/2 inch mesh galvanized expanded metal.
- C. Each guard shall be designed for easy installation and removal.
- D. All necessary supports and accessories shall be provided for each guard. Supports and accessories, including bolts, shall be galvanized.
- E. All safety guards in outdoor locations shall be designed to prevent the entrance of rain and dripping water.

01610-4

1.10 ANCHOR BOLTS

- A. Equipment suppliers shall furnish suitable anchor bolts for each item of equipment.
- B. Anchor bolts, together with templates or setting drawings, shall be delivered sufficiently early to permit setting the anchor bolts when the structural concrete is placed.
- C. Anchor bolts shall comply with Section 05051, Anchors, Inserts and Dowels and, unless otherwise specified, shall have a minimum diameter of 1/2-inch.
- D. Unless otherwise indicated or specified, anchor bolts for items of equipment mounted on baseplates shall be long enough to permit 1-1/2 inches of grout beneath the baseplate and to provide adequate anchorage into structural concrete.

1.11 EQUIPMENT BASES

- A. Unless otherwise indicated or specified, all equipment shall be installed on concrete bases at least 6 inches high.
- B. Cast iron or welded steel baseplates shall be provided for pumps, compressors, and other equipment.
- C. Each unit and its drive assembly shall be supported on a single baseplate of neat design.
- D. Baseplates shall have pads for anchoring all components and adequate grout holes.
- E. Baseplates for pumps shall have a means for collecting leakage and a threaded drain connection.
- F. Baseplates shall be anchored to the concrete base with suitable anchor bolts and the space beneath filled with grout as specified in Section 03600, Grout.

1.12 SPECIAL TOOLS AND ACCESSORIES

- A. Equipment requiring periodic repair and adjustment shall be furnished complete with all special tools, instruments, and accessories required for proper maintenance. Equipment requiring special devices for lifting or handling shall be furnished complete with those devices.

1.13 SHOP PAINTING

- A. Surface Protection:
 - 1. All steel and iron surfaces shall be protected by suitable paint or coatings applied in the shop.
 - 2. Surfaces that will be inaccessible after assembly shall be protected for the life of the equipment.
 - 3. Exposed surfaces shall be finished smooth, thoroughly cleaned, and filled as necessary to provide a smooth uniform base for painting.
 - 4. Electric motors, speed reducers, starters, and other self-contained or enclosed components shall be shop primed or finished with a high-grade oil-resistant enamel suitable for coating in the field with an alkyd enamel.
 - 5. Coatings shall be suitable for the environment where the equipment is installed.

01610-5

- B. Shop Primer:
1. Surfaces to be painted after installation shall be prepared for painting as recommended by the paint manufacturer for the intended service, and then shop painted with one or more coats of the specified primer.
 2. Unless otherwise specified, the shop primer for steel and iron surfaces shall be:
 - a. Cook "391-N-167 Barrier Coat",
 - b. Koppers "No. 10 Inhibitive Primer",
 - c. Tnemec "37H Chem-Prime HS",
 - d. Valspar "13-R-28 Chromox Primer",
 - e. Or equal.
- C. Machined, polished, and nonferrous surfaces which are not to be painted shall be coated with rust-preventive compound, Houghton "Rust Veto 344", Rust-Oleum "R-9", or equal.

1.14 PREPARATION FOR SHIPMENT

- A. All equipment shall be suitably packaged to facilitate handling and protect against damage during transit and storage. All equipment shall be boxed, crated, or otherwise completely enclosed and protected during shipment, handling, and storage. All equipment shall be protected from exposure to the elements and shall be kept thoroughly dry at all times.
- B. Painted surfaces shall be protected against impact, abrasion, discoloration, and other damage. All painted surfaces which are damaged prior to acceptance of equipment shall be repainted to the satisfaction of ENGINEER.
- C. Grease and lubricating oil shall be applied to all bearings and similar items.
- D. Each item of equipment shall be tagged or marked as identified in the delivery schedule or on the Shop Drawings. Complete packing lists and bills of material shall be included with each shipment.

1.15 STORAGE

- A. Upon delivery, all equipment and material shall immediately be stored and protected until installed in the work.
- B. Pumps, motors, electrical equipment, and all equipment with antifriction or sleeve bearings shall be stored in weathertight structures maintained at a temperature above 60°F. Equipment, controls, and insulation shall be protected against moisture and water damage. All space heaters furnished in equipment shall be connected and operated continuously.
- C. Equipment and materials shall not show any pitting, rust, decay, or other deleterious effects of storage when installed in the work.

1.16 INSTALLATION AND OPERATION

- A. Equipment shall not be installed or operated except by, or with the guidance of, qualified personnel having the knowledge and experience necessary for proper results. When so specified, or when employees of the CONTRACTOR or their subcontractors are not

qualified, such personnel shall be field representatives of the manufacturer of the equipment or materials being installed.

- B. Qualified field representatives shall be provided by the equipment manufacturers as required by Section 01750, Testing, Training and Startup.
- C. All equipment installed under this Contract, including that furnished by OWNER shall be placed into successful operation according to the written instructions of the manufacturer or the instructions of the manufacturer's field representative. All required adjustments, tests, operation checks, and other startup activity shall be provided.
- D. Acceptance of work in connection with the installation of equipment furnished by others will be subject to approval of the field representative. The CONTRACTOR shall be responsible for planning, supervising, and executing the installation of work, and the approval or acceptance of ENGINEER or the field representative will not relieve the CONTRACTOR of responsibility for defective work.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION (NOT USED)**

+ + END OF SECTION + +

01610-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01750

TESTING, TRAINING AND STARTUP

PART 1 - GENERAL**1.1 GENERAL**

- A. Scope:
1. This Section covers general equipment and system testing and startup requirements, services of the manufacturer's representatives and special coordinating services required of the CONTRACTOR that shall apply during construction and training of the OWNER's personnel for facilities operation.
 2. Specific testing and tracking procedures and requirements found in the Technical Specifications shall also apply.
- B. The CONTRACTOR shall inform all Subcontractors and manufacturers of the requirements herein and include the required services in their costs for the work specified in these Contract Documents. Where a minimum amount of time is stated in the Technical Specifications for manufacturers' services, any additional time required to perform the specified services shall be provided at no additional cost to the OWNER.
- C. Scheduling:
1. Equipment testing and plant startup are requisite to satisfactory completion of the Contract and, therefore, shall be completed within the contract time.
 2. All equipment testing and plant startup activities shall be realistically allowed for and shown on the CONTRACTOR's Construction Schedule, in accordance with Section 01320, Progress Schedule.
 3. All equipment testing and plant startup activities shall be scheduled in conformance with the restrictions specified in Section 01130, Special Project Constraints.
- D. Equipment testing shall be satisfactorily completed prior to commencing plant startup associated with the particular equipment item or equipment package. The equipment shall not be considered ready for testing until the following conditions are satisfied:
1. Manufacturer's certification of equipment installation has been accepted by the ENGINEER.
 2. Electrical and/or instrumentation Subcontractor certification of motor control logic has been accepted by the ENGINEER.
 3. Related Technical Submittals, O&M Manual and Final Shop Drawings have been accepted by the ENGINEER.
 4. Operator training services have been furnished by the CONTRACTOR (operational testing only).
 5. Testing procedures have been submitted in writing and accepted by the ENGINEER in accordance with Section 01330, Submittal Procedures. All testing procedures and results shall be submitted in writing.
- E. The requirements of plant startup specified herein shall also apply to the startup of individual treatment plant processes and facilities.
- F. Startup Plan:

01750-1

1. Not less than 3 months prior to initial equipment or system startup, the CONTRACTOR shall submit to the ENGINEER for review, a detailed Facilities Startup Plan for the associated items of equipment and/or systems.
2. The Startup Plan shall include:
 - a. A detailed sub-network of the CONTRACTOR's Construction Progress Schedule including the following activities:
 - 1) Manufacturer's Services;
 - 2) Installation Certifications;
 - 3) Operator Training;
 - 4) O&M Manual;
 - 5) Functional Testing;
 - 6) Performance Testing;
 - 7) Operational Testing;
 - 8) All other activities necessary to affect a coordinated and successful Testing, Training and Startup.
 - b. Written testing plan with proposed data logs for each item of equipment to be tested.
 - c. A discussion of any coordination required with the Owners staff and/or any system or equipment outage requirements.
 - d. The Plan shall be updated and/or revised as necessary prior to subsequent Construction Progress Meetings.
 - e. Testing shall not be scheduled earlier than 30 days after approval of the Plan.

1.2 SERVICES DURING CONSTRUCTION

A. General:

1. Manufacturer's Representative:

- a. The CONTRACTOR shall provide the services of competent and experienced technical representatives of the manufacturers of all equipment and systems furnished under the contract, for as many days as may be necessary for assembly, installation, testing assistance and operator training.
- b. Manufacturer's field representatives shall observe, instruct, guide, and direct CONTRACTOR's erection or installation procedures, or perform an installation check, as required.
- c. In each case, the CONTRACTOR shall arrange to have the manufacturer's representative revisit the job site as often as necessary until operator training is complete and testing and startup problems have been resolved to the satisfaction of the ENGINEER.
- d. This requirement applies to manufacturers of all equipment furnished (excluding manually operated valves smaller than 24 inches in size, and any other items of equipment specifically exempted by the ENGINEER in writing), whether or not specifically set forth in the Technical Specifications.
- e. The CONTRACTOR shall maintain a service record on each item of equipment and shall deliver these service records to the ENGINEER prior to acceptance of operational testing.

B. Fulfillment of Specified Minimum Services:

1. The CONTRACTOR shall obtain prior written approval from the ENGINEER for providing manufacturers' services.
2. All requests to the ENGINEER for prior approval shall (1) be in writing, (2) be submitted not less than 10 calendar days prior to the providing of the subject

- services, (3) state the service to be provided, and (4) state the reason(s) why the timing of the service is appropriate.
3. Request made to the ENGINEER less than 10 calendar days prior to the manufacturers' services may not receive consideration and response prior to the times the services are provided.
 4. Visits of manufacturers and their representatives to the jobsite or training classroom without prior approval as provided herein may not act to fulfill the specified minimum man-day requirements.
- C. Certificate of Proper Installation:
1. Equipment requiring factory tests shall not be delivered to the jobsite until the CONTRACTOR submits acceptable certified test results to the ENGINEER.
 2. Equipment shall not be considered ready for functional testing until after the following certifications have been submitted and accepted by the ENGINEER.
 - a. Manufacturer Representatives:
 - 1) The CONTRACTOR shall require that each manufacturer's representative furnish to the ENGINEER a written and signed report addressed to the OWNER certifying that the equipment has been properly installed, adjusted, lubricated, is in accurate alignment, is free from any undue stress imposed by connecting piping or anchor bolts, has been operated satisfactorily under full-load conditions and is ready for full-time operation.
 - 2) For pumps, compressors, blowers, engines, motors, and other rotating or reciprocating equipment, the report shall certify that the equipment operates within the manufacturer's allowable limits for vibration.
 - 3) The report shall also certify that all controls, protective devices, instrumentation, and control panels furnished as part of the manufacturer's equipment package are properly installed and calibrated; and that the control logic for equipment startup, shutdown, sequencing, interlocks, and emergency shutdown has been tested and is properly operating.
 - 4) The CONTRACTOR shall also sign said certification.
 - 5) The CONTRACTOR shall submit "Manufacturer's Certification of Proper Installation" on the OWNER form.
 - b. Electrical and Instrumentation Subcontractor:
 - 1) The CONTRACTOR shall require that the electrical and/or instrumentation Subcontractor shall furnish a written and signed report to the ENGINEER certifying that the motor control logic for the equipment item that resides in motor control centers, control panels, control boards, microprocessors, distributed processing units, computers, and the like furnished by the electrical and/or instrumentation Subcontractor has been properly tested and calibrated.
 - 2) The report shall certify that the control logic for equipment startup, shutdown, sequencing, interlocks, and emergency shutdown has been tested and is properly operating.
 - 3) The CONTRACTOR shall also sign said certification.

1.3 STARTUP AND TESTING

- A. General:
1. The CONTRACTOR shall provide the effective coordination of all parties necessary for the successful project startup.

01750-3

2. The ENGINEER shall not be responsible to instruct the CONTRACTOR in the startup of the project, however, the ENGINEER will be available prior to and during startup to provide operational and technical support to the CONTRACTOR.
 3. The CONTRACTOR shall furnish all labor, consumables (power, water, chemicals, air, etc.) tools, equipment, instruments, and services required and incidental to completing all functional, performance and operational testing of installed equipment.
 4. The CONTRACTOR shall submit the proposed test procedures to the ENGINEER for review at least 30 days prior to testing.
 5. The CONTRACTOR shall give the ENGINEER written notice confirming the date of testing at least five working days before the time the equipment is scheduled to be tested.
 6. All testing shall be witnessed by the ENGINEER to be considered valid.
 7. Test Reports:
 - a. CONTRACTOR shall submit written detailed results of all functional, performance and operational testing.
 - b. Upon successful completion of Operational testing all equipment installation, testing and maintenance records shall be submitted to the ENGINEER.
 - c. Said records shall be bound separately for each piece of equipment or system and shall be collected by type of record.
 8. For factory tests, written test results shall be submitted to the ENGINEER at least 10 days prior to shipment.
- B. Functional testing:
1. All items of mechanical and electrical equipment shall be functionally tested by the CONTRACTOR after installation for proper operation.
 2. A minimum of ten (10) days prior to the start of functional testing, the CONTRACTOR shall submit interconnection diagrams for the equipment and for the alarms, controls and instruments associated with the equipment. This requirement shall not relieve the CONTRACTOR of meeting any requirements in the technical specifications for earlier submittal of the interconnection diagrams.
 3. Minimum Test Requirements
 - a. The functional test of each piece of mechanical equipment shall continue for not less than eight (8) continuous hours without interruption.
 - b. The functional test shall include checking for proper rotation, alignment, speed, flows, pressure, vibration, sound level, etc. Initial equipment and system adjustment and calibrations shall be performed in the presence of and with the assistance of the manufacturer's representative.
 - c. The functional test shall include a demonstration of the proper performance of all alarms, local and remote controls, instrumentation, equipment functions, and all other electrical, mechanical and piping systems.
 - d. All parts shall operate satisfactorily in all respects, under continuous full load, and in accordance with the specified requirements, for the full duration of the eight-hour test period.
 - e. If any part of a unit shows evidence of unsatisfactory or improper operation during the eight-hour test period, correction or repairs shall be made and the full eight-hour test operation, as specified herein, shall be repeated after all parts operate satisfactorily.
- C. Performance testing:
1. Where performance testing is required by the Technical Specifications, the testing shall be supervised by the manufacturer's representative. These services shall continue until such times as the applicable equipment or system has been

- successfully tested for performance and has been accepted by the ENGINEER for operational testing.
2. Performance testing shall take place after functional testing is successfully completed in accordance with Article 1.3 B.
 3. Performance testing shall demonstrate that the equipment meets all performance requirements specified.
- D. Startup/operational testing:
1. Upon successful completion of operator training and the functional, performance and leakage testing, the CONTRACTOR shall startup the plant facilities and test the equipment operation and performance by conducting a seven (7) day, continuous operational test of the completed facilities as an operational process unit to demonstrate to the ENGINEER's satisfaction that all equipment and systems required by these specifications will operate in the manner in which they are intended to perform.
 2. The OWNER will provide CONTRACTOR-trained operating personnel for the duration of the operational test. Said operation shall be conducted and under the supervision and direction of the CONTRACTOR and/or manufacturer's representative.
 3. Operational Defects:
 - a. All defects in materials or workmanship which appear during the operational test shall be immediately corrected by the CONTRACTOR.
 - b. In the event of a malfunction or deficiency that results in shutdown or partial operation of a system or process unit or results in performance that is less than that specified, the startup duration shall be repeated for that corresponding system or process unit and any other affected equipment so its proper operation and performance as required by the Contract Documents is demonstrated for a minimum of seven (7) continuous and trouble free days.
 4. If the operational test is interrupted through no fault of the CONTRACTOR the test may resume at the earliest mutually agreeable time.
 5. No unit process or part thereof shall be placed in service until it has successfully completed operational testing.
 6. During plant startup, the CONTRACTOR shall provide the appropriate construction trades and the services of authorized Manufacturer's representatives for operational testing and as necessary, to correct faulty equipment operation.
 7. After completion of all startup/operational testing, the CONTRACTOR shall repaint, hose, scrub, clean up and otherwise return the work to a "like new" condition, prior to OWNER acceptance.

1.4 TRAINING OF OWNER PERSONNEL

- A. General:
1. Operation and maintenance training of OWNER's personnel shall be provided for mechanical, electrical, instrumentation and control equipment as listed in this Section or elsewhere in the Specifications.
 2. For the purposes of this requirement, operations training is considered to be separate from maintenance training. Instructions are to be tailored to the needs of each group.
 3. These training services shall be conducted by the manufacturer's representative and shall ensure measurable and observable means that OWNER personnel are qualified to perform equipment task requirements, including essential knowledge, skills and abilities.

01750-5

4. Training shall be conducted by competent representatives who are certified by the manufacturer to be thoroughly familiar with the subject matter as well as instructional methods.
 5. Training materials shall be submitted to the OWNER (see Paragraph 1.4 C below) for review. Acceptance of training materials is required prior to start of training.
 6. All training shall be completed prior to beginning operational testing.
 7. The OWNER shall have the right to videotape any or all training sessions, or may designate separate sessions or portions thereof for the sole purpose of videotaping.
- B. Training coordinator:
1. The CONTRACTOR shall designate and provide one or more persons to be responsible for coordinating and expediting training duties.
 2. The person or persons so designated shall be present at all training coordination meetings with the OWNER.
- C. Training schedule:
1. The CONTRACTOR's coordinator shall coordinate the training periods with OWNER's personnel and manufacturer's representatives, and shall submit a training schedule and the training materials for each piece of equipment or system for which training is to be provided.
 2. The training schedule shall be submitted not less than 21 calendar days prior to the time that the associated training is to be provided and shall be based on the then current Plan of Operation.
 3. Equipment and/or systems shall be deemed suitable for use in training upon satisfactory completion of functional testing.
 4. All training with regards to a unit process or part thereof shall be completed prior to the start of operational testing.
 5. As a minimum, training shall be provided on the following equipment and systems:
 - a. Pump Station A
 - b. Pump Station B
 - c. Compressed Air System
 6. The CONTRACTOR shall provide distinct and separate training sessions for both operations and maintenance personnel, meeting the following criteria:
 - a. Maintenance Training:
 - 1) Maintenance training shall be provided for all items in 1.4.C.5 above.
 - 2) The CONTRACTOR shall provide two (2) separate training sessions on a day agreed to by the ENGINEER.
 - 3) Training shall emphasize theory of operations, troubleshooting, and preventative maintenance and repair procedures.
 - 4) The discussion shall encompass issues relating to instrumentation, electrical, and mechanical systems.
 - b. Operations training:
 - 1) Operations training shall be provided for each piece of equipment listed in Paragraph 1.4.C.5 above.
 - 2) The CONTRACTOR shall provide two (2) separate training sessions for each three (3) operating shifts.
 - 3) Sessions are to be provided for each shift within the following time periods.
 - a) Day Shift 8:00 a.m. - 2:00 p.m.
 - b) Swing Shift 4:00 p.m. - 10:00 p.m.
 - c) Grave Shift 12:00 a.m. - 6:00 a.m.
 - c. Training session schedules shall be approved by the ENGINEER.

01750-6

- d. Training shall emphasize theory of operations, startup instructions, emergency and normal shutdown instructions, lockout procedures, troubleshooting, preventative maintenance, and alarm and control logic.
7. The CONTRACTOR shall confirm each training period a minimum of three working days prior to the schedule time.
8. If a manufacturer's representative fails to conduct a scheduled training class, the CONTRACTOR hereby agrees to compensate the OWNER for labor costs, including overhead, for all OWNER personnel in attendance for the entire scheduled training period.
9. If the CONTRACTOR or the manufacturer's representative fails to provide training that qualifies the OWNER personnel to perform equipment task requirements, the CONTRACTOR hereby agrees to provide remedial training to ensure OWNER personnel proficiency at no additional cost to the OWNER.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 RECORD KEEPING**

- A. The CONTRACTOR shall maintain as a minimum, the following records:
 1. Equipment manufacturer's shop drawings.
 2. Daily logs indicating all equipment testing and startup activities.
 3. Log and time sheets of all manufacturer's representatives performing services on the jobsite.
 4. Updated equipment testing and startup schedules.
 5. Records of system cleaning.
 6. Hydrostatic and pressure test records.
 7. Equipment alignment and vibration measurements and corrective actions.
 8. Equipment lubrication records.
 9. Insulation resistance measurements.
 10. Electrical phase, voltage and amperage measurements.
 11. Electrical breaker inspection, test, and adjustment records.
 12. Logs of abnormal circuits and lifted wires.
 13. Testing and validation of all central and alarm functions.
 14. Data sheets of all testing and calibration of instrumentation devices and control loops including documentation of set points.
 15. Equipment and system release logs (from construction to startup).
 16. Daily work reports.

3.2 GENERAL PROCEDURES

- A. The general work procedures listed below outline the work to be performed by the CONTRACTOR. Additional procedures applicable to specific equipment items are specified elsewhere.
- B. Technical assistance and support:
 1. Obtain the assistance of the appropriate construction trades and the manufacturer or vendor, as required for technical assistance during equipment installation, testing,

01750-7

- and startup by the CONTRACTOR and for training of the OWNER's Operation and Maintenance personnel.
2. Furnish names and telephone numbers of manufacturer's and vendor's current technical service representatives for use by the ENGINEER.
- C. Instructions:
1. Maintain an adequate manufacturer's instruction file so that the information will be readily available during equipment testing and startup.
 2. Prior to equipment testing, finalize, and transmit to the ENGINEER the applicable technical manuals as required under Section 01330, Submittal Procedures of the Contract Specifications.
- D. Removal of rust preventives:
1. Prior to equipment testing, remove all rust preventives and oils used to protect the equipment during the construction period whenever these protective materials will be detrimental to operation or equipment maintenance.
- E. Lubricants:
1. At least 60 days prior to startup, provide a list of the manufacturer's recommended lubricants for use in the plant. All equipment lubrication shall be listed with the lubricant types and quantities recommended and approved by the equipment manufacturers.
 2. Provide the necessary lubricants for startup and the initial 60 days of operation.
 3. Flush systems and install the initial charge of all lubricants. Dispose of flushing oil in accordance with applicable regulations.
 4. The CONTRACTOR shall lubricate the equipment in accordance with the manufacturer's recommendations until the equipment is accepted by the OWNER.
 5. Maintain a lubrication record for each item of equipment. The CONTRACTOR shall submit the lubrication records to the ENGINEER prior to equipment testing.
- F. Packing and seals:
1. Install, adjust, and replace packing, mechanical seals, and accessories, as necessary, during the equipment testing and startup period.
 2. Adjust seal water and flushing water flow rates in accordance with the equipment manufacturer's recommendations.
- G. Removal of temporary bracing:
1. Prior to equipment testing, remove all temporary supports, bracing, or other foreign objects that were installed in vessels, transformers, rotating machinery, or other equipment to prevent damage during shipping, storage, and erection, and repair any damage sustained.
- H. Rotation, alignment, and vibration:
1. Prior to equipment testing, check rotating machinery for correct direction of rotation and for freedom of moving parts before connecting the driver.
 2. Prior to equipment testing, perform the cold alignment and hot alignment to the manufacturer's tolerances.
 3. Prior to equipment testing, test equipment vibration and correct any vibration in excess of the manufacturer's recommendation.
- I. Tie-ins at the contract limits:

01750-8

1. Provide proper notification, preparation, and coordination for safe tie-ins and minimal interference with the plant operation.
 2. Obtain approval and make the necessary tie-ins at the unit limits as required by the Contract Documents and as approved by the ENGINEER.
 3. Prior to startup, remove the temporary blind flanges, plugs, bulkheads, seals, etc.
- J. Leak and pressure tests:
1. Provide the ENGINEER with 3-day advance notification in writing of the schedule for non-operating field leak tests or field pressure tests on piping and field fabricated equipment, unless otherwise directed by the ENGINEER.
 2. Provide the water, air and any special media required for the test purposes.
 3. Prior to startup, conduct all leak and pressure tests in accordance with applicable codes, regulations, and the Contract Documents, and as approved by the ENGINEER. The CONTRACTOR is advised that the tests shall be witnessed by the ENGINEER, to be considered valid.
 4. Maintain a record of the leak and pressure test data and work completed.
 5. Dispose of the test media in a manner that is acceptable to and approved by the OWNER and applicable regulatory agencies.
 6. Isolate in-line equipment as necessary for protection against test pressure.
- K. Pressure/vacuum safety relief devices:
1. Prior to equipment testing, test and adjust all safety devices as recommended by the equipment manufacturer.
 2. Prior to plant startup, provide the ENGINEER with a list of all field or factory equipment settings.
- L. Flushing and chemical/mechanical cleaning:
1. Prior to equipment operation, conduct all flushing, blowing, and chemical/mechanical cleaning operations without using the permanently installed equipment.
 2. Provide any special media needed for flushing and/or cleaning purposes.
 3. Dispose of all media in a manner that is acceptable to and approved by the OWNER and the applicable regulatory agencies.
 4. All systems shall be free of trash and construction debris before initiating startup.
 5. Maintain a record of the work completed.
- M. Screens, strainers, and blind flanges:
1. Provide and install temporary strainers, screens, and blind flanges as necessary to protect the equipment and to test the equipment and pipelines.
 2. Prior to startup, remove all of the temporary blinds and temporary appurtenances.
 3. Clean the screens and strainers as required during startup.
 4. At the end of startup, clean all of the permanently installed screens and strainers.
- N. Purging/inerting:
1. Prior to startup, purge and/or passivate the facilities as specified.
 2. Install purge/inerting connections in accordance with the manufacturer's recommendations.
 3. Provide purge or inerting materials and conduct the necessary operations as recommended by the equipment manufacturer.
- O. Drying out:

1. Prior to startup, dry out the facilities as specified or recommended by the equipment manufacturer to prevent contamination of catalysts, operating materials, and/or product.
2. Dry out systems, protective coatings, refractories, and linings as specified or recommended by the equipment manufacturers.

3.3 SPECIFIC PROCEDURES

- A. In addition to the work responsibilities described in Subsection 3.2, the procedures outlined below further define the work responsibilities of the CONTRACTOR for specific systems and items of equipment.
- B. Mechanical equipment:
 1. Level baseplates and soleplates and grout under all load bearing surfaces.
 2. Install suitable supports and flexible connections to alleviate any piping stresses that may be imposed on pumps, compressors, and drivers.
 3. In accordance with the manufacturer's recommendations, chemically clean lube oil, seal oil, and cooling systems. Dispose of waste and cleaning media in a manner that is acceptable to and approved by the OWNER and applicable regulatory agencies.
 4. In accordance with the manufacturer's recommendations, charge the lube oil, seal oil, and cooling systems with flushing media and circulate for cleaning purposes. Dispose of any flushing media in a manner that is acceptable to and approved by the OWNER and applicable regulatory agencies.
 5. Charge the lube oil systems, seal oil systems, and cooling systems with the amount and type of operating oil or coolant recommended by the manufacturer.
 6. Operate the equipment and check for excessive vibration, abnormal operating noises, overheating and lubricant leakage, etc., and test any safety shutdown/alarm devices for proper operation, and make any operating tests required by the ENGINEER. The adjustments required for proper operation shall be made prior to operational testing.
 7. Utilize manufacturer's representative for technical assistance during installation and startup.
 8. Prior to startup, all sidewalks, gratings, handrails, safety chains, safety shields, etc., shall be installed.
 9. Prior to startup, demonstrate to the ENGINEER's satisfaction that all chemical solution pipelines are connected to the intended tank(s), feeder(s), pump(s), and application points, and that the pipes, appurtenances contained therein and diffusers will operate at the intended flow rates.
 10. Prior to startup, the applicable safety equipment, emergency shower and eyewash units, fire extinguishers, fire suppression equipment, self-contained breathing apparatus, toxic and/or combustible gas detectors (including the respective personnel warning system), protective clothing, emergency repair kits, etc., shall be installed in an acceptable manner-subject to the ENGINEER's approval, and be fully ready for operation.
 11. All safety hazards, e.g., exposed drive shafts or rotating equipment members, exposed electrical circuitry, open electrical junction boxes and panels, improperly supported piping and conduits, missing safety devices, etc., shall be corrected prior to supplier training of the OWNER's personnel.
 12. The CONTRACTOR shall perform a comprehensive safety inspection and correct any safety deficiencies found before implementing plant startup.
 13. Roadways that are required for ambulance service, fire fighting access, delivery of treatment chemicals and supplies, and disposal of the treatment byproducts shall be completed prior to startup.

01750-10

14. Prior to startup, install all warning and safety signs, labels, and devices.

C. Tanks:

1. Test all tanks and internals, as required to demonstrate conformance to the Contract Documents. Dispose of test media in a manner that is acceptable to and approved by the OWNER and the applicable regulatory agencies.
2. Prior to startup, conduct chemical cleaning or flushing operations as specified. Dispose of wastes and cleaning media in a manner that is acceptable to and approved by the OWNER and the applicable regulatory agencies.
3. Prior to startup, install all chemical identification, warning, and safety signs and labels.

D. Electrical power and lighting systems:

1. Provide the ENGINEER with 3-day advance notification in writing of the test schedule. The CONTRACTOR is advised that the tests shall be witnessed by the ENGINEER.
2. Perform insulation resistance tests on all wiring 120 volt and larger. Do not meggar instruments or solid-state devices.
3. Perform insulation resistance tests on all motor and transformer windings from phase to phase and phase to ground.
4. Perform grounding system tests to determine the continuity of connections and the value of resistance to ground.
5. Fill electrical gear with oil and/or other media as recommended by the equipment manufacturer.
6. Prior to substantial completion and startup, test and set switchgear and circuit breaker relays for proper coordination and operation.
7. The CONTRACTOR shall obtain the services of a qualified "independent testing service", member of the National Electric Testing Association, to perform a thermographic survey on all switchgear buses, insulators and power connections when energized and under at least 20 percent load. Significant hot spots shall be further checked by infrared pyrometer for exact temperature rise. The CONTRACTOR shall troubleshoot and correct the thermographic hot spots. Correction shall be verified by repeating the thermographic survey at no additional cost to the OWNER.
8. The CONTRACTOR shall obtain the services of a qualified "independent testing service", member of the National Electric Testing Association, to inspect and test the protective relays and the 800-ampere and larger drawout breakers for proper installation, adjustment, and operation in accordance with the manufacturer recommendations.
9. The CONTRACTOR shall obtain the services of a qualified "independent testing service", member of the National Electrical Testing Association, to perform DC high potential tests on all cables that will operate at more than 2,000 volts to ground.
10. Obtain local electrical inspector's approval where required.
11. Energize all substations, with approval of the Utility Company and the ENGINEER after completion of all electrical testing.
12. Prior to startup, perform tests and adjustments on all switchgear and motor control equipment to demonstrate proper operation and conformance to the Contract Documents and manufacturer's recommended settings.
13. Prior to startup, test installation of emergency power and lighting systems for proper operation, including light intensity.
14. Prior to startup, provide the ENGINEER with a record of all test data and the work completed.
15. Vacuum clean all electrical equipment prior to startup and acceptance.

01750-11

E. Piping systems:

1. Provide the ENGINEER with 3-day advance notification in writing of test schedule.
2. Hydrostatically or pneumatically test all piping as required by the codes and contract documents.
3. After successful testing of the piping, slowly drain the system and then flush the system. Orifice plates shall be installed after testing. If installed with the piping, they will be removed and replaced with spacers or pipe spools of equal length prior to the pressure test.
4. Dewater the system, remove blind flanges, and perform tightness tests, as required by the ENGINEER.
5. Insulate or paint piping, flanges, threaded joints, or field welds after the specified testing of each item has been completed unless instructed otherwise by the ENGINEER.
6. Leave exposed all welded joints (longitudinal, girth, and nozzle) in underground piping that have not been shop tested until the specified testing has been completed. After final testing of these joints, cover the system.
7. Prior to substantial completion and startup, check pipe hangers, supports, guides, and pipe specialties for the removal of all shipping and erection stops and for the correctness of the cold and hot settings for the design service, make adjustments as necessary to obtain proper installation. Provide the ENGINEER with instructions for the hot settings.
8. As necessary during equipment testing and at the end of substantial completion and startup, clean or replace the screens and filter elements as appropriate for the filter type and service.
9. Prior to startup, verify, to the extent required by the ENGINEER, that specified valve packing has been provided on valves installed in the plant.
10. Prior to startup, install all of the valve and piping system identification labels.
11. Prior to startup, check and record the position of all process system valves.
12. Prior to startup, correct support, vibration, and thermal expansion problems detected during the preliminary equipment testing.
13. Prior to the startup, retorque all hot and cold service bolting as required to ensure a permanent and proper installation.
14. Prior to startup, demonstrate to the ENGINEER's satisfaction that each piping system (e.g., chemical, sample, utility, irrigation process, etc.) functions as designed and required by the Contract Documents.

+ + END OF SECTION + +

01750-12

SECTION 01800

OPERATIONAL COMPLETION AND PROJECT CLOSEOUT

PART 1 - GENERAL**1.1 GENERAL**

- A. The Work will be considered operationally complete when all technical and administrative submittals, testing, training and startup are completed satisfactorily in accordance with the Contract Documents.
- B. Operational completion shall apply to the project in its entirety.

1.2 CERTIFICATION OF OPERATIONAL COMPLETION

- A. Prior to requesting the ENGINEER's inspection for certification of each phase as operationally complete, the CONTRACTOR shall certify in writing that each phase of the Work is operationally complete and shall submit a list of known items still to be completed or corrected (punchlist) prior to Contract Completion.
- B. The following items shall be completed:
 - 1. OWNER has been advised of any pending insurance changeover requirements.
 - 2. Specific warranties, maintenance agreements, final certifications and similar documents have been submitted.
 - 3. All tools, spare parts, extra stocks of materials, and similar physical items have been delivered to OWNER.
 - 4. Instruction of OWNER's operation/maintenance personnel, and start up testing has been completed.
 - 5. Submittal and acceptance of all O&M manuals.
 - 6. Changeover of locks to OWNER's cores/keys.
- C. Punchlist:
 - 1. When the CONTRACTOR considers that the Work, or a portion or phase thereof which the OWNER agrees to accept separately, is operationally complete, the CONTRACTOR shall certify in writing that the work is operationally complete and shall prepare and submit to the ENGINEER a comprehensive list of items to be completed or corrected prior to Contract Completion (punchlist).
 - 2. The ENGINEER may add additional work items to the punchlist.
 - 3. Failure to include an item on the punchlist does not alter the responsibility of the CONTRACTOR to complete all Work in accordance with the Contract Documents.
 - 4. Upon receipt of the CONTRACTOR's punchlist, the ENGINEER will make an inspection to determine whether the Work or designated portion thereof is operationally complete.
 - 5. If the ENGINEER's inspection discloses any item, whether or not included on the CONTRACTOR's list, that is not in accordance with the requirements of the Contract Documents, the CONTRACTOR shall, upon notification by the ENGINEER and before an issuance of the Certificate of Operational Completion is provided, complete or correct such item.
 - 6. The CONTRACTOR shall then submit a request for another inspection by the ENGINEER.

01800-1

7. When the Work or designated portion thereof is accepted by the ENGINEER to be operationally complete, the ENGINEER will prepare a Certificate of Operational Completion.
8. The date of Operational Completion shall be the date of the ENGINEER's inspection and acceptance.

1.3 DESCRIPTION OF PROJECT CLOSEOUT

- A. Closeout is hereby defined to include general requirements near the end of the Contract Time, in preparation for Final Acceptance, Final Payment, normal termination of Contract, occupancy by OWNER and similar actions evidencing completion of the Work.
- B. Specific requirements for individual units of Work are specified in Sections of Divisions 2 through 16.

1.4 FINAL CLEANUP

- A. At completion, leave project clean and ready for use.
 1. Legally dispose of waste materials, debris and rubbish off the site.
 2. Remove grease, dust, dirt, stains, labels, fingerprints and other foreign materials from exposed and enclosed surfaces.
 3. Repair, patch and touch up all affected curbs, gutters, and sidewalks to match adjacent surfaces.
 4. Broom clean paved surfaces, rake clean other surfaces of grounds. Vacuum clean all interior surfaces, rake clean other surfaces of grounds.

1.5 RECORD DRAWINGS

- A. The CONTRACTOR shall prepare and submit Contract Record Drawings for the OWNER.
 1. The CONTRACTOR shall make a record of changes during construction on prints of the Drawings provided by the OWNER for this purpose (Contract Record Drawings) as described in Section 01330, Submittal Procedures.
 2. The reproducible drawings on which changed conditions are recorded shall be returned to the ENGINEER prior to project completion.

1.6 GUARANTEES

- A. The General Conditions cover the CONTRACTOR's responsibility to remedy defects due to faulty workmanship and materials which appear within one year from the date of Final Acceptance.
- B. Special guarantees are required by various Sections of the Specifications. Assemble written guarantees, label and submit to the ENGINEER.
 1. Provide the "Warranty Form" included in the General Conditions.
 2. Equipment guarantees shall be written in the manufacturer's standard form and shall be countersigned by the Subcontractor or supplier and the CONTRACTOR.
 3. All other guarantees shall be written on the Subcontractor's or supplier's letterhead and shall be countersigned by the CONTRACTOR.

1.7 SPARE PARTS AND MAINTENANCE MATERIALS

- A. Spare parts and maintenance materials are required by various Sections of the Specifications.
 - 1. Parts and materials shall be packaged so as to preclude damage in normal handling and storage.
 - 2. Packages shall be labeled with full description of contents and project name and clearly identified as to which item of equipment they belong to. CONTRACTOR shall maintain a spare parts inventory list which shall be provided to the OWNER prior to Final Acceptance.
 - 3. Submit packaged parts and materials to ENGINEER.
 - 4. Submit the value of all spare parts.

1.8 FINAL INSPECTION

- A. Prior to requesting ENGINEER's final inspection for certification of Final Acceptance and Final Payment, complete the following and list known exceptions (if any):
 - 1. Submit Final Payment request with final releases and supporting documentation not previously submitted and accepted.
 - 2. Submit copy of final punchlist of itemized work to be completed or corrected, stating that each item has been completed or otherwise resolved for acceptance, endorsed and dated by ENGINEER.
 - 3. Submit Consent of Surety.
 - 4. Revise and submit evidence of final, continuing insurance coverage complying with insurance requirements.
- B. Certify in writing that the work has been completed in accordance with the Contract Documents, and request ENGINEER's final inspection.
- C. Reinspection:
 - 1. Within seven (7) days after receipt of the CONTRACTOR's notice that the work has been completed, including punchlist items resulting from earlier inspections, and excepting incomplete items delayed because of acceptable circumstance, the ENGINEER will reinspect the work.
 - 2. Upon completion of reinspection, ENGINEER will either prepare a certificate of Final Acceptance or advise the CONTRACTOR of work not complete or obligations not fulfilled as required for Final Acceptance.
 - 3. If necessary, inspection procedure will be repeated.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION (NOT USED)**

+ + END OF SECTION + +

01800-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 01810**CLEANING****PART 1 - GENERAL****1.1 WORK INCLUDED**

- A. This Section covers the work necessary for cleaning during construction and final cleaning on completion of the Work.

1.2 GENERAL

- A. At all times maintain areas covered by the Contract and public properties free from accumulations of waste, debris, and rubbish caused by construction operations.
- B. Pollution Control:
 - 1. Conduct cleaning and disposal operations to comply with local ordinances and anti-pollution laws.
 - 2. Do not burn or bury rubbish and waste materials on project site.
 - 3. Volatile wastes shall be properly stored in covered metal containers and removed daily.
 - 4. Do not dispose of volatile wastes such as mineral spirits, oil, or paint thinner in storm or sanitary drains.
 - 5. Do not dispose of wastes into streams or waterways.
- C. Construction materials such as concrete forms and scaffolding shall be neatly stacked by the CONTRACTOR when not in use. The CONTRACTOR shall promptly remove splattered concrete, asphalt, oil, paint, corrosive liquids, and cleaning solutions from surfaces to prevent marring or other damage.
- D. Use only cleaning materials recommended by manufacturer of surface to be cleaned.
- E. Use cleaning materials only on surfaces recommended by cleaning material manufacturers.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 CLEANING DURING CONSTRUCTION**

- A. During execution of Work, clean site and public properties and dispose of waste materials, debris, and rubbish to assure that buildings, grounds, and public properties are maintained free from accumulations of waste materials and rubbish.
- B. Wet down dry materials and rubbish to lay dust and prevent blowing dust.

01810-1

- C. Provide approved containers for collection and disposal of waste materials, debris, and rubbish. Empty containers within one day after they are full.
- D. Remove grease, dust, dirt, stains, labels, fingerprints, and other foreign materials from exposed and semi-exposed surfaces.
- E. Repair, patch, and touch up marred surfaces to specified finish to match adjacent surfaces.
- F. Vacuum clean all interior spaces, including inside cabinets. Broom clean paved surfaces, rake clean other surfaces of grounds.
- G. Handle materials in a controlled manner with as few handlings as possible; do not drop or throw materials from heights.
- H. Schedule cleaning operations so that dust and other contaminants resulting from cleaning process will not fall on wet, newly painted surfaces.
- I. Vacuum clean interior building areas when ready to receive finish painting and continue vacuum cleaning on an as-needed basis until building is ready for substantial completion or occupancy.

3.2 FINAL CLEANING

- A. Refer to the requirements of the General Conditions, Section 6.11 in addition to the requirements of this Section.
- B. See Section 01800, Operational Completion and Project Closeout, for additional requirements.
- C. At the completion of Work on all Contracts and immediately prior to final inspection, cleaning of the entire Project will be accomplished according to the following provisions:
 - 1. The CONTRACTOR shall thoroughly clean, sweep, wash, and polish all work and equipment, including finishes. The cleaning shall leave the structures and site in a complete and finished condition to the satisfaction of the ENGINEER.
 - 2. Should the CONTRACTOR not remove rubbish or debris or not clean the building and site as specified above, the OWNER reserves the right to have the cleaning done at the expense of the CONTRACTOR.
 - 3. Employ professional cleaners for final cleaning.
 - 4. In preparation for substantial completion of occupancy, conduct final inspection of sight-exposed interior and exterior surfaces, and of concealed spaces.
 - 5. Remove grease, dust, dirt, stains, labels, fingerprints, and other foreign materials from sight-exposed interior and exterior finished surfaces; polish surfaces so designated to shine finish.
 - 6. Repair, patch, and touch up marred surfaces to specified finish, to match adjacent surfaces.
 - 7. Broom clean paved surfaces; rake clean other surfaces of grounds.
 - 8. Replace air-handling filters if units were operated during construction.
 - 9. Clean ducts, blowers, and coils, if air-handling units were operated without filters during construction.
 - 10. Clean luminaires in accordance with manufacturer's recommendations. Clean all light fixtures.

01810-2

11. Remove from the OWNER's property all temporary structures and all materials, equipment, and appurtenances not required as a part of, or appurtenant to, the completed work. See Section 01500 - Temporary Construction Facilities and Utilities.

+ + END OF SECTION + +

01810-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02140**DEWATERING****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Furnish all labor, materials, equipment and incidentals required and remove and dispose of all surface water and ground water entering excavations.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01330, shop drawings showing details of dewatering system
- B. Submit a dewatering plan in accordance with Contract Specification 01130.

1.3 DESIGN REQUIREMENTS

- A. The CONTRACTOR is responsible for the proper design and implementation of methods for controlling surface water and groundwater.
- B. The primary purpose of the groundwater control system is to preserve the natural undisturbed condition of the subgrade soils in the areas of the proposed excavations. Prior to excavation, the CONTRACTOR shall lower the groundwater to at least 2-ft below the lowest excavation subgrade elevation. Additional groundwater lowering may be necessary beyond the 2-ft requirement, depending on construction methods and equipment used and the prevailing groundwater and soil conditions. The CONTRACTOR is responsible for lowering the groundwater as necessary to complete construction in accordance with the Contract Documents at no additional cost to the OWNER.
- C. Design deep wells, well points and sumps, and all other groundwater control system components to prevent loss of fines from surrounding soils. Sand filters shall be used with all dewatering installations unless screens are properly sized by the CONTRACTOR's design ENGINEER to prevent passage of fines from surrounding soils.
- D. The CONTRACTOR shall be responsible for damage to properties, buildings or structures, sewers and other utility installations, pavements and work that may result from dewatering or surface water control operations.
- E. Design review and field monitoring activities by the OWNER or by the ENGINEER shall not relieve the CONTRACTOR of his/her responsibilities for the work.
- F. The CONTRACTOR shall perform pre-conditions surveys of job site.

02140-1

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Piping, pumping equipment and all other materials required to provide dewatering of excavations shall be suitable for the intended purpose. Standby pumping units shall be maintained at the site to be used in case of failure of the normal pumping units.
- B. A noise attenuation system is required for dewatering pumps producing noise louder than 70 dBA at 23 feet from pump.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Continuously control all water during the course of construction, including surface water and ground water, to prevent any damage to any excavation or to the construction activities occurring within those excavations.
- B. Maintain all dewatering systems full time (24-hours/day) during the entire time the excavation is open. Do not shut down dewatering systems at night, on weekends or on holidays, or any other time the excavation is open.
- C. Provide and maintain proper equipment and facilities to remove all water entering each excavation to be kept dry during subgrade and pipe bedding preparation and continually thereafter until the structure to be built, or the pipe to be installed therein is inspected by the OWNER and the ENGINEER and backfill operations have been completed.
- D. Methods of groundwater control may include but are not limited to perimeter trenches and sump pumping, perimeter groundwater cutoff, well points, and combinations thereof.
- E. Where groundwater levels are above the proposed bottom of excavation level, a pumped dewatering system will be required for pre-drainage of the soils prior to excavation, and for maintaining the lowered groundwater level until construction has been completed to such an extent that the structure, pipeline or fill will not be floated or otherwise damaged.
- F. Provide adequate alarm, monitoring and back-up systems for all dewatering systems to maintain control of all water during all times any excavation is open.
- G. All work included in this Section shall be done in a manner which will protect adjacent structures and utilities and shall not cause loss of ground or disturbance to the pipe bearing soils or to soils which support overlying or adjacent structures.
- H. Temporary dewatering and drainage systems shall be in place and operational prior to beginning excavation work.
- I. Install, monitor and report groundwater data from observation wells as necessary. Evaluate the collected data relative to groundwater control system performance and modify systems as necessary to dewater the site in accordance with the Contract Documents.

02140-2

- J. Take all additional precautions to prevent uplift of any structure during construction. All such arrangements shall be subject to the approval of the ENGINEER.
- K. All damage resulting from failure to properly dewater excavations shall be repaired to the satisfaction of the ENGINEER at no additional cost to the OWNER.

3.2 SURFACE WATER CONTROL:

- A. Provide and maintain adequate drainage and dewatering system to prevent surface water from entering excavations and to remove and dispose of all rainwater entering excavations, trenches, or other parts of the Work.
- B. Keep the different working areas on the site free of surface water at all times. Special care will be taken to eliminate depressions that could serve as mosquito pools.
- C. The diversion and removal of surface water will be performed in a manner that will prevent the accumulation of water behind temporary structures or at any other locations within the construction area where it may be detrimental.

3.3 GROUND WATER CONTROL:

- A. Provide, operate and maintain dewatering system to permit excavation and subsequent construction activities in a dry, safe environment.
- B. System shall be of sufficient size and capacity to maintain groundwater level a minimum of 2 feet below the lowest point of excavation.
- C. CONTRACTOR shall make an assessment of the potential for dewatering induced settlement of surrounding soils and structures. CONTRACTOR shall provide all necessary equipment and facilities, including re-injection wells, cutoff walls, infiltration trenches, etc, to prevent damage to adjacent structures.
- D. In no event shall water rise to cause unbalanced pressure on structures until the concrete or mortar has set at least 24 hours. Prevent flotation of the pipe by promptly placing backfill.
- E. Excavation dewatering shall at all times be conducted in such a manner as to preserve the natural undisturbed condition of the subgrade soils at the proposed bottom of excavation.
- F. If the subgrade of the trench or excavation bottom becomes disturbed due to inadequate dewatering or drainage, excavate below normal grade as directed by the ENGINEER and refill with trench stabilization material as approved by the ENGINEER at the CONTRACTOR's expense.
- G. It is expected that the initial dewatering plan may have to be modified to suit the variable soil/water conditions to be encountered during construction. Dewater and excavate, at all times, in a manner which does not cause loss of ground or disturbance to the pipe bearing soil or soil which supports overlying or adjacent structures or instability of the excavation.

02140-3

3.4 OBSERVATION WELLS:

- A. ENGINEER may require to install observation well(s) to monitor groundwater levels beneath and around the excavated area until adjacent structures and pipelines are completed and backfilled.
- B. Locations and depths of observation wells are subject to approval by the OWNER and the ENGINEER.
- C. Observation wells shall be developed so as to provide a reliable indication of groundwater levels. Wells shall be re-developed if well clogging is observed, in the event of apparent erroneous readings, or as directed by the ENGINEER.
- D. The CONTRACTOR shall maintain each observation well until adjacent structures and pipelines are completed and backfilled. Clean out or replace any observation well which ceases to be operable before adjacent work is completed.
- E. The groundwater level shall be kept at a minimum of 2-ft below the lowest trench level for a given excavation.

3.5 REMOVAL OF DEWATERING SYSTEM:

- A. At the completion of the excavation and backfilling work, and when approved by the ENGINEER, all pipe, pumps, generators, observation wells, other equipment and accessories used for the groundwater and surface water control systems shall be removed from the site. All materials and equipment shall become the property of the CONTRACTOR. All areas disturbed by the installation and removal of groundwater control systems and observation wells shall be restored to their original condition.

3.6 DISPOSAL OF WATER:

- A. Disposal of discharge water shall conform to any and all applicable permit requirements as described in the Contract Specification section 01140, Water Pollution Control.

+ + END OF SECTION + +

02140-4

SECTION 02200
SITE PREPARATION

PART 1 - GENERAL**1.1 DEFINITIONS**

- A. Interfering or Objectionable Material: Trash, rubbish, and junk; vegetation and other organic matter, whether alive, dead, or decaying; topsoil.
- B. Clearing: Removal of interfering or objectionable material lying on or protruding above ground surface.
- C. Grubbing: Removal of vegetation and other organic matter including stumps, buried logs, and roots greater than 0.5 inch caliper to a depth of 6 inches below subgrade.
- D. Stripping: Removal of topsoil remaining after applicable scalping is completed.
- E. Project Limits: Areas, as shown or specified, within which Work is to be performed.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 GENERAL**

- A. Clear, grub, and strip areas actually needed for waste disposal, borrow, or site improvements within limits shown or specified.
- B. Do not injure or deface vegetation that is not designated for removal.

3.2 LIMITS

- A. As follows, but not to extend beyond Project limits.
 - 1. Excavation 5 feet beyond top of cut slopes.
 - 2. Trench Excavation: 4 feet from trench centerline, regardless of actual trench width.
 - 3. Waste Disposal:
 - a. Clearing: 5 feet beyond perimeter.
 - b. Scalping and Stripping: Not required.
 - c. Grubbing: Around perimeter as necessary for neat finished appearance.
 - 4. Structures: 5 feet outside of new structures.
 - 5. Roadways: Clearing , grubbing and stripping 50 feet from centerline.
 - 6. Overhead Utilities:
 - a. Clearing and Grubbing: Entire width of easements and rights-of-way.
 - b. Scalping and Stripping: Wherever grading is required.
 - 7. Other Areas: As shown.
- B. Remove rubbish, trash, and junk from entire area within Project limits.

02200-1

3.3 CLEARING

- A. Clear areas within limits shown or specified.
- B. Fell trees so that they fall away from facilities and vegetation not designated for removal.
- C. Cut stumps not designated for grubbing flush with ground surface.
- D. Cut off shrubs, brush, weeds, and grasses to within 2 inches of ground surface.

3.4 GRUBBING

- A. Grub areas within limits shown or specified.

3.5 STRIPPING

- A. Do not remove topsoil until after scalping is completed.
- B. Strip areas within limits to minimum depths shown or specified. Do not remove subsoil with topsoil.

3.6 DISPOSAL

- A. Clearing and Grubbing Debris: Dispose of debris offsite.
- B. Strippings:
 - 1. Dispose of strippings that are unsuitable for topsoil or that exceed quantity required for topsoil offsite or approved by ENGINEER.
 - 2. Stockpile topsoil in sufficient quantity to meet Project needs. Dispose of excess strippings as specified for clearing and grubbing.

+ + END OF SECTION + +

02200-2

SECTION 02220**DEMOLITION****PART 1 - GENERAL****1.1 DEFINITIONS**

- A. "Demolish": CONTRACTOR shall remove from the site as property of CONTRACTOR. Demolition includes disconnecting, removal, loading, repairs, cleanup, transportation, unloading, disposal permits and fees, disposal, and all other items required to remove the material from the site.
- B. "Salvage": CONTRACTOR shall remove from area of Work and place in location designated by ENGINEER. Equipment is property of OWNER. Salvage includes disconnecting, removal, repairs, cleanup, loading, transportation, unloading, and all other items required to remove and relocate the material.
- C. "OWNER to Remove": OWNER will remove from area of Work prior to CONTRACTOR commencing demolition Work for this area.
- D. "Relocate": CONTRACTOR shall relocate material shown to new locations shown on Drawings or stated herein. Relocation includes disconnecting, removal, reconnecting, attaching, repairs, and all other items required to relocate material to new location.
- E. "Abandon": CONTRACTOR shall disconnect and leave in place as specified.
- F. "Materials": Any and all items and objects that are scheduled, specified, or shown to be demolished, salvaged, removed, relocated, or abandoned.

1.2 SUBMITTALS

- A. Action Submittals:
 - 1. Product Information: Grout, sealants, and bonding agents to be used for patching.
- B. Informational Submittals:
 - 1. Plan and schedule phased demolition, including limits of demolition, as part of and consistent with the progress schedule specified in Section 01320, PROGRESS SCHEDULE.
 - 2. Methods of demolition and equipment proposed to demolish materials.
 - 3. Copies of any authorizations and permits required to perform Work.
 - 4. Copies of Hazardous Materials Inspection Reports.
 - 5. Repair procedures for demolition of materials beyond limits shown on Drawings.

02220-1

PART 2 - PRODUCTS**2.1 GENERAL**

- A. CONTRACTOR shall provide all materials and equipment in suitable and adequate quantity as required to accomplish the Work shown, specified herein, and as required to complete the Project.

PRODUCTS**PART 3 - EXECUTION****3.1 GENERAL**

- A. Drawings are based on available information. The Work may differ slightly from what is shown. CONTRACTOR shall be responsible for determining the work required by inspecting the site.

3.2 SAFETY REQUIREMENTS

- A. All Work shall be done in conformance with all applicable rules and regulations pertaining to safety.
- B. Hazardous Materials:
1. See General Conditions.
 2. Existing facilities, or portions thereof, to be demolished may contain hazardous materials such as asbestos cement piping, residual chemicals in existing or abandoned piping, lead-based paint, mercury seals, or other unknown hazardous materials.

3.3 SEQUENCE

- A. Be responsible for the sequence of Work.
- B. Conform to constraints as specified in Section 01130, SPECIAL PROJECT CONSTRAINTS.

3.4 COORDINATION

- A. Coordination with ENGINEER:
1. Only materials specified herein, shown on the Demolition Photographs or the Drawings, or approved by ENGINEER in the field shall be demolished, salvaged, removed, relocated, or abandoned.
 2. Verify materials scheduled to be demolished, salvaged, removed, relocated, or abandoned with ENGINEER prior to performing Work.
 3. Do not remove materials without prior approval of ENGINEER.
 4. Provide at least 3 working days' notice to ENGINEER prior to start of Work.
 5. Notify ENGINEER to turn off affected services or facilities before starting Work.
 6. Provide temporary services during interruptions to affected services or facilities as acceptable to ENGINEER.
 7. ENGINEER will indicate limits of Work if not clearly shown.

02220-2

- B. Coordination with Utility Owners:
 - 1. Notify utility owners to turn off affected services or facilities before starting Work.
 - 2. Provide not less than 72 hours notice to utility owners prior to shutdown, unless otherwise directed by utility owners.
 - 3. Provide temporary services during interruptions to affected services or facilities as acceptable to utility owners.

3.5 LIMITS

- A. Drawings define minimum portions of materials to be demolished. Unless otherwise shown, rough cuts or breaks may be made to limits of demolition shown. If rough cuts or breaks are made exceeding limits shown, CONTRACTOR shall repair the cuts or breaks back to the dimensions shown on Drawings at CONTRACTOR's expense.
- B. If limits are not clear on the Drawings or Demolition Photographs, limits shall be as directed by ENGINEER.
- C. All areas not within the limits of demolition Work shown on the Drawings, or as specified herein, shall be left undisturbed, unless necessary for demolition of materials.

3.6 DEMOLITION

- A. General:
 - 1. Inspect condition of materials to be demolished prior to bidding to assess potential for salvage value.
 - 2. Remove all materials associated with existing equipment that is to be demolished.
 - 3. Materials within limits of demolition will become the property of CONTRACTOR.
 - 4. All materials from the demolition process shall be removed safely from the project site as soon as possible. They shall be disposed of in accordance with applicable federal, state, and city regulations. CONTRACTOR is responsible for determining these regulations and shall bear all costs associated with disposal of the materials.
- B. Pavement and Curbs:
 - 1. Provide saw cut at all concrete and pavement surfaces and curb removal limits and where neat connection lines are required.
 - 2. Surfaces exposed by demolition activities shall be repaired and finished to provide a uniform, smooth, level transition between adjacent surfaces.
- C. Concrete, CMU, and Reinforcing:
 - 1. In areas where concrete or CMU portions are to be removed from a structure, the edge of removal shall be cut with a concrete saw to leave a perpendicular edge or by core-drilling where a circular hole is required.
 - 2. Damaged concrete shall be removed to solid concrete. Damaged concrete shall include concrete that is soft, spalled, cracked, or otherwise damaged as determined by ENGINEER.
 - 3. Depth of removal shall be as determined by ENGINEER unless otherwise shown or specified.
 - 4. Reinforcing shall be cut and removed unless otherwise shown or instructed by ENGINEER.
 - 5. Spalled edges may be required to be resawn at the discretion of the ENGINEER.
 - 6. Protect adjacent structures and equipment from damage during Work.

02220-3

7. Exposed surfaces following demolition activities shall be repaired and finished to provide a uniform, smooth, and level transition between adjacent surfaces.
 8. Remove and repair designated cracked and damaged concrete areas shown in accordance with this section and Section 03300, CAST-IN-PLACE CONCRETE.
- D. Concrete Embedded Items:
1. Except for core drills, demolish anchor bolts, reinforcing steel, conduit, and other materials that are concrete embedded to a minimum of 1 inch below final finished surface. For core drills, coat rebar exposed by core drilling with System No. 304 in accordance with Section 09900, PAINTING.
 2. Plug empty pipes and conduits with fireproof sealant to maintain fire ratings for floors or walls.
 3. Patching:
 - a. Demolish damaged concrete. Damaged concrete shall be removed to solid concrete. Damaged concrete shall include concrete that is soft, spalled, cracked, or otherwise damaged as determined by ENGINEER.
 - b. Coat with approved bonding agent.
 - c. Patch with nonshrink, nonmetallic grout.
- E. Piping:
1. Pressurized Services: Install restrained caps or plugs at the demolished ends, unless otherwise shown.
 2. Gravity Services: Install concrete plugs, 5-foot minimum length.
- F. Utilities:
1. Excavate utility lines serving structures to be demolished.
 2. Demolish electrical, sanitary, and storm drainage lines serving structures to be demolished.
 3. Support or relocate utility lines exposed by Work.
 4. For water and gas lines to be demolished or capped and terminated, provide a permanent leakproof closure. Closure type shall be as recommended by utility owner.
- G. Electrical:
1. Remove conduits and wiring from materials to be demolished back to nearest junction box.
 2. For existing circuits to remain operational, intercept existing conduit at the most convenient location, or as shown, and splice and extend conduit to new location. Install new conductors as required to accomplish intended results. New conductors shall be continuous without splices between junction boxes.
 3. For existing circuits no longer needed, demolish conductors from conduits.
 4. Demolish all surface-mounted conduit which is no longer needed.
 5. For conduit below grade or concealed within walls, cap and abandon in place.

3.7 SALVAGE

- A. Salvage materials for OWNER's own use where shown.
- B. Remove materials with extreme care so as not to damage.
- C. Promptly remove materials from Work area.
- D. Store materials in location designated by ENGINEER.

02220-4

- E. Clean and protect materials from dust, dirt, natural elements, and store as directed.

3.8 RELOCATION

- A. ENGINEER will determine condition of materials prior to removal.
- B. Remove all materials associated with items to be relocated.
- C. Existing materials shall not be damaged during removal.
- D. Properly store and maintain materials in same condition as when removed.
- E. Clean and protect materials from dust, dirt, natural elements, and store as directed.

3.9 ABANDONMENT

- A. Structures: Break holes into or core drill floor slabs, catch basins, and other below-grade concrete structures to be abandoned in place to allow water to freely migrate through.
- B. Piping and Conduits:
 - 1. Abandonment media: Where specified, completely fill abandoned utilities with Type 2 LCC.
 - 2. General: Piping and conduits to be abandoned shall be capped with a watertight plug at demolished end in a manner that will prevent entrance of soil, groundwater, or moisture.
 - 3. Pressurized Services: Install restrained caps or plugs at the demolished ends, unless otherwise shown.
 - 4. Gravity Services: Install concrete plugs, 5-foot minimum length.

3.10 REPAIR AND REPLACEMENT

- A. Any damaged materials scheduled to be salvaged or relocated shall be repaired by the CONTRACTOR to the satisfaction of ENGINEER or replaced at the CONTRACTOR's expense.
- B. Any damage to areas not within the limits of demolition Work shown on the Demolition Photographs, Drawings, or as specified herein shall be repaired or replaced to original precontract conditions at the CONTRACTOR's sole expense.

3.11 DISPOSAL

- A. Dispose of materials offsite in licensed landfills and in accordance with all local, state, and federal regulations. CONTRACTOR is responsible for obtaining any and all necessary permits for disposal.

+ + END OF SECTION + +

02220-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02300**EARTHWORK****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Section includes: All excavating, backfilling, filling, grading, subgrade preparation and disposing of earth materials as required. It also includes all temporary means needed to prevent discharge of sediment to watercourses from dewatering systems or erosion.

1.2 REFERENCES

- A. American Society for Testing and Materials (ASTM)
1. ASTM C33, Standard Specification for Aggregate Material.
 2. ASTM D422, Method for Particle-Size Analysis of Soils.
 3. ASTM D423, Liquid Limit of Soils.
 4. ASTM D427, Shrinkage Factors of Soils.
 5. ASTM D698, Test Method for Laboratory Compaction Characteristics of Soil.
 6. ASTM D1556, Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method.
 7. ASTM D2922, Test Methods for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth).
 8. ASTM D2166, unconfined compressive strength of soils.
- B. Occupational Safety and Health Administration (OSHA)
1. Title 29, Code of Federal Regulations, Part 1926

1.3 SYSTEM DESCRIPTION

- A. Permits and Regulations:
1. Perform excavation Work in compliance with applicable requirements of governing authorities having jurisdiction.
 2. Obtain all necessary permits for Work in roads, rights-of-way, railroads, etc. Also, obtain permits as required by local, state and federal agencies for discharging water from excavations, for erosion control, and for prevention of air and water pollution.

1.4 SUBMITTALS

- A. Test Reports - Borrow, Backfill, and Grading: Testing laboratory shall submit copies of the following reports directly to ENGINEER:
1. Tests on borrow material.
 2. Tests on footing subgrade.
 3. Field density tests.
 4. Optimum moisture - maximum density curve for each soil used for backfill.
 5. Reports of observations for conformance of borrow material to the Project Geotechnical Report.

02300-1

6. Quality Control Plan: Names and phone numbers of independent testing companies that will be used to perform soil and asphalt concrete testing, qualifications, and proposed procedures for performing tests and providing test results to ENGINEER.
- B. Submit to the ENGINEER samples of all materials, including select backfill, general backfill, bedding, crushed stone, sand and topsoil. Submit samples of the proposed material at least seven days in advance of its anticipated use.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General:
 1. All material will be tested by the laboratory and approved by the ENGINEER.
 2. No material shall be placed without the approval of the ENGINEER.
- B. Marking Tape: Marking Tape:
 1. Continuously install marking tape along centerline of all buried piping, on top of last lift of pipe zone material unless otherwise shown. Coordinate with piping installation drawings. Install in accordance with manufacturer's recommendations.
 2. Plastic Marking Tape: Install with metallic piping.
 - a. Inert polyethylene, impervious to known alkalis, acids, chemical reagents, and solvents likely to be encountered in soil.
 - b. Thickness: Minimum 4 mils.
 - c. Width: 12 inches.
 - d. Identifying Lettering: Minimum 1-inch high, permanent black lettering imprinted continuously over entire length.
 - e. Manufacturers and Products:
 - 1) Reef Industries; Terra Tape.
 - 2) Allen; Markline.
 - 3) Or equal.
 3. Metallic Marking Tape: Install with nonmetallic piping and waterlines. Join ends with clips provided by the manufacturer:
 - a. Solid aluminum foil, visible on unprinted side, encased in a protective high visibility, inert polyethylene plastic jacket.
 - b. Foil Thickness: Minimum 5.5 mils.
 - c. Width: 12 inches.
 - d. Identifying Lettering: Minimum 1-inch high, permanent black lettering imprinted continuously over entire length.
 - e. Joining Clips: Tin or nickel-coated, furnished by tape manufacturer.
 - f. Manufacturers and Products:
 - 1) Reef Industries; Terra "D".
 - 2) Allen; Detectatape.
 - 3) Or equal.
 4. Marking tape shall be marked with the following statements:
 - a. FM1/FM2/BR/LS2: "CAUTION - SANITARY SEWER FORCEMAIN BURIED BELOW"
 - b. SS: "CAUTION - SANITARY SEWER PIPELINE BURIED BELOW"
 - c. FO: "CAUTION - FIBER OPTIC CONDUIT BURIED BELOW"
 - d. IPR: "CAUTION - RECYCLED WATER PIPELINE BURIED BELOW"
 - e. WATER: "CAUTION - WATER PIPELINE BURIED BELOW"
 5. Color:

02300-2

- a. Sanitary Sewer Pipeline: Green, as specified in ANSI Z53.1 Safety Color Code.
 - b. Others Disturbed: Color, as specified for specific utility in ANSI Z53.1 Safety Color Code.
- C. Tracer/Locating Wire
1. Pipe tracer wire shall be installed above all buried piping unless indicated otherwise
 2. Install pipe locating wire by strapping to the top of the pipe with PVC tape, polyethylene-backed tape, or tie locks every 10-ft at a maximum.
 3. Pipe tracer wire shall be of a green color polyethylene insulated 30 mils min thickness 12 gauge annealed copper wire or copper clad steel (CCS) wire. Insulation shall conform to ANSI requirements. Bare wire or nylon jacketed wire such as type THHN are not acceptable.
 - a. Manufacturers and products:
 - 1) Republic Wire, Inc;
 - 2) Copperhead Industries LLC,
 - 3) Or Equal
 4. Where a splice is required for the tracer wire, utilize an appropriate size wire nut or compression fitting which shall then be placed inside a 3M brand Direct Bury Splice kit (DBR), or approved equal, of appropriate size. No bare wire shall be left exposed anywhere. Twisting the wires together and wrapping with electrical tape is not allowed. All wires shall be spliced to all other wires for a continuous pipe locating wire system.
 5. Location and frequency of tracer wire terminals shall be located on project plans. Stub the tracer wire up inside each valve box and splice together. Sufficient excess length shall be provided at terminal connections to allow continuation of the pipe-locating wire to the terminal connection.
 6. Tracer wire shall be terminated or dead-end at a ground rod station.
 7. Tracer wire shall pass a continuity/locating test prior to acceptance.
- D. Fill Material:
1. Classification:
 - a. Fill adjacent to structures to a distance measured horizontally from the structure that is equal to the depth from the finished grade is classified as Select Fill.
 - b. Outside these limits, the fill is classified as Common Fill, unless otherwise specified.
 2. Common Fill:
 - a. Common Fill materials shall consist of soils obtained from on-site excavations or off-site sources that are uniformly mixed, contain no organic material, and have been passed through a 3" screen.
 - b. The maximum expansion of off-site materials shall be 1.5% as performed on a sample remolded to approximately 9% of the maximum dry density as determined in accordance with ASTM D 698 at 2% below optimum moisture content under a 100 psf surcharge pressure.
 - c. If on-site material is unsuitable as determined by the ENGINEER, imported fill shall be used.
 3. Select Fill:
 - a. Select fill or backfill is material selected by the ENGINEER from the excavation.
 - b. Select material shall be free of organic or other unsuitable materials and shall not contain rocks, or unbroken masses of soil larger than 4" in greatest dimension.
 4. Structural Fill:

02300-3

- a. Structural fill or backfill is material that is non-expansive having an Expansion Index of less than 20 when tested according to the latest approved addition of ASTM D4829.
 - b. Structural material types include: SC, SM, SP, and SW per ASTM D2487.
 - c. Fill and borrow sources shall be reviewed and approved by the ENGINEER prior to being imported and used on the site.
 - d. The on-site soil encountered within the anticipated depths of excavations is not considered suitable for reuse as Structural Fill.
- E. Aggregate Base:
1. Class 2, $\frac{3}{4}$ " maximum conforming to Section 26 of the Caltrans Standard Specifications.
- F. Granular Bedding:
1. Well-graded sand and gravel materials.
 2. Unfrozen, friable, and no clay balls, roots, or other organic material.
 3. Clean or gravelly sand with less than 5 percent passing No. 200 sieve, as determined in accordance with ASTM D1140, or gravel or crushed rock within maximum particle size and other requirements as follows unless otherwise specified.
 4. $\frac{3}{4}$ -inch maximum particle size, except $\frac{1}{4}$ inch for stainless steel pipe, copper pipe, tubing, and plastic pipe under 3-inch diameter.
 5. Conduit and Direct-Buried Cable:
 - a. Sand, clean or clean to silty, less than 12 percent passing No. 200 sieve.
 - b. Individual Particles: Free of sharp edges.
 - c. Maximum Size Particle: Pass a No. 4 sieve.
 - d. If more than 5 percent passes No. 200 sieve, the fraction that passes No. 40 sieve shall be non-plastic as determined in accordance with ASTM D4318.
- G. Sand:
1. Natural or manufactured granular material, containing no organic material.
 2. Sand will be non-plastic, when tested in accordance with ASTM D 4318, 100% passing a $\frac{1}{2}$ " screen and no more than 20% passing a No. 200 screen.
- H. Crushed Stone :
1. Crushed stone will be crushed rock or gravel conforming to the requirements of ASTM C33, Size #57.
- I. Gravel Surfacing
1. Gravel Surfacing will be crushed rock, angular, and well-graded.
 2. Maximum size of $\frac{3}{4}$ ", at least 50% passing the No 4. screen, between 10 and 30% passing the No. 10 screen and no more than 15% passing the No. 40 screen.
 3. Color to be selected by OWNER.
- J. Controlled Low Strength Material (CLSM):
1. Select and proportion ingredients to obtain compressive strength between 50 and 150 psi at 7 days in accordance with ASTM D4832. Sufficient cement shall be added to meet the strength and material requirements given below and as required to provide sufficient strength for compacting overlying trench backfill. Provide certified mix design and test results in accordance with submittal requirements.
 2. Materials:
 - a. Cement: ASTM C150, Type I or II, two sacks minimum per cubic yard.

02300-4

- b. Aggregate: ASTM C33, maximum Size 7. The amount of material passing a No. 200 sieve shall not exceed 12 percent. The above No. 200 sieve material shall be well graded so as to avoid segregation. The minus #200 sieve fraction shall be nonplastic.
- c. Fly Ash (if used): ASTM C618, Class C or F.
- d. Water: Clean, potable, containing less than 500 ppm of chlorides.
- 3. Mix Design:
 - a. The CONTRACTOR and its suppliers shall determine the materials and proportions used to meet the requirements of these Specifications. Make daily checks of the aggregate gradation and adjust the mix design as required. Modify the CLSM mix as necessary to meet the flowability, pumpability, and set time requirements for each individual pour.
 - b. At least 30 days before placing CLSM, submit to the ENGINEER a mix design for each CLSM to be used. The mix design shall include trial lab and field data, with pairs of 6-inch by 12-inch cylinder breaks performed at 7, 14, and 28 days. Molds shall be plastic or waxed cardboard. The mix design shall be performed by an independent laboratory under the direction of an engineer licensed in California.
 - c. No CLSM shall be placed until the ENGINEER has approved the mix design. The ENGINEER's approval of the mix design shall be understood to indicate conditional acceptance. Final acceptance will be based on tests conducted on field samples and conformance with these Specifications.

K. Lightweight Cellular Concrete (LCC)

- 1. General:
 - a. Lightweight Cellular Concrete (LCC) is defined as low density preformed foam, water, portland cement, and optional additives appropriate for abandonment media, fill material, and specialized engineered backfill.
- 2. Quality Assurance
 - a. Applicator shall be approved by the manufacturer and shall be experienced and familiar with the requirements and the methods for proper performance of the work. The approved applicator shall be regularly engaged in the placement of LCC including completion of mass fills having a minimum of 10,000 cubic yards in the past five years.
 - b. The specialized batching, mixing and placing equipment shall be automated with bulk handling equipment approved by the manufacturer. Transit mixers and volumetric batching mixers are not acceptable for low density applications.
- 3. Materials
 - a. Expansion Material: The expansion material shall meet ASTM C869 when tested in accordance with ASTM C796
 - b. Cement: Portland cement shall comply with ASTM C150, C595 or C1157. Pozzolans and other cementitious materials may be used.
 - c. Admixtures: Admixtures may be used when specifically approved by the Manufacturer.
 - d. Properties: The LCC shall meet the following properties:

	CLASS II	CLASS III	CLASS IV	CLASS V	CLASS VI
MAXIMUM CAST DENSITY	30pcf	36pcf	42pcf	50pcf	80pcf

02300-5

MINIMUM COMPRESSIVE STRENGTH @ 28 DAYS	40psi	80psi	120psi	160psi	300psi
COEFFICIENT OF PERMEABILITY (CM/SEC) @ 13.8 KPA (2.0 PSI)	1×10^{-5}	1×10^{-5}	1×10^{-5}	1×10^{-5}	1×10^{-5}
FROST HEAVE PER BRRL LR90 (250 HOUR EXPOSURE) 11.43 CM (4.5") HIGH X 10.16 CM (4") DIAMETER	<1.25 CM (0.5")	<1.25 CM (0.5")	<1.25 CM (0.5")	<1.25 CM (0.5")	<1.25 CM (0.5")

e. Preparation:

- 1) Fill area shall not have standing water in it.
- 2) Items encased in fill shall be set and stable prior to installing LCC

f. Installation:

- 1) Install LCC in lift thickness recommended by manufacturer
- 2) Control application rate and exercise care to not overflow the application location
- 3) Control application pressure to not exceed 5 psi
- 4) Utilize bulkheads and appropriately sized inlet and outlet piping

g. Sampling: During placement of the initial batches, check the density and adjust the mix as required to obtain the specified cast density at the point of placement. Take four (4) test specimens for each 300 cubic yards of LCC or every four (4) hours of placing.

h. Testing: Test in accordance with ASTM C495. Do not oven dry load test specimens. The specimens shall be 3" diameter x 6" high cylinders covered after casting to prevent damage and loss of moisture. Moist cure the specimens at least up to 3 days prior to a 28-day compressive strength test. Specimens may be tested at any age to monitor the compressive strength

i. Manufacturer:

- 1) Elastizell EF or equal

L. Geotextile Fabric

1. General:

a. Subgrade Drainage and Filtration

- 1) Geotextile fabric shall be per AASHTO M288-06(2011), Elongation > 50%, CLASS 2. Approved manufacturers and products: US Fabrics 160NW, Tencate Mirafi 160N, ACF N060, or equal.

02300-6

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Inspection:
 - 1. Provide ENGINEER with sufficient notice and with means to examine the areas and conditions under which excavating, filling, and grading are to be performed.
 - 2. ENGINEER will notify CONTRACTOR if conditions are found that may be detrimental to the proper and timely completion of the Work.
 - 3. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.
- B. Temporary Fencing:
 - 1. Furnish and install a temporary fence surrounding excavations and work area, including the stockpile and storage areas.
 - 2. Provide fence openings only at vehicular, equipment and worker access points.

3.2 EROSION CONTROL

- A. General: Implement the construction procedures outlined herein to assure minimum damage to the environment during construction. Take all additional measures required to conform to the requirements of applicable codes and regulations.
 - 1. Whenever possible, locate and construct access and temporary roads to avoid environmental damage. Make provisions to regulate drainage, avoid erosion and minimize damage to vegetation.
 - 2. Where areas must be cleared for storage of materials or temporary structures, provisions will be made for regulating drainage and controlling erosion, subject to the ENGINEER'S approval.
 - 3. Remove only those shrubs and grasses that must be removed for construction. Protect the remainder to preserve their erosion-control value.
- B. Control Measures: Apply measures to control erosion and to minimize the siltation of the existing waterways, and natural ponding areas. Such measures include, but are not limited to, the use of berms, baled straw silt barriers, gravel or crushed stone, mulch, slope drains and other methods.
 - 1. Install erosion and sediment control practices where shown and according to applicable standards, codes and specifications. The practices will be maintained in effective working condition during construction and until the drainage area has been permanently stabilized.
 - 2. Temporary measures will be coordinated with the construction of permanent drainage facilities and other Work to the extent practicable to assure economical, effective, and continuous erosion and siltation control.
 - 3. CONTRACTOR will provide special care in areas with steep slopes. Disturbance of vegetation will be kept to a minimum to maintain stability.
 - 4. After stabilization, remove all straw bale dikes, debris, etc., from the site.
- C. Dust Control:
 - 1. Prevent blowing and movement of dust from exposed soil surfaces and access roads to reduce on- and off-site damage and health hazards.
 - 2. Control may be achieved by irrigation in which the site is sprinkled with water until the surface is moist.
 - 3. Repeat the process as needed.

02300-7

- D. Failure to Comply: In the event CONTRACTOR repeatedly fails to satisfactorily control erosion and siltation, the OWNER reserves the right to employ outside assistance or to use its own forces to provide the corrective measures indicated. The cost of such work, plus engineering costs, will be deducted from monies due CONTRACTOR.

3.3 DEWATERING

A. General:

1. Continuously control all water during the course of construction, including surface water and ground water, to prevent any damage to any excavation or to the construction activities occurring within those excavations.
2. Maintain all dewatering systems full time (24-hours/day) during the entire time the excavation is open. Do not shut down dewatering systems at night, on weekends or on holidays, or any other time the excavation is open.
3. Each excavation will be kept dry during subgrade preparation and continually thereafter until the structure to be built, or the pipe to be installed therein is inspected by the ENGINEER and backfill operations have been completed.
4. Provide adequate alarm, monitoring and back-up systems for all dewatering systems to maintain control of all water during all times any excavation is open.

B. Surface Water:

1. Provide and maintain adequate drainage and dewatering system to prevent surface water from entering excavations and to remove and dispose of all rainwater entering excavations, trenches, or other parts of the Work.
2. Keep the different working areas on the site free of surface water at all times. Special care will be taken to eliminate depressions that could serve as mosquito pools.
3. The diversion and removal of surface water will be performed in a manner that will prevent the accumulation of water behind temporary structures or at any other locations within the construction area where it may be detrimental.

C. Ground Water:

1. Provide, operate and maintain dewatering system to permit excavation and subsequent construction activities in a dry, safe environment.
2. System shall be of sufficient size and capacity to maintain groundwater level a minimum of 2 feet below the lowest point of excavation.
3. Contractor shall make an assessment of the potential for dewatering induced settlement of surrounding soils and structures. Contractor shall provide all necessary equipment and facilities, including re-injection wells, cutoff walls, infiltration trenches, etc, to prevent damage to adjacent structures.

D. Disposal of water:

1. Disposal of discharge water shall conform to any and all applicable permit requirements.

3.4 EXCAVATION AND TRENCH SAFETY:

- A. The CONTRACTOR must obtain a permit from the Division of Industrial Relations per Labor Code Section 6500, as specified in California Code of Regulations, Title 8, Article 6, Section 1539 "Permits" of the Construction Safety Orders, for all excavations five feet (5') or deeper to which an employee is required to descend. The permit shall be kept at the construction site at all times.

02300-8

- B. In accordance with Labor Code Section 6705, at least five (5) Working Days in advance of excavation of any trench or trenches five feet (5') or more in depth, with a total value of twenty-five thousand dollars (\$25,000) or more, the CONTRACTOR shall submit to the OWNER a detailed plan showing the design of shoring, bracing, sloping, or other provisions for worker protection from the hazard of caving ground during the excavation of such trench or trenches. If such plan varies from the shoring system standards, the plan shall be prepared by a California registered civil or structural engineer. A signed copy of the detailed plan shall be on the site at the time of the excavation. Nothing in this Section shall be deemed to allow the use of a shoring, sloping, or protective system less effective than that required by the Construction Safety Orders. Nothing in this Section shall be construed to impose tort liability on the OWNER or any of its employees. These systems must support the sides of the excavation and prevent soil movement that could cause injury to any person or structure. Any damage resulting from a lack of adequate shoring, bracing, shielding or sheeting shall be repaired at the CONTRACTOR's expense.
- C. The Contractor shall immediately replace or repair any unsafe ladder, scaffolding, shoring, or bracing, or correct any other dangerous or hazardous situation that exists.
- D. The shoring, bracing, shielding and sheeting plan shall contain alternative (i.e., contingent) systems should the initial systems not achieve the following minimum performance requirements.
1. Protect personnel that enter the excavation.
 2. Protect existing utilities, pavements and structures.
 3. Excavation of slopes and/or installation of the shoring system must be done in a manner that does not damage existing structures, pavements, and utilities including through settlement, heave, or vibrations.
 4. Prevent caving or lateral movement of excavation walls and associated loss of adjacent ground and adjacent ground surface settlement, even when subjected to construction vibrations.
 5. Provide stable excavation walls, slopes, and bottom.
 6. Allow for removal of shoring and excavation backfilling in a manner that does not damage the finished pipeline or existing structures, pavements, and utilities including through settlement, heave, or vibrations. Any void space created by shoring removal should be completely filled with controlled density fill.
 7. Resist lateral loads from vehicular traffic, construction equipment and spoils, and hydrostatic pressures, if any.
- E. Site specific shoring design submittal shall be required when excavations fall within an imaginary plane projected downward at an inclination of 1H: 1V from the nearest edge of adjacent structures and utilities.
- F. The CONTRACTOR shall monitor and evaluate subsurface soil conditions encountered in project excavations. Contractors and their excavation designers shall acknowledge Cal/OSHA requirements to develop their own assessment of safe slopes for the project. The responsibility for soil type classification and determination of safe temporary slope inclinations is a field decision to be made at the time of excavation by the Contractor's "competent person".
- G. In the interest of public safety and convenience, the entire open trench and all excavations shall be plated and equipment relocated as directed to minimize public

02300-9

impact at the end of each working day. The completed sections of trench shall be backfilled and compacted, and when in streets, opened to traffic as soon as possible.

- H. A Competent Person, as defined in California Code of Regulations, Title 8, Construction Safety Orders, Section 1504, "Definitions", shall be on site at all times when the CONTRACTOR's employees are working within the trench. A "Competent Person" is one who is capable of identifying existing and predictable hazards in the surroundings, or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measure to eliminate them.
- I. CONTRACTOR shall submit detailed Sheeting, Shoring, and Bracing Plan as per sections 3.5 & 3.6.

3.5 EXCAVATION SUPPORT SYSTEMS

- A. Trench Support
 - 1. Provide, install and maintain trench shields for all trench excavations for which trench shields are required (at a minimum, as required by OSHA).
 - 2. Follow all OSHA guidelines and other applicable laws and ordinances.
 - 3. Elevation of Bottom:
 - a. Excavation of earth material below the bottom of a shield will not exceed the limits established by ordinances, codes, laws and regulations.
 - b. When using a shield for pipe installation, the bottom of the shield will not extend below the mid-diameter of installed pipe at any time.
 - c. When using a shield for the installation of structures, the bottom of the shield shall not extend below the top of the bedding for the structures.
 - 4. Moving Shield: When a shield is removed or moved ahead, extreme care will be taken to prevent the movement of pipe or structures or the disturbance of the bedding for pipe or structures. Pipe or structures that are disturbed are to be removed and reinstalled as specified.
- B. Below Grade Structure Excavation Support
 - 1. Provide, install and maintain excavation support systems for all structural excavations where excavation support is required (at a minimum, as required by OSHA).
 - 2. Follow all OSHA guidelines and other applicable laws and ordinances.
 - 3. Prepare excavation support plan addressing the following topics:
 - a. Details of shoring, bracing, sloping or other provisions for worker protection from the hazards of caving ground
 - b. Design assumptions and calculations
 - c. Methods and sequencing of installing excavation support
 - d. Proposed locations of stockpiled excavated materials
 - e. Minimum lateral distance from the crest of slopes for vehicles, equipment and materials
 - f. Location of vertical and horizontal monitoring points on structures and recommended frequency of monitoring for excavation support system stability and performance
 - 4. Design of excavation support systems and excavation support plan shall be prepared by a civil or structural engineer registered in the state in which the system is installed.
 - a. Excavation support system shall consist of h-pile and lagging, sheet piles, or other reliable method of excavation support.

02300-10

- b. The use of below-ground tiebacks is allowed, however, Contractor is responsible for locating and avoiding potential conflicts with existing utilities in the area in which the tie-backs are installed. All tiebacks shall be further than 3 feet from any conflicting utility. Tiebacks shall not use existing structures for support.
- C. Removal of Excavation Support
 - 1. Completely remove all excavation support unless ENGINEER specifically allows requested excavation support to remain in place after backfill.
 - 2. Remove all excavation support in a manner that will maintain support as excavation is backfilled and will not leave voids in the backfill.

3.6 EXCAVATION

- A. General:
 - 1. Material removed: Excavations include earth, sand, clay, gravel, hardpan, boulders, rock, pavements, rubbish and all other materials within the excavation limits.
 - 2. Excavations for structures and pipelines will be open excavations. Provide excavation protection system(s) required by ordinances, codes, law and regulations to prevent injury to workmen and to prevent damage to new and existing structures or pipelines. Unless shown or specified otherwise, protection system(s) will be utilized under the following conditions.
 - a. Excavation Less Than 5' deep: Excavations in stable rock or in soil conditions where there is no potential for a cave-in may be made with vertical sides. Under all other conditions, excavations will be sloped and benched, shielded, or shored and braced.
 - b. Excavations More Than 5' deep: Excavations in stable rock where there is no potential for a cave-in may be made with vertical sides. Under all other conditions, excavations will be sloped and benched, shielded or shored and braced.
 - c. Excavation protection system(s) will be installed and maintained in accordance with the excavation plan submitted.
- B. Structural Excavation:
 - 1. The elevation of the bottom of footings shown is approximate only. ENGINEER may order such changes in dimensions, and elevations as may be required to secure a satisfactory footing.
 - 2. Hand-trim all structure excavations to permit the placing of full widths and lengths of footings on horizontal beds. Rounded and undercut edges will not be permitted.
 - 3. Excavations shall allow for aggregate base, forms, working space, installation of shoring or bracing or the safe sloping of banks.
- C. Pipe Trench Excavation:
 - 1. No more than 100' of trench may be opened in advance of pipe laying
 - a. Maximum installation lengths shall be coordinated with proposed project work zones
 - 2. Minimize trench width to the greatest extent practical, but conform to the following:
 - 3. Sufficient to provide room for installing, jointing and inspecting piping, but in no case wider at top of pipe than pipe barrel outside diameter plus 3'.
 - 4. Enlargements at pipe joints may be made, if required, and approved by ENGINEER.
 - 5. Sufficient for shoring and bracing, or shielding and dewatering.
 - 6. Sufficient to allow thorough compaction of backfill adjacent to bottom half of pipe.

7. Depth of trench will be as shown. If required and approved by ENGINEER, depths may be revised.
- D. Subgrades:
 1. Subgrades for roadways, structures and trench bottoms shall be firm, dense, and thoroughly compacted and consolidated; free from mud, muck, and other soft or unsuitable materials; and remain firm and intact under all construction operations.
 2. Subgrades that are otherwise solid, but which become soft or mucky on top due to construction operations, shall be reinforced with select fill.
 3. The finished elevation of stabilized subgrades shall not be above subgrade elevations shown.
- E. Material Storage: Stockpile satisfactory excavated materials in approved areas, until required for backfill or fill. Place, grade and shape stockpiles for proper drainage.
 1. Locate and retain soil materials away from edge of excavations.
 2. Dispose of excess soil material and waste materials as specified hereinafter.
- F. Unauthorized Excavation:
 1. All excavation outside the lines and grades shown, and which is not approved by ENGINEER, together with the removal and disposal of the associated material is at the CONTRACTOR'S expense.
 2. Unauthorized excavations shall be filled and compacted with select fill by the CONTRACTOR at his expense.

3.7 PLACEMENT OF FILL AND BACKFILL

- A. General:
 1. Backfill excavations as promptly as Work permits, but not until completion of the following:
 - a. Acceptance by the ENGINEER of construction below finish grade.
 - b. Inspection, testing, approval, and recording of locations of underground piping and ductwork.
 - c. Removal of concrete formwork.
 - d. Removal of shoring and bracing, and backfilling of voids with satisfactory materials.
 - e. Removal of trash and debris.
 2. Remove and replace with approved fill material, as specified, fill containing organic materials or other unacceptable material.
 3. Compact all fill and backfill as specified in Subsection 3.7.
- B. Structural Backfill:
 1. Select fill shall be placed as structural backfill where shown on the Drawings or indicated herein.
 2. Constraints:
 - a. Backfill water-holding basins or structures only after satisfactory leakage tests have been conducted as specified in Sections Concrete and Precast Concrete.
 - b. No backfill or fill material shall be placed when free water is standing on the surface of the area.
 - c. No compaction of fill will be permitted with free water on any portion of the fill to be compacted.
 - d. No fill shall be placed or compacted in a frozen condition or on top of frozen material.

- e. Any fill containing organic materials or other unacceptable material previously described shall be removed and replaced with approved fill material prior to compaction.
 - 3. Levels of backfill against concrete walls are not to differ by more than 2' on either side of walls, unless walls are adequately braced or all floor framing is in place up to and including grade level slabs.
 - 4. Wherever a pipe passes through a structure backfill, the structure backfill shall be placed and compacted to an elevation 12" above the top of the pipe before the trench is excavated.
- C. Backfill in Pipe Trenches:
- 1. Pipeline trenches may be backfilled prior to pressure testing, but no structure shall be constructed over any pipeline until it has been tested.
 - 2. Unless otherwise shown, place all pipe on a minimum 6" thick layer of Granular Bedding. The bedding shall extend 12" above the top of the pipe.
 - 3. Install bedding as follows:
 - a. Spread bedding and grade to provide a uniform and continuous support beneath the pipe at all points between bell holes or pipe joints.
 - b. After each pipe section is placed, deposit and compact sufficient bedding material under and around each side of the pipe to hold the pipe in proper position and to maintain alignment during subsequent pipe jointing and bedding operations.
 - c. Bedding material shall be deposited and compacted uniformly and simultaneously on each side of the pipe to prevent lateral displacement. Then place and compact the bedding material to an elevation 12" above the top of pipe.
 - 4. Above the level of bedding, place Select or Common Fill, as specified elsewhere in these specifications.
 - 5. Controlled Low Strength Material (CLSM):
 - a. When CLSM pipe zone material is indicated, the pipe may be supported above the trench floor on pea gravel bags or sandbag supports. The CONTRACTOR shall demonstrate to the ENGINEER, 7 days prior to full pipeline backfill installation, placement of CLSM as described below. This demonstration shall occur on the first 300 feet of trench, The CLSM pipe zone material shall be installed as indicated.
 - 1) Bedding and Embedment: Place and compact CLSM pipe zone material using the following techniques:
 - a) Following placement and anchoring of the pipe, remove all loose soil from trench walls and floor. Remove any unstable soil at the top of the trench which might fall into the trench during placement of the CLSM.
 - b) Deliver the CLSM to the trench in ready mix trucks or traveling pug mill and utilize pumps or chutes to place the CLSM in the trench. Direct CLSM to one side of the pipe, taking care not to displace the pipe at any time. Continue placing CLSM on one side of the pipe until CLSM has gone under the pipe and up the other side to a depth of 6 inches above the pipe bottom. Use at least two handheld vibrators to continuously liquefy and move CLSM into all voids. Adjust water in mixture to maintain fluid consistency but maintain strength requirements. Continue placing CLSM on both sides of the pipe continuously using two vibrators for every 30 feet of pipe run.
 - c) Maintain stability of pipe and conduit throughout CLSM placement and curing. CLSM will likely require placement in lifts to prevent pipe flotation. No movement of the pipe caused by flotation will be allowed. If any movement occurs, the CLSM material shall be removed and/or repaired in

- full conformance with these Contract Documents at no additional cost to the OWNER. Remove all sloughed material or other debris from top of previously placed CLSM.
- d) CLSM shall be allowed to cure a minimum of 4 hours prior to placing each lift as well as trench zone material. A smaller cure period will be allowed if it can be demonstrated to the ENGINEER that it will support the individual lift or trench zone material. The CLSM shall be sufficiently strong to support trench backfill material and the compaction effort required to achieve the specified compaction.
- D. Resume backfilling operations using the techniques described above to complete the pipe zone backfill. ENGINEER will approve the pipe zone backfill prior to initiating the trench zone backfill.
- E. Embankments:
1. To the maximum extent available, use excess earth obtained from structure and trench excavations for construction of embankments. Obtain additional material from borrow pits, if such pits are shown, otherwise obtain additional material from offsite sources as necessary.
 2. Strip, scarify, level and roll the subgrade so that surface materials of the subgrade will be compact and well bonded with the first layer of the embankment.
 3. Wherever a pipe is to pass through a fill or embankment, place and compact the fill or embankment material to an elevation 12" above the top of the pipe before the trench is excavated.
- F. Crushed Stone:
1. Place where shown on the Drawings, to the limits shown.
 2. Place in hand-tamped lifts, not to exceed 6".
- G. Replacement of Unacceptable Excavated Materials: In cases where over-excavation for the replacement of unacceptable soil materials is required, backfill the excavation to the required subgrade with select backfill material and thoroughly compacted.

3.8 COMPACTION

- A. General:
1. Compaction by inundation with water will not be permitted.
 2. Provide equipment capable of discing, aerating, and mixing the soil to ensure reasonable uniformity of moisture content throughout the material and to reduce the moisture content by air drying, if necessary.
 3. Perform compaction with equipment suitable for the type of fill material being placed. Select equipment that is capable of providing the minimum density required by these Specifications. Use hand-operated compacting equipment within a distance of 3 feet from the wall of any completed below grade structure. Between 3 feet and 12 feet adjacent to below grade structures, compaction may be completed with lightweight compaction equipment weighing less than 15,000 pounds. Beyond 12 feet adjacent to below grade structures, there are no equipment weight restrictions. Provide equipment that is capable of compacting in restricted areas next to structures and around piping.
- B. Compaction Density Requirements: The degree of compaction required for several types of fill is listed below. Moistened or aerated material as necessary to provide the moisture

02300-14

content specified, or if not specified, that will facilitate obtaining the specified compaction.

MATERIAL	Required Minimum Density (ASTM D 1557)	Maximum Uncompacted Lift*
Common Fill/Prepared Subgrade:	90%	8"
Select Fill/Trench Backfill above pipe:		
More than 2 feet below final grade	90%	8"
Less than 2 feet below final grade	95%	8"
Aggregate Base:	95%	8"
Granular Bedding	90%	6"
Sand	90%	6"
Gravel Surfacing	95%	6"

*Where large areas of backfill allow for use of large, heavy equipment, ENGINEER may, at their option, allow uncompacted lifts up to 12".

- C. Moisture Content: All fill and backfill shall be prepared and thoroughly mixed to achieve optimum moisture content, $\pm 3\%$, with the following exception: On site clayey soils optimum to $+3\%$.
- D. Testing: Testing will be as specified under Paragraph 3.10, "Field Quality Control".

3.9 GRADING

- A. General:
 - 1. Uniformly grade areas within limits of grading under this Section, including adjacent transition areas.
 - 2. Smooth subgrade surfaces within specified tolerances, and compact with uniform levels or slopes between points where elevations are shown or between such points and existing grades.
- B. Adjacent to Structures: Grade areas adjacent to structures to drain away from structures (including masonry fences) and to prevent ponding.
- C. Walks: Shape surface of areas under walks to line, grade and cross-section, with finish surface not more than 1" above or below the required subgrade elevation.
- D. Pavements: Shape surface of areas under pavement to line, and grade and cross-section with finish surface not more than 1/2" above or below the required subgrade elevation.
- E. Under Building Slabs: Grade smooth and even, free of voids, compacted as specified and to required elevation. Provide final grades within a tolerance of 1/2" when tested with a 10' straightedge.
- F. Special Areas: In turfed areas or areas covered with gravel, stone, wood chips, or other special cover, grade to within not more than 1-inch above or below the required subgrade elevations.

- G. Compaction: After grading, compact subgrade surfaces to the depth and percentage of maximum density for each area classification.

Area	Required Minimum Density (ASTM D 1557)
Beneath Treatment Structures and Buildings	95%
Beneath Pavement	90%
Landscaped and other areas	85%

3.10 PAVEMENT BASE COURSE

- A. Shoulders:
1. Place shoulders along edges of base course to prevent lateral movement.
 2. Construct shoulders of acceptable soil materials, placed in such quantity to compact to thickness of each base course layer.
 3. Compact and roll at least a 12" width of shoulder simultaneously with compacting and rolling of each layer of base course.
- B. Placing:
1. Place base course material on prepared subgrade in layers of uniform thickness conforming to indicated cross-section and thickness.
 2. Maintain optimum moisture content for compacting base material during placement operations.

3.11 FIELD QUALITY CONTROL:

- A. General: Testing by a testing laboratory of materials, testing for moisture content during placement and compaction of fill materials, and of compaction requirements for compliance with technical requirements of the Specifications.
- B. The CONTRACTOR shall retain one or more independent testing agencies to perform all quality control testing required for all materials except portland cement concrete. The required testing is for soil, aggregates, imported gravel, aggregate base, asphalt concrete, and CLSM. Each independent testing agency shall perform the testing under the supervision of an engineer registered in California. Technicians performing the testing shall be certified to operate the equipment and have at least 1 full year of experience in the type of tests being performed.
- C. A Quality Control Plan shall be submitted by the CONTRACTOR to the ENGINEER at least 30 days before field testing is required. It shall include the names, addresses, and phone number of the companies, the major personnel that will be involved, and resumes of the individuals that will be supervising and performing the tests. Copies of certificates held by the companies and the testing personnel shall be included.
- D. CONTRACTOR's independent testing agency shall perform all field and laboratory testing as described in these Specifications. Test shall include specific gravity, sand equivalent, durability, abrasion resistance, soundness, gradation, compaction curves, lab and field moisture contents, compressive strength, and field density. Other tests shall be performed by the CONTRACTOR's independent testing agency as may be required to meet the Specifications. Mix design testing for portland cement concrete, CLSM, and asphalt concrete shall also be performed by the CONTRACTOR. Field testing for portland cement concrete will be performed by the ENGINEER.

02300-16

- E. CONTRACTOR shall schedule all lab testing so that materials arriving at the site have been approved by the ENGINEER for use on the Project.
- F. All lab tests shall be performed on Samples obtained from the source of actual material that will be used on the Project. No test results more than 90 days old shall be submitted for review.
- G. The location of field density tests shall be determined by the ENGINEER.
- H. Frequency of tests: Frequency will be not less than as follows:
 - 1. For trenches:
 - a. In open fields: 2 locations every 1,000 linear feet, for each layer
 - b. Along dirt, gravel, or paved roads or off traveled right-of-way: 2 locations every 500 linear feet, for each layer
 - c. Crossing roads: 2 locations along each crossing, for each layer
 - 2. For structural backfill: 1 every 50 cubic yards.
 - 3. In embankment or fill: 1 every 200 cubic yards.
 - 4. Base material: 1 every 50 cubic yards.
 - 5. Footing Subgrade: 1 every 50 linear feet, for each layer.
 - 6. Paved Areas and Building Slab Subgrade: 1 every 500 square feet, but in no case less than 3 tests, for each layer.
- I. The ENGINEER may modify the frequency or spacing of tests to provide for testing at specific structures or locations where the ENGINEER deems additional testing is required. The CONTRACTOR shall perform such additional testing up to 10 percent above the frequency and total number of tests specified at no additional cost to the OWNER.
- J. Verbal and hand-written test results shall be provided to the ENGINEER and CONTRACTOR immediately following the field testing. Written test data sheets shall be provided to the ENGINEER not more than 12 hours following completion of the field test. Typed lab test results shall be provided to the ENGINEER not more than 7 calendar days following completion of the tests; however, the results must be reviewed and approved by the ENGINEER prior to placing the material in the trenches or incorporating it in the Work.
- A. Any location where a failing test occurs shall be recompacted and retested until a passing test is obtained. Specified testing values are minimums and no tests shall be accepted below the specified minimums. No material shall be placed over the failing test area until the failing material is recompacted and a passing test is obtained, and the area is approved by the ENGINEER. The limits of the failing test shall be assumed to be halfway between the failing location and the nearest passing location. Additional tests may be taken to determine the limits of unsatisfactory compaction.
- B. At the first of each month, the CONTRACTOR shall provide to the ENGINEER a typed summary of all tests performed for the previous month including test location by station, depth below finished grade, material tested, wet density, moisture content, dry density, maximum density curve used, and percent relative compaction. Lab test results shall also be included in the monthly report with clear description of material tested, intended use on the Project, and a statement of compliance or noncompliance with the Project Specifications.

02300-17

- C. Any material which does not meet the Specifications shall be removed from the site and replaced with material in compliance.
- D. Material which has been softened or modified prior to placing the overlying lift shall be removed down to material which is in compliance.

3.12 DISPOSAL OF EXCAVATED MATERIALS

- A. Material removed from the excavations that does not conform to the requirements for fill or is in excess of that required for backfill shall be hauled away from the Work site and disposed of by CONTRACTOR in compliance with ordinances, codes, laws and regulations at no additional cost to the OWNER.
- B. A site is not available to dispose of excess material.

+ + END OF SECTION + +

02300-18

SECTION 02350

BORE AND JACK TRENCHLESS CONSTRUCTION

PART 1 - GENERAL**1.1 SCOPE OF WORK**

- A. Furnish all labor, equipment, materials, and incidentals required to install steel casing and carrier pipes by bore and jack tunneling under Willow Creek at the location shown on the Drawings. The work shall be done in strict accordance with the requirements of the California Department of Transportation (Caltrans) as shown on the Drawings and as specified herein.
- B. The following geotechnical investigation has been completed for the bore and jack undercrossing of Willow Creek
 - 1. Geotechnical Investigation Report (GIR) by Yeh and Associates dated May 2020. The CONTRACTOR is directed to this geotechnical data for characterization of subsurface conditions (bedrock and groundwater) and selection of appropriate shaft shoring, shaft dewatering, shaft thrust block design, bore and jack jacking frame selection, casing selection, casing overcut selection and bedrock cutting head selection and tunneling productivity schedule.
- C. The auger boring system shall include a guidance control system to maintain the steel casing installation on design line and grade and within specified tolerances. Guidance systems may include pilot tubes, a steering head on the front section of steel casing or other proprietary system submitted by the Contractor for Owner review.
- D. Prior to installing the steel casing, retain at Contractor's own expense the services of a competent civil and/or geotechnical engineer with 5 years demonstrated experience in the design and installation of steel casings by bore and jack methods and, carrier pipes and appurtenances. The aforementioned engineer shall, prior to submittal, approve and affix his/her stamp to the Contractor's submitted drawings and work plans for the bore and jack. The drawings and work plans shall include but not be limited to the dewatering, portal soil stabilization, jacking pit, receiving pit, jacking frame, casing overcut selection, jacking force calculations, thrust block capacity, guidance system and installation/tunneling productivity schedule. The Contractor's engineer shall avail himself of all the available information contained on the contract drawings and herein including the geotechnical data referenced above and shall be responsible for making whatever additional investigations of the site and the conditions thereon that he/she may deem necessary.
- E. Continuously keep the jacking and receiving pit subgrades free from groundwater and surface waters during the operation and shall be prepared to implement additional groundwater control on short notice as directed by the Engineer. Groundwater levels prior to construction are to be lowered a minimum of 3 feet below the invert elevation of the jacking and receiving pits. All pits should have crushed-rock and sump areas to clear groundwater and water used to clean the casings. Pits shall be lined with non-woven geotextile filter fabric when groundwater is found and pumping is required.

02350-1

- F. Be fully responsible for inspecting the location where the pipes are to be installed and shall familiarize himself with the conditions under which the work will be performed and with all necessary details as to the orderly execution of the work. The omission of any details for the satisfactory installation of the work in its entirety, which may not appear herein, shall not relieve the Contractor of full responsibility.
- G. Install surface, subsurface and utility monitoring points as shown on the drawings.
- H. The Contractor shall establish a "Survey Grid Line" for the proposed 72" diameter casing as per Caltrans requirements and provide it to Owner and Engineer. Stationing and centerline elevation of the pipe are per the centerline of the casing.
- I. Prepare to complete the bore and jack in an orderly fashion with normal tunneling shifts working on a daily basis with no more than 24 hours between shifts.
- J. If any movement or settlement occurs which causes or might cause damage to existing utilities or structures over, along or adjacent to the work, immediately stop any or all work except that which assists in making the work secure and in preventing further movement, settlement or damage. Resume tunneling only after all necessary precautions have been taken to prevent further movement, settlement or damage and shall repair the damage, at Contractor's own cost and to the satisfaction of the Engineer.
- K. Place a minimum of 6-feet fencing or Type-K barrier around the work area as per Caltrans requirements. Re-vegetation of graded areas shall take place as quickly as possible as weather permits and as per project SWPPP requirements.

1.2 SUBMITTALS

- A. Submittals:
 - 1. Stamped drawings and calculations for the following: a) jacking and receiving pit shoring design including tunnel portal ground stabilization considerations, b) selected casing overcut and systemic surface settlements along representative sections of the tunnel alignment c) anticipated jacking load on casing and safety factor on casing capacity in compression, d) thrust block bearing capacity and safety factor on the thrust block capacity, and e) vertical loading on the casing from overburden and safety factor against casing wall stress capacity and buckling capacity. For all cases of loading the steel casing shall have a minimum safety factor of 2.0.
 - 2. Shop drawings showing size, location and design calculations for the jacking pit thrust block.
 - 3. Number and capacities of jacking frame jacks.
 - 4. Size, arrangement and installation of soil stabilization at tunnel portals in jacking and receiving shafts and dewatering wells, pumps and associated equipment.
 - 5. Detailed description of equipment, materials, sequence and procedures for jacking steel casing including provisions for standby and backup equipment. Submit "Notice of materials to be used" for CEM-3101 to Caltrans on all Caltrans projects.
 - 6. Details of guidance system for casing installation within allowable tolerances for line and grade.
 - 7. Details of casing lubrication system and description of casing lubricants to be used during bore and jack operation, including manufacturer's literature and MSDS.
 - 8. Details of contact grouting system and description of contact grout materials and pumps to be used upon completion of casing installation.

02350-2

9. Revisions to shop drawings, as necessary to accommodate field conditions and/or comply with the Specifications herein.
 10. Tunnel support system and shoring design shall be designed by a Registered Civil or Structural Engineer.
 11. Tunneling productivity schedule.
 12. Example of daily tunneling logs including productivity/length of casing installed, excavated volumes and spoils weight estimates.
 13. Contingency plan for ground loss or equipment failure during bore & jack operation.
 14. Emergency plan outlining the duties and responsibilities of all personnel during an emergency as per Cal OSHA requirements.
 15. Proof of experience as stipulated by Caltrans and as required by the encroachment permit.
- B. Acceptance of the submitted material by Engineer does not indicate acceptance of responsibility for the means and methods of construction. The CONTRACTOR shall be solely responsible for the entire bore and jack operation.

1.3 RELATED WORK

- A. Section 01330 – Submittal Procedures
- B. Section 02140 – Dewatering
- C. Section 02445 – Casing Pipe for Jacking Installation
- D. Section 02495 – Geotechnical Instrumentation
- E. Section 03320 - Contact Grouting

1.4 REFERENCE STANDARDS

- A. American Society for Testing and Materials (ASTM)
 1. ASTM A36 – Standard Specification for Carbon Structural Steel
 2. ASTM A53 - Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
 3. ASTM A139 – Standard Specification for Electric-Fusion Welded Steel Pipe, NPS 4 and over
 4. ASTM A572 – Standard Specification for High-Strength Low-Alloy Columbium-Vanadium Structural Steel
 5. ASTM C32 - Standard Specification for Sewer and Manhole Brick (Made from Clay or Shale).
 6. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
 7. ASTM C150 - Standard Specification for Portland Cement.
 8. ASTM C207 - Standard Specification for Hydrated Lime for Masonry Purposes.

02350-3

B. American Water Works Association (AWWA)

1. AWWA C200 - Steel Water Pipe 6-in (150mm) and Larger.
2. AWWA C203 - Coal-Tar Protective Coatings and Linings for Steel Water Pipelines - Enamel and Tape - Hot-Applied.
3. AWWA C206 - Field Welding of Steel Water Pipe.
4. AWWA M11 - Steel Pipe - A Guide for Design and Installation

C. American Welding Society (AWS)

- D. Where reference is made to one of the above standards, the revision in effect at the time of bid opening shall apply.

PART 2 - GENERAL**2.1 MATERIALS**

- A. Steel casings shall conform to the requirements of ASTM A139, Grade B or A572 Grade 42 and shall have a minimum yield strength of 35,000 psi. The casing pipes shall have the minimum nominal diameter and wall thickness as shown on the Drawings.
- B. Steel casing shall have a magnesium sacrificial anode inside of the casing for cathodic protection. Anodes shall be high potential magnesium conforming to ASTM B843 Grade M1C.
- C. Minimum thickness of casing pipe shall be 0.75"
- D. The overcut banding on the front section of steel casing shall provide a maximum tunnel overcut of 1-inch on diameter.
- E. Welded Steel and Stainless Steel Joints (WLD)
- a. Field welded joints shall be in accordance with AWWA C206
 - b. Welder Qualifications:
 - 1) All welding shall be done by skilled welders, welding operators, and tackers who have had adequate experience in the methods and materials to be used.
 - 2) Welders shall be qualified by the CONTRACTOR under the provisions of ASME BPVC for shop welds and ANSI/AWS D1.1 for field welds.
 - 3) Furnish all material and bear the expense of qualifying welders.
 - c. Backing rings will not be permitted for 30-inch and smaller pipe. Single field-welded butt joints with outside backing rings may be used for pipe larger than 30 inches in diameter.
 - d. Where exterior welds are performed, adequate space shall be provided for welding and inspection of the joints.
 - e. Butt Straps
 - 1) Butt straps shall be used as closure pieces and where shown on the Drawings.
 - 2) Where used or required, shall be as shown on the Contract Drawings or as approved during shop drawing review.

02350-4

- 3) When fitting up the ends of pipe to be welded or fitting butt-strap pieces, minor jacking or clamping will be allowed. Cold working the metal and sledges or localized application of heat and working the metal and sledges will not be allowed. If field displacement of joints, where butt strap joints are indicated, does not allow proper fit-up with the tolerances indicated, special closure butt straps or mitered pieces shall be shop fabricated and installed.
 - 4) Butt straps shall be welded on both the inside and outside of the pipe and at each end of the pipe and strap to avoid stress multiplication.
 - f. Prior to the pipe jacking or beginning the welding procedure, any tack welds or joint stops used to position the pipe during positioning in the jacking frame shall be removed. The weld shall then be made in accordance with ANSI/AWWA C206. Where more than one pass is required, all dirt, slag, and flux shall be removed before the succeeding bead is applied.
 - g. Repair of Welds: All welds that are defective shall be repaired by the CONTRACTOR to meet the requirements of this section at no additional cost to the OWNER. Defects in welds or defective welds shall be removed, and that section of the joint shall then be re-welded. Only sufficient removal of defective material that is necessary to correct the defect is required. After the repair is made, the joint shall be checked by repeating the original test procedure. Welds deficient in size shall be repaired by adding weld metal.
- F. A proprietary steel pipe that is utilizing an integral, machined press-fit interlocking connection method are acceptable for casings. Northwest Pipe Permalok or approved equal.
- G. HDPE/FPVC shall be as shown on the Drawings and as specified in these Contract Documents.

PART 3 - EXECUTION

3.1 JACKING PIT AND RECEIVING PIT

- A. The pits shall be shored with full face shoring fully supporting the excavation side walls in accordance with the Contractors approved shoring plan.
- B. Furnish, install and remove, to the extent required, thrust blocks or whatever provisions may be required in driving the steel casing forward.
- C. Be fully responsible for the removal of the pits including the breaking up, removing and disposing of concrete, if so required, or cutting off of sheeting and furnishing and placing screened gravel fill to the normal subgrade as may be required following the installation operations.
- D. Pits shall be protected by placement of 6' chain link fence or Type-K barrier around them.

3.2 JACKING OPERATIONS

- A. CONTRACTOR is solely responsible for preventing the occurrence of voids outside the steel casing. The Contractor shall keep written records of the tunnel spoil weights and volume compared to the calculated tunnel weights and volume and tunnel advance rate. Deviation of the tunnel spoil weights and volume (accounting for soil bulking) from the

02350-5

calculated tunnel weights and volume by more than 10% shall be reported to the Engineer. Ongoing deviation by more than 10% may require adjustment of the Contractor's means and methods.

- B. The overcut banding on the front section of steel casing shall provide a maximum tunnel overcut of 1-inch on diameter. CONTRACTOR must use lubrication system to fill the overcut annular space. The lubrication system shall be as per manufacturer's recommendation and as approved by the ENGINEER and OWNER. Lubricant is to be injected into the overcut annular space on a full time continuous basis. Lubrication injection pressure should not exceed 5 psi at the ends of lubricant injection pipes.
- C. Surface and subsurface monitoring points shall be surveyed after the jacking pit is fully excavated and shored and at least 24 hours before the start of tunneling (baseline reading), surveyed daily as the tunnel approaches and passes beneath and passes by for a distance of 20 feet and then weekly for the duration of tunneling and until the jacking pit is backfilled. More than 1" of settlement in the subsurface monitoring points shall be reported to the Engineer and will require action by the Contractor to control and minimize settlement over the tunnel. CONTRACTOR shall provide a Licensed Surveyor for this work.
- D. Proper alignment and elevation of the steel casing shall be consistently maintained throughout the jacking operation. The maximum deviation at any point along the casing shall not exceed 6" from the line and grade shown on the drawings.
- E. Use a jacking ring consisting of steel construction. This jacking ring will allow the jacking pressure to be distributed evenly around the wall of the steel casing.
- F. The use of a jacking frame shall also be required. It shall be fabricated from structural steel members and shall be designed to distribute the stresses from the jacks evenly to the jacking ring.
- G. Steel casing sections shall have beveled ends with a single "V" groove and shall be full penetration butt welded on the outside of the sleeve in accordance with the applicable portions of AWWA C206 and AWS D7.0 for the field welded water pipe joints. All joints of the steel sleeve shall be butt welded prior to being subject to the jacking operation. The welded joints shall be wire brushed and painted with bitumastic enamel coating in accordance with AWWA C203.

3.3 CARRIER PIPE INSTALLATION

- A. After the steel casing has been completely installed, thoroughly clean the interior. Place within the steel casing, the carrier pipes using spacers bound together with steel banding as shown on the Drawings.
- B. After the carrier pipes are installed within the steel casing and prior to the placement of sand fill, conduct a leakage test on carrier pipe as designated by the Engineer. Any leaks which are discovered during the testing phase shall be repaired to the satisfaction of the Engineer.
- C. Brick bulkheads 8 in wide minimum shall be installed at each end of the steel casing after the carrier pipes have been installed. The portion of the pipes passing through the brick

02350-6

bulkhead shall be wrapped with three layers of 15 lb asphalt impregnated felt before the bulkhead is constructed.

- D. The carrier pipes shall be installed to the line and grade required within the steel casing and, after they have been satisfactorily placed and approved by the Engineer, the space between the outside of the carrier pipes and the steel casing shall be completely filled with sand in one continuous uninterrupted operation in a manner to prevent occurrence of any voids between carrier pipes and steel casing.
- E. Carrier pipes to be installed within the steel casing must be braced to the sides and top of the steel casing with spacers as specified to prevent motion during the placing of sand.

3.4 TESTING

- A. Casing:
 - 1. All straight pipe sections are recommended to be hydrostatically tested in the shop to the test pressures determined by Section 5.2 of AWWA C200 after fabrication and prior to shipping onsite.
 - 2. Field testing in accordance with AWWA C200 is not required but recommended for the project.
- B. Carrier:
 - 1. See Specs 01725 for carrier pipeline testing.

+ + END OF SECTION + +

02350-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02410**SHAFT EXCAVATION AND SUPPORT SYSTEM****PART 1 - GENERAL****1.1 SCOPE OF WORK**

- A. The work specified in this Section includes requirements for excavation and support of temporary shaft excavations and trenches. The CONTRACTOR shall design, furnish, install, and maintain a system of supports, including all bracing and associated items, to retain excavations in a safe manner and to control ground movements. Upon completion of the required construction the system of supports shall be completely removed and the excavation, shaft, and staging area sites restored as discussed herein.
- B. The work shall include site grading; temporary access road construction; fencing and signing; construction staging areas; design and construction of shaft excavations; material disposal of surface water, ground water, and construction water; and site restoration.
- C. Shaft excavation shoring shall consist of water tight, sheet pile or equal construction for the Roundabout crossing jacking and receiving shafts located along Quintana and/or Las Tunas, and the Willow Creek crossing jacking and receiving shafts located near Unnamed Rd on Main St. The CONTRACTOR must provide sheet pile design for review and approval prior to construction. The CONTRACTOR may propose alternative designs for review subject to the requirements specified herein. Shafts and near surface excavations must satisfy the criteria contained in this section for sheet pile support designs.
- D. The shaft location shall be as shown within the allowable footprint areas shown on the Contract Drawings. The CONTRACTOR shall be responsible for sizing the excavations and shafts. The size of the shafts shall, however, be adequate for construction of any structures indicated on the Drawings and to provide adequate space to meet the CONTRACTOR's work space requirements for his selected methods of construction. Shaft excavations larger than those shown on the Drawings will be subject to the approval of the ENGINEER and any modifications to the approved traffic control measures shall be obtained and carried out at no additional cost to the OWNER.
- E. The initial support of the shafts shall be designed by the CONTRACTOR based upon the anticipated ground conditions described in the Geotechnical Investigation Report (GIR) by Yeh and Associates dated May 2020. The CONTRACTOR will also be responsible for the final design of the internal dewatering system for the shafts and any external dewatering system for tunnel portals stabilization as per the Contract Drawings.
- F. Relocate, support, protect-in-place, or bypass all existing utilities as required in the performance of the Work.

1.2 RELATED WORK

- A. Section 01140 – Water Pollution Control

02410-1

- B. Section 01330 – Submittals
- C. Section 02200 – Site preparation
- D. Section 02240 – Dewatering
- E. Section 02300 – Earthwork
- F. Section 02420 – Tunnel Portal Treatment
- G. Section 02350 - Bore and Jack
- H. Section 02441 – Microtunneling
- I. Section 03320 – Contact Grouting

1.3 DEFINITIONS

- A. Shaft: A vertical excavation that provides a means of access and material transport to and from an underlying tunnel. The construction of a shaft requires appropriate ground support and groundwater mitigation. During the construction phase the bottom of a shaft may serve as the beginning location of a tunnel heading.
- B. Shaft Bottom: The cleaned bottom level of a shaft from where the shaft is supported and incrementally deepened by subsequent rounds of excavation and support installation.
- C. Soil Overburden Initial Support: Requirements for initial ground support in the overburden soil cover varies to include a variety of types including ring beams and lagging, soldier piles and lagging, slurry walls, caissons, and secant pile walls

1.4 SUBMITTALS

- A. Submit, in accordance with Section 01330, shop drawings for excavations, excavation support systems, and other related information as requested by the ENGINEER. The shop drawings shall be prepared and sealed by an independent professional civil or structural ENGINEER and not in the direct employment of the CONTRACTOR. Submittals shall include the following:
 - 1. Name and qualifications of person responsible for excavation support system design.
 - 2. A site plan for each excavation indicating the location, excavation dimensions, site grading and site development details for the excavation and all work areas, and the proposed limits of disturbance surrounding each excavation.
 - 3. Drawings and design calculations indicating arrangement of supports and construction sequence for proposed support system(s) and with following data:
 - a. Show the elevation of struts or other supports as related to the depth of excavation at intermediate stages of construction.
 - b. Indicate sizes, shapes, and material specifications for all support elements including lagging, if used.
 - c. Calculations shall include estimates of likely deflections or deformations of the support system and maximum tolerable values.

02410-2

- d. Details of shaft bottom treatment, concrete slab, drain rock layer, sump pumps, etc.
 - e. Site drainage and ground water control details. Show details of the measures to control, treat, handle and dispose of surface water runoff, ground water, and construction water. Provide details of working slab, subdrains and sump construction.
 - f. Complete geometry, grade of materials used, and dimensions of all steel set support elements and assemblages.
4. Ventilation system design criteria, calculations, and plan.
 5. Breakout plans indicating support installed to transfer loads and maintain excavation supports and stability of the excavation when commencing tunneling operations and when holing out into exit shafts (e.g. tunnel portal ground treatment).
 6. Calculations for jacking shaft thrust block/reaction wall safe capacity including estimated thrust block deflection and impacts on shoring.
 7. Provisions for protecting adjacent facilities and utilities. All utilities within 20 feet of excavations and all structures within 50 feet of excavations shall be addressed.
 8. Details of materials handling, stockpiling, and disposal sites for excavated materials.
 9. For tieback anchors that project beyond vertical projections of property lines shown, and into adjoining property, obtain permission of OWNER or agency in writing prior to installation. Submit copies of correspondence documenting property owner's or agency's permission.
 10. Methods and details for repairing damage to initial support.
 11. Plans indicating removal of excavation supports and site restoration details.
 12. Plans for environmental controls.
- B. Reports and Records: Submit the following on each day that measurements are made:
1. Excavation monitoring data of horizontal and vertical deflections of supports.
 2. Geotechnical instrumentation monitoring data including inclinometers, and surface settlement monitoring points outside the shaft footprint.
- C. Proposed methods by which construction of the shaft is to be accomplished. Address each work element including the methods and sequence chosen for shaft support, excavation within soft soils and heavy groundwater conditions, and ground treatment methods for initiation of tunneling at the tunnel portals. Include details on mucking using loading equipment; hoisting using skips or buckets; hoisting of personnel; dumping and stockpiling at the surface; and transport of spoil for disposal.
- D. Methods proposed for monitoring shaft support and to prevent catastrophic ground loss, running or flowing ground conditions, or loss of bottom stability and detailing contingency measures for encountering open joints in the initial support during shaft excavation, and unacceptable water inflows through the excavation subgrade.
- E. Measures and repair methods to protect the public and surrounding property from hazards inherent in the operations, including leakage and spillage of slurry, if used.
- F. Concrete mix design including strength at three days, seven days, and at 28 days of age.
- G. Quality Control:

02410-3

1. Identify how the quality of materials and installation will be controlled (e.g. measurements, inspections, testing, etc.) in accordance with Section 01400- Quality Control.
2. Address materials testing requirements, proof-test and performance test requirements for tiebacks, and excavation monitoring provisions.
3. Submit signed statement from the bore and jack and microtunneling subcontractors that the shaft support systems shown on the Contract Drawings without modifications, with proposed modifications, or proposed alternate shaft support systems have been reviewed and are acceptable to them for bore and jack and microtunneling.
4. Submit signed statement from installer of carrier pipe that the shaft and excavation support systems shown on the Contract Documents without modifications, with proposed modifications, or proposed alternate support systems have been reviewed and are acceptable to them for installation of the carrier pipe.

1.5 REFERENCE SPECIFICATIONS, CODES, AND STANDARDS

- A. American Society for Testing and Materials (ASTM)
 1. ASTM A36 - Specification for Structural Steel Standard Specifications
- B. American Institute of Steel Construction (AISC)
 1. Manual of Steel Construction
- C. American Welding Society (AWS)
 1. AWS D1.1 for Public Works Construction
- D. Codes
 1. U.S. Occupational Safety and Health Administration (OSHA) Regulations, 29 CFR Part 1926 Subpart P - Excavations.
 2. California Division of Occupational Safety and Health (Cal/OSHA)
- E. Where reference is made to one of the above standards the revision in effect at the time of the bid opening shall apply.

1.6 DESIGN CRITERIA

- A. General:
 1. CONTRACTOR shall select and design initial support systems that complement the means and methods selected in excavating the tunnel and shafts.
 2. CONTRACTOR shall assume responsibility for the safety of excavations and initial support systems. All initial support shall be observed, assessed for adequacy, and in proper, well-maintained service at all times.
 3. Design excavation and shaft support systems and working slabs to withstand earth pressures, unrelieved hydrostatic pressures, bottom heave, equipment loads, applicable traffic and construction loads and other surcharge loads to allow the safe construction of the tunnel or jacked pipe without movement or settlement of the ground, and to prevent damage to or movement of adjacent structures, streets and utilities.

02410-4

4. The CONTRACTOR shall be responsible for the control of ground water, including the removal, disposal, pressure reduction, or cutoff of ground water flows as necessary to construct the selected support system and maintain a stable excavation and shaft.
5. Design and construct shafts and near surface excavation so that they are completely within right-of-way and permanent easement limits shown on the Plans.
6. Design and construct shafts to use in-the-wet construction or dry excavation with internal unwatering within shaft or near surface excavation support systems.
7. Design, install, operate, and maintain ground water control system for excavations to control ground water inflows, prevent piping or loss of ground, and maintain stability of the excavation. All shafts shall be watertight shoring. Incorporate a sump pump into the excavation design.

B. The CONTRACTOR shall provide the following:

- a. Size of equipment and construction and permanent materials to be hoisted through the shaft, and size of mucking equipment and concurrent ventilation ducts/equipment and other services through the shaft.
- b. Provide adequate size of openings at the base of the shaft to accommodate handling of materials and equipment for transport to and from the tunnel.
- c. CONTRACTOR shall design and implement shape, size, and initial support of the shaft tunnel intersections to suit tunnel CONTRACTOR's needs for underground construction.
- d. Design the support system to minimize horizontal and vertical movements, and to protect adjacent utilities from damage. Design support system to maintain the stability of the excavation and provide a factor of safety of at least 1.5 against sliding and against bottom heave.
- e. Employ wales, struts, beams, and tiebacks for lateral support as required for excavation faces supported by soldier piles and lagging, liner plate, or sheeting systems. Provide struts with intermediate vertical and horizontal supports as required to prevent buckling. Provide timber lagging, liner plates, shotcrete or steel sheeting as required to retain soil between supports.
- f. Design a working slab for each shaft bottom to provide stable support for jacking frame guide rails, thrust block, and other construction operations.
- g. Locate access and shafts as indicated on the Drawings.
- h. Provide temporary screen fencing around all shaft excavations. Provide traffic control around working areas and shafts located within or adjacent to streets, roadways, freeways, driveways or parking lots.
- i. Design excavation support systems in accordance with all OSHA requirements.
- j. Review of the CONTRACTOR's plans and methods of construction by the ENGINEER does not relieve the CONTRACTOR of his responsibility to provide an adequate support system achieving the specified requirements.
- k. The initial support of the shaft shall be designed by the CONTRACTOR based upon the anticipated ground conditions described in the GIR, and needs to account for any surcharge loads imposed by materials and equipment, and for varying field and subsurface conditions. The initial support shown in the Contract Drawings is a conceptual design, compatible with the anticipated ground conditions, and shall represent the minimum acceptable support, provided for bidding purposes only. The final design submittal for any alternative shall include complete calculations, and shall be stamped and signed by a Professional ENGINEER registered in the State of California.

02410-5

C. Jacking Shaft:

1. The jacking and receiving shafts shall limit the flow of water into the shafts to less than 10 gallons per minute with the groundwater at the natural level outside the shafts. The CONTRACTOR shall utilize a support system which restricts water inflow by itself and without the use of chemical grout. Chemical grout may be utilized only in localized areas and shall not be the primary system to restrict water inflow.
2. Demolition. Prior to completion of the project, the components of the jacking shafts and receiving shafts shall be either completely removed or alternatively abandoned in-place in accordance with the following:
 - a. No wood shall remain as part of the abandoned portion of the shaft.
 - b. The upper 6 feet of shaft support shall be completely removed.

1.7 QUALITY ASSURANCE**A. Regulations:**

1. Perform all work in accordance with current applicable regulations and codes of all Federal and local agencies.
2. Assume responsibility for the safety of the work, the protection of personnel, and damage to property.

B. Qualifications:

1. Submit verification that the workforce is qualified to complete the work of this Section (licenses, certifications, etc.) and that the work has been effectively supervised (manager, foreman, etc.).
2. Excavation support systems shall be designed by a professional civil or structural engineer licensed in the State of California who has minimum of five years of experience in the design of earth retaining structures.
3. The Shaft Superintendent shall have no less than 10 years of recent on-the-job supervision experience on projects involving tunnels and shafts of similar size constructed by similar methods as those proposed by the CONTRACTOR.

C. Tolerances:

1. Location of the excavation supports shall be within 3-in of that shown on the shop drawings.
2. Construct the shaft wall vertically within a tolerance of 0.5 percent.
3. Shaft walls must not deflect more than 0.1 feet during the excavation within the completed initial support.

D. Testing:

1. Perform an initial test, and periodic tests, of the standby power system for the shaft sinking operations in the presence of the OWNER'S Representative. Also, periodically demonstrate the functionality and capabilities of the automatic switchover, and notification systems.
2. The CONTRACTOR shall submit for review and approval a field testing program consistent with the proposed shaft excavation and support systems.

1.8 SAFETY

- A. All shaft excavations and support systems shall conform with applicable OSHA excavation, trenching, and shoring standards which are contained in the U.S. Code of Federal

02410-6

Regulations 29 (C.F.R.) 1926.650-1926.653. In the event of a conflict, comply with the more restrictive applicable requirements.

- B. For each underground construction effort, provide two power sources:
 - 1. A primary power system comprising commercially available or site generated power, capable of providing all of the CONTRACTOR's power requirements for the underground construction.
 - 2. A back-up system comprising site-generated power, capable of:
 - a. Providing uninterrupted operation of the CONTRACTOR's essential tunnel support services such as ventilation, lighting, and pumping.
 - b. Coming on line automatically and immediately through an automatic transfer switch or similar device in the event of a power outage.
 - c. Immediately notify the heading crew of the power outage.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Provide all shoring materials for complete shoring systems complying with the requirements specified herein, on the Contract Drawings, and in accordance with favorably reviewed submittals.
- B. All timber and structural steel used for the supporting systems, whether new or used shall be sound and free from defects which may impair their strength.
- C. Structural steel shall conform to ASTM A36 unless approved otherwise.
- D. Use steel sheet piling that is continuous interlocking type ASTM A328 of appropriate shape.
- E. Use fabricated connections and accessories, steel H-piles, WF shapes, and other structural steel that conform to the requirements of ASTM A36, unless otherwise favorably reviewed.
- F. All timber shall be structural grade with a minimum allowable flexural strength of 1100 psi.
- G. Use concrete as specified in Section 03300.

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Notify the ENGINEER not less than 15 days before beginning excavation. Excavations and construction for site development shall not extend beyond the property lines and limits of disturbance shown on the Drawings.
- B. Commence excavations and site development only after shop drawings have been reviewed and accepted by the ENGINEER.

02410-7

- C. Methods of construction for excavations shall be such as to ensure the safety of the work CONTRACTOR's employees, ENGINEER and OWNER's employees and inspectors, the public and adjacent property and improvements, whether public or private.
- D. Provide shaft excavations with a concrete working slab equipped with a sump to pump out ground water and construction water.
- E. The shaft bottom invert shall be thoroughly cleaned from all tunnel muck and be dry prior to placement of backfill.
- F. Before beginning construction at any location of this project, adequately protect existing structures, utilities, trees, shrubs, and other existing facilities. Design excavation support systems to limit deformations that could damage facilities including utilities and structures. The repair of or compensation for damage to existing facilities shall be at no additional cost to the OWNER.
- G. As a minimum, place fencing, gates, lights, and signs as necessary around the shafts and staging areas to provide for public safety.
- H. Install support system monitoring provisions as indicated on the shop drawings. Monitor performance of excavation support system for both horizontal and vertical deflections daily during excavation, and at intervals not to exceed seven days following the completion of excavation work. If monitoring data indicates that deflections have exceeded estimated values, increase frequency of monitoring as required by the ENGINEER. Submit all monitoring measurements to the ENGINEER on the same day measurements are taken.
- I. Install excavation support systems in accordance with shop drawings which have been reviewed by the ENGINEER. If settlement or deflections of supports indicate that support system requires modification to prevent excessive movements, redesign and resubmit revised shop drawings and calculations to the ENGINEER at no additional cost to the OWNER.
- J. Conduct all shaft and tunnel construction work, including excavation, shoring, temporary facilities, materials storage, and construction traffic within construction easements established for the project. All work shall be in accordance with the applicable permits.
- K. Provide excavations with a sump to pump out incidental, construction, and storm water. A sump of sufficient size shall be constructed in the invert mud slab to collect water flowing from the shaft wall and the tunnel heading sloping toward the shaft.
- L. Construct shafts and near surface excavations with the shoring flush with the existing ground surface unless otherwise indicated on the Contract Drawings.
- M. Before starting excavations, provide a fall protection system around the shafts and near surface excavations in accordance with 29 CFR 1926.

3.2 GROUNDWATER CONTROL

- A. During allowed times, design, install, operate, and maintain a ground water control system to provide stable, dry subgrade for the prosecution of the work and subsequent operations.

02410-8

Provide a positive cutoff to prevent ground water inflows using a continuous interlocking sheet pile system or similar system designed to cutoff ground water inflows; or provide combinations thereof to achieve the requirements described herein. Provide drainage blankets, filter fabric, trench drains, and sumps as required to collect ground water inflows at the bottom of all shaft excavations. In addition, provide positive ground water control using a water restrictive lining, dewatering, chemical grouting, or other acceptable methods to maintain excavation support and to prevent seepage and loss of ground when launching or retrieving microtunnel boring machines or steel casings from jacking and receiving shafts.

- B. Maintain the ground water level at least two feet below the base of shaft excavations until no danger to the tunnels and shafts can occur because of ground water inflows or the buildup of hydrostatic pressure. Furnish observation wells for monitoring dewatering operations at each shaft excavation in accordance with requirements of Section 02240.
- C. If required, groundwater control operations shall be prosecuted and maintained 24 hours a day, 7 days a week. Qualified personnel shall be on-site at all times to monitor system operations and to perform maintenance as necessary to keep the system in operation. Provide a generator and all equipment necessary to provide a backup electrical power source in the event of a power service interruption.
- D. Maintain temporary drainage facilities of adequate size, with standby pumps and adequate back-up power for emergency use, to collect and dispose of water which enters shaft excavations.
- E. Dispose of all water removed for ground water control and removed from shaft excavations in accordance with Section 02140. Dispose of contaminated ground water in accordance with Federal and local authority regulations.

3.3 STEEL SHEET PILING

- A. Design and construct the shaft bottom concrete base slab as an integral part of the entire shaft.
- B. Drive in plumb position with each sheet pile interlocked with adjoining piles for its entire length, including corners so as to form a continuous diaphragm throughout the length of each run of wall, bearing tightly against original ground. Drive to depth indicated on the shop drawings. Exercise care in driving so that interlocking members can be extracted without damaging adjacent structures or utilities. The methods of driving, cutting, and splicing shall conform to the shop drawings.
- C. If favorably reviewed by the Construction Manager, discontinue the use of vibratory equipment, which cannot provide adequate pile penetration, and use suitably sized impact-type equipment. Monitor ground for undesirable effects of vibration if sheets are vibrated. Stop and redesign excavation support system if vibration is causing undesirable affects.
- D. Remove all shoring that lies within the upper six feet below final grade.

02410-9

3.4 GROUND IMPROVEMENT FOR PENETRATIONS

- A. Provide ground improvement at shaft penetrations in accordance with the requirements of Sections 02420.
- B. Before commencing with a shaft penetration, verify that the surrounding ground outside the shaft wall is stabilized and the permeability of the ground in the vicinity of the penetrations is reduced such that water inflows into the shaft, upon penetration, will be within specified tolerances.
- C. Implement excavation of shaft penetrations in accordance with the requirements of Section 02441 and other mechanical excavation methods as required to break through the improved ground behind the shaft, or through the shaft wall itself.
- D. Monitor ground water inflow quantities for total inflow and note increasing or decreasing trends in flow quantities. If inflows exceed the specified inflow limit, implement additional ground treatment or other methods to reduce the inflows of acceptable levels.

3.5 INTERNAL BRACING SUPPORT SYSTEM

- A. The internal bracing support system shall include wales, struts, and/or shores.
- B. Provide struts with intermediate bracing as needed to enable them to carry maximum design load without distortion or buckling. Provide diagonal bracing as necessary to maintain the stability of the system. Provide web stiffeners, plates, or angles as needed to prevent rotation, crippling, or buckling of connectors at points of bearing between structural steel members. Allow for eccentricities resulting from field fabrication and assembly.
- C. Include web stiffeners, plates, or angles as needed to prevent rotation, crippling, or buckling of connections and points of bearing between structural steel members. Allow for eccentricities caused by field fabrication and assembly.
- D. Install and maintain all bracing support members in tight contact with each other and with the surface being supported.
- E. Use walers in conjunction with struts to transfer lateral pressure from wales to the struts.
- F. Bolt or weld all connections between bracing elements and the walls. Do not use connections that rely on friction between the elements.
- G. Preload bracing members by jacking struts to 50 percent of the design load if necessary to control shoring movement. Preload bracing members in accordance with methods, procedures, and sequence as described on the shop drawings. Coordinate excavation work with installation of bracing and preloading. Use steel shims and steel wedges welded or bolted in place to maintain the preloading force in the bracing after release of the jacking equipment pressure. Install support and preload immediately after installation and prior to continuing excavation.
- H. Use procedures that produce uniform loading of bracing member without eccentricities or overstressing and distortion of members of system.

02410-10

3.6 TIEBACK SYSTEMS

- A. Where a system of tiebacks is proposed in conjunction with or in lieu of struts, bracing and shores, perform on-site tests to demonstrate adequacy of tiebacks for subsurface conditions. Tieback lengths shall be adequate to obtain anchorage behind potential failure plane of excavation.
- B. Conduct proof-tests and performance tests of the tieback systems in accordance with shop drawings.

3.7 SITE GRADING

- A. Clear and grade the shaft sites in accordance with the shop drawings.
- B. Excavations shall be performed in accordance with the requirements of Section 02200.

3.8 DUST AND EROSION CONTROL

- A. Take all precautions necessary to prevent a dust nuisance to adjacent properties. Provide erosion and sediment control. Correct and repair any damage resulting from dust or erosion at no additional cost to the OWNER.

3.9 DISPOSAL OF EXCAVATED MATERIALS

- A. Remove and dispose of all excavated materials in accordance with Section 02200.
- B. Dispose of contaminated soils in accordance with Federal and local authority regulations.
- C. Temporary stockpiling, if allowed, shall not exceed the safe height limitation in accordance with shop drawings.
- D. Do not place excavated material adjacent to trenches, shafts and other excavations unless excavation side slopes and excavation support systems are designed, constructed, and maintained for embankment or surcharge loads.
- E. Do not place excavated materials near or over existing facilities, adjacent property, or completed Work, if weight of stockpiled material could induce excessive settlement.

3.10 REMOVAL OF SUPPORT SYSTEM

- A. All shoring and temporary construction elements, including sheet piles, wales, struts, lagging, and shores shall be removed from the excavation prior to restoration. Remove the support system in a manner that will not disturb or harm adjacent construction or facilities.
- B. All voids created by the removal of the support system shall be immediately filled with well-graded cohesionless sand, lean concrete, or cement grout, as approved by the ENGINEER. The support system removed from the excavation shall remain the property of the CONTRACTOR and shall be removed from the site.

02410-11

- C. Do not allow any shoring or excavation support elements to remain in place except as specified herein or shown on the drawings. At a minimum, the upper 10 feet of shaft support shall be completely removed.

3.11 RESTORATION

- A. Furnish, compact, and backfill all excavations in accordance with Section 02300. Prepare the bottom of shaft excavations as a foundation of installing pipe in accordance with Section 02300. Restore the work area disturbed by construction activities, and repair any damage caused to existing utilities, to its original, or better, condition. Paved areas shall be restored to match existing conditions as approved.
- B. Remove and dispose of all trailers, temporary utilities, drainage facilities, temporary fencing, waste materials and surplus materials, and other site development facilities provided by the CONTRACTOR following backfilling of the excavation.
- C. Obtain letters or other written documentation indicating acceptance and a release from all affected property owner(s) and utility companies that the area has been satisfactorily restored, and that any damaged utilities have been repaired, to its original, or better condition respectively. Submit copies of such letters and documentation to the ENGINEER.

+ + END OF SECTION + +

02410-12

SECTION 02420**TUNNEL PORTAL TREATMENT****PART 1 - GENERAL****1.1 SCOPE OF WORK**

- A. This section specifies the requirements for ground treatment at penetrations to and from the shafts; for the tunnel and pipelines; to provide base stability at shaft inverters; and as indicated for the protection of structures and utilities.
- B. The work shall include but is not limited to the following:
 - 1. Drilling exploratory borings as required at each grouting location to confirm ground conditions indicated in the GIR.
 - 2. Design and implementation of a grouting program using jet, permeation, and chemical grouting.
 - 3. Drilling of horizontal, inclined, and vertical cased grout holes; installation of grout pipes allowing controlled and successive grouting of soil zones or intervals; supplying of grout materials, pump injection of grout, and filling of grout pipes.
 - 4. Restoration of street, sidewalks, landscaped areas, and structures to the condition existing before the start of the grouting work under this Section.
 - 5. Field and laboratory testing
 - 6. Monitoring of grouting operations.

1.2 RELATED WORK

- A. Section 01140 – Water Pollution Control
- B. Section 01330 - Submittals
- C. Section 02200 – Site preparation
- D. Section 02240 – Dewatering
- E. Section 02300 – Earthwork
- F. Section 02410 - Tunnel Shaft Excavation
- G. Section 02441 – Microtunneling

1.3 DEFINITION

- A. Permeation Grouting: Grout injected to fill the soil pore spaces without causing excessive movement or fracturing of the soil formation, accomplished with chemical or cementitious grout.

- B. Chemical Grout: A fluid chemical that improves the structural properties of a geologic mass, typically composed of (1) matrix forming base materials, (2) reactants and, (3) accelerators or retarders.
- C. Cement Grout: Grout composed of Portland cement (or microfine Portland Cement) and water, which may contain additives such as clay, bentonite, sodium silicate, fly ash, silica fume, and accelerators or retarders as appropriate.
- D. Jet Grouting: The process of injecting cement grout to create an in-situ soil-cement mixture. The cement grout is injected and mixed with the soil under high pressure through nozzles at the end of a monitor inserted in a borehole. The monitor is rotated at slow, smooth, constant speed and lifted at a rate to achieve a continuous geometry (typically a column) and quality of soil-cement. A casing pipe around the monitor pipe is required in soft ground conditions to ensure spoil returns to the ground surface.
- E. Spoil Return: All materials including, but not limited to, liquids, semi-solids, and solids that are discharged above ground surface or mudline during, or as a result of jet grouting.
- F. Specialty Subcontractor: A subcontractor specializing in ground treatment, with the qualifications specified in Paragraph 1.7.A.

1.4 SUBMITTALS

- A. Submit, in accordance with Section 01330, shop drawings for tunnel portal treatment and other related information as requested by the Engineer. The shop drawings and calculations shall be prepared and sealed by an independent professional civil or structural engineer and not in the direct employment of the Contractor.
- B. Provide descriptions of drilling, grouting, and monitoring procedures, plan, equipment, and materials, including criteria to be used to establish that the target section is fully grouted. Include major equipment to be utilized for drilling and grouting.
- C. Provide certified laboratory test results at least 30 days before starting injection operations documenting that the proposed grout mix meets requirements as specified herein. Include uniaxial compressive strength and set-time test results of three sets of three grouted laboratory samples, as defined in ASTM D4320.
- D. Submittals shall include the following:
 - 1. Provide drawings and procedures for grouting tunnel penetrations, shaft bottoms, and other locations. Provide a site map showing proposed grout hole locations and depths. If the grouting is zoned vertically, describe the methods to be used to isolate the different grouting zones. Provide a discussion of potential problems and remedial measures to be used remediate zones that are incompletely grouted such that the density, stability or permeability are compromised.
 - 2. Provide methods of installation, staging, location and details of grout pipes, and computations of quantities for the grouting used. Present assumptions with respect to porosity and target volumes.
 - 3. Provide calculations demonstrating that the treated ground prism (length, height and width) at shaft tunnel portals has sufficient strength to resist hydrostatic and earth

- loads and punching shear failure into the shafts upon cutting tunnel portal openings into the shoring.
4. Provide calculations of treated ground prism permeability and anticipated groundwater inflow into shafts upon cutting tunnel portal openings into the shoring.
 5. Provide details of testing methods used to verify the effectiveness of grouting, with respect to strength, permeability and acceptance criteria.
 6. For jet grouting operations, provide locations of spoil containment structures and methods to be used to prevent migration of leakage of spoil return, disturbed in-situ soils, or other material beyond the immediate limits of jet grouting operations. Include details and methods used to collect and dispose of the spoil return and other spoil materials.
 7. Provide working drawings and calculations for the grouting operations at least 30 days before starting tunneling operations. These drawings and calculations shall be stamped and signed by a Professional Engineer licensed in the State of California.
- E. Provide documentation indicating approval of chemical grout materials from the State of California, Department of Health.
- F. Boring logs for exploratory borings.
- G. Schedule of Operations: A schedule showing anticipated times for mobilization, grout pipe installation, and actual grouting operations as related to the excavation progress.
- H. Manufacturer's product data and certification that materials meet specification requirements.
- I. Grout materials: Certificate of compliance that grout materials meet the requirements as specified herein.
- J. Submit suppliers written recommendations for handling, transporting, mixing, and disposing of grout materials.
- K. Submit equipment for mixing, drilling, and injecting grout. Include operational parameters and instrumentation to ensure grout is mixed and injected in conformance with the design.
- L. Submit proposed forms showing records of grouting operations on a daily basis. Accurate and timely records of grouting are required. Include grout mix, gel time, injection date and time, injection pressure and rate, injection volumes and exact injection location, including elevation. Provide data in an acceptable chart-type format, and update daily.
- M. Grout Mix Design(s):
1. For jet grouting, submit proposed soil-cement column diameters, injection pressures and rates, withdrawal rates, rotational speeds, and calculations to demonstrate that full continuous columns of required diameter will be achieved in the site soils.
 2. For chemical grouting, submit certified laboratory test results at least 30 days before starting injection operations documenting that the proposed chemical grout mix meets requirements as specified herein and uniaxial compressive strength and set-time test results of three sets of three grouted laboratory samples.

3. For permeation grouting, submit certificate of compliance documenting that the cement grout meets requirements as specified herein.

- N. Monitor water quality in accordance with permit requirements.

- O. Program for monitoring existing sewers, storm drains, and underground utilities.

- P. Methods for determining that grouted zone is thoroughly stabilized.

- Q. As-built sketches showing locations depths and orientations of drilled holes and any grout pipes left in place.

- R. Quality Control:
 1. Identify how the quality of materials and installation will be controlled (e.g. measurements, inspections, testing, etc.) in accordance with Section 01400- Quality Control.
 2. Provide a Quality Assurance-Quality Control Plan for grouting.
 3. Provide results of Quality Control Testing.

1.5 REFERENCES

- A. American Society for Testing and Materials (ASTM)
 1. ASTM A36 - Specification for Structural Steel Standard Specifications
 2. D2166- Standard Test Method for Unconfined Compressive Strength of Cohesive Soil
 3. D4219 - Unconfined Compressive Strength Index of Chemically-Grouted Soils
 4. D4320 - Laboratory Preparation of Chemically Grouted Soil Specimens for Obtaining Design Strength Parameters.

- B. American Petroleum Institute (API)
 1. 13A — Drilling Fluid Materials

- C. American Welding Society (AWS)
 1. AWS D1.1 for Public Works Construction

- D. Codes
 1. U.S. Occupational Safety and Health Administration (OSHA) Regulations, 29 CFR Part 1926 Subpart P - Excavations.

1.6 DESIGN CRITERIA

- A. Limit total inflow through each shaft penetration to less than 5 gallons per minute (gpm).

- B. Limit total inflow through each shaft excavation bottom to less than 5 gpm with leakage from all sources not to exceed 10 gpm.

- C. Design tunnel shaft excavation and support in accordance with Specs 02410.

- D. Project Conditions:

02420 -4

1. Geotechnical conditions to be anticipated are presented in the GIR.
2. Design grouting program and mobilize equipment to conduct proper grouting operations and accommodate site restrictions.
3. Design grouting program to ensure that all grout and spoil returns are continuously controlled and collected within the work area.

E. Performance Requirements:

1. Improve stability of the ground and reduce groundwater inflows to the shafts during penetrations for the MTBM at the shafts.
2. Protect adjacent structures or utilities from damage resulting from ground movements caused by loss of ground into shafts.
3. Provide treated ground as needed for excavation base stability and to limit groundwater inflows through shaft bottoms during construction of the shafts.

1.7 QUALITY ASSURANCE

A. Qualifications:

1. Provide grouting subcontractor's supervisors with at least five years of experience in planning and executing grouting programs, placement of grout pipes, and mixing and injecting grout for soil stabilization to protect structures similar to those specified. The supervisors shall have completed a minimum of 3 projects with similar grouting and mixing procedures, automatic recording equipment, and types of grout to be used for this application.
2. On each grouting shift, have a supervisor assisted by an experienced grouting foreman who has similar grouting stabilization work experience.

B. Field Quality Control:

1. Verify that the surrounding ground is stabilized and the permeability of the ground is reduced such that inflow from 2-inch diameter test holes cut in around the perimeter of the tunnel portal penetration is less than 0.5 gal/min/hole. Drill a minimum of three (3) test holes at locations selected by the Owner's Representative. During construction, limit total inflow from portal cuts to less than 5 gpm by re-stabilizing and re-grouting the treated region from within the tunnel or shaft if required.
2. Do not commence tunnel portal penetrations until the ground is stable and water inflows are limited to the specified values.
3. Monitor surface and structure settlements during progress of the tunnel excavation in accordance with Section 02495.
4. Modify grouting procedures if subsequent tunnel penetrations indicate insufficient grout penetration or if field quality control procedures indicate inadequate densification, strengthening and/or permeation of the soils.
5. Obtain samples of grout used for chemical grouting for gel time checks: at least one for every half-hour of pumping or for every 300 gallons of grout, whichever is more frequent. Properly label gel samples and store until the completion of the project.
6. Prepare three samples for grout mortar per day or a minimum of one set per 50 cubic feet of grout mortar injected.
7. Provide a jet grouting Quality Assurance-Quality Control the following:
 - a. Details of procedures to obtain soil-cement samples. Include catalog cuts or shop fabrication drawings of the soil-cement sampling device and curing boxes.
 - b. For jet grouting measures to be implemented each day, continuously monitor, modify, and control; water-cement ratios; cement-grout injection pressures and

- rates; rotation speeds; penetration and withdrawal rates; horizontal and vertical alignments; and other related aspects of the jet grouting process.
- c. Daily production reports.
- d. Methods for sampling and testing grout mix, injection mix, and in situ grouted material for consistency and strength.

1.8 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Cooperation with Property Owners:
 - 1. Before starting Work, coordinate the sequence of operations with the property owners, OWNER, and ENGINEER.
 - 2. Coordinate the permitted areas of operations
 - 3. Coordinate the time restrictions for the Work.
- B. Store cement, silicates, and other materials to be used for ground improvement according to manufacturer's recommendations as well as all state, local and federal regulations and use these materials in the order received. Do not use materials beyond their expiration date.
- C. Deliver reactant materials in sealed containers accompanied by the supplier's certificate of origin.

1.9 SAFETY

- A. All shaft excavations and support systems shall conform with applicable OSHA excavation, trenching, and shoring standards which are contained in the U.S. Code of Federal Regulations 29 (C.F.R.) 1926.650-1926.653. In the event of a conflict, comply with the more restrictive applicable requirements.

PART 2 - PRODUCTS

2.1 EQUIPMENT

- A. Drilling: Provide equipment of type and capacity suitable for the accepted grouting program.
- B. Chemical Grouting:
 - 1. Provide chemical grouting equipment having the capacity and mechanical capability to do the specified Work. Maintain equipment in operating condition at all times. Fill and replace by other holes any grout holes that are lost or damaged for any reason.
 - 2. Grout Plant: Continuous mixing type, capable of supplying, proportioning, mixing and pumping the grout with a gel time of 2 to 50 minutes. Batch-type systems will not be permitted. Equip main pumps with recording, positive displacement meters that operate independently of the viscosity of the fluid. Have capability in pumping unit to vary the rate of pumping while maintaining the component ratios constant.
 - 3. Pumping Unit: Equip with piping and/or hoses of adequate capacity to carry the base grout and reactant solutions separately to the point of mixing. Equip with check valves to prevent backflow. a baffling chamber, a sampling valve beyond the point of

mixing, a water flushing connection or valve to facilitate flushing the grout from the mixing hose, and baffle between grouting sessions. Monitor distribution of proportioned grout, under pressure, to the grouting locations by separate automatic real-time display, flow rate indicators, and gauges.

4. Store chemicals per manufacturers' recommendation and protect from accidental discharge. Maintain storage tank capacity sufficient to supply grouting materials as to not interrupt the Work if chemical delivery delays occur.
5. Provide at the Site the required chemical quality control testing apparatus including, but not limited to, hydrometers, balance scales, graduates, viscometers, and other devices required to conduct chemical material acceptance tests, chemical proportioning tests, and grout quality tests for proper quality control of the Work.

C. Cement Grouting:

1. Equipment for Mixing and Injecting Cement Grout: Designed for grouting service; maintained throughout duration of Work to be capable of satisfactorily mixing, agitating, and forcing grout into grout holes, in a continuous flow, at required pressures.
2. High speed colloidal double-tank mixer for mixing cement grouts and is capable of maintaining continuous flows of grout.
3. Provide grout pump capable of developing in a continuous, uniform manner, pressure at grout hole connection up to the maximum pressure required.
4. Hose for Pressure Grouting: Nominal 1.5 inches capable of withstanding maximum pressures used.
5. Equipment to provide for continuous circulation of grout in the system and to permit accurate pressure control at grout hole connection.
6. Configure equipment so flushing can be accomplished with grout intake valves closed, with water supply valve open, and with grout pump running at full speed.
7. Mixer Capacity: Not less than 20 cubic feet, and with an accurate water meter reading in cubic feet to nearest 0.1 cubic feet, for measuring amount of mixing water added to dry grout ingredients.
8. In addition to grout mixer, provide mechanical agitator tanks equipped with suitable screens.
9. Provide two pressure gauges, one at grout pump and other on manifold hookup at collar of hole being grouted. Provide a return hose from the grout manifold to the grout pump to allow continuous circulation and prevent pressure build-up in the hose. Use pressure gauges with ranges that include maximum required injection pressure, and which can be read to an accuracy of at least 5 psi. Furnish a separate accurately calibrated, high-precision gauge; use for periodic checking of accuracy of gauges used in grouting.
10. Provide suitable stop valves at collar of hole for use in maintaining pressure, as required, until grout has set.
11. Provide a totalizing type meter, which reads in cubic feet to accurately -determine amount of grout injected.
12. Equip pump with by-pass valve to prevent sudden excessive grout pressure from developing at the grout hole connection.

D. Jet Grouting:

1. Equipment for mixing and injecting jet grout into the formations and to the depths required for formation of the soil-cement elements to provide stability and reduce the permeability of the underlying soil strata.

02420 -7

2. Maintain equipment to ensure continuous and efficient production throughout duration of jet grouting.
3. Provide jet grouting equipment with specialty drilling bits capable of advancing through the site subsurface conditions as indicated in the GIR.
4. Provide a jetting system that is capable of utilizing single, double, or triple fluid systems.
5. Provide jet grouting equipment that is capable of providing continuous positive return flow using sacrificial casing or retractable pipe casing during jetting.
6. Equip jetting tools with instrumentation that allows continuous monitoring and recording of data throughout the jet grouting operations. As a minimum, provide the following:
 - a. Pressure gauges at the drilling rig, and recording devices to record cement grout injection and other fluids pressures during grouting.
 - b. Flowmeter to monitor and record the rate and total volume of cement grout injection and other fluids through the grouting monitor at every soil-cement element.
 - c. A means of monitoring and recording the rate of rotation and rate of withdrawal of the monitor.
7. Provide equipment capable of replacing hardened, non-conforming elements.

a.

2.2 MATERIALS

A. Chemical Grout

1. Use a chemical grout consisting of a liquid sodium silicate base, reactant, water, accelerator, and other accepted admixtures required. Design the chemical grout mix so that (1) when injected into standard medium dense sand (Ottawa 20-30) specimens, the average unconfined compressive strength of the grouted test sample is a minimum of 100 psi. Design the trial mix and conduct laboratory tests to verify trial mix meets strength requirements in accordance with ASTM 04219 and D4320. After acceptance by the Owner's Representative, do not change mix designs without performing another trial mix test and submitting.
2. Base Material for Grout: Liquid sodium silicate with a specific gravity of 1.4 to 1.5, a silicate-to-soda ratio of 3.20 to 3.35, and a minimum sodium silicate concentration of 50 percent of the mix by volume. Deliver sodium silicate in sealed containers a certified tank truck, and accompanied by the supplier's certificate of origin.
3. Reactant: Organic base type which, when properly mixed with the other grout components, provides a permanent, irreversible gel with controllable gel times. The resulting gels to exhibit less than 15 percent syneresis in 30 days when mixed with appropriate amounts of sodium silicate, water, and accelerator, and not exhibit objectionable odors such as ammonia. Sodium bicarbonate, sodium aluminate, and other reactants that produce a temporary grout will not be

- allowed. Deliver the reactant in sealed containers accompanied by the supplier's certificate of origin.
4. Accelerator: If required, technical grade, water soluble calcium chloride or other accepted metal salt, containing a minimum amount of insolubles.
 5. Grout: Nontoxic and nonflammable during and after grouting.
 6. Water Used with Grout: Potable and free of impurities that will affect the grout gelling characteristics and strength development of the grouted soil.
 7. Gel Times: Provide grout having a gel time of two to 50 minutes, with 90 percent of the grout having gel times of ten to 30 minutes.
- B. Cement Grout
1. Portland Cement Type II.
 2. Water: Potable.
 3. Admixtures: As accepted by the Owner's Representative.
 4. Bentonite: Manufactured in accordance with API 13A.
- C. Grout Pipes for Permeation Grouting
1. Provide the re-groutable sleeve-port type grout pipes, with grout ports at maximum 2-foot centers covered by expandable rubber sleeves.

PART 3 - EXECUTION

3.1 CONSTRUCTION

- A. General
1. Perform permeation grouting, chemical grouting or jet grouting to stabilize the soil as indicated, allowing sufficient set time or grout prior to excavation work. The grouting shall improve the ground by increase soil strength, decrease permeability, and/or improving ground behavior so that the ground will stand sufficiently long for the shaft tunnel portal penetrations.
 2. Before beginning grouting, drill one exploratory borehole to confirm ground conditions in each area to be grouted. Extend boreholes to a depth of 2 feet below the proposed bottom of ground treatment zone. Provide continuous sampling within the treated zone specified in the Plans.
 3. Locate, protect, support, and maintain without interruption, utility facilities, equipment and services.
 4. Grout pipes may be installed horizontally, inclined or vertically to obtain the planned grout coverage between adjacent grout pipes.
 5. Encase sleeve-port grout pipes with a continuous brittle mortar sheath, and an internal double packer shall be used to inject grout at a specified sleeve-port.
 6. Keep equipment and lines clean by constant circulation of grout or by periodic flushing with water.
 7. Monitor for ground movements throughout all grouting operations in accordance with Section 02495.

B. Chemical Grouting Procedures

1. Mixing Chemical Grout: Perform by the continuous mixing method, with the proper amounts of sodium silicate base material, water, reactant, and admixtures flow rates and pressures. The batch system of mixing grout will not be permitted. Pass the base material and the water-accelerator-catalyst solution through parallel separate hoses to a baffling chamber near the top of the hole. Place a sampling cock, to allow frequent gel time checks, after the baffling chamber. Place check valves in the grout lines to prevent backflow.
2. Injection:
 - a. Using double packers, inject chemical grout into the selected zones through ports in the sleeve pipes. Adjust injection procedures as required to prevent excessive surface heave. Temporary high injection pressures are permitted to crack open sleeve-ports, but these pressures will not be allowed for longer than one minute.
 - b. Conduct surface pressure test of sleeve port grout tube from manifold to injection point equivalent to the maximum grout depth to ascertain the system pressure loss. This measured pressure is used for estimating appropriate grouting pressures for production grouting. Inject grout at rates not greater than 10 gallons per minute.
 - c. Do not heave ground or utilities more than that Specified in Section 02495.
3. Leakage Monitoring:
 - a. Closely monitor the rate of grout take during grout injection. Ascertain the cause of sudden drops in grout injection pressures following initial start-up pressure adjustments. Periodically monitor paved areas and the ground surface adjacent to the grouting site for leakage. In the event that grout leaks are observed, "temporarily terminate injection and plug leaks before resuming pumping. Inform the Owner's Representative immediately of such leakage.
 - b. If excessive grout take is experienced that is not attributable to leakage, change injection pressure, pumping rates, gel or setting times, or grout composition, subject to the acceptance of the Owner's Representative, to reduce grout use to acceptable levels.
 - c. While grouting operations are ongoing continuously monitor sewers, storm drains, adjacent utilities for intrusion of grout. Notify the Owner's representative immediately if errant grout flows are detected.

C. Cement Grouting Procedures

1. Mix grout in accordance with accepted mix proportions and mixing procedures.
2. Inject cement grout through sleeve pipes as specified herein for chemical grout injection.
3. Monitor for leakage as specified above.

D. Jet Grouting Procedures

1. Verify the compressive strength (f'c) and total unit weight of the jet grouted soil throughout the course of the Work in accordance with the Quality Assurance-Quality Control Plan.
2. Perform compressive strength testing on cores taken from the Work, in accordance with ASTM D2166.
3. Ensure jet grouted soil conforms to the following compressive strength requirements:
 - a. For penetrations at shafts, provide jet grouted soil that achieves a 28-day unconfined compressive strength (fc) of at least 300 psi.

02420 -10

- b. For ground improvement at shaft bottoms, provide jet grouted soil that achieves 28-day unconfined compressive strength of at least 300 psi.
4. Confirm, with the observation of the Owner's Representative, that the design depth of the soil-cement column has been obtained prior to commencing jetting.
5. Once jet grouting is started at any location, continue the jet grouting operation until the soil-cement element is completed.
6. Do not install jet grout elements within 2 feet as measured between outside edges of jet grout columns that are less than 48-hours old. The 48-hour delay may be shortened if demonstrated to the satisfaction of the Owner's Representative that the installation of any adjacent columns will not have deleterious effect on any previously installed soil-cement columns or the ground.
7. Maintain the site clear of all debris and water at all times during jet grouting operations. Pipe or channel spoil return to holding ponds, tanks or other collection equipment. Regularly dispose of all waste materials in accordance with the existing regulations of all agencies having jurisdiction.
8. Take all necessary precautions and implement measures to prevent any spoil return, other spoil material or stockpiled materials from entering sewers, storm drain structures, drainage courses and other utility lines or from leaving the site via surface runoff. Prevent the migration of spoil return, spoil material or stockpiled materials into any surface water body.
9. Coordinate all operations and the segregation of materials to prevent contaminating unregulated spoil return materials.

3.2 SEQUENCING

A. Complete Ground Improvement:

1. Ground improvement for tunnel portal treatments shall be completed after jacking and receiving shaft excavation and shoring are fully complete.

3.3 FINISHING

A. Cleanup and Site Restoration

1. Remove grout pipes installed from surface in accordance with the accepted submittal. Abandon grout holes in accordance with the permit requirements.
2. Clean up spilled materials and grout.
3. Restore street pavement and sidewalks in accordance with Sections 02770.
4. Where grouting or grout operations are performed from ground surface, restore grouting locations to their existing condition after completing the grouting work.
5. Remove grout intruded into adjacent utilities, sewers, and storm drains.
6. Repair and restore affected utilities and any other structure(s) affected to condition existing before grouting operations.
7. Furnish, compact, and backfill all excavations in accordance with Section 02300.

+ + END OF SECTION + +

02420 -11

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02441

MICROTUNNELING TRENCHLESS CONSTRUCTION

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. This section includes the provision and installation of a multiple pressurized pipelines in one steel casing pipe installed by microtunneling. The project location is as follows:
 - 1. Morro Bay Blvd Roundabout
 - a. Casing: 60-inch
 - b. 3x pressurized carrier pipelines, 1x pressurized carrier pipeline within a casing, 1x fiber optic conduit, and 1x spare conduit. from FPVC or HDPE.
- B. Microtunneling performed on this project is to be completed in accordance with ASCE Standard 36-15, Standard Design and Construction Guidelines for Microtunneling.
- C. CONTRACTOR shall furnish all labor, equipment, and materials necessary for the completion of the work described in this section including but not limited to: all microtunneling systems; spoil transportation and separation; hoisting; lifting; safety; and control equipment.
- D. The casing and carrier pipes shall be installed between shafts.
- E. The microtunneling equipment and all necessary ancillary systems shall be selected and furnished by the CONTRACTOR and shall meet the minimum requirements specified herein, subject to the review and approval of the ENGINEER.
- F. CONTRACTOR shall conduct all necessary ground improvement operations at tunnel portals and protection and relocation of utilities as required.
- G. The CONTRACTOR, including its key engineering personnel, the superintendent(s) and MTBM operator(s) shall familiarize themselves with the project Geotechnical Investigation Report (GIR) in developing and executing their means and methods to suit the ground conditions.
- H. CONTRACTOR shall set up staging areas and areas for the microtunneling equipment within the easement areas shown on the Contract Drawings. CONTRACTOR shall provide all site security including temporary fencing, maintenance and protection of traffic, barricades, signs, lights, etc. CONTRACTOR shall construct temporary roads and access paths as required and shall maintain the site during construction. After the operation, CONTRACTOR shall remove all temporary fencing, roads, etc. and shall restore the area to pre-existing conditions.
- I. Select and utilize methods and equipment compatible with the selected dimensions of the tunnel and with the anticipated geologic conditions described in the GIR.
- J. Jacking and receiving shafts shall be in accordance with the requirements of this Section and Section 02410.

02441-1

- K. The Contractor shall conduct field testing of the installed carrier pipe in accordance with Section 15990.

1.2 DEFINITIONS

- A. Ancillary Support: The addition of selective support elements not defined and included in the required initial support for the ground classes, to maintain stable and safe conditions in the tunnel. These support elements may include spiling, forepoling, crown bars, breastboarding, wall plates, shotcrete, and extensive lagging.
- B. Microtunneling: A process of installing pipe underground behind a remotely controlled, closed-face, steerable, laser-guided, articulated Microtunnel Boring Machine (MTBM) that exerts a continuous, controllable pressure at the microtunnel heading to prevent uncontrolled groundwater and soil inflow. The MTBM is connected to and followed by steel casing which is installed by jacking. The MTBM ensures that the rate at which the material is being excavated is fully controlled at all times.
- C. Microtunnel Boring Machine (MTBM): The MTBM refers to the remote controlled microtunnel shield and cutterhead jacked through the earth, which excavates the ground in advance of the steel casing being installed.
- D. Skinned-Up MTBM: An MTBM that is fitted with a steel shell or extension to increase the outer diameter of the machine to match the outer diameter of the jacking pipe and overcut.
- E. Casing Pipe: Steel pipe capable of withstanding installation forces due to pipe jacking and other construction or temporary loads in addition to permanent ground, hydrostatic and live and dead loads.
- F. Carrier Pipe: Final product pipe used to convey raw wastewater, treated effluent, recycled water, and fiber conduit.
- G. Jacking and Receiving Shafts: Working pits between which steel casing pipe is installed by means of microtunneling. Shafts shall accommodate the MTBM, microtunnel jacking equipment including steel casing pipe segments, and MTBM retrieval. The words pit and shaft are used interchangeably.
- H. Drive: Section or reach of complete steel casing pipe installed by microtunneling from jacking shaft to receiving shaft.
- I. Intermediate Jacking Station (IJS): Fabricated steel shield incorporating a series of hydraulic jacks temporarily installed between two steel casing pipe sections. IJSs are used to better distribute the thrusting force along the steel casing pipe string and reduce the jacking force required of the main jacking frame and thrust block in the jacking shaft.
- J. Annular Space: The distance measured radially between the outside radius of the jacking pipe and the excavated radius of the outermost gauge cutter on the MTBM. The gap calculated by the radial distance between the outside radius of the jacking pipe and the excavated radius of the outermost gauge cutter.
- K. Controls: Part of the microtunneling control system that synchronizes excavation, removal of excavated materia. and jacking of pipe to balance forward movement with

the removal of excavated materials so that ground settlement or heave is minimized or eliminated.

- L. Cutterhead: Any rotating tool or system of tools on a common support that rotates and excavates at the face of a bore.
- M. Emergency Recovery Shaft: A vertical excavation required for the removal of an obstruction or for removal or repair of the trenchless construction equipment. The location of an emergency shaft is determined by construction necessity and typically will not have permanent civil structures constructed in the shaft.
- N. Face: The location where excavation is taking place.
- O. Guidance System: System that locates the actual position of the MTBM relative to the design location.
- P. Inadvertent Return: The loss of drilling fluid, including slurry and lubrication, from the slurry or lubrication system. A common form of inadvertent return, where the fluid reaches the surface or waterway, is commonly called a "Frac-out."
- Q. Jacking Frame: A structural component, fitted with hydraulic cylinders that is used to push the MTBM/shield and jacking pipe into the ground. The jacking frame distributes the thrust load to the jacking pipe and the reaction load to the shaft wall, trench wall, or thrust block, or other structure.
- R. Jacking Pipe: A specialty pipe (e.g. steel casing) that is engineered and manufactured with a smooth outer wall and watertight joints. The pipe is specifically designed to be jacked through the ground and may also serve as a carrier or product pipe.
- S. Lubricant (Lubrication): A fluid, normally bentonite and/or polymers, used to reduce skin friction on the jacking pipe and to fill the annular space between the jacking pipe and the native unexcavated material.
- T. Contact Grout: The grout injected into the annular space to completely fill the space between the steel casing pipe and the soil, injected through grout ports in the steel casing pipe.
- U. Annular Space Filling: Dry blown sand or grout injected into the void between the steel casing pipe and the carrier pipes to completely fill the space between casing pipe and carrier pipes.
- V. Spoil: Excavated material that has been mixed with slurry and pumped to surface to be separated and recycled or disposed.
- W. Waste Material: All excavated material, spoil or muck, waste slurry, drilling fluids, excess grout, and any other waste material or fluid produced as a result of any item of work performed for the project and not covered by any other specification.
- X. Groundwater Control: Dewatering and depressurization of water-bearing soil and rock layers using deep wells, well-point systems, vacuum-assisted wells or eductor systems. Use of sump pumps does not constitute groundwater control. Sump pumps are a means of collecting and removing water from excavations or open shafts/tunnels.

02441-3

- Y. Obstruction: Any buried object that lies completely or partially within the cross section of the microtunnel and that impedes continued forward progress along the design path and within allowable tolerances.

1.3 RELATED SECTIONS

- A. Section 01330 – Submittal Procedures
- B. Section 02410 – Shaft Excavation and Support System
- C. Section 02420 – Tunnel Portal Treatment
- D. Section 02445 – Casing Pipe for Jacking Installation
- E. Section 03320 - Contact Grouting

1.4 REFERENCES

- A. OSHA – Construction Standards and Interpretations, 29 CFR Part 1926, Subpart S: Underground Construction; and Subpart P: Excavations.
- B. NFPA 241 – Standard for Safeguarding Construction, Alteration and Demolition Operations, National Fire Protection Association, Current Edition.
- C. ANSI A10.16-1995 (R2001) – Safety Requirements for Tunnels, Shafts, and Caissons
- D. Geotechnical Investigation Report (GIR) by Yeh and Associates dated May 2020.

1.5 SUBMITTALS

- A. CONTRACTOR shall submit in accordance with Section 013300, but no more than 30 days after Letter of Acceptance and no less than 30 days before delivery of the MTBM at the job site.
- B. CONTRACTOR shall submit a detailed MTBM Work Plan of the proposed MTBM for use. At a minimum, the following information shall be included in this submittal:
 - 1. Include a description and details of proposed methods and procedures for: excavating the tunnel; providing ground water control; tunnel initial support, contact grouting between excavation and steel casing, support transportation, and installation procedures; temporary face support; ventilation; illumination; procedures for handling and disposal of water; traffic control; hauling and disposal of tunnel muck; muck disposal sites; types of equipment to be used; equipment specifications; and other pertinent data requested by the ENGINEER.
 - 2. For slurry MTBM – submit descriptions and details of shield systems, pressure chamber, pressure controls, slurry density to control face stability and groundwater in monitoring and testing provisions, operating procedures, cutterhead, and slurry transport, separation, and treatment.
 - 3. For earth pressure balance MTBM - Submit descriptions and details of shield systems including screw auger discharge system, bentonite or other additives required to develop an effective sand plug, bentonite or additive injection provisions, mixing chamber, cutterhead, operating procedures and controls to balance soil and

02441-4

- groundwater pressures and prevent loss of ground, and muck handling and transport systems.
4. Provide a written certification stating that the MTBM and backup equipment meet all the requirements of this section.
 5. Means and routes of MTBM transport to site; method for MTBM assembly on site; dismantling/removal from site and transporting between shafts.
 6. Sequence of operations, including proposed pipe jacking/tunneling cycle, work shifts, and scheduled shutdown times and durations for maintenance etc.
 7. Methods, frequency and procedures to control line and grade accuracy to meet tolerances specified herein; Field forms for establishing and checking line, grade and invert elevation of the microtunnel; Procedures to mitigate laser distortion by heat and/or humidity in the microtunnel; Proposed emergency methods to be implemented should line and grade fall outside of tolerances.
 8. Method of disposal of spoil, groundwater, tunnel construction water, or any other waste material during the course of microtunneling and shaft construction in accordance with the OWNER's requirements.
 9. Description of method of operation and provisions used to exert a positive stabilizing pressure at the tunnel heading that will prevent loss of ground and groundwater inflows. Indicate range of pressures anticipated to be required to stabilize tunnel heading and control groundwater inflows and provide details of methods and equipment to be used to monitor and control pressures.
 10. Description of features and operation procedures to control heave and settlement of ground surface.
 11. Details of MTBM launch and reception including details of face support and control of excavation at transitions between grouted ground and native soil.
 12. Capacity of jacking equipment, jacking thrust reaction system, and jacking pipe. Include emergency measures to be taken if pipe string seizes and cannot be advanced.
 13. Detailed data sheets for intermediate jacking stations (IJSs) including IJS capacity, operation requirements, installation within the pipe string, and proposed procedures for permanent closure of the IJS upon completion of the associated drive.
 14. Description of slurry solids separation system, and its method of operation.
 15. Details of spoil transport system shall include:
 - a. Procedures, materials, and equipment for slurry production during microtunneling;
 - b. Submit information of the proposed slurry mix and product data for the components, including materials to be added if saline water is encountered. Submit Material Safety Data. Sheets (MSDS) for the proposed slurry and lubrication materials and additives. Details of any additives that may be required, in particular any special requirements to address sticky soil conditions described in the GIR;
 - c. Details of target properties for slurry mix design including viscosity and frequency of testing during microtunneling;
 - d. Contractor shall include provisions for monitoring the ground surface visually for signs of slurry frac-out.
 16. Procedures for accurately and reliably measuring the volume of excavated material per pipe. Include a determination of the theoretical volume of excavated material per pipe, and a running average of excavated volume per steel casing segment and allowable tolerances on these volumes, to be approved by the ENGINEER. The actual excavated material volume shall be determined after each pipe is installed and prior to commencing the advance for the next pipe and shall be compared with the theoretical volume and running average. Excavated material volumes shall also be

02441-5

calculated for partially installed pipes at the end of a shift or during periods of downtime, and at any other times required by the ENGINEER. The work plan shall describe measures to be taken by the CONTRACTOR in the event that the actual excavated volume exceeds the theoretical volume or running average volumes with tolerances.

17. MTBM Machine details shall include:
 - a. Manufacturer, model number, and date of manufacturing.
 - b. Previous machine use, reconstruction, and modifications.
 - c. Method and mode of operation.
 18. Descriptions including drawings of key machine components, including but not limited to: cutterhead, propulsion system, drive system, shield, pressure chamber, seals, belt conveyor, screw auger/conveyor and spoil removal system.
 19. Plans for protection and/or relocation of utilities and special precautions proposed along the entire microtunnel alignment.
 20. Plans for maintenance and protection of traffic; Coordination and communication plan with owners of affected properties and the public.
 21. MTBM system designs shall be prepared by a licensed professional engineer, registered in the State of California and having a minimum of 5 years of professional experience in the design and construction of jacking systems.
- C. CONTRACTOR shall submit the following shop drawings along with the MTBM Work Plan in accordance with Section 01330:
1. Construction site plans showing clear delineations of the layout of all major equipment including control console, slurry separation system, spoil removal system, electrical equipment, pipe storage, and pipe lifting crane.
 2. MTBM dimensions and major component details; MTBM set-up in jacking shafts.
 3. Details of jacking assembly and any necessary specialized equipment.
 4. Pipe lubrication system details.
 5. Shaft entry and exit mechanical seal details including details of ground improvement at launch and retrieval zones.
 6. Electrical power supply and configuration, including location of generators, transformers, lighting arrangement and supplies to major equipment.
 7. Proposed gas monitoring and ventilation system to be used should personnel entry into the pipeline be needed or access to the cutter head required.
 8. Groundwater control provisions of MTBM.
 9. Initial support system and the equipment and methods used to install the initial support inside the MTBM shield.
- D. CONTRACTOR shall submit the following calculations along with the MTBM Work Plan in accordance with Section 01 33 00:
1. Calculation of the maximum jacking load required for each drive, taking into account the ground soil properties provided in the GIR, pipe surface texture and roughness, and pipe jacking lubricant(s) to be used.
 2. Determination of the number and spacing of IJSs and their jacking capacities required. This must be based on a rational assessment of anticipated jacking loads and the capacities of both the jacking frame and the jacking pipe with a minimum factor of safety of 2.0.
 3. Determination of the maximum hydraulic pressure that is required to develop the maximum allowable axial load in the pipe and descriptions of controls to ensure that the hydraulic pressure determined by the Contractor will not be exceeded during the microtunneling operations.

02441-6

4. Determination of maximum allowable face pressure and slurry pressure that can be exerted at the face of the MTBM without fluid loss to the surface, other structures or features, or heave of the ground. The calculations shall identify the operating range of face pressure and slurry pressure and target pressures for face. Corrections related to line losses shall also be provided.
 5. Design calculations for zone of treated ground to be installed outside shaft at tunnel portal cuts at launch and reception shafts.
 6. Design calculations and details relating to the construction of temporary bulkheads within the launch shaft to protect installed product pipes.
 7. All calculations shall be signed and sealed by a Professional Engineer licensed in the State of California.
- E. CONTRACTOR shall submit a Sequence of Operations separate for MTBM portion of the project in accordance with Submittal section 013300:
1. Provide a description of the proposed method of construction and the sequence of operations to be performed during construction. This submittal shall include a general description and schedule of the tunneling procedure, including:
 - a. Set-up of tunneling equipment, tunneling duration, and removal of tunneling equipment from the shaft and tunnel.
 - b. Method of spoil removal, spoil disposal transportation method, and disposal location.
 - c. Methods of protection and maintenance of project site.
 - d. Groundwater control methods.
 - e. Slurry separation plant location and operation.
 2. Contingency Plan. Provide contingency plan for the following:
 - a. When MTBM operational characteristics being monitored indicate that the MTBM is not advancing, experiencing excessive ground movement, excessive deviation from design live and grade, excessive groundwater leakage, slurry or lubricant releases to the ground surface , or other unusual or non-compliant performances. The plan shall include an explanation of probable causes and corrective actions such as replacing operators, adjusting advance rates and slurry pressures, changing slurry mix, etc.
 - b. An obstruction removal plan shall include MTBM operational characteristics that indicate the MTBM is not advancing due to an obstruction. The plan shall include confirmation of the obstruction and methods to remove the obstruction considering groundwater control, ground support methods, likely type of obstruction and location of stoppage.
- F. CONTRACTOR shall submit a qualifications package including the following information in accordance with Submittal section 013300:
1. Cover sheet with date, company name, address, telephone, and fax numbers, email address, and contact person;
 2. Resumes of managerial, supervisory, and operational key personnel; Resumes of Superintendents and MTBM Operators;
 3. Summary sheet(s) of previous projects performed using microtunneling that demonstrates experience and expertise, including detailed descriptions.
 4. Submit for each named project above, and in the same order, the following detailed information:
 - a. Date, full name of project, and location;
 - b. Owner's name, address, telephone and fax numbers, e-mail address, and contact person;

02441-7

- c. Client's name, address, telephone and fax numbers, e-mail address and contact person;
 - d. Employees in charge of work at both head office and site;
 - e. Description of relevant work successfully completed, including ground conditions;
 - f. Features under which pipe passed, depth below water table, photos, and published articles, if available; and
 - g. Additional information, as necessary.
5. CONTRACTOR's proposed superintendent(s) and the MTBM operator(s) shall not be permitted to be replaced without the written approval of the ENGINEER.

1.6 SYSTEM DESCRIPTION

A. Design Requirements -

1. General:

- a. The ultimate methods and the determination of meeting specified tolerances is the responsibility of the CONTRACTOR. However, minimum requirements are specified in this section.
- b. The thrust block backstop shall be square with the proposed pipe alignment and shall be designed to withstand the maximum jacking pressure to be used with a factor of safety of at least 2.0, without excessive deflection or displacement.
- c. Ground surface settlement or heave shall be limited to one inch or less. (The CONTRACTOR shall repair any damage resulting from long or short term surface settlement or heave caused by shaft excavation, dewatering, or steel casing installation at no additional cost to the Owner.)
- d. Dewatering for groundwater control shall be utilized only at the jacking and receiving shafts.
- e. The maximum allowable overcut shall not be greater than 2 inches larger in diameter than the outside diameter of the pipe. The annular space created by the overcut shall be fully and continuously pressure-filled with an approved bentonite lubricant.
- f. No gasoline powered equipment shall be permitted in jacking and receiving shafts. Electrical, hydraulic and air powered equipment will be acceptable, subject to applicable local, state and federal regulations.
- g. Intermediate jacking stations shall be used when primary jacking forces will exceed specified acceptable bearing stresses on the pipe or when primary jacking forces will exceed the capacity of the primary jacks.

2. Launch and Receiving MTBM:

- a. Stabilize the ground outside of the shafts before launching and receiving in accordance with Section 02420 so that no more than 0.5 cubic yard of ground enters the shaft and that there is no measureable ground movement on the surface directly above the tunnel.
- b. Prevent water from entering the shaft at a rate greater than 5 gallons per minute.
- c. Prevent MTBM from deviating from acceptable line and grade during launch.

3. Line and Grade Tolerances:

- a. 4 inches of design horizontal alignment.
- b. 2 inch of design vertical elevation.
- c. When the MTBM departs from the design line or grade, return to the design line or grade over the remaining portion of the drive at a rate less than 1-inch over 25 feet.

B. Equipment -

1. Machine Type:

02441-8

- a. The MTBM shall be a closed pressurized face machine that provides continuous support of the tunnel face.
 - b. The MTBM shall be designed to resist and allow drilling under full hydrostatic groundwater conditions at the site.
 - c. The MTBM including all support and backup systems shall be equipped to operate safely in ground classifications at the site as described in the project GIR.
 2. Jacking System:
 - a. The installed jacking system capacity shall exceed the maximum anticipated jacking forces by at least 20%.
 - b. The jacking pipe shall be designed for maximum anticipated construction loads and jacking force, or service loads if governing.
 3. Lubrication System:
 - a. Lubrication shall be injected at the tail of the MTBM on a full time and continuous basis during pipe jacking.
- C. Permits and Regulations:
1. Perform excavation Work in compliance with applicable requirements of governing authorities having jurisdiction.
 2. Obtain all necessary permits for Work in roads, rights-of-way, railroads, etc. Also, obtain permits as required by local, state and federal agencies for discharging water from excavations, for erosion control, and for prevention of air and water pollution.
- D. Site Constraints:
1. Boring logs and GIR are included in the Appendix A and boring locations are as indicated in the GIR. The boring logs indicate the soil and groundwater conditions at the boring locations at the time of drilling. Soil conditions can vary away from actual boring locations. Groundwater conditions can vary with time. The boring logs are made available to the CONTRACTOR for his information to be used at his own risk. The CONTRACTOR is responsible for any conclusions to be drawn from the borings including the character of the materials to be encountered and the degree of difficulty to be expected in the performance of the work. The CONTRACTOR is encouraged to perform his own subsurface investigation to supplement the borings provided.
 2. Do not assume that materials other than those disclosed by the borings will not be encountered or that the proportions and character of the various materials will not vary from those indicated in the boring logs.

1.7 QUALITY ASSURANCE

- A. Qualifications: All tunneling operations shall be performed by a qualified experienced Contractor in comparable soft ground tunneling work using the same methods that will be used for this project.
1. The actual work shall at all times be performed under the direct supervision of an approved, experienced project superintendent with at least 5 years' recent on-the-job supervision experience on similar projects involving tunnels of similar size constructed by similar methods and in similar ground conditions.
 2. Safety representative(s): Shall be experience in tunnel construction and certified by OSHA.
 3. Personnel responsible for testing underground gasses shall be certified by OSHA.
 4. The project superintendents and MTBM operators shall have at least five (5) years of shaft and microtunneling experience and shall have worked on at least five (5) microtunneling projects within the past ten (10) years using similar type of equipment required for this project, in similar soil and groundwater conditions, as

contained in these documents. Contact information for the superintendent's references shall be provided. ENGINEER will be the sole judge in determining if the superintendents and MTBM equipment operators meet the aforementioned work and project experience.

5. The CONTRACTOR, and the CONTRACTOR's design engineer, shall have microtunneling design and construction experience in at least three (3) projects involving shaft construction and microtunneling of similar pipe diameter, size, and scope proposed for this project through soil and groundwater conditions similar to those expected for this project, as contained in the Contract Documents. Experience must be with MTBM meeting the requirements for this project. Shaft design and construction experience must be in similar soils, to similar depths, and using similar support of excavation and ground treatment methods.

B. Run Test and Drive Start Up:

1. Run Test: Test full system on completion of set up and before commencing each drive. ENGINEER shall witness the Run Test prior to each launch of the MTBM.
2. Before commencement of any drive, demonstrate to Engineer that required set up procedures and system checks are complete and required materials are at hand to commence drive.

1.8 DELIVERY, STORAGE AND HANDLING

- A. CONTRACTOR shall unload and handle materials in accordance with Manufacturer's instructions and with equipment of adequate capacity, equipped with slings to protect materials from damage.
- B. CONTRACTOR shall store materials on site in a reasonably level well-drained area free from brush, within the easements identified on the plans.
- C. Store individual pieces and bundles off the ground in an orderly manner to minimize double-handling and with safe walking space between items to allow full view for inspection purposes.
- D. Deliveries shall be scheduled so that the progress of the work is at no time delayed.

1.9 PERMIT REQUIREMENTS

- A. Permits, easements, and agreements that have been obtained are attached hereto and assigned to the CONTRACTOR. CONTRACTOR shall comply with all requirements of these permits, easements, and agreements. Permits from various regulatory agencies were obtained for design purposes only. CONTRACTOR shall obtain and pay for all permits necessary for construction. All inspection fees associated with the construction permits obtained by the CONTRACTOR will be paid for by the OWNER.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Jacking Pipe: Provide in accordance with Specs 02445.
- B. Carrier Pipe: Provide in accordance with project Plans.

02441-10

2.2 EQUIPMENT

A. MTBM AND ANCILLARY EQUIPMENT:

1. CONTRACTOR shall be fully responsible for the design, testing, supply, installation and removal of the microtunneling machine(s) and ancillary equipment.
2. The MTBM and ancillary equipment shall meet the following minimum requirements:
 - a. The MTBM shall be equipped with a cutter head and accessories capable of cutting, excavating and removing the soils and ground conditions as described in the GIR.
 - b. The MTBM shall be pressurized, closed-face, shielded and capable, at all times, of maintaining face stability through continuously monitoring and adjusting face support pressure to balance the soil and groundwater pressures at the face.
 - c. The MTBM shall be provided with measures to prevent clogging of the machine due to sticky soils. As a minimum, provide water jets directed into the crushing chamber.
 - d. The MTBM shall allow access to the cutter head to enable inspection and maintenance as well as the removal of obstructions.
 - e. The maximum annular space shall not exceed 2 inches on diameter.
 - f. Skinning up of a MTBM (where the outer diameter of the MTBM shell is increased to accommodate the diameter of the jacking pipe) shall be restricted to a maximum of six (6) inches diametrically for original MTBM outer diameters greater or equal to 60 inches and to a maximum of four (4) inches diametrically for original MTBM outer diameters less than 60 inches.
 - g. The measuring and balancing of groundwater and earth pressures shall be achieved by the use of slurry pressure and by maintaining a pressurized mass of excavated soil against the tunnel face. The system shall be capable of continuous adjustments required to maintain face stability for the encountered soil conditions. Slurry pressure shall be controlled by use of variable flow slurry pumps, pressure control valves, and a minimum of two (2) flow meters, one on the feed side and one on the return side. Provide pressure adjustment to an accuracy of better than +/- one (1) foot of equivalent hydrostatic head.
 - h. The control system shall coordinate rate of excavation and machine advance rate to avoid over-excavation.
 - i. A slurry type MTBM shall include a slurry bypass unit in the system to allow the direction of flow to be changed and isolated, as necessary.
 - j. The MTBM shall be capable of controlling rotation or roll by means of bi-directional drive on the cutter head or by the use of fins or grippers. The MTBM shall be mechanically articulated to enable steering of the shield in all directions.
 - k. The MTBM shall be equipped with a roll indicator and laser target system to permit continuous monitoring, control and setting of line and grade. Line and grade shall be controlled by a guidance system that relates the actual position of the MTBM to a design reference established by a laser beam transmitted from the jacking shaft along the centerline of the pipe to a target mounted on the MTBM, or equivalent system. The steering information shall be monitored and transmitted to the operation console.
 - l. The minimum information available to the operator at the control console shall include the position of the MTBM relative to the reference position, rate of advance, MTBM roll and inclination, installed length, jacking loads and thrust force, cutter head torque and rotation rate, pressure of the slurry and earth pressure balance at the face and flow rates in both the slurry supply and return lines. All data shall be electronically recorded continuously by the control system.
 - m. The MTBM shall be designed to provide access for routine maintenance.

02441-11

- n. The MTBM shall have protected motors and operating controls against the anticipated water inflows. Parts and components shall be water resistant.
 - o. The MTBM shall be equipped with a fire warning system.
 - p. Hydraulic fluids used in the MTBM shall be fire resistant, in accordance with NFPA 241, and shall be certified by the manufacturer as being fire resistant.
 - q. The MTBM shall be equipped for monitoring hazardous gases, with alarms and automatic shut-off.
 - r. A means for injecting pipe lubricant at the leading edge of the first pipe section shall be incorporated in the MTBM.
 - s. The interface between the tail skin of the MTBM and the lead pipe shall be contained by watertight gaskets and/or seals to prevent materials or water from entering the MTBM or the pipe.
- B. MTBM Spoil Transport and Separation:
- 1. The MTBM shall include an automated spoil transport system that shall match the excavation rate to the rate of spoil removal thereby maintaining settlement or heave within tolerances specified.
 - 2. If a slurry type MTBM is used, the slurry spoil separation process shall suit the size of the tunnel being constructed, the soil type being excavated, and the available space for erecting the separation plant. The system may employ mechanical shakers, screens, hydrocyclones, and centrifuges. Slurry separation using only sedimentation tanks will not be permitted. The separation process shall be designed to provide adequate and efficient separation of excavated solids from the slurry such that clean slurry can be returned to the cutting face for re-use and the solids can be removed and disposed of in an efficient manner
 - 3. If an auger spoil transportation system is utilized, the ground water pressures shall be managed by controlling the volume of spoil removal with respect to the advance rate (Earth Pressure Balance Method) and the application of compressed air. In soils with excessive groundwater, approval of the ENGINEER will be required for earth pressure balance auger systems. Approval will be given based on the evaluation of equipment's ability to balance soil and water pressures at the face, stability of the soils and the significance of the groundwater present.
- C. The Contractor shall maintain an inventory recommended by the MTBM and backup systems' manufacturer(s) to ensure continued availability of MTBM and all essential systems. At a minimum, the following inventory of spare parts shall be maintained and be available on site at all times during MTBM excavation:
- 1. Power and control cables.
 - 2. Drive motors.
 - 3. Hydraulic cylinders, hoses, controls, and seals.
 - 4. Bearings and seals for all motors and pumps.
- D. JACKING SYSTEM AND THRUST REACTION STRUCTURE:
- 1. A main pipe jacking system consisting of hydraulic jacks and a suitable jacking frame shall be provided. The hydraulic cylinder extension rate of the jacking system shall be synchronized with the excavation rate of the MTBM.
 - 2. The jacking system shall develop a uniform distribution of jacking forces on the end of the pipes by the use of thrust rings and cushioning material specified herein and shall have pressure control devices to ensure that the load capacity of the pipes will not be exceeded at all times.
 - 3. The jacking frame shall be mounted to a thrust reaction structure in accordance with approved submittals. The thrust reaction structure shall be installed such that it is

normal to the pipe alignment, it will not overstress any shaft elements, and it will not load any previously installed pipes from the same jacking shaft.

4. Intermediate jacking stations (IJSs) shall be provided to maintain total jacking forces within the capacity of the pipe, jacking frame and thrust reaction structure. The design capacity of the IJSs shall be compatible with the distribution of jacking loads along the pipe.

E. SLURRY AND PIPE LUBRICANT:

1. CONTRACTOR is required to use products with a proven history of performance and shall submit microtunneling slurry and pipe lubricant data sheets to the ENGINEER for review and approval.
2. Bentonite, polymers, or other additives used for slurry and pipe lubricant shall be nontoxic and shall not adversely affect groundwater quality.
3. Water used for making the slurry and pipe lubricant shall be clean, potable, fresh and free from oil, acid, alkali, organic matter or other deleterious substances.
4. Lubrication system shall include pressure gauge, volumetric gauge, and shut-off valve on the pump or at the point of injection.

PART 3 - EXECUTION

3.1 DAILY ACTIVITY LOG

- A. Maintain a daily activity log during jacking operations for casing and submit to ENGINEER for record purposes on a daily basis.
1. Start and finish time of casing pipe advancement.
 2. Total length of casing pipe installed.
 3. Horizontal and vertical alignment deviation at not greater than 1 foot intervals or period not exceeding 5 minutes, whichever is most frequent.
 4. Maximum jacking force exerted during installation of each casing pipe section including forces required to re-initiate jacking following periods of system shutdown.
 5. General description for each discernible ground condition mined.
 6. Instrumentation monitoring readings.
 7. Hydraulic pressure
 8. Volume of lubricant used, viscosity, and pumping pressure
 9. Volumes of excavated material and comparison with theoretical and running average volumes.
 10. Volumes of slurry batched and slurry pressure at the face
 11. Disposal records.
- B. Where Microtunneling system utilizes an electronic data logger, set up so that the above information is recorded and can be readily identified. Data shall be recorded in 1 minute intervals.
1. Identify known errors with recorded data and explain in daily log submittal.

3.2 PREPARATION

- A. Inspection:
1. Provide OWNER and ENGINEER with at least seven (7) working day notice and with means to examine the areas and conditions under which excavating, filling, and grading are to be performed.

2. Maintain clean working conditions inside jacking operation area and remove spoil, debris, equipment, and other material not required for operations.
 3. During construction, maintain access to private and commercial properties at all times, unless approval from both property owner and Engineer has been obtained.
 4. ENGINEER will notify CONTRACTOR if conditions are found that may be detrimental to the proper and timely completion of the Work.
 5. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.
 6. Jacking shaft subgrades shall be kept continuously free from ground and surface waters during jacking operations. Additional groundwater controls may be ordered on short notice and shall be implemented as directed. Observed water levels prior to construction are to be below the invert elevation of the jacking pits. Groundwater control along and at the face of the jacking casing shall include chemical grout stabilization as required.
- B. "Pot-holing":
1. Excavate and backfill, in advance of the construction, test pits to determine conditions or location of the existing utilities and structures.
 2. Define the location of each existing facility involved within the area of his excavation for Work under this Contract.
 3. Exercise care during such location work to avoid damaging and/or disrupting the affected facility.
 4. CONTRACTOR is responsible for repairing, at his expense, damage to any structure, piping, or utility caused by his Work.
- C. Temporary Fencing:
1. Furnish and install a temporary fence surrounding excavations and work area, including the stockpile and storage areas.
 2. Provide fence openings only at vehicular, equipment and worker access points.
- D. Subgrade conditions:
1. Jacking shaft subgrades shall be kept continuously free from ground and surface waters during jacking operations. Groundwater control along and at the face of the jacking casing shall include chemical grout stabilization as required.
 2. Provide power generation equipment and any other equipment operating on or with fuel or lubrication oils with suitable barriers and safeguards to ensure no loss of oil to drains or waterways or to contaminate ground.

3.3 INSTALLATION

- A. Furnish a level concrete slab at the bottom of the jacking shaft. Steel rails or beams shall be embedded in the concrete slab for placement and alignment of each piece of casing pipe or carrier pipe during installation operations.
- B. Jacking operations for the steel casing pipe shall be continuous and precautions shall be taken to avoid interruptions which might cause the pipe to "freeze" in place.
- C. Dewatering through the steel casing pipe during construction will not be permitted.
- D. Alignment:
1. Surveyor shall check baseline and benchmarks before commencing excavation and immediately report any errors or discrepancies to the ENGINEER.

2. Use the baseline and benchmarks shown on the Contract Drawings to furnish and maintain reference control lines and grades for the pipeline construction.
 3. Check the primary control for the microtunneling system against an undisturbed above ground reference at least once each week or not greater than every 100 feet of pipeline constructed.
- E. Maintain an envelope of lubricant around the exterior of the steel casing pipe during jacking and excavation operations.
- F. Locate equipment powered by combustible fuels at suitable distances from shafts and protect equipment to prevent the possibility of explosion and fire in shafts or the pipe.
- G. Synchronize the rate of advance of the MTBM with the rate of spoil removed to avoid over-excavating.
- H. Operate the microtunneling system within the operating parameters established in the specifications and accepted submittals.
- I. Furnish and install, and later remove to the extent required, thrust blocks or other provisions for backing up the jacks employed in driving the casing pipe forward.
- J. Immediately following the jacking operation, pressure grout (i.e. contact grout) the entire length of steel casing annular overcut space to fill all voids existing outside of the jacked steel casing. Contact grouting shall be from the interior of the steel casing through the grouting holes.
- K. The Contractor shall conduct field testing of the installed carrier pipe in accordance with Section 15990
- L. In the event a section of pipe should be damaged during the jacking operation or joint failure occurs, as evidenced by visible groundwater inflow or other observations, use one of the following procedures to correct the damage, as agreed upon by the City Representative.
1. Non-structurally damaged pipe that passes leakage test and maintains pipe barrel and joint structural integrity, may be repaired in place with a method approved by the pipe supplier and if the proposed technique is accepted by the City Representative.
 2. Structurally damaged pipe, or pipe where joint failure is evident, shall be removed from the excavation by surface excavation, except as noted above, or by jacking it through the excavation and removing it at the receiving shaft. The removed pipe, if found to be without defect after inspection, may be jacked a second time by being placed into the same pipe string at the jacking shaft.
- M. Obstruction during Microtunneling:
1. Remove, clear, or otherwise make it possible for the microtunneling equipment and pipe to progress past, or through an object in accordance with the CONTRACTOR's submitted contingency plan.
 2. CONTRACTOR shall remove, clear, or otherwise make it possible for the microtunneling equipment to progress past an object that is not an obstruction. Objects that are not considered an obstruction are any natural object that is less than one-third the diameter of the microtunnel boring machine in largest dimension and has an unconfined compressive strength of less than 30,000 psi.

3. Payment for obstruction removal shaft, including the removal of the obstruction, shall be made if the object is found to meet the definition of an obstruction and subject to the following requirements:
 - a. Notify the OWNER immediately in writing upon encountering an object that stops forward progress.
 - b. Upon written authorization by the OWNER, proceed with removal of the object by means of obstruction removal procedure.
 - c. No excavation shall be allowed within 5 feet of the MTBM without the OWNER being present.
 4. The proposal of alternative methods for removing, clearing or otherwise making it possible for the microtunneling equipment to progress past an object that does not allow for the direct observation, measurement and testing of the object to determine if the object satisfies the definition of an obstruction as provided herein shall not be considered for additional payment.
- N. Inadvertent Return Contingency Plan:
1. CONTRACTOR shall provide a barrier around the perimeter of the launching and receiving shaft work areas for the start and end of the microtunnel to prevent drilling fluids from leaving the work area.
 2. CONTRACTOR shall provide minimum one (1) on-site monitor during the jacking operations to look for observable inadvertent release or frac-out conditions or lowered pressure readings on the microtunneling equipment that may indicate a potential frac-out.
 3. If CONTRACTOR and/or machine operator suspect that there is a frac-out (i.e. notices a loss of circulation of slurry and cuttings or slurry is observed at the surface) CONTRACTOR shall stop work and notify the OWNER.
 4. In the event of a frac-out, CONTRACTOR shall cease tunneling, including the recycling of the slurry, notify the ENGINEER and OWNER. and implement measures to stop the frac-out, such as reducing the pressure or thickening the slurry (e.g., by using less water). If the slurry does not resurface, no other actions will be taken and, at the direction of the OWNER, tunneling can resume.
 5. If the slurry surfaces, CONTRACTOR shall surround affected area with a barrier (e.g., sand bags and plastic sheeting) to prevent further dissemination of the slurry.
 6. CONTRACTOR may resume tunneling upon approval by the OWNER once frac-out is contained and measures have been implemented to minimize potential for continued release.

3.4 FIELD QUALITY CONTROL

- A. Implement contingency plans and notify the OWNER in writing immediately upon implementation of any contingency plan.
- B. If allowable tolerances are exceeded, the CONTRACTOR shall pay all costs for correction, redesign, reconstruction. and re-inspection. If redesign is required, the CONTRACTOR shall obtain the services of a Professional Engineer licensed in the State of California. The installed pipe shall be capable of meeting the design flow.
- C. Perform a verification survey of the installed pipe from shaft to shaft after removal of the MTBM. Document measured conformance to design line and grade of the pipe together with locations and deviation (distance and direction) of any out-of-tolerance locations.

3.5 SITE RESTORATION

- A. At the conclusion of all jacking operations, remove excavation support systems for jacking pits. If withdrawal should damage or disturb the roadway subgrade, leave supports in place and cut off 6 feet below finished grade.
- B. Following pipe installation and backfill operations, restore the profile of the right-of-way to its original condition. Construct sidewalks and fencing, if applicable, to match existing. Install sodding or seeding to match existing, as required.
- C. Remove all equipment, supplies, excess excavation materials and miscellaneous items associated with the jacking operation and leave the site in a clean and tidy condition.
- D. If required by the OWNER of the right-of-way, coordinate and schedule a final inspection of the work by the OWNER of the right-of-way.

+ + END OF SECTION + +

THIS PAGE INTENTIONALLY LEFT BLANK

02441-17

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02445**CASING PIPE FOR JACKING INSTALLATION****PART 1 - GENERAL****1.1 DESCRIPTION****A. SCOPE OF WORK**

1. Furnish all labor, equipment, materials and incidentals required and install all piping and appurtenances as shown on the Drawings and as specified herein.
2. This work shall include, but not be limited to the following: steel casing pipe, galvanized steel vent pipe, wooden skids, steel straps, masonry seals, coatings, annular space and contact grouting, miscellaneous appurtenances and restoration.

1.2 RELATED WORK

- A. Section 01330 – Submittal Procedures
- B. Section 02240 - Dewatering
- C. Section 02350 – Bore and Jack Trenchless Construction
- D. Section 02441 – Microtunneling Trenchless Construction
- E. Section 03320 – Contact Grouting

1.3 REFERENCES

- A. OSHA – Construction Standards and Interpretations, 29 CFR Part 1926, Subpart S: Underground Construction; and Subpart P: Excavations.
- B. NFPA 241 – Standard for Safeguarding Construction, Alteration and Demolition Operations, National Fire Protection Association, Current Edition.
- C. ANSI A10.16-1995 (R2001) – Safety Requirements for Tunnels, Shafts, and Caissons
- D. American Society for Testing and Materials (ASTM)
- E. ASTM A139 - Standard Specification for Electric-Fusion (Arc)-Welded Steel Pipe (NPS 4-in and over).
- F. American Welding Society (AWS)
- G. American Water Works Association (AWWA)

1.4 SUBMITTALS

- A. Submit, in accordance with Section 013300, drawings showing jacking pipe details, pipe coating, lubricant used at joints, push rings and other appurtenances.
- B. Submit recent certified mill test reports, joining procedure, and the method proposed to seal the ends of the casing.

1.5 QUALITY ASSURANCE

- A. All pipe to be installed under this Contract may be inspected at the site of manufacture for compliance with this Section by an independent laboratory selected by the OWNER. The manufacturer's cooperation shall be required in these inspections. Any inspection requested by the OWNER of all pipe approved for this Contract, plus the cost of inspection of a reasonable amount of disapproved pipe, will be borne by the OWNER.
- B. Submit to the ENGINEER for approval, within 30 days after signing of the Contract, a listing, including materials to be furnished, the name of the suppliers, the date of delivery of materials to the job site and a time schedule for the completion of the project.

PART 2 - PRODUCTS2.1 STEEL CASING PIPE

- A. Welded Steel Pipe:
 - 1. Steel casings shall conform to the requirements of ASTM A139, Grade "B".. The casing pipes shall have the minimum nominal diameter and wall thickness as shown hereon.
 - 2. The steel casing pipe wall thicknesses shall be used:

Casing Pipe
Inside Diameter
(inches)

Casing Pipe
Wall Thickness
(inches)

60

0.750 or verified per manufacturer's calculations

- 3. Dimensional Tolerances –
 - a. Roundness - The pipe diameter as measured along any single plane shall not vary more than 1% from the specified diameter.
 - b. Circumference - The outside circumference shall not vary more than $\pm 1\%$ from the nominal circumference based on the specified diameter, or $\pm 3/4"$ maximum.
 - c. Wall Thickness - The actual wall thickness of the steel pipe sections shall not vary more than 5% under the nominal wall thickness specified.
 - d. Straightness - The maximum straightness deviation in any 10' length shall be $1/8"$. The maximum straightness deviation in fabricated sections up to 40' shall be $3/8"$.
- 4. Field and shop welds of the casing pipes shall conform with the AWS Standards. Field welds shall be complete penetration, single-vee groove or single-bevel groove type joints.

- B. Interlocking Steel Pipe:

1. An interlocking steel pipe shall conform to the requirements of ASTM A-36, ASTM A515, grade 60 or ASTM A572, grade 42.
2. Dimensional Tolerances –
 - a. Roundness - The pipe diameter as measured along any single plane shall not vary more than 1% from the specified diameter.
 - b. Circumference - The outside circumference shall not vary more than $\pm 1\%$ from the nominal circumference based on the specified diameter, or $\pm 3/4"$ maximum.
 - c. Wall Thickness - The actual wall thickness of the steel pipe sections shall not vary more than 5% under the nominal wall thickness specified.
 - d. Straightness - The maximum straightness deviation in any 10' length shall be $1/8"$. The maximum straightness deviation in fabricated sections up to 40' shall be $3/8"$.
3. An interlocking steel pipe shall have pre-installed precision joint connection, which is flush with the interior and exterior surfaces of the pipe.
4. The interlocking steel casing pipe wall thickness shall be 0.750-inches or verified per manufacturer's calculations.
5. The interlocking steel casing pipe shall be T5 Permalok or equal.

2.2 CARRIER PIPE

- A. All carrier pipe joints within the casing pipe shall be restrained or harnessed.
- B. Ductile iron fittings shall be used as shown on the Contract Drawings and as specified in Sections 15100 PSDS DIP.
- C. High density polyethylene pipe shall be as shown on the Contract Drawings and as specified in Section 02511.
- D. Fusible polyvinyl chloride pipe shall be as specified in Section 02531.
- E. Skids or spacers shall be non-metallic or metallic casing insulators as manufactured by GPT, Inc., Cascade Waterworks Manufacturing Company, or equal.

2.3 ANNULAR SPACE FILLING

- A. Annular space filling shall be used to fill void between the casing pipe and carrier pipe as shown in the Contract Drawings and specified herein.
- B. Sand fill shall be of such sizes that when dry, 100 percent by weight shall pass a No. 20 sieve and not over 5 percent by weight shall pass a No. 100 sieve.

2.4 CONTACT GROUTING

- A. Contact grouting shall be used to fill any voids between the steel casing pipe and surrounding ground surface outside of the steel casing pipe.
- B. Contact grouting shall be in accordance with Section 03320.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Care shall be taken in loading, transporting and unloading to prevent injury to the pipe or coatings. Pipe shall not be dropped. All pipe shall be examined before laying and no piece shall be installed which is found to be defective. Any damage to the pipe coatings shall be repaired as directed by the ENGINEER.
- B. All pipe shall be subjected to a careful inspection prior to being installed. If the pipe fails to meet the specified requirements it shall be removed and replaced with a satisfactory replacement at no additional expense to the OWNER.
- C. The carrier pipes shall be supported within the steel casing pipes so that the pipe bells do not rest directly on the steel casing. The load of the carrier pipes shall be distributed along the steel casing by the method of support shown on the Contract Drawings.
- D. Immediately following the jacking operation, pressure grout (i.e. contact grout) the annular space outside the steel casing to fill all voids existing outside of the steel casing. Contact grouting shall be performed from the interior of the steel casing through the grouting holes.
- E. After the casing pipe has been completely installed including contact grouting, thoroughly clean the interior of the casing pipe and remove all excess material leaving a smooth interior throughout.
- F. The carrier pipes shall be installed within the steel casing using skids as specified above. Carrier pipes shall be installed from the jacking pit end of the steel casing. Each joint shall be thoroughly checked prior to being inserted into the steel casing.
- G. Dewatering through the steel casing during construction will not be permitted. All dewatering methods shall be approved by the ENGINEER before work begins.
- H. Complete record information shall be obtained prior to backfilling the work.

+ + END OF SECTION + +

SECTION 02450**PIPE RAMMING****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The work includes furnishing and installing cased tunnels by pipe ramming methods where indicated to pass other utilities or obstructions without open excavation, and installation of specified appurtenances as shown on the drawings and as specified.
- B. For the purpose of this Section, pipe ramming is defined as the trenchless installation of a pipe by pushing the pipe using a pneumatically powered driving device. During the ramming process the pipe may be unloaded using a screw auger or screw conveyor system.
- C. Set-up of pipe ramming machine of suitable capacity to drive home entire length of casing.
- D. The Contractor shall have the option to select the necessary steps for casing pipe installation, subject to approval by the CONSTRUCTION MANAGER.

1.2 DEFINITIONS

- A. Pipe Ramming: A non-steerable system of forming a bore by driving an open-ended casing using a percussive hammer from a pit and only displacing the wall thickness of the casing. The soil will remain in the casing until the bore has been completed and then may be removed by water, auguring, jet-cutting or compressed air.
- B. Drive/Launch Pit: A pit used for "launching" a trenchless technology excavation tool.
- C. Launch Seal: A mechanical seal, usually comprised of a rubber flange that is mounted to the wall of the drive pit. The flange seal is distended by the pipe as it passes through creating a seal to prevent groundwater or lubrication inflow into the pit during ramming operations.
- D. Locator: An electronic instrument used to determine the position of the leading edge of the pipe. Sometimes referred to as a walkover system or water level.
- E. Reception/Exit Shaft/Pit: Excavation into which trenchless technology equipment is driven and recovered following the installation of the product pipe.
- F. Reinstatement: The backfilling, compaction and resurfacing of any excavation in order to restore the surface and underlying structure to enable it to perform its original function.
- G. Retrieval Seal: A mechanical scale usually comprised of a rubber flange that is distended by the pipe. Similar to the launch seal but used during the holing-out operation. Serves to keep water from infiltrating into the reception pit.
- H. Sliplining: Insertion of new pipe by pushing it into the existing pipe.

02450-1

1.3 SUBMITTALS

- A. Submit for approval complete working drawings showing details of the proposed method of construction and the sequence of operations to be performed during construction. Show the method of pipe ramming, including the ramming system to be used, location of working pits including method of excavation, shoring and bracing appurtenance installation, and dewatering techniques that are proposed to be used. These submittals shall include all the restrictions and limitations imposed by the special provisions. The following is not intended to limit, but to provide, the minimum of details which must be included
1. A detailed description of the pipe ramming procedure including construction techniques to provide the access required to install pipe in conformance with contract documents.
 2. Manufacturer's literature describing in detail the pipe ramming system to be used. Detailed description of projects on which this system has been successfully used including the names, addresses and telephone number of owner's representatives for these projects as well as length, diameter, and pipe material used.
 3. Calculations and drawings indicating limits of access pits and any ground support to be utilized.
 4. Methods of spoils disposal.
 5. A groundwater stabilization scheme covering the excavations for starter and receiver pits. Verify this plan to stabilize anticipated unstable soil conditions. Such verifications shall include all calculations and detail drawings for methods of controlling groundwater.
 6. Certification by the pipe ramming manufacturer of the thrust, condition and operational characteristics of all equipment to be used for installing the specified pipes. The equipment shall employ a spoil removal system. The system shall include a safeguard to prevent caving beyond the outside diameters of the pipe.
 7. Working Drawings, including the following pages:
 - a. Layout of pipe ramming and ancillary equipment at each pit location.
 - b. Shop drawings including configuration of cutter head show and overcut.
 - c. Spoil removal system details.
 - d. Pipe lubrication system details.
 - e. Grade and alignment control system details.
 - f. Groundwater control provisions.
 8. Details of mucking system and soil disposal methods.
 9. Calculations demonstrating that the pipe selected has been designed to support the maximum anticipated earth loads and superimposed live loads, both static and dynamic, which may be imposed on the pipe. Determine the additional stresses imposed on the pipe during ramming operations and upgrade the quality and strength of the pipe and pipe joints to extent necessary to withstand the additional stresses imposed by the ramming operation. The details shall be submitted for approval.
 10. Complete information on Contractor's safety plan for personnel conducting the ramming operations and appurtenance installation. The plan shall include provisions for lighting and electrical safeguards.
 11. Keep and maintain at the construction site a complete set of field drawings for recording as built conditions. It shall have marked or noted there on all field information, properly dated, recording as built conditions. This set of drawings shall be kept up to date.
 12. Pipe certification of compliance.
 13. Pipe jointing method and details.

02450-2

14. All contractor submittals requiring structural design shall be signed by a professional civil or structural engineer registered in the State of California.
 15. Written documentation summarizing the qualifications of the project, superintendent, operators, and site safety representative.
- B. Submit a log of the ramming operations. As a minimum the log shall consist of the following:
1. The position of the pipe in relation to the design line and grade.
 2. The date, the starting time, and the finish time.
 3. Inclination.
 4. Advance rates.
 5. Hammer strokes per minute.
 6. Operating pressure
 7. Muck quantities removed.
- C. Submit a separate hand log tracking pipe lubricant used in gallons, its viscosity, and pumping pressure. Log shall be submitted daily.
- D. The CONSTRUCTION MANAGER will base the review of submitted details and data with consideration of requirements for the completed work, utilities, and the possibility of unnecessary details in the execution of the work to be constructed under this contract.
- E. Equipment and installation methods shall be adequate to preserve quality of pipe.

1.4 QUALITY ASSURANCE

- A. The project superintendent shall have at least three years of pipe ramming experience and shall have worked on at least two projects in similar ground conditions using equipment similar to the equipment required for this project. The operator shall have at least two years of pipe ramming experience and shall have worked on at least one pipe ramming project using the same equipment required for this project.

1.5 PROJECT CONDITIONS

- A. Work is to be completed in accordance with the special provisions.
- B. If person entry is required, provide adequate ventilation. Design ventilating system to include such factors as the volume required to furnish fresh air and the volume to remove dust and vapor.
- C. Provide adequate lighting for the nature of the activity being conducted by workers. Separate both power and lighting circuits and thoroughly insulate. Lighting voltage not to exceed 120 VAC protected by a ground fault circuit interrupter.

1.6 CONTRACTOR QUALITY CONTROL

- A. Field Tests and Inspections
1. The Construction Manager will witness field tests specified in this section.
 2. Perform field tests and provide labor, equipment, and incidentals required for testing. Be able to produce evidence, when required, that each item of work has been constructed properly in accordance with the drawings and specifications.

- B. Casing Testing
 - 1. General: Check each straight run of casing pipe for gross deficiencies by holding a light in the casing; it shall show a practically full circle of light through the casing when viewed from the adjoining end of line.
 - 2. Make sure that the pipe is unloaded from trucks with crane or backhoe and not dropped off or pushed off.
- C. Quality Control
 - 1. Contractor shall establish and maintain quality control for operations under this section to assure compliance with contract requirements and maintain records of his quality control for materials, equipment, and construction operations including but not limited to the following:
 - a. Preparatory Inspection: (To be conducted prior to commencing work.)
 - 1) Check pipe for conformance to approved certified tests.
 - 1b) Check to make sure that there is no mid seam welds or if there are they be certified as 100% penetration weld.
 - 2) Check pipe for proper storage and handling.
 - 3) Discuss and review pipe installation procedure with Construction Manager to include placing of pipe, joint preparation and application of each pipe used.
 - b. Initial Inspection: (To be conducted after a representative sample of the work is complete.)
 - 1) Check for proper depth and grade for pipe.
 - 2) Check method of joining pipes.
 - 3) Check the pipe for proper alignment.

PART 2 - EQUIPMENT AND MATERIALS

2.1 PNEUMATIC PIPE PUSHER

- A. Pneumatic pipe pusher/driving device selected shall be a mono-bloc design with rear cushion and Teflon slide seals, no bolts or threaded connections; specifically designed for installing pipe from a drive pit through the geological materials as described in the Geotechnical Report.
- B. Patented soil removal system (soil port - partial removal with cone or adaptor) shall be capable of being operated in a manner which will prevent loss of ground during installation.
- C. Amount of overcut shall be compatible with the soil conditions, stiffness characteristics of selected pipe, and joint system at the designed maximum ramming loads.
- D. Line and grade shall include, as a minimum, the capability to report the operating parameters listed in Article 1.3B.

2.2 MATERIALS

- A. Pipe material shall be steel.
- B. Pipe to be placed by ramming shall be as follows:

02450-4

1. Steel casing shall be new, smooth wall carbon steel pipe which conforms to ASTM Specifications A139, Grade B. No hydrostatic testing will be performed.
2. Steel casing pipe shall have a minimum yield strength of 35,000 psi.
3. Pipe casing diameter shall be 12-inch I.D. minimum. Pipe wall thickness shall be determined by contractor based on static and dynamic loads from traffic loading and anticipated ramming forces for selected pipe and driven pipe lengths. Pipe lengths shall be determined by contractor.
4. Steel pipe joints shall be (1) a pressure fit type, or (2) welded.
5. All steel casing pipe shall be square cut. (with beveled ends for welding)
6. Steel casing pipe shall have a roundness such that the difference between the major and minor outside diameters shall not exceed 1% of the specified nominal outside diameter or 0.25 inch, whichever is less.
7. Steel casing shall have an outside circumference which is within 1% of the nominal circumference which in within 0.50 inch, whichever is less.
8. Steel casing pipe shall have a minimum allowable straightness deviation in any 10 foot length of 1/8 inch.

PART 3 - EXECUTION**3.1 CONSTRUCTION****A. Pits**

1. Construction techniques required to provide access for pipe ramming shall be such as to ensure the safety of the work. Acceptable excavation methods include the use of interlocked steel sheet piling or open excavation.
2. Final dimensions of access pits selected by Contractor shall conform as a minimum with dimensions required to permit installation of the work.
3. The contractor shall be required to properly support all excavations and to prevent all movement of the soil, pavement, utilities or structures outside of the excavation. All pits shall conform with applicable Local Safety Standards, OSHA Standards, trenching and shoring standards.
4. If at any time the method be used by the contractor for supporting any material or structure adjacent to any excavation is not safe in the opinion of the Construction Manager or applicable Federal, State or local inspection authorities, the Construction Manager may require and the Contractor shall provide additional bracing and support necessary to furnish the added degree of safety required by the Construction Manager. The contractor shall provide such added bracing and support by such method approved by the Construction manager as he may elect to use but the taking of such added precautions shall in no way relieve the contractor of his sole final responsibility for the safety of lives, work and structures. The use of such additional bracing and support shall be without additional cost to the authority. The absence of an order from the Construction Manager for the aforementioned additional bracing shall in no way relieve the contractor of his sole and final responsibility.

02450-5

5. Construct pits to accommodate the installation of pipe casings and ramming device. Install seals in the pit walls as required to control ground movement where the casings enter and exit the ground.
6. All work of excavating shoring and bracing, and pipe ramming shall be so executed that settlement is minimized, the in-place casing shall have full bearing against earth, and no voids or pockets are left in any portion of the work.
7. Before beginning construction at any location of this project, adequately protect existing structures and other permanent objects. The repair of or compensation for damage to permanent facilities due to negligence or lack of adequate protection on the part of the contractor will be at no cost to the Authority.
8. Provide surface drainage during the period of construction to protect the work.
9. Conduct operations in such a fashion that trucks and other vehicles do not create a dirt nuisance on the taxiway, runway or impact airport operations. Secure the required permits and promptly remove and dispose of any spillage.
10. Blasting will not be permitted.
11. Provide all dewatering and test any groundwater discharges. All discharge limits and reporting requirements shall be the responsibility of the contractor.
12. Traffic: Size and locate pits and their work areas so as to avoid interferences with all forms of traffic.

B. Control of Line and Grade

1. The Construction manager will establish the baseline and benchmarks indicated on the plans. Check these baselines and benchmarks at the beginning of the contract period and report any error or discrepancies to the Construction Manager.
2. Use these baselines and benchmarks to furnish and maintain all reference lines and grades for the pipe installation. Use these lines and grades to establish the exact starting location of the pipe.
3. Submit to the Construction Manager copies of field notes used to establish all lines and grades; however, the contractor remains fully responsible for the accuracy of his work and the correction of it, as requires.
4. The excavation and run of pipe rammed shall be controlled such that the deviation from grade is below the design grade.
5. After installation of the pipe, provide the Construction Manager with access to both casing ends for visual inspection of the line and grade of the completed casing.

3.2 INSTALLATION

A. Pipe Ramming:

1. No work shall commence on the pipe ramming phase until the design and construction procedure has been approved in writing by the Construction Manager. The contractor is totally responsible for the performance of the equipment and methods selected for this phase. The Construction Manager's approval signifies only that the construction process is compatible with the overall objectives of the project.
2. Each pipe section shall be rammed forward as the excavation progresses in such a way to provide complete and adequate ground support at all times. Lubrication shall be applied to the external surface of the pipe to reduce skin friction. A hammer frame shall be positioned to develop a uniform distribution of ramming forces around the periphery of the pipe. Special care shall be taken by the contractor to insure that the launch seal is properly designed and constructed. Special care should be taken when setting the pipe guard rails in the pit to ensure correctness of the alignment.

02450-6

3. Be responsible for monitoring ground movements associated with the work and making suitable changes in the construction methods to control ground movements and prevent damage or detrimental movement to the work and adjacent structures and pavements. Permissible tolerances with respect to settlement of ground surface and alignment of pipe shall not be exceeded.
4. The soil transportation method shall be capable of handling and removing material identified in the geotechnical report. All excavated material from the pipe ramming and pit construction shall be disposed of off-site by the contractor.
5. A lubrication system shall be provided that injects an approved lubricant on the inside and outside of the pipe to lower the friction developed on the sides of the pipe during ramming. Spacing of lubricant points shall be at the contractors option with approval from the Construction Manager.
6. The overcut on the pipe shall not exceed 1 inch without the approval of the Construction Manager. The annular space created by the overcut shall be filled with a lubricant that has been proved suitable for the particular soil conditions.

3.3 INVERT FINISHING

Clean pipe of all debris from construction.

3.4 SAFETY WORK PRACTICES

All construction practices shall comply with the "Safety and Health Regulations for Construction" of the U.S. Department of Labor "Occupational Health and Safety Act".

+ + END OF SECTION + +

02450-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02495**GEOTECHNICAL INSTRUMENTATION****PART 1 - GENERAL****1.1 SCOPE OF WORK**

- A. This section specifies the requirements for furnishing, installing, monitoring, reading, recording, maintaining, protecting, and removing or abandoning geotechnical instrumentation for work related to bore and jack and microtunneling operations. Geotechnical instrumentation consists of vertical inclinometers, ground movement monitoring points (GMMP), sub-surface monitoring points (SSMP), survey reference points, utility monitoring points (UMP), and vibration monitoring.
- B. CONTRACTOR shall furnish all labor, equipment, and materials necessary for the completion of the work described in this section including but not limited to monitoring all bore and jack and microtunneling steel casing installations.
- C. Minimum instrumentation requirements are shown on the Plans and specified herein. Additionally, the CONTRACTOR shall install other instrumentation as necessary to control operations, monitor ground conditions and ground response to achieve specified project requirements and to prevent damage to existing structures and facilities.

1.2 RELATED WORK

- A. Section 01330 – Submittals
- B. Section 02350 – Bore and Jack Trenchless Construction
- C. Section 02410 – Shaft Excavation and Support Systems
- D. Section 02420 – Tunnel Portal Treatment
- E. Section 02441 – Microtunneling Trenchless Construction
- F. Section 02445 – Casing Pipe for Jacking Installation

1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM)
 - 1. ASTM A53 - Standard Specification for Pipe. Steel, Black and Hot-Dipped Zinc-Coated Galvanized), Welded and Seamless.
 - 2. ASTM C150 - Standard Specification for Portland Cement
 - 3. ASTM C778- Standard Specification for Standard Sand
 - 4. ASTM D54 - Standard Guide for Field Logging of Subsurface Explorations of Soil and Rock

5. ASTM D1785 - Standard Specification for Polyvinyl Chloride (PVC) Plastic Pipe, Schedules 40, 80, and 120
6. ASTM D2487 - Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System).
7. ASTM D2488 - Standard Practice for Description and Identification of Soils (Visual-Manual Procedure).

1.4 DEFINITION

- A. Action Trigger Level: Level or magnitude at which same day reporting to the ENGINEER and OWNER are required.
- B. CONTRACTOR Response Level: The level at which the CONTRACTOR must take corrective action to actively control ground movement or vibrations to prevent reaching the Maximum Allowable Levels. The CONTRACTOR response level shall be 80% of the Maximum Allowable Levels. Work is permitted to continue with corrective actions being incorporated.
- C. Geotechnical Instrumentation: Devices measuring surface and subsurface movement; movement of existing infrastructure and vibrations. Includes measurement devices and appurtenant equipment, probes, sensors, cabling, readout devices, and PC based data management systems; including ancillary facilities required for their operation, such as boreholes, casings, housings, and covers.
- D. Ground Movement Monitoring Point (GMMP): A system for monitoring points (rebar, survey nails) to observe vertical deformation at specific depth intervals using optical survey techniques. The monitoring points can consist of:
 1. Type-A: A hard Point, such as a survey nail, round-head bolt, or an existing fixed element embedded in at-grade pavement that cannot bridge over settling ground, or targets affixed to existing surface objects.
 2. Type-B: A steel rod with a round head steel cap driven so that the tip of the rod bottom is approximately two feet below the pavement.
- E. Maximum Allowable Level: Level at which no further movement or vibration will be acceptable and if reached requires Work to be halted until submittal and acceptance of a written plan detailing corrective actions and restorative measures.
- F. Response Level: Specified amount of measured movement or vibration at which point action must be taken by the CONTRACTOR.
- G. Subsurface Monitoring Point (SSMP): A cased borehole settlement monitoring point located above the tunnel crown used for detecting settlement between the location of the settlement point and the tunnel excavation.
- H. Survey Reference Point: A fixed point to monitor by optical survey methods the occurrence and amount of vertical and horizontal displacements at the instrument location. The points are located on existing structures and include embedded survey nails or glued-on survey targets.

- I. Utility Monitoring Point (UMP): A system for monitoring vertical deformation of an existing subsurface utility.
- J. Vibration Monitoring Equipment: A piece of equipment that includes geophones and data collector that monitors peak particle velocity of ground-borne vibrations adjacent to where vibration-inducing construction work is occurring.

1.5 SUBMITTALS

- A. Submit, in accordance with Section 01330, shop drawings for geotechnical instrumentation and other related information as requested by the ENGINEER. The shop drawings shall be prepared and sealed by an independent professional engineer and not in the direct employment of the CONTRACTOR.
- B. Submit name and qualifications of individuals designated as the instrumentation specialist.
- C. Report all instrumentation readings in units as specified in Table 1.
- D. Product Data: Two sets of manufacturers' catalogs, specifications, and installation, operating, and maintenance instructions for each type of data acquisition and management system, instrumentation component, and monitoring device, all as required for a complete installation at least 30 days prior to installing instruments.
- E. Working Drawings and Method Statements:
 - 1. Indicate and describe instrumentation types, locations, and layouts in conjunction with a detailed plan of existing surface and subsurface utilities at a scale no less than 1-inch equal to 40 feet. Include identification number or label with elevation, station and offset, and coordinates as applicable for each instrumentation location.
 - 2. Method statements for installing, monitoring, maintaining, protecting, replacing damaged, and removing or abandoning instrumentation.
 - 3. Monitoring schedule.
 - 4. Reporting measures if Action Trigger Level is reached.
 - 5. Corrective measures if CONTRACTOR Response Level is reached.
 - 6. Corrective measures if Maximum Allowable Level is reached.
- F. Designs: Materials, admixtures, other additives, and grout mix design required for settlement casing installation. Provide manufacturer's product descriptions for all admixtures and additives.
- G. Detailed boring logs describing the ground conditions encountered, extent with depth, drilling rates, recovery, and details of instrument installations. Drilling activities shall be supervised and boring logs recorded by a qualified geologist or Geotechnical Engineer experienced with the specific types of earth materials to be encountered. Drafted logs depicting the lithology and the instrument build-out shall be prepared and submitted for acceptance. Field boring logs shall not be an acceptable submittal.
- H. Quality Control:
 - 1. Qualifications included in the CONTRACTOR's Quality Control Plan:
 - a. Manufacturer(s).

- b. Instrument installer(s).
- c. Independent personnel performing monitoring.
- d. Independent licensed Surveyor.
- 2. Certifications:
 - a. Calibration certificates with calibration dates within 6 months of intended use for each sensor, probe, readout device and data logger by, independent test laboratory.
 - b. By manufacturer for materials specified herein.
 - c. By independent Geotechnical Engineer that geotechnical instrumentation has been installed in accordance with the manufacturer requirements.
 - d. Required permit(s) for ground movement and utility monitoring points.
- 3. Quality Control Plans:
 - a. Proposed methods for identifying instrumentation.
 - b. Proposed format for presenting raw data readings. Include the date, time, and name of personnel taking measurements or performing monitoring. Record weather conditions including temperature and humidity at start and end of readings.
 - c. Methods for assuring the quality of data readings.
 - d. Methods for protecting instrumentation and if damaged, assuring their timely repair or replacement.
- 4. Recordkeeping:
 - a. Submit within one working day:
 - 1) The initial instrument readings to the OWNER's Representative.
 - a) The initial readings taken 1-day apart for each instrument within 2 working days of installation.
 - 2) Daily instrument readings in tabular form to the OWNER's Representative.
- 5. Notifications:
 - a. Written within three working days prior notice of intent to install instrumentation.
 - b. Verbally within one hour upon discovering damaged or malfunctioning instrumentation and in writing within one working day.
 - c. Verbally within one hour for any reading exceeding specified levels or limits and in writing within one working day.
- 6. As-Built Data:
 - a. Instrumentation installation surveyor's notes within one working day of their installation.
 - b. As-built plan of instrumentation type and location accurate to within 1-inch vertical and horizontal and at a scale no less than 1-inch equal to 40 feet within one working day of installing required instrumentation within a reach. Include identification numbers with elevations, stations and offsets, and coordinates as applicable for each type of instrumentation.
 - c. As-built installation details of each instrument, including depth, lengths, elevations, materials used, and dimensions of key elements.
 - d. Procedure and sequence used for installation of each instrument.

1.6 PERFORMANCE REQUIREMENTS

- A. As specified in Table 1 below:

Table 1 – Action Trigger Levels and Maximum Allowable Movement

Type of Instrumentation (Movement Direction)	Action Trigger Level	CONTRACTOR Response Level	Maximum Allowable Movement
Survey Reference Point (vertical)	N/A	N/A	1/8-inch
Ground Movement Monitoring Point – Type A or B (vertical)	0.25 inches	80% of the Maximum Allowable Movement	0.75 inches
Sub-Surface Monitoring Point (vertical)	0.5 inches	"	1 inch
Utility Monitoring Point (vertical)	0.25 inches	"	1 inch
Vibration Limits (Peak Particle Velocity)	0.5 inch/sec at 10 feet away from shaft		1.0 inch/sec at 10 feet away
Vertical inclinometer^{AD5}	0.5 inch^{AD5}	0.8 inch^{AD5}	1.0 inch^{AD5}

B. Tolerances:

1. General: Install within 12 inches of theoretical location specified or indicated to avoid obstacles or utilities, except where otherwise approved by the OWNER's Representative.

C. Corrective Action Trigger Levels: If monitoring devices indicate action trigger levels are reached, notify the ENGINEER and OWNER immediately, on the same day as measurements. If at any time the instruments indicate that movement or vibrations equal to 80 percent of the maximum allowable value has occurred, the CONTRACTOR response value is said to have been reached. At this time, the CONTRACTOR shall actively control ground movement in accordance with the submitted plan to prevent reaching the maximum, or shutdown, value.

D. Maximum Allowable Levels: If at any time the instruments indicate that movement or vibrations equal to 100 percent of the maximum allowable value has occurred the shutdown value is said to have been reached. At this time, the OWNER or Caltrans Representative may direct the CONTRACTOR to stop all Work immediately, and the CONTRACTOR must meet with the OWNER to develop a plan of action before Work can be resumed, unless this creates an unsafe condition. Work shall not resume until appropriate measures, in the opinion of the OWNER, have been undertaken to correct the performance.

E. Restoration: Restore damage to existing facilities caused by construction related settlement in excess of allowable maximums at no additional cost to the OWNER. Obtain prior approval from the OWNER for any proposed repairs to roadways.

1.7 QUALITY ASSURANCE

A. Qualifications:

1. Manufacturer: Company with a minimum of 5 years of experience specializing in the fabrication of instrumentation of the type specified.

02495 -5

2. Installation and Monitoring Personnel for Geotechnical Instruments: A Geotechnical Engineer registered in State of California with at least 5 years of experience installing, reading, and interpretation of geotechnical instruments of the type specified.
 3. Independent Surveyor: Registered California Land Surveyor with at least 5 years of experience in surveying of structure or surface deformations.
 4. Drilling Supervisor/Logger: California Registered Geologist or Engineer with minimum five years of experience with the specific type of drilling equipment and ground conditions at each site.
- B. Acceptance Criteria:
1. Provide certification to indicate that the manufacturer's test equipment is calibrated and maintained in accordance with the test equipment manufacturer's calibration requirements, and that all calibrations have been made with equipment certified as meeting standards established by the National Bureau of Standards for that purpose.
- C. Preconstruction Meeting:
1. Hold a meeting at least 5 days but not more than 30 days prior to installing each type of geotechnical instrumentation.
 2. Review and discuss the following items at each meeting:
 - a. Construction methods and constraints to be considered in executing the work.
 - b. Protection of survey equipment.
 - c. Equipment operating parameters.
 - d. Safety procedures.
 - e. Quality Control procedures and Quality Assurance requirements.
 - f. Reporting requirements.
 - g. Other issues as may be raised by either party.
 3. Meetings can be combined if multiple types of instrumentation are to be installed at the same time.
- D. Testing: Calibrate all sensors and readout instruments at the manufacturer's facility prior to shipment. Verify readings of instruments compared to the factory calibrations once instruments are installed in the field.
- E. Job Conditions: Refer to the Geotechnical Investigation Report (GIR) for a description of anticipated ground conditions.
- F. Perform geotechnical instrumentation monitoring with a Geotechnical Engineer.
- G. Perform ground movement monitoring with an independent licensed surveyor. Surveying for monitoring settlement instrumentation shall be referenced to the same control points and benchmarks established for setting out the Work. Control points shall be tied to benchmarks and other monuments outside of the zone of influence of the excavation or trenchless construction.
- H. Procure and install the instrumentation.

1.8 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. As recommended by instrument manufacturers.

1.9 SEQUENCING AND SCHEDULING

- A. Ensure that instrumentation is installed, fully functional, calibrated, consistent baseline readings are collected, and that the instrumentation is ready for monitoring at least 7 days prior to performing excavation within 500 feet in plan of the designated instrumentation location.

1.10 WARRANTY

- A. Equipment warranty as provided by the manufacturer.
- B. Installation warranty shall be for the period of construction and post-construction instrumentation monitoring as specified herein.

1.11 SAFETY

- A. All shaft excavations and support systems shall conform with applicable OSHA excavation, trenching, and shoring standards which are contained in the U.S. Code of Federal Regulations 29 (C.F.R.) 1926.650-1926.653. In the event of a conflict, comply with the more restrictive applicable requirements.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Ensure that all instrumentation components are on hand and accepted by the OWNER's Representative before instrument installation begins.
- B. Acceptable manufacturer contacts information:
 - 1. Applied Geomechanics Inc., San Francisco, CA
 - 2. Roctest Ltd., I Trans-Border Drive, P.O. Box 3568, Champlain, NY 12919.
 - 3. Slope Indicator Co., 12123 Harbour Reach Drive, Suite 106, Mukilteo, WA, 98275.
 - 4. Geokon, Inc., 48 Spencer Street, Lebanon, NH 03766.
 - 5. RST Instruments LTD., 200-2050 Hartley Avenue, Coquitlam, BC, Canada
 - 6. Instatel, 808 Commerce Park Drive, Ogdensburg, New York, USA, 13669
 - 7. GEO-Instruments, 24 Celestial Drive Narragansett, RI 02882 800-477-2506
- C. Upon delivery, check all instrumentation components for completeness and damage. When determined correct and undamaged, deliver all components not to be installed at the Project site to the OWNER.
- D. Furnish street-rated monuments with access cover and install at the ground surface to protect installed casings, GMMP, SSMP and UMP. Use steel of sufficient strength to withstand HS-20 truck loadings. Provide a watertight access cover. Use a 12-inch ID traffic rated monument for the instruments.

02495 -7

2.2 GROUND MOVEMENT MONITORING POINT:

- A. Ground Movement Monitoring point (GMMP) shall be established by an inscribed marking or approved surveyor's nail driven flush with the surface in asphalt or concrete paved areas.
- B. In landscaped areas, GMMP shall be established by driving a 2-inch by 2-inch timber stake flush with the ground. The stake shall be driven to a depth required to provide a stable control point given the soil conditions.
- C. Each GMMP shall have a tag or marking indicating the station and offset from centerline.
- D. Install GMMP as shown on the Plans and as approved by the OWNER's Representative.

2.3 SUBSURFACE MONITORING POINT:

- A. Subsurface monitoring point (SSMP) shall be established and installed as indicated on the Drawings. Each point shall consist of a #6 rebar settlement rod installed within and isolated from a PVC cased borehole.
- B. The settlement rod shall be driven 6 to 12 inches past the bottom of the borehole casing and the tips shall be located at ten feet above the pipe crown centerline as noted on the Drawings, or as directed by the ENGINEER.
- C. The settlement rod shall be secured to the PVC casing with a 12-inch length of loose cable or chain to prevent the rod from falling more than approximately 12 inches.
- D. The casing shall be flush with pavement or recessed, and capped and protected with a HS-20 traffic rated box if installed within traffic lanes, shoulders, parking lots, or bike lanes and shall be in accordance with the CITY and other applicable permit requirements.
- E. Refer to Plans for additional instrumentation details.

2.4 UTILITY MONITORING POINT

- A. Use standard weight black steel pipe and threaded couplings, ASTM A53, welded, standard weight, for inner benchmarks monitoring pipes and outer casing.
- B. Use PVC or ABS glue-welded couplings for outer casings.
- C. Use ball fabricated read points made of stainless steel.
- D. Use centering devices for placement between the inner benchmark and outer casing that is suitable for use in deep settlement markers.

2.5 VERTICAL INCLINOMETERS

- A. Use up to 3" diameter ABS linear machine-grooved inclinometer casings

- B. Use ABS locking couplings compatible with inclinometer casing that use a locking ring, O-Ring, and key that render each joint watertight.
- C. In special circumstances where settlement is anticipated, use telescoping watertight inclinometer casings that accommodate casing contraction from settlement.

2.6 VIBRATION MONITORS

- A. For automated vibration monitoring, enclose data logging equipment in a strong waterproof case that is locked and secured.

PART 3 - EXECUTION

3.1 GENERAL

- A. Instrumentation shall be installed at the locations shown on the Drawings, and as approved by the ENGINEER. Instruments shall be installed in accordance with the approved installation schedule.
- B. The CONTRACTOR shall locate conduits and underground utilities in all areas where borings are to be drilled and instruments installed. Instrument locations shall be modified, as approved by the ENGINEER, to avoid interference with the existing conduit and utilities. Repair damage to existing utilities resulting from instrument installations at no additional cost to the OWNER.
- C. CONTRACTOR shall install and perform a baseline survey of all surface and subsurface settlement monitoring devices at least 14 days prior to excavation.
- D. CONTRACTOR shall provide access and assistance to the ENGINEER for obtaining supplemental monitoring data, as requested by ENGINEER.
- E. Provide data from readings of all monitoring points to the ENGINEER within 24 hours of reading.
- F. Dispose of excavated materials in accordance with the requirements of Section 02220.

3.2 PREPARATION

- A. Prepare, clear, and strip instrument locations in accordance with this specs and drawings.
- B. Provide additional excavation in accordance with Section 02300.

3.3 INSTALLATION

- A. General:
 - 1. Install instrumentation at the locations indicated unless otherwise directed by the OWNER. Install in accordance with the manufacturer's printed instructions and as

- specified in this Section. Install within the accuracy limits specified by the manufacturer.
2. Inspect and log any drilled hole for instrument installation in accordance with the associated ASTM standards. Confirm the ground conditions are compatible with proposal installation.
- B. Survey Reference Point:
1. Furnish and install survey reference points as indicated on Plans and as specified herein.
- C. GMMP:
1. Furnish and install ground movement monitoring points as shown on the Plans and as specified herein or as accepted by the OWNERS-Representative.
 2. Surveying of GMMPs will consist of determining the elevation of each control point with respect to a benchmark selected by the ENGINEER to a precision of 0.01 foot.
- D. Utility Monitoring Points:
1. Locations for utility monitoring points as shown on the Plans are based on as-built information available. Determine the locations of the utilities to be monitored accurately by potholing prior to Installation of the utility monitoring points.
 2. Furnish and install utility monitoring points as shown on the Plans or as accepted by the OWNER's Representative.
- E. SSMP:
1. Notify the ENGINEER at least 5 days in advance of installing subsurface monitoring points.
 2. The subsurface monitoring points shall be installed as close as practicable to the locations shown on the Drawings. The ENGINEER may modify subsurface monitoring point locations depending on field conditions, conflicting utilities and monitoring objectives.
 3. Locate and confirm all utilities and protect utilities or relocate monitoring points as necessary to protect all utilities. Follow accepted industry procedures for one-call notification and visual confirmation of locations of all crossing or adjacent utilities.
 4. Subsurface monitoring point installations shall be completed at least 14 days in advance of commencing shaft construction or bore and jack operations.
 5. Conduct drilling operations using appropriate methods that are consistent with anticipated geologic conditions. Use mud rotary wash methods or provide casing as required to hold drill hole open.
 6. Subsurface monitoring rods shall move freely with the soil at the tip and shall be isolated from the soil surrounding the borehole by the casing.
 7. Protection: Install protective housing with cap. Protective housing shall be installed within a flush-mounted precast concrete box or vault so as not to obstruct vehicle or foot traffic, and shall be in accordance with CITY standards and permit requirements.
- F. Vertical Inclinator
1. Each inclinometer borehole and casing shall not be shared with other geotechnical instrumentation.
 2. Ensure inclinometer is free of debris that will not impede movement along the linear grooves.
 3. Orient casing grooves in expected direction of movement.

4. Cap end of casing so that it is watertight and terminate it 5'-0" in hard stratum or 10'-0" below movement zone.
5. Utilize non-shrink grout and completely fill borehole and casing annulus so that it is free of voids and soft zones. The CONTRACTOR shall not float the casing.
6. Terminate the casing in a flush mounted and locking H-20 rated utility box at ground surface if located outside of controlled construction work zones.

G. Vibration Monitors:

1. Ensure vibration monitor transducer is level and effectively anchored to the ground per the manufacturer's recommendations to achieve full ground coupling.
2. Protect the vibration monitor transducer location from all vehicular and foot traffic.

3.4 MAINTENANCE AND REPAIR/RESTORATION

- A. Protect and maintain instruments throughout the duration of monitoring. Drain water or flush debris from under traffic covers. Keep traffic covers secured.
- B. Provide substantial proactive barriers around instruments in construction areas that can be damaged from construction activities.
- C. Maintain instrumentation in accordance with manufacturer recommendations and industry standard of practice.
- D. Repair instrumentation in accordance with manufacturer recommendations or replace damaged or missing instrumentation. Repair or replace damaged or missing instrument components or entire instrument within 48 hours or as accepted by OWNER's Representative.
- E. For replacement instrumentation, take initial readings and correlate with previous readings.

3.5 SURVEYS AND INITIAL READINGS

- A. After installation, survey the location of the top of each instrument or its marker point to a horizontal accuracy of 0.10 feet and elevation accuracy of 0.01 feet. Submit location information to the OWNER.
- B. After completion of each instrument installation, take 3 sets of verification data readings for each instrument to demonstrate the adequacy of the installation, to demonstrate the proper operation of the instrument, and to establish an initial value. Submit the initial readings to the OWNER.

3.6 INSTRUMENTATION AND MONITORING

A. General:

1. The CONTRACTOR shall monitor all instruments during construction. Upon request, provide such assistance, labor and equipment necessary to set up instrumentation and monitor instruments. Cooperate with OWNER as needed to allow the required monitoring data to be obtained.

2. During excavation, instrument measurements shall be recorded and compared to the established baseline measurements at the frequency specified herein.
 3. Coordinate with such instrumentation monitoring activities as follows :
 - a. Schedule employees' and subcontractors' activities to minimize interference.
 - b. Remove obstructions from lines of sight when requested.
 4. Temporarily cease activities that create hazards to instrument monitoring surveying personnel.
 5. Be available to discuss the interpretation of instrumentation data as used· evaluating shaft excavation performance and controlling ground movements to prevent damage to structures, facilities, and utilities.
 6. Damaged installations shall be replaced or repaired prior to continuing excavation or bore & jack operations unless permitted otherwise in writing by the ENGINEER.
- B. Monitoring:
1. The following are minimum requirements when measurements are with specified limits:
 - a. Double the frequency of measurements as directed by the OWNER if and when measurements exceed 80 percent of Action Trigger Levels specified in Table 1 and excavation is taking place within 250 feet in plan of the designated instrumentation location.
 - b. Take additional, immediate measurements where measured values indicate excessive variability, as determined by the OWNER.
 - c. Stop work if the Maximum Allowable Movement specified in Table 1 are reached and begin implementation of corrective actions.
 2. Coordinate with such instrumentation monitoring activities as follows:
 - a. Make probes, sensors, and readout devices available as required.
 - b. Schedule employees' and subcontractors' activities to minimize interference.
 - c. Remove obstructions from lines of sight when requested.
 3. Temporarily cease activities that create hazards to instrument monitoring or surveying personnel.
 4. Be available to discuss the interpretation of instrumentation data as used in evaluating tunneling and shaft excavation performance and controlling settlements to prevent damage to structures, facilities,' and utilities.
 5. Monitoring frequency: The frequency of instrument reading shall be as follows and listed in Table 2, unless otherwise indicated:
 - a. Monitor survey reference points daily until excavation work is complete.

Table 2 — Monitoring Frequency

"d"* ,	Survey Reference Point	GMMP & UMP	SSMP	Automated Vibration Monitoring	Inclinometer
-100 to 0 feet	daily	daily	daily	Record for the duration of shaft shoring installation and extraction.	Weekly ^{AD5}
0 to +100 feet	daily	daily	daily		
+100 to +200 ft	Twice weekly	Twice weekly	Twice weekly		
>+ 200 feet	monthly	weekly	Monthly		
* = "d" measured along longitudinal planned tunnel centerline. "-100 feet" denotes 100-feet ahead of the tunnel face and "+200 feet" denotes 200-feet behind the excavated tunnel face. ** Not applicable for blasting activities					

C. Response Values:

1. Action Trigger Level:

- Identify the cause of movement.
- Provide verbal and written notice as specified herein.
- Meet with the ENGINEER and OWNER's Representative to discuss means and methods to determine what changes, if any, must be made to better control ground movement.

2. CONTRACTOR Response Level:

- Review all monitoring, excavation, and ground condition data in the area to establish cause of movement. Take initial actions to actively control ground movement.
- Immediately meet with the ENGINEER and OWNER's Representative to discuss means and methods to determine what changes must be made to better control ground movement.

3. Maximum Allowable Movement:

- Stop all Work immediately.
- Provide verbal and written notice as specified herein.
- Review all monitoring, excavation and ground condition data in the area to establish cause of movement.
- Conduct a meeting with the OWNER's Representative, ENGINEER and other respected parties/agencies:
 - Review monitoring data.
 - Develop a plan of action, including modification to construction procedures and means and methods, before the Work can be resumed.
 - Outline "plan of action and next steps" to the OWNER of damaged or affected facilities and structures and perform corrective and restorative measures on an agreed timetable.

3.7 INSTRUMENT PROTECTION, MAINTENANCE AND RESTORATION

- Protect and maintain instruments throughout the duration of monitoring. Drain water or flush debris from under traffic covers. Keep traffic covers secured.

- B. Provide substantial protective barriers around instruments in construction areas that are suitable for protecting instruments from damage due to construction activities.
- C. Maintain instrumentation in accordance with manufacturer recommendations.
- D. Repair or replace damaged or missing instrumentation in accordance with manufacturer recommendations. Repair or replace damaged or missing instrument components or entire instrument within 48 hours or as approved by OWNER.
- E. If an instrument is considered critical to construction and becomes damaged, the CONTRACTOR will be instructed to cease Work until the damaged instrument is replaced and readings established. The CONTRACTOR will not be entitled to additional time or compensation for the damage instrument.
- F. For replacement instrumentation, take initial readings and correlate with previous readings.

3.8 FILED QUALITY CONTROL

- A. Quality control will be performed under the provisions of Section 01400.
- B. Products: Submit verification that the installed products are authentic (delivery receipts, bill of lading, etc.).
- C. Execution: Submit verification that the work was installed correctly (inspection records, as-built drawings, etc.).
 - 1. Provide survey coordinates for all buried products.
 - 2. Provide photographs for all buried products.
- D. Testing and Inspection
 - 1. The CONTRACTOR's QC program shall be responsible for the performance of all inspections and testing.
 - 2. The CONTRACTOR shall provide access to the ENGINEER or Testing Agency for additional inspection and testing.

3.9 ABANDONMENT AND REMOVAL

- A. General:
 - 1. Verify with OWNER that instrumentation is no longer required.
 - 2. Remove instrumentation prior to substantial completion of the work, unless otherwise indicated.
 - 3. Remove all non-Utility Monitoring Point instrumentation per requirements and methods of the applicable County or applicable regulating agency where located outside of OWNER easement or Right-of-Way.
 - 4. Remove all Utility Monitoring Points per the requirements of owner of the underlying utility.
 - 5. Remove 6'-0" below surface grade all instrumentation within OWNER easement or Right-of-Way and backfill.
 - 6. Backfill grout holes with grout mix approved by the applicable county or regulating agency and restore surfaces to conditions existing before installation.

7. Fill holes drilled in masonry or concrete surfaces with cement mortar or CLSM to present an appearance matching the surrounding surface.
8. Record removal and/or abandonment for each geotechnical instrumentation location and provide documentation of selected methodology, procedures taken, and photographs of each location prior to and after removal/abandonment.

+ + END OF SECTION + +

SECTION 02770**ASPHALT CONCRETE PAVING****PART 1 - GENERAL****1.1 SUBMITTALS****A. Information Submittals:**

1. Asphalt Concrete Mix Formula:
 - a. Submit minimum of 15 days prior to start of production.
 - b. Submittal to include the following information:
 - 1) Gradation and portion for each aggregate constituent used in mixture to produce a single gradation of aggregate within specified limits.
 - 2) Bulk specific gravity for each aggregate constituent.
 - 3) Measured maximum specific gravity of mix at optimum asphalt content determined in accordance with ASTM D2041.
 - 4) Percent of asphalt lost due to absorption by aggregate.
 - 5) Percentage of asphalt cement, to nearest 0.1 percent, to be added to mixture.
 - 6) Optimum mixing temperature.
 - 7) Optimum compaction temperature.
 - 8) Temperature-viscosity curve of asphalt cement to be used.
2. Chip Seal Mix Formula:
 - a. Submit minimum of 15 days prior to start of production.
 - b. Submittal to include the following information:
 - 1) Samples of the uncoated aggregate.
 - 2) Depending on the type of chip seal, samples of asphaltic emulsion, polymer modified asphaltic emulsion, or asphalt rubber binder.
 - 3) Binder data for asphaltic emulsion, polymer modified asphaltic emulsion, asphalt binder or asphalt rubber binder.
 - 4) Aggregate test results.
 - 5) Vialit test for aggregate retention in chip seals test results
3. Slurry Seal Mix Formula:
 - a. Samples of the aggregate.
 - b. Samples of asphaltic emulsion or polymer modified asphaltic emulsion.
 - c. Asphaltic emulsion or polymer modified asphaltic emulsion data.
 - d. Aggregate test results.
4. Seal Coat (or Tack Coat) Formula:
 - a. Samples of asphaltic emulsion or polymer modified asphaltic emulsion.
 - b. Asphaltic emulsion or polymer modified asphaltic emulsion data.
5. Test Reports:
 - a. Submit minimum 10 days prior to start of production.
 - b. Show appropriate test method(s) for each material and the test results.
6. Statement of qualification for independent testing laboratory.

1.2 QUALITY ASSURANCE**A. Qualifications:**

1. Independent Testing Laboratory: In accordance with ASTM E329.
2. Asphalt concrete mix formula shall be prepared by approved certified independent laboratory under the supervision of a certified asphalt technician.

02770-1

1.3 ENVIRONMENTAL REQUIREMENTS

- A. Temperature: Do not apply asphalt materials or place asphalt mixes when ground temperature is lower than 10 degrees C (50 degrees F) or air temperature is lower than 4 degrees C (40 degrees F). Measure ground and air temperature in shaded areas away from heat sources or wet surfaces.
- B. Moisture: Do not apply asphalt materials or place asphalt mixes when application surface is wet.

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Asphalt Material: Conform to the following specification:
 - 1. Asphalt Material shall be a hot mix asphalt concrete, consisting of a mixture of mineral aggregate and paving asphalt conforming to Section 92 of the Caltrans Standard Specifications, PG 64-10.
- B. Asphaltic Emulsions for Pavement Rehabilitation: Conform to the following specification:
 - 1. Asphaltic emulsions for seal (tack) coats, slurry seals, chip seals, and other pavement rehabilitation applications shall conform to Section 37 and Section 94 of the Caltrans Standard Specifications. It is the responsibility of the CONTRACTOR to select the correct emulsion type, grade, class, and/or additives that are most appropriate for the selected pavement rehabilitation methodology and local environmental conditions as specified in Caltrans Standard Specifications.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Provide Traffic Control:
 - 1. In accordance with all applicable specification sections and laws.
 - 2. In accordance with approved encroachment permit, restrict vehicular access to freshly treated or paved surfaces to avoid pickup and tracking of asphalt.
- B. Driveways: Repave driveways from which pavement was removed or damaged by the CONTRACTOR. Leave driveways in as good or better condition than before start of construction.

3.2 LINE AND GRADE

- A. Provide and maintain intermediate control of line and grade, independent of underlying base, to meet finish surface grades and minimum thickness.
- B. Survey and verify drainage flow lines within and adjacent to work area. Notify ENGINEER if proposed work shall impact existing drainage control and cause ponding or pooling.
- C. Shoulders: Construct to line, grade, and cross-section shown.

02770-2

3.3 PREPARATION

A. General:

1. Identify all utility structures within work area such as utility vaults, utility boxes, utility lids, monuments, concrete structures, sidewalk pads, and traffic loops.
2. It is the responsibility of the CONTRACTOR to identify existing conditions that render surface preparation infeasible for the specified pavement rehabilitation method. In such instances, the CONTRACTOR shall notify the ENGINEER and apply pavement and subgrade replacement if directed by the OWNER.

B. Subgrade

1. Approved subgrade for pavement replacement shall be minor concrete, slurry concrete, Controlled Low Strength Material (CLSM), or specified road base at a depth specified in Contract Drawings compacted to 95% relative compaction. Ensure all cementitious subgrade surfaces are roughened.

C. Tack Coat

1. Apply tack coat between existing pavement surface and new hot mix asphalt overlay including milled surfaces.
2. Between layers of each lift of hot mix asphalt
3. At any vertical surfaces (curbs, gutters, and construction joints).
4. A tack coat is defined as a light application of asphaltic emulsion or asphalt binder.
5. A tack coat is not required before placing a chip seal or slurry seal.
6. Prevent staining of adjacent surfaces.
7. Ensure pavement application before setting or breaking of the asphaltic emulsion occurs, generally indicated by the turning of brown to black in color.

D. Crack Repair

1. Apply crack repair prior to qualifying pavement rehabilitation or where specified.
2. Crack repair is defined as the following:
 - a. Crack Sealing – Placement of rubberized asphaltic emulsion materials and additives into working cracks and requires cleaning, cutting or routing of the crack.
 - b. Crack Filling – Placement of asphaltic emulsion materials into non-working or low movement cracks and requires minimal cleaning and crack preparation.
3. The following pavement distress conditions do not qualify for crack repair:
 - a. Potholes defined as a loss of pavement layer and interconnected cracking that occurs around a single point.
 - b. Water bleeding and/or pumping defined as water and or materials ejected out of pavement surfaces and may deflect under moving vehicular loads.
 - c. Depressions and longitudinal rutting defined as elevation differences in the pavement that may not exhibit cracking
 - d. Raveling defined as disintegrated asphalt layer with dislodgement of aggregate particles and in a general roughened state.
 - e. Rippled, corrugated, or "shoving" pavement defined as the uppermost pavement layer having migrated.
 - f. Fatigue "alligator"-pattern cracking defined as high-frequency of interconnected many-sided sharp-angled cracking.
 - g. Visibly deflecting or shifting pavement under moving vehicular load
 - h. Edge cracking: crescent-shaped or continuous cracks that intersect the unbound pavement edge and are located within 2 ft of the pavement edge, adjacent to an

02770-3

unpaved shoulder. They include longitudinal cracks outside of the wheel path and within 2 ft of the pavement edge.


- i. Slippage cracks defined as crescent shaped cracks where asphalt has sheared and separated from underlying material in direction of travel.
4. Crack repair is suitable for the following list of cracks:
 - a. Transverse Cracks – perpendicular to centerline of the pavement
 - b. Longitudinal – parallel to centerline of pavement
 - c. Blocking – Interconnected large rectangular shaped cracks over 1 square-foot in size where cracking is in transverse or longitudinal directions.
 - d. Cold joints – clearly defined linear crack along edge of trenching, patching, or differently aged pavements.
5. Sealing or filling cracks shall be determined by the following table.

Criteria for Sealing or Filling a crack		
Crack Characteristics	Criteria for Crack Sealing	Criteria for Crack Filling
Width	0.12 – 1.00 inch	0.12 – 1.00 inch
Edge Deterioration	Minimal to None (<25% of crack length)	Moderate to None (<50% of crack length)
Annual Horizontal Movement*	> 0.12 inch (working cracks)	< 0.12 inch (working cracks)
Type of Crack	Transverse, Longitudinal, Transverse Cold Joints	Longitudinal, Blocking, Longitudinal Cold Joints


*Annual Horizontal Movement is calculated by multiplying the distance between cracks times the typical annual temperature difference times the coefficient of expansion (0.0001in/in/°C)

6. Apply crack repair during dry weather in cool conditions defined as being closest to the yearly mean temperature. If project schedule restrictions cannot accommodate this, then apply crack repairs at earliest working hour feasible during hotter seasons.
7. Crack repair placement methods shall be per the following:


- a. Flush fill method – material is forced into existing uncut crack until it is flush with pavement surface. Not applicable for working cracks.



- b. Overband method – material is forced into and placed over uncut crack. Not applicable for working cracks. If overlying pavement rehabilitation is specified, a capped overband method is acceptable. If overlying pavement rehabilitation is not specified and will be exposed to vehicular traffic, then the

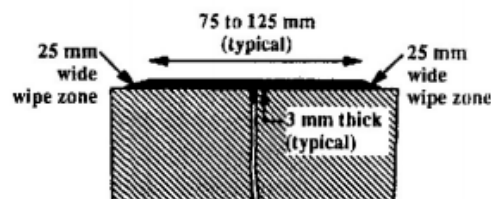

a) Simple Band-Aid




b) Capped

02770-4

overband material must be squeegeed flat to a 3" to 5" wide "band-aid".

- c. Reservoir Method – crack is cut or routed to form a reservoir that is filled with sealant. Suitable for working cracks. Sealant may be left flush or slightly below the surface of the reservoir. Depth and width of saw depth shall be determined per the following table.



Nominal Crack Width*	Rout or Saw Width	Rout or Saw Depth**	Width in Areas of temp extremes	Depth in Areas of Temp extremes**
¼ inch	½ inch	½ inch	1 inch	1/2in
3/8 inch	½ inch	½ inch	1 inch	1/2in
½ inch	¾ inch	¾ inch	1 inch	1/2in
5/8 inch	¾ inch	¾ inch	1.5 inches	¾ inch
¾ inch	No routing required	¾ inch***	1.5 inches	¾ inch
7/8 inch	No routing required	¾ inch***	1.5 inches	¾ inch
1 inch	No routing required	¾ inch***	1.5 inches	¾ inch
* Nominal crack width is the approximate width for 80% of the length of the crack				
** If using recessed fill method, add ¼ inch				
***Use sand fill or backer rod to limit material depth to ¾ inch				

8. Prior to crack repair, the crack shall be cleaned and dried per one of the following methodologies.
- Apply air blasting
 - Apply hot air blasting
 - Apply sand blasting
 - Apply wire brushing:

E. Patching & Edge Repair

- Apply patching and edge repair prior to qualifying pavement rehabilitation or where specified.
- Patching is defined as placing new material to cover a qualifying distressed area such as:
 - Localized high severity "alligator" cracking of an area equal to or less than 6-square feet
 - Potholes defined as a loss of pavement layer and interconnected cracking that occurs around a single point.
 - Damaged edges

02770-5

3. The following pavement distress conditions do not qualify for Patching and Edge Repair:
 - a. Water bleeding and/or pumping defined as water and or materials ejected out of pavement surfaces and may deflect under moving vehicular loads.
 - b. Depressions and longitudinal rutting defined as elevation differences in the pavement that may not exhibit cracking
 - c. Raveling defined as disintegrated asphalt layer with dislodgement of aggregate particles and in a general roughened state.
 - d. Rippled, corrugated, or "shoving" pavement defined as upper the pavement layer having migrated.
 - e. Fatigue "alligator"-pattern cracking defined as high-frequency of interconnected many-sided sharp-angled cracking across an area greater than 6-square feet.
 - f. Visibly deflecting or shifting pavement under moving vehicular load
 - g. Edge cracking: crescent-shaped or continuous cracks that intersect the unbound pavement edge and are located within 2 ft of the pavement edge, adjacent to an unpaved shoulder. They include longitudinal cracks outside of the wheel path and within 2 ft of the pavement edge.
 - h. Slippage cracks defined as crescent shaped cracks where asphalt has sheared and separated from underlying material in direction of travel.
 4. Patching and Edge Repair methods shall be per the following:
 - 1) Cut out square, in neat appearance, bounded by sound pavement.
 - 2) Remove water and debris
 - 3) Observe underlying subgrade. Recompact to 95% relative compaction or remove unsuitable subgrade and replace with approved subgrade material.
 - 4) Apply tack coat
 - 5) Place patch material and compact until finished patch exhibits 0.1" to 0.2" crown.
 - 6) After placement of pavement apply seal coat at joints.
- F. Milling (also defined as Grinding)
1. General:
 - a. Meet cross slopes and depth of milling as specified.
 - b. Meet profile grade required or indicated by ENGINEER.
 - c. Do not disfigure adjacent work or existing surface improvements by accidentally cutting into them. Make appropriate repairs.
 - d. If milling exposes smooth underlying pavement surface, mill the smooth surface to make it rough.
 - e. Mill off additional material if standing water has a potential to accumulate or if surface has been damaged by water since beginning of milling operation.
 - f. Where vehicles or pedestrians must pass over milled edges provide safe temporary ramps suitable to speed of user vehicles (or suitable for wheel chair user needs).
 - g. Unless stipulated elsewhere, all residues from the milling process become property and responsibility of CONTRACTOR. Waste millings legally. Do not discharge millings into storm drains, ditches, or waters of the State.
 - h. If work equipment is removed from the milling site and milled surface awaits further work, provide appropriate traffic control and surface preparation.
 - i. Notify ENGINEER when milling exposes weak or unstable surfaces. Verify extent of exposure by proof rolling at no additional cost to OWNER
 2. Tolerances:
 - a. Milling Depth: As indicated plus or minus 10 percent not uniformly high or uniformly low.

02770-6

- b. Striation Texture: Uniform, discontinuous, longitudinal, 3/16 inch deep maximum, 3/4 inch center to center.
 - c. Smoothness:
 - 1) On Longitudinal Grade: Plus or minus 5/16 inch in 25 feet.
 - 2) At Longitudinal Grade Breaks: Plus or minus 1/4 inch in 10 feet.
 - d. Cross Slope:
 - 1) In the Parking Lane: Two (2) percent target, five (5) percent maximum.
 - 2) In the Travel Lane: Two (2) percent target, 1.5 percent minimum.
3. Quality Control
- a. Edge mill. Verify cross slopes.
 - b. Full width mill to limits indicated in Contract Documents. Use laser profiling to determine depth of milling along the proposed crown line or other breakover point. Verify cut depth calculations with ENGINEER before milling.

3.4 PROTECTION

- A. Provide for the protection of utility frames, covers, and other street fixtures via temporary removal and resetting to existing grade or elevation as directed by OWNER if the pavement replacement or rehabilitation methodology requires it. Install invert covers to protect debris from entering utilities.
- B. Provide for the protection of utility frames, covers, and other street fixtures in place from pavement rehabilitation materials by applying plastic or oil-resistant construction paper secured by tape or adhesive to the facility being covered. Document these coverings and ensure subsequent removal after the pavement rehabilitation application.

3.5 APPLICATION

- A. Asphalt Concrete Pavement Replacement:
 - 1. General: Place asphalt concrete mixture on approved, prepared base in conformance with this section.
 - 2. Preparation:
 - a. Tack Coat
 - b. Dry surface clean of loose particles of pavement, dirt, and extraneous material.
 - c. Patch holes in primed surface with asphalt concrete pavement mix.
 - 3. Application:
 - a. Place asphalt concrete pavement mix in one single lift.
 - b. Total Compacted Thickness: 3 inches minimum or at the depth specified, whichever is greater.
 - c. Apply such that meet lines are straight and edges are vertical.
 - d. Collect and dispose of segregated aggregate from raking process. Do not scatter material over finished surface.
 - e. After placement of pavement apply seal coat at joints.
 - f. Compaction: Roll until roller marks are eliminated and density of 92 percent of measured maximum density determined in accordance with ASTM D2041.
 - g. Tolerances:
 - 1) General: Conduct measurements for conformity with crown and grade immediately after initial compression. Correct variations immediately by removal or addition of materials and by continuous rolling.
 - 2) Completed Surface or Wearing Layer Smoothness:
 - a) Uniform texture, smooth, and uniform to crown and grade.

- b) Maximum Deviation: 1/8 inch from lower edge of a 3.6-meter (12-foot) straightedge, measured continuously parallel and at right angle to centerline.
 - c) If surface of completed pavement deviates by more than twice specified tolerances, remove and replace wearing surface.
- 3) Transverse Slope Maximum Deviation: 1/4 inch.

B. Asphalt Concrete Pavement Overlay:

- 1. General:
 - a. Place asphalt concrete mixture on approved, prepared base in conformance with this section.
- 2. Preparation:
 - a. Milling to depth specified.
 - b. Patching & Edge Repair
 - c. Tack Coat
 - d. Dry surface clean of loose particles of pavement, dirt, and extraneous material.
- 3. Application:
 - a. Place asphalt concrete pavement mix in one single lift.
 - b. Total Compacted Thickness: at the depth specified
 - c. Apply such that meet lines are straight and edges are vertical.
 - d. Collect and dispose of segregated aggregate from raking process. Do not scatter material over finished surface.
 - e. After placement of pavement apply seal coat at joints.
 - f. Compaction: Roll until roller marks are eliminated and density of 92 percent of measured maximum density determined in accordance with ASTM D2041.
 - g. Tolerances:
 - 1) General: Conduct measurements for conformity with crown and grade immediately after initial compression. Correct variations immediately by removal or addition of materials and by continuous rolling.
 - 2) Completed Surface or Wearing Layer Smoothness:
 - a) Uniform texture, smooth, and uniform to crown and grade.
 - b) Maximum Deviation: 1/8 inch from lower edge of a 3.6-meter (12-foot) straightedge, measured continuously parallel and at right angle to centerline.
 - c) If surface of completed pavement deviates by more than twice specified tolerances, remove and replace wearing surface.
 - 3) Transverse Slope Maximum Deviation: 1/4 inch.

C. Seal Coat at Joints

- 1. General: Apply seal coat of paving grade or emulsified asphalt to finished surface at longitudinal and transverse joints, joints at abutting pavements, areas where asphalt concrete was placed by hand, patched surfaces, and other areas as directed by ENGINEER.
- 2. Preparation:
 - a. Crack Repair.
 - b. Dry surface clean of loose particles of pavement, dirt, and extraneous material.
- 3. Application:
 - a. When sealing patched surfaces and joints with existing pavements, extend minimum 150 millimeters (6 inches) beyond edges of patches.
 - b. Cover immediately with sand if open to vehicular traffic within 24 hours.

D. Chip Seal:

02770-8

1. General: Apply chip seal to prepared and qualified surface.
 2. Disqualifications:
 - a. Areas with wheel path rutting in excess of 3/8 inch when measured by placing a straightedge 12 feet long on the finished surface perpendicular to the center line and measuring the vertical distance between the finished surface and the lower edge of the straightedge
 - b. Areas exhibiting flushing, defined as the occurrence of a film of asphaltic material on the surface of the chip seal.
 3. Preparation:
 - a. Patching and Edge Repair
 - b. Crack Repair
 - c. Dry surface clean of loose particles of pavement, dirt, and extraneous material.
 4. Application:
 - a. All materials shall be onsite prior to application of chip seal
 - b. When applied the temperature of the asphaltic emulsions must be from 130°F to 180°F. Apply when the ambient air temperature is from 65°F to 110°F. Do not apply asphaltic emulsions when weather forecasts predict the ambient air temperature will fall below 40°F within 24 hours after application.
 - c. Ensure screenings are damp at time of application.
 - d. Ensure application of asphaltic emulsion is uniform both transversely and longitudinally.
 - e. Ensure screenings are placed before setting or breaking of the asphaltic emulsion occurs, generally indicated as the turning of brown to black in color.
 - f. Coat application after chip spreader shall leave voids 50% to 70% filled. Unsatisfactory coat application that lead to the following conditions will not be accepted and shall be repaired when directed by OWNER.
 - 1) Non-uniform surface texture
 - 2) Raveling, which consists of the separation of the aggregate from the asphaltic emulsion or asphalt binder. Must be repaired by placing an additional layer of chip seal over the non-accepted area.
 - 3) Flushing, which consists of the occurrence of a film of asphaltic material on the surface of the chip seal
 - 4) Streaking, which consists of alternating longitudinal bands of asphaltic emulsion or asphalt binder without uniform aggregate retention, approximately parallel with the lane line. Must be repaired by placing an additional layer of chip seal over the non-accepted area.
- E. Slurry Seal:
1. General: Apply slurry seal to a prepared and qualified surface.
 2. Disqualifications:
 - a. Areas with wheel path rutting in excess of 3/8 inch when measured by placing a straightedge 12 feet long on the finished surface perpendicular to the center line and measuring the vertical distance between the finished surface and the lower edge of the straightedge
 - b. Areas exhibiting flushing, defined as the occurrence of a film of asphaltic material on the surface of the chip seal.
 3. Preparation:
 - a. Patching and Edge Repair
 - b. Crack Repair
 - c. Dampened surface clean of loose particles of pavement, dirt, and extraneous material.
 4. Application:

02770-9

- a. Ensure pavement and air temperatures are at least 50°F, rain is not imminent, and the expected high temperature within 24 hours following placement is at least 65°F and not below 40°F
- b. Protect fresh slurry seal from traffic damage and apply sand to surfaces at intersections and driveways if directed by OWNER.
- c. Unsatisfactory application that lead to the following conditions will not be accepted and shall be repaired when directed by OWNER.
 - 1) Non-uniform surface texture
 - 2) Marks in the surface
 - a) Up to 4 marks in the completed slurry seal or micro-surfacing surface that are up to 1 inch wide and up to 6 inches long per 1000 square feet of slurry seal placed
 - b) No marks in the completed slurry seal or micro-surfacing surface that are over 1 inch wide or 6 inches long
 - 3) Excessive raveling consisting of the separation of the aggregate from the asphaltic emulsion, polymer modified asphaltic emulsion.
 - 4) Bleeding consists of the occurrence of a film of asphaltic material on the surface of the slurry seal
 - 5) Delaminating of slurry seal or micro-surfacing from the existing pavement.
 - 6) Rutting or wash-boarding

+ + END OF SECTION + +

02770-10

SECTION 02830**CHAIN LINK FENCES AND GATES****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings: Detailed information and specifications for materials, finishes, and dimensions.
- B. Samples: Approximately 6 inches square, or 6 inches long of posts, rails, braces, fabric, wire, ties, and fittings.
- C. Quality Control Submittals:
 - 1. Manufacturer's recommended installation instructions.
 - 2. Evidence of Supplier and installer qualifications.

1.2 SCHEDULING AND SEQUENCING

- A. Complete necessary site preparation and grading before installing chain link fence and gates.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Match style, finish, and color of each fence component with that of other fence components.

2.2 CHAIN LINK FENCE FABRIC

- A. PVC-coated galvanized fabric conforming to ASTM F668, Class 1 or 29.
 - 1. Color: Black.
 - 2. Manufacturers and Products:
 - a. Colorbond Corp., Raritan, NJ; Colorbond II.
 - b. Cyclone Fence, United States Steel, Chicago, IL; Cyclone Color Fence System.
- B. Height: 72 inches, unless otherwise shown.
- C. Wire Gauge: No. 9.
- D. Pattern: 2-inch diamond-mesh.
- E. Diamond Count: Manufacturer's standard and consistent for fabric furnished of same height.
- F. Loops of Knuckled Selvages: Closed or nearly closed with space not exceeding diameter of wire.

02830-1

- G. Wires of Twisted Selvages:
1. Twisted in a closed helix three full turns.
 2. Cut at an angle to provide sharp barbs that extend minimum 1/4-inch beyond twist.
- H. Privacy Slats, if called for on Drawings:
1. HDPE or PVC Top Lock slats sized for No. 9 gauge 2-inch mesh, approximately 1 3/32-inches wide.
 2. Length to match the fabric height minus 2 inches.
 3. Color selected by OWNER.

2.3 POSTS

- A. General:
1. Strength and Stiffness Requirements: ASTM F669, Heavy Industrial Fence, except as modified in this section.
 2. Steel Pipe: ASTM F1083.
 3. Roll-Formed Steel Shapes: Roll-formed from ASTM A570, Grade 45, steel.
 4. Protective Coatings:
 - a. Zinc Coating: ASTM F1234, Type A external and internal coating.
 5. Color Coating: ASTM F1043, minimum 10 mils thickness over zinc coating to match color of chain link fabric.
- B. Line Posts:
1. Steel Pipe:
 - a. Outside Diameter: 2.375-inch.
 - b. Weight: 3.65 pounds per foot.
 2. Roll-Formed Steel C Shape:
 - a. Outside Dimensions: 2.25-inch by 1.625-inch.
 - b. Weight: 2.70 pounds per foot.
 3. Steel H-Section:
 - a. Outside Dimensions: 2.25-inch by 1.70-inch.
 - b. Weight: 3.26 pounds per foot.
- C. End, Corner, Angle, and Pull Posts:
1. Steel Pipe:
 - a. Outside Diameter: 2.875-inch.
 - b. Weight: 5.79 pounds per foot.
- D. Posts for Removable Fence Panels: As specified for end, corner, angle, and pull posts.
- E. Posts for Swing Gates:
1. Material: ASTM F1043 Group IA ASTM F1083 schedule 40 pipe.
 2. Gate Post Size per ASTM F900:

For gate fabric height up to and including 6 feet	
Gate Leaf Width	Post Outside Diameter
Up to 4 ft	2.375-inch
Over 4 ft to 10 ft	2.875-inch
Over 10 ft to 18 ft	4.0-inch
For gate fabric height over 6 feet to 12 feet	
Up to 6 ft	2.875-inch
Over 6 ft to 12 ft	4.0-inch
Over 12 ft to 18 ft	6.625-inch

02830-2

Over 18 ft to 24 ft	8.625-inch
---------------------	------------

- a. Roll-formed steel shapes may be substituted for steel pipe posts for gate leaf widths up to 6 feet and fabric heights up to 8 feet.
 - 1) Outside Dimensions: 3.5-inch by 3.5-inch.
 - 2) Weight: 4.85 pounds per foot.

2.4 TOP RAILS AND BRACE RAILS

- A. Galvanized steel pipe or roll-formed steel C shapes, color-coated.
- B. Protective Coatings: As specified for posts.
- C. Color Coating: ASTM F1043, minimum 10 mils thickness over zinc coating to match color of chain link fabric.
- D. Strength and Stiffness Requirements: ASTM F669, Top Rail, Heavy or Light Industrial Fence.
- E. Steel Pipe:
 - 1. ASTM F1083.
 - 2. Outside Diameter: 1.66-inch.
 - 3. Weight: 2.27 pounds per foot.
- F. Roll-Formed Steel C Shapes:
 - 1. Roll formed from ASTM A570, Grade 45.
 - 2. Outside Dimensions: 1.625-inch by 1.25-inch.
 - 3. Weight: 1.40 pounds per foot.

2.5 FENCE FITTINGS

- A. General: In conformance with ASTM F626, except as modified by this article.
- B. Post and Line Caps: Designed to accommodate passage of top rail through cap, where top rail required.
- C. Tension and Brace Bands: No exceptions to ASTM F626.
- D. Tension Bars:
 - 1. One-piece.
 - 2. Equal in length to full height of fabric.
- E. Truss Rod Assembly: 3/8-inch diameter.
- F. Barb Arms: 45-degree arms for supporting three strands of barbed wire.

2.6 TENSION WIRE

- A. Zinc-coated steel marcelled tension wire conforming to ASTM A824, Type II, Class 2.

2.7 GATES

- A. General:
 - 1. Gate Operation: Opened and closed easily by one person.
 - 2. Welded Steel Joints: Paint with zinc-based paint.
 - 3. Chain Link Fabric: Attached securely to gate frame at intervals not exceeding 15 inches.
- B. Swing Gates: ASTM F900.
 - 1. Hinges:
 - a. Furnished with large bearing surfaces for clamping in position.
 - b. Designed to swing either 180 degrees outward, 180 degrees inward, or 90 degrees in or out, as shown, and not twist or turn under action of gate.
 - 2. Latches: Plunger bar arranged to engage stop, except single gates of openings less than 10 feet wide may each have forked latch.
 - 3. Gate Stops: Mushroom type or flush plate with anchors, suitable for setting in concrete.
 - 4. Locking Device and Padlock Eyes: Integral part of latch, requiring one padlock for locking both gate leaves of double gates.
 - 5. Hold-Open Keepers: Designed to automatically engage gate leaf and hold it in open position until manually released.
- C. Fabric Salvage: Knuckled.
- D. Appurtenances and Framework: As specified.

2.8 REMOVABLE FENCE PANELS

- A. Panel Length:
 - 1. Equal division of total length of removable fence section.
 - 2. Maximum 10 feet.
- B. Frames: ASTM F1184, Type I.

2.9 CONCRETE

- A. Provide as specified in Section 03300, CAST-IN-PLACE CONCRETE.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Install chain link fences and gates in accordance with ASTM F567, except as modified in this section, and in accordance with fence manufacturer's recommendations, as approved by ENGINEER. Erect fencing in straight lines between angle points.
- B. Provide all necessary hardware for a complete fence and gate installation.

3.2 PREPARATION

- A. Establish locations of fence lines, gates, and terminal posts.

02830-4

3.3 POST SETTING

- A. Driven posts are not acceptable.
- B. Post Hole Depth:
 - 1. Minimum 3 feet below finished grade.
 - 2. 2 inches deeper than post embedment depth below finish grade.
- C. Backfill post holes with concrete to 2 inches above finished grade.
- D. Before concrete sets, crown and finish top of concrete to readily shed water.

3.4 BRACING

- A. Brace gate and corner posts diagonally to adjacent line posts to ensure stability.

3.5 TOP RAILS

- A. Install top rail sleeves with springs at 105 feet maximum spacing to permit expansion in rail.

3.6 CHAIN LINK FABRIC

- A. Do not install fabric until concrete has cured minimum 7 days.
- B. Install fabric with twisted and barbed selvage at top.

3.7 GATES

- A. Hang gates and adjust hardware so gates operate satisfactorily from open or closed position.
- B. Set gate stops in concrete to engage center drop rod or plunger bar.

3.8 ELECTRICAL GROUNDING

- A. Ground fences in accordance with applicable requirements of IEEE C2, National Electrical Safety Code.

3.9 FIELD QUALITY CONTROL

- A. Gate Tests: Prior to acceptance of installed gates and gate operator systems, demonstrate proper operation of gates under each possible open and close condition specified.

+ + END OF SECTION + +

02830-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 02900

LANDSCAPE PLANTING

PART 1 - GENERAL**1.1 SCOPE OF WORK**

- A. Furnish all materials, labor, transportation, services, and equipment necessary to install landscape planting as shown on the Drawings and as specified herein. Any and all permits, fees, bonds, and observations necessary to perform and complete portion of the work shall be included.
- B. Work included in this Section:
 - 1. Verification of Existing Conditions
 - 2. Surface Drainage of Planting Areas
 - 3. Preparation
 - 4. Plant Installation
 - 5. Watering
 - 6. Cleanup
 - 7. Site Observation Before Acceptance
 - 8. Site Observation Schedule

1.2 REQUIREMENTS OF REGULATORY AGENCIES

- A. All Federal, State, and local laws and regulations governing this work are hereby incorporated into and made part of this Section. When this Section calls for certain materials, workmanship or a level of construction that exceeds the level of Federal, State, or local requirements, the provisions of this Section shall take precedence.

1.3 REFERENCE STANDARDS

- A. All plant material shall be true to botanical and common name as indicated in:
 - 1. McClintock, E. M., and A. T. Leiser. 1979. *An Annotated Checklist of Woody Ornamental Plants of California, Oregon, and Washington*. University of California, Division of Agricultural Sciences. Berkeley, CA.
 - 2. American Nursery & Landscape Association. 2004. *American Standard for Nursery Stock*. ANSI Z60.1-2004. Washington, DC.
 - 3. L. H. Bailey Hortorium of Cornell University. 1976. *Hortus Third: A Concise Dictionary of Plants Cultivated in the United State and Canada*. Macmillan. New York, NY.
 - 4. Hickman, J.C. (ed.). 1993. *The Jepson Manual: Higher Plants of California*. University of California Press. Berkeley, CA.
 - 5. U.S. Natural Resources Conservation Service. 2011. Plants Database. Available: <<http://plants.usda.gov>>. Last updated May 16, 2011.
- B. All plant material shall conform to the California State Department of Agriculture's regulations for nursery observations, rules and ratings.
 - 1. Quality Control

02900-1

- C. Manufacturer's directions and drawings shall be followed in all cases where the manufacturers of articles used in this Specification furnish directions covering points not shown in the Drawings and Specifications.
- D. Upon execution of the order, the Engineer has the option of either inspecting the plant material at the nursery, requesting representative color photos or inspecting the material as it is being delivered to the site for conformity to the Drawings and Specifications.
 - 1. Such approvals shall not impair the right of additional observations during further progress of the Work.
- E. Any tagging of plant material by the Engineer does not constitute his/her approval of the plant materials' health and vigor. The health and vigor of the plant material is the sole responsibility of the Contractor.
- F. The Engineer reserves the right to refuse observation, if in his judgment; a sufficient quantity of plant material is not available for observation at that time.

1.4 QUALIFICATIONS

- A. The nursery that supplied planting materials shall be a reputable nursery.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01330:
 - 1. List of all proposed materials and equipment to be used indicated by description, manufacturer and model number, if applicable. Include catalog cuts where applicable.
 - 2. A copy of the plant procurement order from the nursery including the name, address, and phone number of said nursery.
 - 3. Plant quantity list.
 - a. Plant quantities shown on the Drawings are for estimation only. Provide the actual planting quantities.
 - b. List all plants indicated by botanical name, common name, quantity, size, nursery and location and any specific remarks, (e.g., "unable to locate," "photo submitted," etc.).
 - 4. Written documentation that the plant material listed on the Drawings is available. Any substitutions required due to unavailability must be requested in writing before confirmation of ordering.
 - 5. A schedule identifying plant procurement, storage, and anticipated delivery dates for review and approval.
 - 6. Compliance with State of California and federal quarantine restrictions.

1.6 PROJECT CONDITIONS

- A. Perform planting operations only when weather and soil conditions are suitable in accordance with locally accepted practice.

1.7 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Delivery
 - 1. Deliver all planting materials with legible and durable identification labels.

2. Deliver fertilizer to the site in original, unopened containers bearing the manufacturer's name, guaranteed chemical analysis, and its conformance to California State Law.
 3. Notify the Engineer within 7 days of the delivery of plant materials to the site. Indicate the quantity and type of plant materials in each delivery.
- B. Storage
1. Store planting materials in the shade and protect from the weather.
 2. Maintain and protect plants not planted within 4 hours of delivery.
- C. Protection
1. Protect plants during delivery to the site and after, in order to prevent damage to the root balls or desiccation of leaves.
- D. Handling
1. Take extreme care in the loading and unloading of plants. Do not lift or move container plants by their stems or trunks.
 2. Any plant materials that are damaged due to mishandling shall be removed and replaced with new material at no additional cost.

1.8 REJECTION OF PLANT MATERIAL

- A. All plant material not conforming to the requirements herein shall be considered defective.
1. The Engineer shall mark such plants, whether in place or not, as rejected and the materials shall be immediately removed from the site and replaced with new material at no additional cost.
 2. Replacement plant material shall be of the same size, species and condition as that indicated on the Drawings.

1.9 PROTECTION OF THE SITE

- A. Protect previously installed work and materials which may be affected by work of this Section. Provide safeguards and exercise caution against injury or defacement of existing site improvements.
- B. Repair damage and return the areas to the previous condition at no additional cost.

1.10 COORDINATION

- A. Coordinate operations with other contractors on or adjacent to the project site.
- B. Exercise extreme care in excavating and working near existing utilities. Repair any damages to these utilities at no additional cost. Check existing utility drawings for existing utility locations.
- C. Coordinate installation of all planting materials to avoid interference with utilities, other construction elements, and any existing vegetation.

1.11 GUARANTEE

- A. The manufacturer's warranty shall not relieve the Contractor of its own liability under the guarantee. Such warranties shall only supplement the guarantee.
- B. All plant material installed under this Contract shall be guaranteed against poor, inadequate and inferior quality and installation for a period of 1 year from the date of Final Acceptance.
 - 1. Any plant material not meeting the satisfaction of the Engineer as per the performance standards in Section 02970, Landscape Maintenance, shall immediately be removed and replaced at no cost to the Owner.
 - 2. Replaced plant material shall also be guaranteed for a period of 1 year upon installation.
- C. Replace without cost to the Owner and as soon as weather permits, all dead plants and all plants not found in a vigorous, thriving condition, as determined by the Engineer during and at the end of the plant warranty period.
 - 1. Replacement of plants shall closely match adjacent specimens of the same species and shall be subject to all requirements of this section.
- D. Repair damage to adjacent plant material at no cost to the Owner. All repairs shall be made with materials, varieties and sizes "in kind" with adjacent existing materials.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Procure all plant materials and incidentals required for this project.
- B. All plant material delivered to the site shall have a normal habit of growth and be well formed and shaped, healthy, vigorous, and free of any insects, diseases, sunscalds, windburn, abrasions of the bark, or other objectionable disfigurements.
- C. The size of the plant material shall correspond with that normally expected for species and variety of commercially available nursery stock or as specified on the Drawings.
- D. Plant material shall be grown under climatic conditions similar to those in the locality of the project unless approved otherwise by the Engineer.
- E. Plant material larger than that specified on the Drawings may be used pending approval from the Engineer. However, there will be no change in the Contract amount if the larger plant material is approved and used.

2.2 MATERIALS

- A. Planting soil and backfill for all planting pits shall be existing topsoil.
- B. Trees and Shrubs
 - 1. Tree and shrub trunks shall be sturdy and well hardened with vigorous and fibrous root systems which are not root-bound.

02900-4

2. In the event of a disagreement as to the condition of the root system, the root conditions of the plants will be determined by the removal of soil around the roots of not less than 10 plants or more than 2 percent of the total number of plants of each species.
 3. When container-grown plants are supplied from several sources, the roots of not less than 10 plants of each species from each source will be observed.
 - a. In case the plants sampled are found to be defective, the Engineer has the right to reject the entire lot represented by the defective sample.
 - b. Any plant material rendered unsuitable for use because of this observation will be considered as samples and will be provided at no additional cost.
- C. Container-Grown Stock
1. Container-grown stock shall be in a vigorous and healthy condition and not root bound or with the root system hardened off.
 - a. Container-grown stock shall be grown under climatic conditions similar to that found in the locality of the site.
- D. Ground Cover Stock
1. Ground cover stock shall be well-established in removable containers or come from formed homogenous soil sections.
 2. Ground cover stock shall be grown under climatic conditions similar to that found in the locality of the site.
- E. Fertilizers
1. Planting Tablets (20-10-5), shall be 21-gram, 24-month release, non-burning tablets containing the following percentages of nutrients by weight:

20 percent	Nitrogen
10 percent	Phosphoric Acid
5 percent	Potash
10 percent	Humus
2 percent	Humic Acids
 2. Acceptable product – “Gro-Power Planting Tablets,” as manufactured by Gro-Power (800/473-1307), or approved equal.

2.3 TREE SUPPLIER

- A. Trees shall be provided from a local nursery.
1. Chico Creek Wholesale Nursery
 2. Western Tree Nursery
 3. Or approved equal

PART 3 - EXECUTION

3.1 VERIFICATION OF EXISTING CONDITIONS

- A. Before performing the work in this Section, examine previously installed work from other trades and verify that such work is complete and as required to the point where this installation may begin properly.

02900-5

- B. Remove all rocks, stones, sticks and debris larger than 1-inch in diameter from the surface of the planting areas.
- C. Obtain approval of fine grading by the Engineer before starting planting operations.

3.2 SURFACE DRAINAGE OF PLANTING AREAS

- A. Ensure proper drainage of all planting areas. Any discrepancy in the Drawings or Specifications, obstructions on the site, or prior work done by another contractor, which could preclude the establishment of proper drainage, shall be brought to the immediate attention of the Engineer for correction or relief of said responsibility.

3.3 PREPARATION

- A. Planting Layout
 - 1. Verify with the Owner's site superintendent and local governing agencies the location and depth of all underground utilities.
 - 2. If any underground construction or utility lines are encountered in the excavation of planting holes, alternative planting locations may be selected by the Engineer.
 - 3. Locations for all shrubs and trees shall be marked on the ground either by flagged grade stakes indicating plant type and size or the actual plants themselves for the Engineer's review and approval before planting. Trees and shrubs will be located according to the layout shown on the Drawings.
 - 4. Groundcover plant locations shall be in straight rows, evenly, triangular spaced, and at the on-center spacing indicated on the Drawings.
- B. General Planting Guidelines
 - 1. Plant only as many plants as can be planted and watered on that same day within a given planting area.
 - 2. Protect the planting area from excessive vehicle compaction.
 - 3. Face plant material with fullest growth into the prevailing wind and/or the primary direction of view.
- C. Container Removal
 - 1. Plant container shall be opened and removed in such a manner that the soil surrounding the rootball shall not be broken.
 - 2. Do not injure the root ball while removing the container. After removing plant, superficially cut edge roots with a knife on 3 sides.

3.4 PLANT INSTALLATION

- A. Excavate planting pit 12 inches below the bottom of the rootball and to a diameter of twice the diameter of the rootball. Planting pits shall have vertical sides and roughened surfaces.
- B. Before planting, place the required amount of planting tablets per plant size on top of each root ball while the plants are still in their containers so that the Engineer can easily verify their existence and quantity.
- C. After obtaining approval by the Engineer on plant tablet quantity and after water has completely drained from the planting pit, add plant tables to the planting pits in the following quantities:

02900-6

1-gallon	1 tablet
5-gallon	3 tablets
15-gallon	5 tablets
24-inch box	5 tablets

Place the specified amount of plant tablets between the bottom of the rootball but not higher than 1/3 of the way up the rootball. Space the plant tablets equally around the perimeter of the rootball approximately 2 inches from the rootball.

- D. Center plant material in the planting pit.
- E. Apply backfill mix to the planting pit up to ½ the height of the rootball. Add water to the top of the remaining planting pit and let soak in before completing remainder of backfilling. Finish backfilling with planting soil of the planting pit by tamping the soil firmly around the rootball and watering thoroughly.
- F. Each rooted ground cover plant shall be planted with its proportional amount of soil.
- G. Water Retention Basins
 - 1. After final backfilling, construct a water retention basin around the base of each tree and shrub planting (only) to a 30-inch diameter with backfill mix sufficient to hold 3-inches of water. Water retention basins are not required for groundcover plantings.
- H. Wood Mulch Topdressing
 - 1. Spread a 2-inch deep layer of wood mulch in all tree, shrub, and ground cover planting pits, not including seeding areas.
- I. Plant Settling
 - 1. Any plant material that has settled deeper than the surrounding grade shall be raised to the correct level.

3.5 WATERING

- A. All planting and seeding areas shall be watered immediately after installation. After the first watering, water shall be applied to all plants and seeded areas as conditions may require keeping the vegetation in a healthy and vigorous growing condition until the completion of the Contract.

3.6 CLEANUP

- A. Remove all trash caused from the work on a weekly basis throughout the duration of the Project.
- B. Upon completion of work under this Section, remove all rubbish, waste and debris to an off-site location or as directed by the Engineer.
- C. Repair all scars, ruts or other marks in the ground caused by the work.
- D. Remove all equipment and implements of service and leave the entire work area in a neat and clean condition as accepted by the Engineer. All sidewalks and other paving areas shall receive a broom-clean treatment.

02900-7

3.7 SITE OBSERVATION BEFORE ACCEPTANCE

- A. Corrective actions shall be in strict conformance with the Drawings and these Specifications and according to the Engineer, and shall be completed at the Contractor's expense.
- B. The Engineer will perform progress observations of the work and construction operations on completion of construction stages. The Engineer, the Contractor, and others designated by the Owner shall be agreed upon the construction stages for this Specification before starting work and be present on mutually agreed-on dates for the observations for each stage.
- C. If, after an observation, the Engineer is satisfied with the construction to date and its conformance to the Drawings and Specifications, the Engineer will grant written notice of provisional acceptance for that construction stage.
- D. If, after an observation, the Engineer is dissatisfied with the construction to date and its conformance to the Drawings and the Specifications, the Engineer will prepare a written punch list of necessary corrective action on defective work for the construction stage. All corrections must be completed and will be reobserved by the Engineer within 10 working days from the date of the initial observation.
- E. Project observations shall not occur until all punch list items from previous observations shall not occur until all punch list items from previous observations are corrected. Failure to correct problems in the time specified by the Engineer may result in a delay of payment for the said tasks until the items in question are remedied per the engineer's direction.
- F. The Contractor shall be charged for any additional construction observations and punch lists required from the Engineer for unscheduled and necessary reobservation of the work due to unsatisfactorily or incompletely addressing previous punch lists.

3.8 SITE OBSERVATION SCHEDULE

- A. Provide the Engineer with 48 hours of advance notification, except as otherwise noted, for required stage acceptance observations including, but not limited to, the following:
 - 1. Plant materials at nursery(s) before delivery to project site.
 - 2. Plant materials after delivery to project site and before planting.
 - 3. Plant locations layout before planting pit excavation.
 - 4. Planting operations, one complete installation of each plant size before installation of remaining plants.
 - 5. Progress container planting operations.
 - 6. Completed container planting operations.
 - 7. Progress seeding operations.
 - 8. Completed seedling operations.
 - 9. Substantial Completion Observation: Final installation observation before the start of the Landscape Maintenance Period (provide 10 working days of advance written notice).

+ + END OF SECTION + +

02900-8

SECTION 02930**FABRICATED STEEL GATES AND OPERATORS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings: Detailed information and specifications for materials, finishes, and dimensions.
- B. Quality Control Submittals:
 - 1. Manufacturer's recommended installation instructions.
 - 2. Evidence of Supplier and installer qualifications.

1.2 SCHEDULING AND SEQUENCING

- A. Complete necessary site preparation and grading before installing fabricated steel gates and operators.

PART 2 - PRODUCTS**2.1 FABRICATED STEEL GATES**

- A. Fabricate steel access gates and person gates as shown on the Drawings.
- B. Shop fabricate steel gates and deliver to site completely finished and painted.
 - 1. Clean all weld residue and grind welds smooth prior to painting.
 - 2. Paint with System 300, as described in Section 09900 PAINTING.

2.2 FABRICATED STEEL GATE OPERATORS

- A. Provide gate operators as shown on the Drawings, suitable for operation of the gates, as shown on the drawings.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Install all gates level, plumb and in-line for smooth operation.
- B. Provide all miscellaneous fittings and accessories required for a complete installation of all gates.
- C. Provide padlock hasps for all gates, attached to adjacent fencing to provide for a secure gate system utilizing OWNER's padlocks.
- D. Touch up all damaged paint after installation.

02930-1

3.2 FIELD QUALITY CONTROL

- A. Gate Tests: Prior to acceptance of installed gates, demonstrate proper operation of gates under each possible open and close condition specified.

+ + END OF SECTION + +

02930-2

SECTION 02936**HYDROSEEDING****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This specification includes hydroseeding areas indicated and maintaining seeded areas until acceptance of the Work.

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Topsoil: Furnish from the project site, Topsoil shall be reasonably free from subsoil, refuse, heavy or stiff clay, stones larger than one inch in size and other deleterious substances. Break all lumps and clods before the soil is spread.
- B. Erosion control slurry: A hydromulch type consisting of the following ingredients per acre:

Water	3,000 gal.
Fertilizer	320 lbs.
Seed	50 lbs.
Fiber	1,500 lbs.
Stabilizer	100 lbs.

- C. Commercial fertilizers: Conform to the requirements of the California Food and Agricultural Codes uniform in composition with the guaranteed chemical analysis of 16-20-0. Soluble potash shall be a form that will rapidly dispense in the slurry; Sentinel by Albright and Towne; or equal.
- D. Seed:
1. Outside of State Right of Way and CDFW jurisdiction, CONTRACTOR shall submit for approval a seed mix that meets the following requirements:
 - a. Recommended by an experienced regional supplier and/or nursery
 - b. Suitable for the application season that minimizes risk of dormancy
 - c. Adapted for local climate
 - d. Accommodates OWNER aesthetic constraints
 - e. When properly applied and irrigated, leads to fast uptake and coverage to meet SWPPP-related restoration performance indicators.
 2. In State Right of Way, CONTRACTOR shall submit for approval a seed mix and hydromulch that is meets Caltrans Encroachment Permit requirements.
 3. In CDFW jurisdiction, CONTRACTOR shall submit for approval a seed mix that meets CDFW permit requirements.
- E. Fiber mulch: Green colored, fibrous, wood cellulose mulch containing no growth or germination inhibiting factors. Mulch shall, after addition and agitation in slurry tanks with fertilizer, seed, water, and other approved additives, uniformly suspend fibers to form a homogeneous slurry; and when hydraulically sprayed on the ground, the

02936-1

material will form a blotter-like ground cover impregnated uniformly with seed. After application, mulch shall allow the absorption of moisture and allow the rainfall to percolate to underlying soil.

1. Cellulose: Certified to indicate laboratory and field testing has been accomplished and that it meets all foregoing requirements. Weight specifications from suppliers and for application shall be the air dry weight of the fiber material.
 2. Absolute air dry weight is based on the normal standards of the Technical Association of the Pulp and Paper Industry for wood cellulose and is considered equivalent to 10 percent moisture. Each package of the cellulose fiber shall be marked by the manufacturer to show the air dry weight content.
- F. Stabilizing agent: A mixture of 100 percent organic, water soluble alginic acids derived from cold-water keeps.

PART 3 - EXECUTION

3.1 PREPARATION AND APPLICATION

- A. Restore all areas damaged by erosion, construction activities, or other causes before beginning hydroseeding activities. Restoration shall include filling depressions and gullies, establishing level grades and slopes, and compacting soils to prevent wind erosion. Only native fill shall be used for restoration.
- B. Place and spread native fill a minimum depth of three inches over the areas shown to be hydroseeded, except that sloped areas greater than 1 horizontal to 2 vertical shall not receive this native fill.
- C. The equipment for application of erosion control slurry shall have a minimum tank capacity of 500 gallons, a built-in agitation system of sufficient operating capacity to produce an homogeneous slurry, and a discharge system with a set of spray nozzles which will deliver slurry to the areas to be seeded in a continuous and uniform rate, without misses, waste or erosion. Slurry distribution lines shall be large enough to prevent stoppage and the equipment shall be capable of being propelled.
- D. Prepare slurry at the Project site. Fill the tank with water to the quarter mark and agitate well before adding seed and fertilizer. Agitate slurry during mixing period to assure fast, homogeneous mixing, but seed shall not be added more than twenty minutes before spraying. Continue agitation at one-half optimum rpm until all material is dispersed.
- E. Using the green color of the mulch as a guide, apply slurry in sweeping motions in an arched stream so as to fall like rain. Allow materials to build on each other until a good coat is achieved and slurry is spread at the required rate per acre. In areas difficult to reach, apply in a more controlled manner.
- F. Should slurry cover any object not to be covered, wash with clear water immediately. Apply slurry as soon as practicable on cut slopes; apply to filled and graded areas as directed by the Engineer. Slurry shall not be applied during rain or high wind conditions.

02936-2

3.2 TIMING

- A. Time for hydroseeding shall be scheduled so that seed will be planted in time for the first germination-causing rain. Unless approved by Engineer, planting shall be not earlier than October 15 nor later than October 31.

3.3 MAINTENANCE

- A. Maintenance shall include repair of erosion, replacement of mulch, and incidental work necessary.
- B. CONTRACTOR to hydroseed and then maintain and water it until confirmed that it germinates with two-week, four-week, six-week and eight week germination field checks by owner representative with contract representative present. CONTRACTOR required to maintain hydroseeding through the confirmation of documented germination.

+ + END OF SECTION + +

02936-3

THIS PAGE IS INTENTIONALLY BLANK

**SECTION 02970
LANDSCAPE MAINTENANCE**

PART 1 - GENERAL**1.1 SCOPE OF WORK**

- A. This section only applies to landscaping and not hydroseeding.
- B. After landscape planting and irrigation work have been completed, reviewed and accepted by the Owner and the Engineer, furnish materials, labor, transportation, services and equipment necessary to provide landscape maintenance as indicated on Drawings and as specified herein.
- C. Work included in this Section:
 - 1. Observation of Work Request
 - 2. General Landscape Maintenance
 - 3. Tree and Shrub Care
 - 4. Ground Cover Plant Care
 - 5. Maintaining Water Retention Basins
 - 6. Watering
 - 7. Irrigation System
 - 8. Weed Control
 - 9. Replacement Planting
 - 10. Reseeded Areas
 - 11. Cleanup
 - 12. Site Observation Before Acceptance
 - 13. Site Observation Schedule
 - 14. Final Acceptance

1.2 REFERENCES

- A. International Society of Arboriculture, pruning mature trees.

1.3 DEFINITIONS

- A. Healthy Plants: Healthy plants shall be those that are of good form, free of disease and insect infestation, are robust, and exhibit vigorous growth (foliage and wood). They must not be heat or water stressed.
- B. Landscape Maintenance Period: Landscape Maintenance Period will be 90 days minimum from acceptance of the completed landscape construction by the Owner and the Engineer.
 - 1. At the discretion of the Engineer, proceed into the Landscape Maintenance Period if planting and irrigation are deemed "substantially complete" by the Engineer.
 - 2. Continuously maintain areas included in this Contract during the Landscape Maintenance Period until Final Acceptance has been granted.
 - 3. Improper landscape maintenance or possible poor condition of planting at termination of the scheduled may cause the Landscape Maintenance Period to be continued at no cost to the Owner.

02970-1

4. Any day that Contractor fails to adequately perform landscape maintenance, as determined necessary by the Engineer, will not be credited as one of landscape maintenance working days.
5. The Contractor shall be responsible for establishing and maintaining all plants, including transplants, in a healthy condition throughout the Landscape Maintenance Period. The Contractor shall check the condition of each plant for symptoms of disease, size, color, wilting, defoliation, new growth, browsing by wildlife, insect damage, girdling, structural deformities, dieback, sunburn and vandalism and shall notify the Engineer of the corrective actions required.

1.4 PERFORMANCE STANDARDS

- A. The target survival rate for all container plants shall be 100% survival. The target survival rate for seeded areas shall be 60% cover with native vegetation.
- B. If the percent survival is less than these standards, replacement plants shall be planted, in conformance to the Drawings and Specifications, with the minimum number of plants required to achieve the survivorship standards.
- C. Seeded areas larger than 400 square feet with less than 60% cover with native vegetation shall be reseeded.
- D. If the performance standards are not met at the time of Final Acceptance, the project will not be accepted until the identified remedial actions are implemented as directed by the Engineer. These may include additional weed control and/or additional planting, using adaptive management to identify those plants best suited to the site. All remedial actions shall be conducted in strict coordination with, and upon the approval of the Engineer.

1.5 QUALIFICATIONS

- A. The applicator of all weed control materials shall be licensed by the State of California as a Pest Control Operator and a Pest Control Advisor in addition to any subcontractor licenses that are required.

1.6 SUBMITTALS

- A. At least 30 days before starting landscape maintenance, submit the following to the Engineer:
 1. A schedule of activities planned during the Landscape Maintenance Period. This schedule must be accepted by the Engineer before start of landscape maintenance. During the Landscape Maintenance Period, document scheduled changes and obtain acceptance by the Engineer.
 2. A written schedule for watering, including rate and length of application for each event over the duration of the Landscape Maintenance Period.
 3. The Pest Control Advisor shall submit a list of the weed control materials and quantities per acre intended for use in controlling the weed types prevalent and expected on the site. Weed control information shall include:
 - a. Data to demonstrate the compatibility of the weed control materials and methods with the intended planting and seed varieties.
 - b. A written list of the proposed herbicide application equipment to be used in performance of the weeding work, including descriptive data and calibration tests. Include the herbicide trade name, chemical composition, formulation,

- concentration, application rate of active ingredients and methods of application for all materials furnished, as well as the name and State license number of the State certified applicator.
- c. Records of manufacturer's literature, labels, and laboratory analytical data for verification of herbicide to be used, including the chemical makeup and application rate.
- d. Certificates of compliance certifying that herbicide materials meet the requirements specified shall be submitted before the delivery of materials. Herbicide material shall include EPA registration number and registered uses.
- e. A Herbicide Treatment Plan (HTP) proposing a sequence of herbicide treatments and a written delivery schedule and written Pest Control Advisor (PCA) recommendation. The herbicide trade name, chemical composition, formulation, concentration, application rate of active ingredients and methods of application for all materials furnished, and the name and state license number of the state certified applicator shall be included. Records of manufacturer's literature, labels, and laboratory analytical data for verification of herbicide to be used including the chemical makeup and application rate shall be submitted. Once approved by the Engineer, the Contractor shall receive written authorization to proceed with the treatment.
- 4. A list of materials that are to be used during landscape maintenance that are not specified in Section 02900 – Landscape Planting in written form to the Engineer for review and approval before purchasing or delivering to the site.
- B. Replacement Materials
 - 1. For all replacement container plants, and upon the direction of the Engineer, submit a copy of the plant procurement order, including the plant species (by botanical and common name), sizes, and quantities ordered, from a reputable nursery as specified in Section 02900 – Landscape Planting. If the nursery is different than that used to supply the materials for the initial planting, submit the name, address, and phone number of the nursery.
 - 2. For any reseeding materials, submit verification of seed mix by way of mix labels from the seed mix bags and related items to be used for installing plant materials shall be included in the submittal.
 - 3. Submit a schedule and plan identifying replacement materials procurement and storage, and anticipated delivery dates for review and approval.
- C. Landscape Maintenance Logs
 - 1. Landscape maintenance activities, including, but not limited to watering, pruning, and weed control shall be logged on a weekly basis and submitted for review during the progress observations.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Provide materials for landscape maintenance work in accordance with requirements of Section 02900, Landscape Planting, except as described herein.

2.2 MATERIALS

- A. Fertilizer

02970-3

1. Shall be consistent with the recommendations from the soils analysis.
 2. Shall be Gro-Power Hi-Nitrogen 14-4-9, or approved equal, commercial fertilizer at the rate of 7 ½ pounds per 1,000 square feet.
- B. Replacement Plants
1. Supply all replacement container plant materials as required during Landscape Maintenance Period. Replacement plants shall be container and seed of same species and size according to Section 02900, Planting, unless otherwise directed by the Engineer. Sources proposed for acquisition of replacement plant material must be approved by Engineer before acquisition. In no event shall plants of larger sizes than those originally planted be required.
- C. Herbicide
1. Select herbicides with low toxicity to wildlife and those that are appropriate for the desired effect (i.e., broadleaf herbicide to avoid harm to grasses).
- D. All materials need to be suitable to use per Santa Clara Valley Water District's standards.

PART 3 - EXECUTION

3.1 OBSERVATION OF WORK REQUEST

- A. Request an observation of work by the Engineer to begin the Landscape Maintenance Period after planting and related work has been completed in accordance with Contract Documents. A prime requirement is that ground cover plant (including seeded areas and turf areas), shrub, and tree areas be planted and show a consistent and healthy appearance. If such criteria are met to satisfaction of the Engineer, a field report may be issued to the Owner recommending a date for beginning of the Landscape Maintenance Period.
- B. Any work conducted before the approved landscape maintenance date will not be credited as one of landscape maintenance working days.

3.2 GENERAL LANDSCAPE MAINTENANCE

- A. Furnish sufficient labor and adequate equipment to perform work during the Landscape Maintenance Period.
- B. The general landscape maintenance operations shall include, but is not limited to:
1. Maintaining planting sites and irrigation systems as described specifically herein.
 2. Provide debris removal in all landscaping areas.
 3. Maintain adequate protection of landscaping areas. Repair damaged area.
 4. Sweep clean paved areas at weekly intervals or more frequently, if deemed necessary.
 5. Replacing all dead and severely stressed plants and other materials, as required and in accordance with the performance standards.
 6. Maintaining all planting areas weed free and removing all noxious weeds from entire project site. Cultivation at intervals of not more than 10 days.
 7. Operating the irrigation system on a regular basis throughout the irrigation season and maintaining the irrigation system in a fully operational condition for the duration of the Landscape Maintenance Period, and up to the Final Acceptance of the project.

02970-4

8. Keeping up-to-date record, or as "As-Built" Drawings during the Landscape Maintenance Period.
9. Providing irrigation controller charts.

3.3 TREE AND SHRUB CARE

- A. Watering: Refer to 3.6, Watering, this Specification section.
- B. Pruning:
 1. Pruning Objectives:
 - a. At no time shall plant material be pruned, trimmed or topped before delivery. Any alteration to a plant material's shape shall only be conducted on-site and in the presence of the Engineer.
 - b. All require pruning of plant material shall be conducted under the observation of the Engineer. Prune plant material only when necessary and under standard horticultural practices to preserve its natural character.
 - c. Select and develop permanent scaffold branches that are smaller in diameter than trunk or branch to which they are attached which have vertical spacing of from 18-inches to 48-inches and radial orientation so as not to overlay one another.
 - d. To eliminate diseased or damaged growth.
 - e. To eliminate narrow V-shaped branch forks that lack strength.
 - f. To reduce toppling and wind damage by thinning out crowns.
 - g. To maintain growth within space limitations.
 - h. To maintain a natural appearance and to balance crown with root mass.
 - i. Do not clip shrubs into balled or boxed forms unless approved initially by the Engineer.
 - j. Make pruning cuts on lateral branches or buds flush with trunk.
 - k. Do not "stub" branches.
- C. Tree Staking
 1. Restake, tighten and repair damaged tree ties.
 2. Reset to proper grades or upright (vertical position, trees that are not in their proper growing position.
 3. Inspect stakes to prevent girdling of trunks or branches and to prevent rubbing that may cause bark wounds.
- D. Weed Control: Refer to 3.8 Weed Control, this Specification section.
- E. Insect and Disease Control:
 1. Maintain insect and disease control during the Landscape Maintenance Period.
- F. Fertilization:
 1. Fertilize planting areas at the start of the Landscape Maintenance Period.
 2. Repeat fertilizer application at 30-day intervals until end of the Landscape Maintenance Period.

3.4 GROUND COVER PLANT CARE

- A. Weed Control: Refer to 3.8, Weed Control, this Specification section.
- B. Watering: Refer to 3.5, Watering, this Specification section.

02970-5

- C. Fertilizing:
 - 1. Fertilize as specified under 3.3, Tree and Shrub care, this Specification section.
- D. Edge ground cover to keep in bounds and trim trop growth as necessary to achieve an overall even appearance.

3.5 MAINTAINING WATER RETENTION BASINS

- A. Unless otherwise directed by the Engineer, maintain water retention basins around each plant. As directed by the Engineer, modify the basin to ensure it is capable of containing the required amount of water at each watering event at one time. The lip (or earthen berm) of the basin shall be preserved to a height as shown on the Drawings. Maintenance actions may include importing soil, reforming, and re-compacting the lip (or earthen berm) of the basin. Should water be retained within a basin for more than 4-hours, breach the berm of said basin in order to provide drainage at a given plant, especially during the rainy season and at other times as necessary. Take corrective actions to ensure positive drainage at a given plant; the berm shall then be restored to reform the water retention basin as prescribed herein.

3.6 WATERING

- A. The plants shall receive water by way of the installed irrigation system as shown on the Drawings and according to Section 02810, Irrigation System. When hand watering, use a water wand to break water force.
- B. The Contractor shall observe said system to ensure that it is functioning and providing adequate water to the plants. Water pressure shall be regulated to a level that applies sufficient water without causing damage to plants or erosion to the planting basin. At no time shall any water be applied in a way that will cause erosion, damage to plants, or excessive runoff. Should the watering application rates need adjustment, immediately contact the Engineer for direction. Assume full responsibility for corrective actions resulting from inappropriate water applications and failure to contact the Engineer for direction. Watering shall consist of the application of water in a manner that is sufficient to wet the soil and saturate the root zone and as frequent as necessary to maintain healthy growth, without damaging the plants, the surrounding grade, or the existing watering basins.
- C. Replenish wood mulch to reduce evaporation and frequency of watering. Throughout warm weather conditions, the plants may require additional watering events. The beginning and ending dates and a schedule for watering shall be determined collaboratively by the Contractor and the Engineer. If most of the plants appear to be stressed and in danger of perishing, consult the Engineer to determine the frequency and duration of additional or decreased watering. If modifications are made to the watering schedule, provide the Engineer with 2 copies of the adjusted watering schedule within 2 weeks of receiving the Engineer's verbal acceptance plus subsequent written approval of the modifications. Regulate irrigation watering times to minimize erosion and gullyng.

3.7 IRRIGATION SYSTEM

- A. Provides maintenance of irrigation system consisting of cleaning and adjusting sprinkler and nozzles, and drip emitters, repairing damaged equipment, servicing valves,

02970-6

programming controllers and other activities required during the Landscape Maintenance Period.

B. Irrigation Controller Charts

1. "As-Built" Drawings shall be approved by the Engineer before Irrigation Controller Charts are prepared.
2. Provide one Irrigation Controller Chart for each irrigation controller supplied.
3. Each Irrigation Controller Chart shall show the area controlled by that automatic irrigation controller and shall be the maximum size that fits through the irrigation controller door will allow.
4. The Irrigation Controller Chart is to be a reduced "As-Built" Drawings of the irrigation system. In the event that the Irrigation Controller Chart is not legible when the chart is reduced, the text on the "As-Built" Drawing may be enlarged to a size that will be readable when reduced.
5. The Irrigation Controller Chart shall be a monochromatic "Xerox" copy on #20 bond with each valve station represented by a different color.S
6. When completed, hermetically seal the Irrigation Controller Chart between two pieces of 10 mil. plastic laminate.
7. Irrigation Controller Charts shall be completed and approved by the Engineer before the Final Acceptance.

C. Refer to Section 02810 – Irrigation System for additional requirements.

3.8 WEED CONTROL

- A. Weed control shall consist of maintaining the individual planting sites, areas between individual planting sites, and all areas within planting boundaries (as shown on the Drawings) free of weeds for the duration of the Landscape Maintenance Period.
- B. At individual planting site, weeds shall be removed within a 36-inch diameter of each plant. Weed removal at the trunks of individual plants shall be conducted by hand pulling. At no time shall weed removal disrupt the root systems of the installed plants.
- C. Observe the project site weekly during the Landscape Maintenance Period to evaluate potential weed problems. Any invasive weed species shall be targeted for removal and long-term control through manual or chemical methods. Manual removal by hand-pulling shall be the preferred weed eradication method.
 1. Mechanical methods (such as mowing) or spot herbicide applications may be considered upon receipt of an HTP and approval from the Engineer before application. If approved, herbicide applications shall be conducted according to the approved HTP and under the direction of the Engineer. At no time shall weed control include burning.
 2. Avoid frequent soil cultivation that destroys shallow surface roots.
 3. Replenish lost wood or straw mulch to reduce weed growth.

3.9 REPLACEMENT PLANTING

- A. Material replacement shall be in strict conformance to the Drawings, these Specifications, and the Engineer's direction, and shall be completed at no additional expense.
- B. Plant material that has no easily observable viable aboveground living matter, or is of consistently poor vigor and form as determined by the Engineer, shall be considered

02970-7

dead and must be replaced according to the Drawings and the Specifications. Dead plants shall be removed before installation of replacement plants. All dead plants shall be removed offsite according to State and local regulations at no additional expense.

- C. Replace plant losses due to inundation, mortality, or poor health and vigor at a rate of 1 replacement plant for each plant lost in accordance with the performance standards described herein. The replacement plants must be similar in size to the current size of the existing plants. If transplants require replanting, the size of the replacements must be approved by the Engineer before ordering or purchase.
- D. All materials determined to be salvaged shall be handled and removed with care. All replacement plant containers and racks shall be salvaged and recycled offsite or returned to the suppliers at no additional cost.

3.10 CLEANUP

- A. Upon completion landscape maintenance, remove rubbish, waste and debris.
- B. Repair scars, ruts or other marks in landscaped areas.
- C. Remove equipment, implements of service and leave landscaping areas in a neat and clean condition as accepted by the Engineer. Sweep clean paved areas.

3.11 SITE OBSERVATION BEFORE ACCEPTANCE

- A. Corrective actions shall be in strict conformance with the Drawings and these Specifications and according to the Engineer, and shall be completed at the Contractor's expense.
- B. The Engineer will perform progress observations of the maintenance work on a weekly basis. The Engineer, the Contractor, and others designated by the Owner shall be present on for the weekly observations.
- C. If, after observation, the Engineer is satisfied with the construction to date and its conformance to the Drawings and the Specifications, the Engineer will grant written notice of acceptance.
- D. If, after an observation, the Engineer is dissatisfied with the maintenance work to date and its conformance to the Drawings and the Specifications, the Engineer will prepare a written punch list of necessary corrective action on defective work. All corrections must be completed by the Contractor and reobserved by the Engineer at the following weekly inspection.
- E. Failure to correct problems in the time specified by the Engineer may result in a delay of payment for the said tasks until the items in question are remedied per the Engineer's direction.
- F. The Contractor shall be charged for any additional observations and punch lists required from the Engineer for unscheduled and necessary reobservation of the Contractor's work due to unsatisfactorily or incompletely addressing previous punch lists.

3.12 SITE OBSERVATION SCHEDULE

- A. Progress observations of the maintenance work shall be one per week. The Engineer and the Contractor shall agree upon a regular day and time for the weekly observations.

3.13 FINAL ACCEPTANCE

- A. At completion of the Landscape Maintenance Period, schedule a Final Acceptance observation with the Engineer. Provide 10 working days of advance written notice for the requested date.
- B. The Owner, Engineer, Contractor, and others deemed necessary by the Engineer may be present at the Final Acceptance observation.
- C. Before requesting Final Acceptance observation, replacement planting shall be completed.
- D. If during the Final Acceptance observation the Engineer is of opinion that landscape maintenance has been substantially completed in accordance with this Specification, written notice of recommendation to allow Contractor to be released from Project will be submitted to the Owner for approval. This report will note any incomplete punch list items from Final Acceptance observation and a date on which these items must be completed. Remaining punch list items shall be completed within 5 working days after the final Acceptance observation was performed by the Engineer.
- E. If during the Final Acceptance observation the Engineer is of opinion that landscape maintenance has not been substantially completed in accordance with this Specification, the Engineer will prepare a written punch list of necessary corrective action on defective work. All corrections must be completed by the Contractor and reobserved by the Engineer within 10 working days from the date of the initial Final Acceptance observation. Written notice of recommendation to allow Contractor to be released from Project will not be submitted to the Owner for approval until all corrective actions have been addressed to the satisfaction of the Engineer.
- F. Corrective actions shall be in strict conformance with the Drawings and these Specifications and according to the Engineers, and shall be completed at the Contractor's expense.

+ + END OF SECTION + +

02970-10

SECTION 03100
CONCRETE FORMWORK

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section includes: Falsework and formwork, as required to construct cast-in-place concrete, including placing of all items such as sleeves, anchor bolts, inserts and all other items to be embedded in concrete for which placement is not specifically provided under other Sections.
- B. REFERENCES
 - 1. American Concrete Institute (ACI)
 - a. ACI 301, Specifications for Structural Concrete for Buildings.
 - b. ACI 347, Guide for Concrete Formwork.

1.2 SYSTEM DESCRIPTION

- A. Coordination:
 - 1. Review installation procedures under other Sections and coordinate the installation of items that must be installed with the formwork.
 - 2. Coordinate formwork specifications herein with the requirements for finished surfaces specified in Section 03300, Cast-In-Place Concrete.

1.3 SUBMITTALS

- A. Submit for information purposes the following: Copies of manufacturer's data and installation instructions for all proprietary materials, including form coatings, manufactured form systems, ties and accessories.
- B. Shop Drawings: Forming, shoring and bracing drawings for footings, walls and roofs.
- C. Calculations: Calculations verifying the selection of form ties, horizontal and vertical stiff-backs or braces for wall panels, forming and form openings, falsework or roof forms, or any other part of forming, shoring or bracing which may be considered critical by the ENGINEER.

1.4 QUALITY ASSURANCE

- A. Allowable Tolerances: Construct formwork to provide completed concrete surfaces complying with tolerances specified in ACI 347, Chapter 3.3, except as otherwise specified.
- B. Furnish and install all items for permanent or temporary facilities in accordance with manufacturer's instructions.

03100-1

PART 2 - PRODUCTS**2.1 FORM MATERIALS**

- A. Forms for Exposed Finish Concrete: Unless otherwise shown or specified, construct formwork for exposed concrete surfaces with plywood overlaid with MDO or HDO specifically designed for concrete forms, metal, metal-framed plywood-faced or other acceptable panel materials, to provide continuous, straight, smooth as-cast surfaces. Furnish in largest practical sizes to minimize number of joints. Provide form material with sufficient thickness to remain watertight and withstand pressure of newly placed concrete without bow or deflection.
- B. Forms for Unexposed Finish Concrete: Form concrete surfaces that will be unexposed in the finished structure with plywood, lumber, metal, or other acceptable material. Provide lumber that is dressed on at least 2 edges and 1 side.
- C. Form Ties:
 - 1. Form ties on exposed surfaces shall be located in a uniform pattern or as indicated on the Drawings. Form ties shall be constructed so that the tie remains embedded in the wall, except for a removable portion at each end. Form ties shall have conical or spherical type inserts, inserts shall be fixed so that they remain in contact with forming material, and shall be constructed so that no metal is within 1 inch of the concrete surface when the forms, inserts, and tie ends are removed. Wire ties will not be permitted. Ties shall withstand all pressures and limit deflection of forms to acceptable limits.
 - 2. Flat bar ties for panel forms shall have plastic or rubber inserts having a minimum depth of 1 inch and sufficient dimensions to permit proper patching of the tie hole.
 - 3. Ties for water-holding structures or dry structures with access such as basements, pipe galleries, etc., that are below finish grade, shall have either an integral steel water stop 0.103 inch thick and 0.625 inch in diameter that is tightly and continuously welded to the tie, or a neoprene water stop 3/16-inch thick and 15/16 inch in diameter whose center hole is 1/2 the diameter of the snap tie, or a molded plastic water stop of comparable size. Flat snap ties complying with above requirements and other sections of this Specification may be used. The water stop shall be considerably larger in area than the tie cross sectional area, and shall be oriented perpendicular to the tie and symmetrical about the center of the tie. The ties shall be constructed to provide a positive means of preventing rotation or disturbance of the center portion of the tie during removal of the ends.
- D. Alternative Form Ties – Through-Bolts:
 - 1. Alternate form ties consisting of tapered through-bolts at least 1 inch in diameter at smallest end, or through-bolts that utilize a removable tapered sleeve of the same minimum size may be used at the CONTRACTOR's option. Clean and roughen, fill, and seal form tie hole as shown on the Drawings; or where not shown on the Drawings, the CONTRACTOR shall provide a shop drawing submittal of his proposed method of sealing the through-bolt hole by sandblasting or mechanically cleaning and roughening the entire interior surface of the hole, epoxy coating the roughened surface and driving a vinyl plug and then dry packing the entire hole on each side of the plug with nonshrink grout, meeting these Specifications. Dry packing shall be done while the epoxy is tacky or remove the epoxy by mechanical means and reapply new epoxy. The CONTRACTOR shall be responsible for watertightness and any repair

- needed. Any leaks or dampness on the exterior of through-bolt patches during or after water testing shall require repair or replacement of the patch.
2. The elastic plug to be inserted into the form tie hole as shown on the Drawings shall be a Dayton Sure Plug, or approved equal, sized to allow insertion using the insertion tool to elongate the plug, place it at the correct location, and allow the plug to return to its original length and diameter upon removal to form a watertight seal. The plugs shall be as manufactured and supplied by Dayton Superior, Dayton OH, phone: 888/977-9500.
- E. Forms Coatings: Provide commercial formulation form-coating compounds that will not bond with, stain, nor adversely affect concrete surfaces, and will not impair subsequent treatment of concrete surfaces requiring bond or adhesion, nor impede the wetting of surfaces to be cured with water or curing compounds.
1. For concrete structures which will be in contact with potable water, the manufacturer shall certify that the form coating used is NSF 61 approved.

2.2 DESIGN OF FORMWORK

- A. The CONTRACTOR shall design all formwork prior to fabrication. The design shall account for all the tolerances, form ties, finishes, architectural features, rebar supports, construction joint locations, and other features and other nonstructural formwork requirements specified. Forms shall contain pouring and observation windows to allow placement of concrete through windows or shall be staged to allow visual observation at all times of the fresh concrete to ensure correct placement and vibration. Provide a formwork and placement design that will limit free fall of concrete in forms 8-inch or less in width to 5 feet; and for forms wider than 8 inches, limit this fall to 8 feet, except as hereinafter specified. Review methods with ENGINEER prior to start of work. Use placement devices, such as chutes, pouring spouts, pumps, as required.
- B. Wall forms shall be designed such that wall sections can be poured full height without creating horizontal cold joints and without causing snapping of form ties which shall be of sufficient strength and number to prevent spreading of the forms during the placement of concrete and which shall permit ready removal of the forms without spalling or damaging the concrete.
- C. Reuse of forms will be permitted only if a "like new" condition, unless otherwise approved in writing, is maintained. The ENGINEER shall be notified 1 full working day prior to concrete placement so that the forms can be inspected. The CONTRACTOR shall correct any defective work, found in the ENGINEER's inspection, prior to delivery of concrete to the project. Formwork surfaces that were in good condition and accepted for use, but were damaged during removal and handling shall not be reused on additional pours. The CONTRACTOR is expected to take care in the handling of forms and to obtain approval of form surfaces prior to each reuse.
- D. Roof forms and falsework supports for structural slabs shall be sufficiently rigid and strong to support the wet concrete and the men and equipment necessary for its placement without appreciable deflections. A minimum of 50 PSF for live load shall be allowed in the design.
- E. All forms, falsework, shoring, and other structural formwork required shall be structurally designed by the CONTRACTOR and the design shall comply with all applicable safety regulations, current OSHA regulations, and other codes. Where federal or state agencies

03100-3

require a licensed engineer to prepare and/or seal all formwork, falsework or shoring designs, the CONTRACTOR shall hire this engineer and pay all costs. The designs shall be made available to any governing agency upon request. Comply with applicable portions of ACI 347, ACI 318 current edition, and these Specifications. All design, supervision, and construction for safety of property and personnel shall be the CONTRACTOR's full responsibility.

PART 3 - EXECUTION**3.1 INSPECTION**

- A. Examine the substrate and the conditions under which Work is to be performed with installer and notify ENGINEER, in writing, of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

3.2 FORM CONSTRUCTION

- A. Construct forms complying with ACI 347; to the exact sizes, shapes, lines and dimensions shown; as required to obtain accurate alignment, location and grades; to tolerances specified; and to obtain level and plumb work in finish structures. Provide for openings, offsets, keyways, recesses, moldings, rustications, reglets, chamfers, blocking, screeds, bulkheads, anchorages and inserts, and other features required. Use selected materials to obtain required finishes. Finish shall be as determined by approved mock-up or sample panel, if specified.
- B. Fabricate forms for easy removal without damaging concrete surfaces. Provide crush plates or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces where the slope is too steep to place concrete with bottom forms only. Kerf wood inserts for forming keyways, reglets, recesses, and the like, to prevent swelling and assure ease of removal.
- C. Provide temporary form windows where interior area of formwork is inaccessible for cleanout, for inspection before concrete placement, and for placement of concrete. Brace temporary closures and set tightly to forms to prevent loss of concrete mortar. Locate form windows on forms in locations as inconspicuous as possible, consistent with requirements of the Work. Form intersecting planes of openings to provide true, clean-cut corners, with edge grain of plywood not exposed as form for concrete.
- D. Falsework:
 - 1. Erect falsework and support, brace and maintain it to safely support vertical, lateral and asymmetrical loads applied until such loads can be supported by in-place concrete structures. Construct falsework so that adjustments can be made for take-up and settlement.
 - 2. Provide wedges, jacks or camber strips to facilitate vertical adjustments. Carefully inspect falsework and formwork during and after concrete placement operations to determine abnormal deflection or signs of failure; make necessary adjustments to produce finished Work of required dimensions.
- E. Forms for Exposed To View Concrete:
 - 1. Do not use metal cover plates for patching holes or defects in forms.

03100-4

2. Provide sharp, clean corners at intersecting planes, without visible edges or offsets. Back joints with extra studs or girts to maintain true, square intersections.
 3. Use extra studs, walers and bracing to prevent bowing of forms between studs and to avoid bowed appearance in concrete. Do not use narrow strips of form material that will produce bow.
 4. Assemble forms so they may be readily removed without damage to exposed concrete surfaces.
 5. Form molding shapes, recesses, rustication joints and projections with smooth-finish materials, and install in forms with sealed joints to prevent displacement.
- F. Corner Treatment:
1. Form exposed corners of beams, walls, foundations, bases and columns to produce smooth, solid, unbroken lines, except as otherwise shown. Except as specified below for reentrant or internal corners, exposed corners shall be chamfered.
 2. Form chamfers with 3/4"x 3/4" strips, unless otherwise shown, accurately formed and surfaced to produce uniformly straight lines and tight edge joints. Use rigid PVC chamfers for all architecturally formed concrete. Extend terminal edges to require limit and miter chamfer strips at changes in direction.
 3. Reentrant or internal corners and unexposed corners need not be formed chamfered.
- G. Openings and Built-In Work:
1. Provide openings in concrete formwork shown or required by other Sections or other contracts.
 2. Accurately place and securely support items to be built into forms.
- H. Cleaning and Tightening: Thoroughly clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt or other debris just before concrete is to be placed. Retighten forms immediately after concrete placement as required to eliminate mortar leaks.

3.3 FORM COATINGS

- A. Coat form contact surfaces with a non-staining form-coating compound before reinforcement is placed. Do not allow excess form coating material to accumulate in the forms or to come into contact with surfaces that will be bonded to fresh concrete. Apply in compliance with manufacturer's instructions.
- B. Coat steel forms with a non-staining, rust-preventative form oil or otherwise protect against rusting. Rust-stained steel formwork is not acceptable.

3.4 INSTALLATION OF EMBEDDED ITEMS

- A. Set and build into the formwork, anchorage devices and other embedded items, shown, specified or required by other Sections and other contracts. Use necessary setting drawings, diagrams, instructions and directions.
- B. Edge Forms and Screeds Strips for Slabs: Set edge forms or bulkheads and intermediate screed strips for slabs to obtain required elevations and contours in the finished slab surface. Provide and secure units to support screeds.

3.5 FIELD QUALITY CONTROL

- A. Before concrete placement, check the formwork, including tolerances, lines, ties, tie cones, and form coatings. Make corrections and adjustments to ensure proper size and location of concrete members and stability of forming systems.
- B. During concrete placement check formwork and related supports to ensure that forms are not displaced and that completed Work is within specified tolerances.
- C. If forms are unsatisfactory in any way, either before or during placing of concrete, postpone or stop placement of concrete until the defects have been corrected, and reviewed by ENGINEER.

3.6 REMOVAL OF FORMS

- A. Conform to the requirements of ACI 301, Chapter 2 and ACI 347, Chapter 3.7 except as specified below.
 - 1. Removal of Forms and Supports: Continue curing in accordance with Section 03300, Cast-In-Place Concrete, Paragraph 3.7. Forms are to remain in-place for the time specified below following the end of concrete placement. The durations shown represent a cumulative number of days, or hours, not necessarily consecutive, during which the temperature of the air surrounding the concrete is above or below 50°F.

<u>Temperature:</u>	<u>Above 50°F</u>	<u>Below 50°F or when retarders are used</u>
Walls	12 hours	48 hours
Columns	12 hours	48 hours
Sides of Slabs	6 hours	12 hours
Structural Floor or Roof Slabs	Do not remove forms until site-cured test cylinders develop 100% of 28-days strength.	

- 2. When wall or column forms also support formwork for slab or beam soffits, the removal times of the latter should govern.
- 3. When high-early strength concrete is specified, a schedule for removal of forms will be developed in the field from the age/ strength relationships established for the materials and proportions used by tests in accordance with ACI 301, Section 2.3.4.
- 4. When construction loads are approximately equal to the structural live load, the forms for structural slabs, joists, and beams shall remain in place until the concrete has reached the specified compressive strength.

3.7 RE-USE OF FORMS

- A. Clean and repair surfaces of forms to be re-used in the Work. Split, frayed, delaminated or otherwise damaged form facing material will not be acceptable. Apply new form coating compound material to concrete contact surfaces as specified for new formwork.
- B. When forms are extended for successive concrete placement, thoroughly clean surfaces, remove fins and laitance, and tighten forms to close all joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces. Form surfaces shall be subject to ENGINEER'S approval.

+ + END OF SECTION + +

03100-6

SECTION 03200**CONCRETE REINFORCEMENT****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section includes: Fabrication and placement of reinforcement including bars, ties and supports, encasements and fireproofing.

1.2 SUBMITTALS

- A. Shop Drawings:
 - 1. Manufacturer's specifications and installation instructions for all materials and reinforcement accessories.
 - 2. Drawings for fabrication, bending, and placement of concrete reinforcement. Comply with ACI 315, Parts A and B. For walls, show elevations to a minimum scale of 1/4-inch to 1 foot. For slabs, show top and bottom reinforcing on separate plan views. Show bar schedules, stirrup spacing, diagrams of bent bars, arrangements and assemblies, as required for the fabrication and placement of concrete reinforcement, unless otherwise noted. Keep splices to a minimum. Avoid splices in regions of maximum tension stresses whenever possible.
- B. Certificates: Submit one (1) copy of steel producer's certificates of mill analysis, tensile and bend tests for reinforcing steel.

1.3 QUALITY ASSURANCE

- A. Reference Standards: Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified:
 - 1. American Concrete Institute (ACI):
 - a. ACI 315, Manual of Engineering and Placing Drawings for Reinforced Concrete Structures.
 - b. ACI 318, Building Code Requirements for Reinforced Concrete.
 - 2. Concrete Reinforcing Steel Institute:
 - a. Manual of Standard Practice, includes ASTM standards referred to herein.
- B. Allowable Placing Tolerances: Comply with ACI 318, Chapter 7 - Details of Reinforcement.

1.4 DELIVERY, HANDLING AND STORAGE

- A. Deliver concrete reinforcement materials to the site bundled, tagged and marked. Use metal tags indicating bar size, lengths, and other information corresponding to markings shown on placement diagrams.
- B. Store concrete reinforcement material at the site to prevent damage and accumulation of dirt or excessive rust. Store on heavy wood blocking so that no part of it will come in contact with the ground.

03200-1

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Reinforcing Bars: ASTM A615, Grade 60 for all non-welded bars. ASTM A706, Grade 60 for welded bars.
- B. Smooth Steel Dowels: ASTM A36.
 - 1. Epoxy coated conforming to ASTM A775 or ASTM A934.
- C. Mechanical Couplers: Reinforcement bars may be spliced with a mechanical connection. Provide a full mechanical connection which shall develop in tension or compression, as required, at least 125% of specified yield strength (f_y) of the bar in accordance with ACI 318 Section 12.14.3.2. The locations of the connections are subject to the approval of the ENGINEER.
 - 1. Dayton Superior Bar Lock S/CA Series.
 - 2. Or approved equal
- D. Threaded Splicing Systems: Dowel Bar Splicer System shall comply with ICC Report #4028. The completed splice shall exceed 160% of the specified yield strength (f_y) of the bar.
 - 1. Dayton Superior DB/DI parallel threaded couplers.
 - 2. Or approved equal
- E. Steel Wire: ASTM A82.
- F. Supports for Reinforcement: Bolsters, chairs, spacers and other devices for spacing, supporting and fastening reinforcement in place.
 - 1. Use wire bar type supports complying with CRSI recommendations, except as specified below. Do not use wood, brick, or other unacceptable materials.
 - 2. For slabs on grade, use 5000 psi concrete blocks.
 - 3. At all formed surfaces, provide supports complying with CRSI "Manual of Standard Practice" as follows: Plastic protected or stainless steel legs.

2.2 FABRICATION

- A. General: Fabricate reinforcing bars to conform to required shapes and dimensions, with fabrication tolerances complying with CRSI, "Manual of Standard Practice". In case of fabricating errors, do not re-bend or straighten reinforcement in a manner that will injure or weaken the material.
- B. Unacceptable Materials: Reinforcement with any of the following defects will not be permitted in the Work:
 - 1. Bar lengths, bends, and other dimensions exceeding specified fabrication tolerances.
 - 2. Bends or kinks not shown on approved Shop Drawings.
 - 3. Bars with reduced cross-section due to excessive rusting or other cause.

PART 3 - EXECUTION**3.1 INSPECTION**

- A. Examine substrate and conditions under which concrete reinforcement is to be placed with installer, and notify ENGINEER, in writing, of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

3.2 INSTALLATION

- A. Comply with the applicable recommendations of specified codes and standards, and CRSI, Manual of Standard Practice, for details and methods of reinforcement placement and supports.
- B. Clean reinforcement to remove loose rust and mill scale, oil, earth, ice, and other materials that reduce or destroy bond with concrete.
- C. Position, support, and secure reinforcement against displacement during formwork construction or concrete placement operations. Locate and support reinforcing by metal chairs, runners, bolsters, spacers and hangers, as required.
 - 1. Place reinforcement to obtain the minimum concrete cover as shown. Arrange, space, and securely tie bars and bar supports together with 16-gage wire to hold reinforcement accurately in position during concrete placement operations. Slab and wall bars shall be tied at every intersection around the periphery of the slab or wall and not less than every 48 inches in the field at walls and 60 inches in the field at slabs.
 - 2. Bar supports shall be placed no further than 4 feet apart in each direction. Supports must be completely concealed in the concrete and shall not discolor or otherwise mar the surface of the concrete.
 - 3. Set wire ties so that twisted ends are directed away from exposed concrete surfaces.
 - 4. Do not secure reinforcing steel to forms with wire, nails or other ferrous metal. Do not permit metal supports subject to corrosion to touch or be within the required clearance to formed or exposed concrete surfaces.
- D. Provide sufficient numbers of supports of strength required to carry reinforcement. Do not place reinforcing bars more than 2-inches beyond the last leg of any continuous bar support. Do not use supports as bases for runways for concrete conveying equipment or similar construction loads.
- E. Splices: Provide reinforcement lap splices by placing bars in contact, and tying tightly with wire. Comply with requirements shown for minimum lap of spliced bars.
- F. Mechanical Couplers in Lieu of Lap Splicing:
 - 1. Provide mechanical butt splices in accordance with the recommendation of the manufacturer of the mechanical splicing device. Butt splices shall develop 125 percent of the specified minimum yield tensile strength of the spliced bars or of the smaller bar in transition splices. Flame dry bars before butt splicing. Provide adequate jigs and clamps or other devices to support, align, and hold the longitudinal centerline of the bars to be butt spliced in a straight line.

- G. Reinforcement Around Openings: Place an equivalent area of steel around the pipe or opening and extend on each side sufficiently to develop bond in each bar. See the Details on Drawings for bar extension length each side of opening. Where welded wire fabric is used, provide extra reinforcing using fabric or deformed bars.
- H. Field Bending: Field bending of reinforcing steel bars is not permitted when rebending will later be required to straighten bars. Rebending of bars at the same place where strain hardening has taken place due to the original bend will damage the bar. Consult with the ENGINEER prior to any pour if the CONTRACTOR foresees a need to work out a solution to prevent field bending.

3.3 INSPECTION OF REINFORCEMENT

- A. Do not place concrete until the reinforcing steel is inspected and permission for placing concrete is granted by ENGINEER. All concrete placed in violation of this provision will be rejected.

+ + END OF SECTION + +

03200-4

SECTION 03251**CONCRETE JOINTS****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section includes installation of concrete joints including, construction joints, expansion joints and fillers, waterstops, and contraction (control) joints.

1.2 REFERENCES

- A. American Concrete Institute (ACI)
 - 1. ACI 301, Specifications for Structural Concrete for Buildings.
- B. American Society for Testing and Materials (ASTM)
 - 1. ASTM A36, Standard Specification for Structural Steel.
 - 2. ASTM D1752, Standard Specification for Preformed Sponge Rubber and Cork Expansion Joint Fillers for Concrete Paving and Structural Construction.
 - 3. ASTM D570, Standard Test Method for Water Absorption of Plastics.
- C. NSF/ANSI Standard 61 Drinking Water Systems Components.

1.3 SYSTEM DESCRIPTION

- A. All joints subject to hydrostatic pressure shall be provided with continuous waterstop.

1.4 SUBMITTALS

- A. Product Data: Submit for approval, Manufacturer's specifications and installation instructions for all materials required.
- B. Shop Drawings: Submit for approval:
 - 1. Layout of all construction joint locations prior to the submittal of steel reinforcing drawings. The concrete pour sequence and placement schedule shall be stated in the construction joint shop drawing layout.
 - 2. Detail for joining polyvinyl chloride waterstops.
- C. Samples: Submit for approval:
 - 1. Waterstops for joints.
 - 2. Expansion joint fillers.

1.5 QUALITY ASSURANCE

- A. Install all manufactured items in accordance with manufacturer's instructions.
- B. Store materials off the ground and protected from moisture, dirt and other contaminants. Protect installed and uninstalled materials from UV exposure in accordance with manufacturer's instruction.

03251-1

PART 2 - PRODUCTS**2.1 WATERSTOPS**

- A. Polyvinyl Chloride:
 - 1. At potable water facilities, provide NSF-61 Certified PVC waterstops.
 - 2. Reference Standard: ASTM D570.
 - 3. Construction Joints: Minimum of 3/8" thick, ribbed, width as shown, or if not shown, 6-inch minimum, center bulb type may be provided but is not required.
 - 4. Control Joints: Minimum of 3/8" thick, ribbed, center bulb type, width as shown, or if not shown, 6-inch minimum.
 - 5. Expansion Joints: Minimum thickness of 3/8" and 9" minimum width. Provide with "O" or "U" shaped center bulb. The "O" shall have an outside diameter of 3/4" minimum unless shown otherwise.
 - 6. Product and Manufacturer: Provide polyvinyl chloride waterstops of one of the following:
 - a. W.R. Meadows
 - b. Sika Greenstreak
 - c. Or approved equal
- B. Hydrophilic:
 - 1. Provide chloroprene rubber waterstops, 3/8-inch thick.
 - 2. Product and Manufacturer: Provide one of the following:
 - a. Sika Hydrotite.
 - b. Or approved equal.

2.2 PREFORMED EXPANSION JOINT FILLER

- A. Bituminous type conforming to ASTM D994 or D1751, unless otherwise shown or specified.

2.3 CONCRETE CONSTRUCTION JOINT ROUGHENER

- A. Provide a water-soluble non-flammable, surface-retardant roughener.
- B. Product and Manufacturer: Provide one of the following:
 - 1. Rugasol-S, as manufactured by Sika Corporation for horizontal joints.
 - 2. MBT EAC-S, as manufactured by Master Builders for horizontal joints.
 - 3. MBT Tuf-Cote (Deep Etch), as manufactured by Master Builders for vertical joints.
 - 4. Or approved equal.

2.4 EPOXY BONDING AGENT

- A. Provide an epoxy-resin bonding agent, two component type.
- B. Product and Manufacturer: Provide one of the following:
 - 1. Sikadur 32 Hi-Mod LPL, as manufactured by Sika Corporation.
 - 2. Dural LPL, as manufactured by the Euclid Chemical Company.
 - 3. Epoxite Binder (Code # 2390), as manufactured by A.C. Horn, Incorporated.
 - 4. Or approved equal.

03251-2

2.5 RUBBER BONDING AGENT

- A. Product and Manufacturer: Provide one of the following:
1. Scotch-Grip 1300 Rubber Adhesive, as manufactured by 3M Company.
 2. Or approved equal.

2.6 MORTAR

- A. Mortar must be composed of cement, sand and water. Materials for mortar must comply with Section 03300. The proportion of sand to cement measured by volume must be 2 to 1 respectively. Mortar must contain only enough water to allow placing.

2.7 BOND BREAKER

- A. Tape for Joints: Adhesive-backed glazed butyl or polyethylene tape, same width as joint that will adhere to premolded joint material or concrete surface.

PART 3 - EXECUTION**3.1 INSPECTION**

- A. Examine substrate and conditions under which Work is to be performed with installer and notify ENGINEER, in writing, of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

3.2 CONSTRUCTION JOINTS

- A. Comply with ACI 301, Chapter 2.2, and as specified below.
- B. Locate and install construction joints as shown. Locate additional construction joints as required to satisfactorily complete all Work.
- C. Horizontal Joints:
1. Roughen concrete at the interface of construction joints by sandblasting to expose the aggregate (1/4-inch minimum amplitude) and remove accumulated concrete on rebar immediately subsequent to form stripping. When sandblasting adjacent to installed waterstops, shield installed waterstops from the sandblasting operation. Immediately before placing fresh concrete, thoroughly clean the existing contact surface using a stiff brush or other tools and a stream of water under pressure. The surface shall be clean and wet, but free from pools of water at the moment the fresh concrete is placed.
 2. Remove laitance, waste mortar or other substance that may prevent complete adhesion.
 3. At the base of walls with waterstops, place a 3" thick coat of mortar over the surface of the old concrete. Place fresh concrete before the mortar has attained its initial set.
- D. Vertical Joints:
1. Remove accumulated concrete on rebar.
 2. Roughen concrete at the interface of the construction joints to expose the aggregate (1/4-inch minimum amplitude) through one of the following:

03251-3

- a. Apply roughener to the form in a thin, even film by brush, spray or roller in accordance with the manufacturer's instructions. After roughener is dry, concrete may be placed. When concrete has been placed and the form removed, wash loosened material off with high-pressure water spray to obtain roughened surface subject to approval by ENGINEER.
- b. Sandblast after concrete has fully cured.
- c. Waterblast after concrete has partially cured.
- d. Perform cleaning so as not to damage waterstop, if one is present.

3.3 EXPANSION JOINTS

- A. Locate and install expansion joints as shown. Install bituminous joint filler in accordance with manufacturer's instructions. Install caulking and sealants as specified in Section 07900, Joint Sealants.

3.4 WATERSTOPS

- A. General:
 1. Comply with ACI 301, Chapter 2, and as specified below. Make all joints in accordance with manufacturer's instructions.
 2. Obtain ENGINEER'S approval for waterstop locations not shown.
 3. Provide waterstops in all basements, tanks and other substructures up to an elevation at least 12" above grade or to an elevation at least 12" above highest liquid level in tanks, whichever is higher, except where otherwise shown or noted.
- B. Polyvinyl Chloride Waterstop:
 1. Tie waterstops to reinforcing steel at 12-inches on center, in each direction, so that it is securely and rigidly supported in the proper position, centered in the joint, during concrete placement. Hog rings shall be used to facilitate placing and tying of waterstops to reinforcing steel forms or form-ties.
 2. Continuously inspect waterstops during concrete placement to ensure their proper positioning.
 3. Provide fused waterstops using equipment as supplied by or recommended by the manufacturer. Joints shall be inspected for strength and pinholes after splicing. Splices shall be strong enough to develop a pulling force of 75 percent of the strength of the waterstop, and shall be watertight.
 4. Cover and protect installed waterstops from UV if the pour of concrete will be delayed more than 30 days.
 5. Shield installed waterstops from sandblasting when performing surface roughening adjacent to installed waterstops.
- C. Hydrophilic Waterstop: Install where shown in accordance with manufacturer's recommendations.

3.5 BONDING WITH EPOXY ADHESIVE

- A. Use adhesive for the following:
 1. Bonding of fresh concrete to concrete cured at least 45 days or to existing concrete.
 2. Bonding of horizontal surfaces, which will receive a topping.
- B. Handle and store epoxy adhesive in compliance with the manufacturer's printed instructions, including safety precautions.

- C. Mix the epoxy adhesive in complete accordance with the instructions of the manufacturer.
- D. Before placing fresh concrete, thoroughly roughen and clean hardened concrete surfaces and coat with epoxy adhesive not less than 1/16" thick. Place fresh concrete while the epoxy material is still tacky, without removing the in-place grout coat, and as directed by the epoxy manufacturer.

+ + END OF SECTION + +

03251-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 03300**CAST-IN-PLACE CONCRETE****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section includes: Place, finish, cure, strip, and repair concrete.

1.2 REFERENCES

- A. American Concrete Institute (ACI)
1. ACI 211.1, Standard Practice for Selecting Proportions for Normal, Heavyweight and Mass Concrete.
 2. ACI 214, Recommended Practice for Evaluation of Strength Test Results of Concrete.
 3. ACI 301, Specifications for Structural Concrete for Buildings, (includes ASTM Standards referred to herein).
 4. ACI 304, Guide for Measuring, Mixing, Transporting and Placing Concrete.
 5. ACI 305, Hot Weather Concreting.
 6. ACI 306, Cold Weather Concreting.
 7. ACI 309, Guide for Consolidation of Concrete.
 8. ACI 311, Guide for Concrete Inspection.
 9. ACI 318, Building Code Requirements for Reinforced Concrete.
 10. ACI 347, Guide to Formwork for Concrete
 11. ACI 350, Environmental Engineering Concrete Structures.

1.3 SYSTEM DESCRIPTION

- A. Class A Concrete shall be steel reinforced and includes:
1. Foundations.
 2. Walls.
 3. Slabs.
 4. Beams.
 5. Equipment bases.
 6. Pipe supports.
- B. Class B Concrete shall be placed without forms or with simple forms, with little or no reinforcing, and includes:
1. Concrete fill.
 2. Curbs and gutters.
 3. Sidewalks.
 4. Thrust blocks.
 5. Encasements.

1.4 SUBMITTALS

- A. Samples: Submit samples of materials as specified and as otherwise may be requested by ENGINEER, including names, sources and descriptions.
- B. Product Data: Submit for approval the following:

03300-1

1. Manufacturer's specifications with application and installation instructions for proprietary materials and items, including admixtures and bonding agents.
 2. List of concrete materials and concrete mix designs proposed for use. Include the results of all tests performed to qualify the materials and to establish the mix designs.
- C. Laboratory Test Reports: Submit copies of laboratory test reports for materials and mix design tests
- D. Delivery Tickets: Furnish to ENGINEER copies of all weighmaster certificate delivery tickets for each load of concrete delivered to the site. Provide items of information as specified in ASTM C94, Section 16. Delivery tickets shall be signed by a Certified Weighmaster.

1.5 QUALITY ASSURANCE

- A. Tests for Concrete Materials: Submit written reports to ENGINEER, for each material sampled and tested, prior to the start of Work. Provide the Project identification name and number, date of report, name of CONTRACTOR, name of concrete testing service, source of concrete aggregates, material manufacturer and brand name for manufactured materials, values specified in the referenced specification for each material, and test results. Indicate whether or not material is acceptable for intended use.
- B. If the concrete mix designs specified herein have not been used previously by the ready-mix supplier, mix proportions and concrete strength curves for regular cylinder tests shall be established by an approved ready-mix supplier or an independent testing laboratory based on the relationship of 7, 14 and 28 day strengths versus slump values of 2, 4 and 6 inches, all conforming to these Specifications. A laboratory, independent of the ready-mix supplier, shall be required to prepare and test all concrete cylinders. The costs for preparation of mix designs, not previously used by the ready-mix supplier, and testing of concrete and materials shall be borne by CONTRACTOR.

PART 2 - PRODUCTS

2.1 CONCRETE MATERIALS

- A. Cement:
1. Portland cement, ASTM C150, Type II; or blended hydraulic cement, ASTM C595, Type 1P (MS).
 2. Do not use cement which has deteriorated because of improper storage or handling.
- B. Aggregates: ASTM C33 and as herein specified.
1. Do not use aggregates containing soluble salts, substances such as iron sulfides, pyrite, marcasite, ochre, or other materials that can cause stains on exposed concrete surfaces.
 2. Fine Aggregate: Provide clean, sharp, natural sand free from loam, clay, lumps or other deleterious substances.
 3. Coarse Aggregate: Provide clean, uncoated, processed aggregate containing no clay, mud, loam, or foreign matter, as follows:
 - a. Crushed stone, processed from natural rock or stone.

03300-2

- b. Coarse Aggregate Size: Size to be ASTM C33, Nos. 57 or 67, except that No. 467 may be used for footings, foundation mats and walls 16" or greater in thickness.
- C. Water: Clean, free from injurious amounts of oils, acids, alkalis, organic materials or other substances that may be deleterious to concrete or steel.

2.2 CONCRETE ADMIXTURES

- A. Provide admixtures produced by established reputable manufacturers, and use in compliance with the manufacturer's printed instruction. Do not use admixtures that have not been incorporated and tested in the accepted mixes, unless otherwise authorized in writing by ENGINEER.
- B. Air-Entraining Admixtures: ASTM C260.
 - 1. Product and Manufacturer: Provide one of the following:
 - a. SIKA AER, as manufactured by Sika Corporation.
 - b. MasterAir AE 200, as manufactured by BASF.
 - c. Daravair, as manufactured by W.R. Grace & Conn.
 - d. Or approved equal.
- C. High-Range Water-Reducing Admixture ("Superplasticizer"): ASTM C494, Type F/G.
 - 1. Superplasticizer shall be used in all Class A Concrete. Do not use high range water-reducing admixture containing more chloride ions than are contained in municipal drinking water. Add only at the job site to concrete in compliance with the manufacturer's printed instruction.
 - 2. Product and Manufacturer: Provide one of the following:
 - a. Sikament 320, as manufactured by Sika Corporation.
 - b. MasterGlenium, as manufactured by BASF.
 - c. Daracem-100, as manufactured by W.R. Grace & Conn.
 - d. Or approved equal.
- D. Water-Reducing Admixture: ASTM C 494, Type A.
 - 1. A water-reducing, aqueous solution of a modification of the salt of polyhydroxylated organic acids. Do not use admixture containing any lignin, nitrates or chlorides added during manufacture.
 - 2. Product and Manufacturer: Provide one of the following:
 - a. Eucon WR-75, as manufactured by The Euclid Chemical Company.
 - b. MasterPozzoloth, as manufactured by BASF.
 - c. WRDA series, as manufactured by W.R. Grace & Conn.
 - d. Or approved equal.
- E. Pozzolanic Admixtures:
 - 1. Pozzolanic admixtures shall not be used in structures with concrete in contact with potable water, but may be used in other concrete.
 - 2. Provide Mineral admixtures, when used, meeting the requirements of ASTM C618 Class F.
 - 3. A substitution by weight, of the portland cement by pozzolan, so that the total tricalcium aluminate content of the resulting cement plus pozzolan is not greater than 8%, will be considered. However, the pozzolan shall not exceed 20% by weight of the cement plus pozzolan.
- F. Set-Control Admixtures: ASTM C494, as follows:

03300-3

1. Type B, Retarding.
 2. Type C, Accelerating.
 3. Type D, Water-reducing and Retarding.
 4. Type E, Water-reducing and Accelerating.
 5. Type F, Water-reducing, high range admixtures.
 6. Type G, Water-reducing, high range, and retarding admixtures.
- G. Calcium Chloride: Do not use calcium chloride in concrete, unless otherwise authorized in writing by ENGINEER. Do not use admixtures containing calcium chloride where concrete is placed against galvanized steel.

2.3 PROPORTIONING AND DESIGN OF MIXES

- A. Prepare design mixes of concrete. Mixes subject to the following limitations:
1. Class A Concrete
 - a. Specified 28-day Compressive Strength:
 - 1) Bridge Abutments: 5,000 psi minimum.
 - 2) All other Class A Concrete: 4,000 psi minimum. Bridge abutment mix design may be used for all Class A concrete if the contractor chooses.
 - b. Air content: 2% \pm 1%.
 - c. Slump, before addition of superplasticizer: 3½" \pm ½"
 - d. Slump, after addition of superplasticizer: 8" maximum

Coarse Aggregate Size	Cementitious Content-Pounds Per Cubic Yard	Water-Cement Ratio by Weight
¾"	625 min, 800 max	0.375
1"	600 min, 800 max	0.385
1 ½"	590 min, 800 max	0.400

- e. Use superplasticizer in all Class A Concrete. Use water reducers in combination with superplasticizers as required for mixing.
 2. Class B Concrete
 - a. Specified 28-day Compressive Strength: 2,500 psi.
 - b. Maximum Water-Cement Ratio by Weight: 0.49.
 - c. Slump: 3" Minimum, 5" Maximum.
- B. Use an independent testing facility acceptable to ENGINEER for preparing and reporting proposed mix designs.
- C. Admixtures:
1. Use amounts of admixtures as recommended by the manufacturer for climatic conditions prevailing at the time of placing. Adjust quantities and types of admixtures as required to maintain quality control.

2.4 EPOXY BONDING AGENT

- A. For use in all dry-packed holes, concrete repair and for unplanned cold-joints.
- B. Provide an epoxy-resin bonding agent, two component, polysulfide type.
- C. Product and Manufacturer: Provide one of the following:

03300-4

1. Sikadur 32, Hi-Mod LPL, as manufactured by Sika Corporation.
2. Eucopoxy LPL, as manufactured by the Euclid Chemical Company.
3. Or approved equal.

2.5 CONCRETE CURING MATERIALS

- A. Absorptive Cover: Burlap cloth made from jute or kenaf, weighing approximately 10 ounces per square yard and complying with AASHTO M182, Class 3.
- B. Moisture-Retaining Cover: One of the following, complying with ASTM C171.
 1. Waterproof paper.
 2. Polyethylene film.
 3. White burlap-polyethylene sheet.
- C. Curing Compound: ASTM C309 Type 1-D (water retention requirements):
 1. Product and Manufacturer: Provide one of the following:
 - a. Super Aqua Cure VOX, as manufactured by The Euclid Chemical Company.
 - b. Sealtight 1100, as manufactured by W.R. Meadows, Incorporated.
 - c. Or approved equal.

2.6 EMBEDDED ITEMS

- A. Provide and install items such as plates, angles, inserts, bolts and similar items not specified elsewhere under this Section. Carbon steel embedded items shall be hot dip galvanized after fabrication.

PART 3 - EXECUTION

3.1 CONCRETE MIXING

- A. Provide concrete produced by the ready-mixed process.
- B. Comply with the requirements of ASTM C 94, and as herein specified. Proposed changes in mixing procedures, other than herein specified, must be accepted by ENGINEER before implementation.
 1. Plant equipment and facilities: Conform to National Ready- Mix Concrete Association "Plant and Delivery Equipment Specification."
 2. Mix concrete in revolving type truck mixers that are in good condition and which produce thoroughly mixed concrete of the specified consistency and strength.
 3. Do not exceed the proper capacity of the mixer.
 4. Mix concrete for a minimum of two minutes after arrival at the job site, or as recommended by the mixer manufacturer.
 5. Mix concrete during transit only as recommended by the mixer manufacturer.
 6. Mix at proper speed until concrete is discharged.
 7. Maintain adequate facilities at the job site for continuous delivery of concrete at the required rates.
 8. Provide access to the mixing plant for ENGINEER at all times.

03300-5

3.2 TRANSPORTING CONCRETE

- A. Transport and place concrete not more than 90 minutes after water has been added to the dry ingredients or before 250 revolutions of the drum or blades, whichever occurs first.
- B. If an admixture is used to retard the set time and the concrete temperature does not exceed 85 degrees F, the travel and placing time may be extended to 120 minutes or 300 revolutions of the drum or blades, whichever occurs first.
- C. Take care to avoid spilling and separation of the mixture during transportation.
- D. Do not place concrete in which the ingredients have been separated.
- E. Do not retemper partially set concrete.
- F. Use suitable and approved equipment for transporting concrete from mixer to forms.

3.3 CONCRETE PLACEMENT

- A. General: Place concrete continuously so that no concrete will be placed on concrete, which has hardened sufficiently to cause the formation of seams or planes of weakness within the section. If a section cannot be placed continuously, provide construction joints as specified in Section 03251, Concrete Joints. Deposit concrete as nearly as practical in its final location to avoid segregation due to rehandling or flowing. Do not subject concrete to any procedure that will cause segregation.
 - 1. Screed concrete that is to receive other construction to the proper level to avoid excessive skimming or grouting.
 - 2. Do not use concrete which becomes non-plastic and unworkable, or does not meet the required quality control limits, or which has been contaminated by foreign materials. Do not use retempered concrete. Remove rejected concrete from the job site and dispose of it in an acceptable location.
 - 3. Do not place concrete until all forms, bracing, reinforcement, and embedded items are in final and secure position.
 - 4. Do not place in cold weather, unless adequate precautions are taken against frost action.
 - 5. Do not place footings, piers or pile caps on frozen soil.
 - 6. Unless otherwise approved, place concrete only when ENGINEER is present.
 - 7. Allow a minimum of 3 days of curing before placing new concrete against a slab or wall already in place.
- B. Concrete Conveying:
 - 1. Handle concrete from the point of delivery and transfer to the concrete conveying equipment and to the locations of final deposit as rapidly as practical by methods that will prevent segregation and loss of concrete mix materials.
 - 2. Provide mechanical equipment for conveying concrete to ensure a continuous flow of concrete at the delivery end. Provide runways for wheeled concrete conveying equipment from the concrete delivery point to the locations of final deposit. Keep interior surfaces of conveying equipment, including chutes, free of hardened concrete, debris, water, ice and other deleterious materials.
 - 3. Pumping concrete is permitted, however do not use aluminum pipe for conveying.

03300-6

C. Placing Concrete into Forms:

1. Deposit concrete in forms in horizontal layers not deeper than 24" and in a manner to avoid inclined construction joints. Where placement consists of several layers, place concrete at such a rate that concrete that is being integrated with fresh concrete is still plastic.
2. Do not permit concrete to free fall within the form from a distance exceeding 8'-0", except as noted in Section 03100. Use "elephant trunks" or "wall pipes" to prevent free fall and excessive splashing on forms and reinforcement.
3. Remove temporary spreaders in forms when concrete placing has reached the elevation of such spreaders.
4. Consolidate concrete placed in forms by mechanical vibrating equipment supplemented by hand-spading, rodding or tamping. Use equipment and procedures for consolidation of concrete in accordance with the applicable recommended practices of ACI 309. Vibration of forms and reinforcing will not be permitted.
5. Vibrators shall have a frequency of at least 8,000 vpm, with amplitude required to consolidate the concrete in the section being placed. At least one stand-by vibrator in operable condition shall be at the placement site prior to initiating placement of the concrete.
6. Do not use vibrators to transport concrete inside of forms. Insert and withdraw vibrators vertically at uniformly spaced locations not farther than the visible effectiveness of the machine. Place vibrators to rapidly penetrate the layer of concrete and at least 6" into the preceding layer. Do not insert vibrators into lower layers of concrete that have begun to set. At each insertion, limit the duration of vibration to the time necessary to consolidate the concrete and complete embedment of reinforcement and other embedded items without causing segregation of the mix.
7. The forms shall contain sufficient windows or be limited in height to allow visual observation of the concrete and the vibrator operators shall be required to see the concrete being consolidated to ensure good quality workmanship or the CONTRACTOR shall have a person who is actually observing the vibration of the concrete at all times and advising the vibrator operators of any changes needed to assure complete consolidation.
8. Do not place concrete in beam and slab forms until the concrete previously placed in columns and walls is no longer plastic.
9. Force concrete under pipes, sleeves, openings and inserts from one side until visible from the other side to prevent voids.

D. Placing Concrete Slabs and Footings:

1. Deposit and consolidate concrete in a continuous operation, within the limits of construction joints, until the placing of a panel or section is completed.
2. Consolidate concrete during placing operations using mechanical vibrating equipment, so that concrete is thoroughly worked around reinforcement and other embedded items and into corners.
3. Consolidate concrete placed in beams and girders of supported slabs, and against bulkheads of slabs on ground, as specified for formed concrete structures.
4. Bring surfaces to the correct level. Smooth the surface, leaving it free of humps or hollows. Do not sprinkle water on the plastic surface. Do not disturb the surfaces prior to beginning finishing operations.

E. Bonding for Next Concrete Pour: Per Section 03251, Concrete Joints.

F. Quality of Concrete Work:

03300-7

1. Make all concrete solid, compact and smooth, and free of laitance, cracks and cold joints.
 2. All concrete for liquid retaining structures, and all concrete in contact with earth, water, or exposed directly to the elements shall be watertight.
 3. Cut out and properly replace to the extent ordered by ENGINEER, or repair to the satisfaction of ENGINEER, surfaces which contain cracks or voids, are unduly rough, or are in any way defective. Thin patches or plastering will not be acceptable.
 4. Repair all leaks through concrete, and cracks, holes or other defective concrete in areas of potential leakage and make watertight.
 5. Repair, remove, and replace defective concrete as ordered by ENGINEER at no additional cost to OWNER.
- G. Cold Weather Placing:
1. Protect all concrete Work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures, in compliance with the requirements of ACI 306 and as herein specified.
 2. When the air temperature has fallen to or may be expected to fall below 40°F, provide adequate means to maintain the temperature, in the area where concrete is being placed, at between 50°F and 70°F for at least seven days after placing. Provide temporary housings or coverings including tarpaulins or plastic film. Maintain the heat and protection, if necessary, to ensure that the ambient temperature does not fall more than 30°F in the 24 hours following the seven-day period. Avoid rapid dry-out of concrete due to overheating, and avoid thermal shock due to sudden cooling or heating.
 3. When air temperature has fallen to or is expected to fall below 40°F, uniformly heat all water and aggregates before mixing as required to obtain a concrete mixture temperature of not less than 55°F and not more than 85°F at point of placement.
 4. Do not use frozen materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials. Ascertain that forms, reinforcing steel, and adjacent concrete surfaces are entirely free of frost and ice before placing concrete.
 5. When temperatures are expected to be below 32°F the night before the concrete is placed, then all reinforcing steel, forms and the ground shall be preheated, for a minimum of 12 hours, under a minimum temperature of 50°F.
 6. Do not use salt and other materials containing antifreeze agents or chemical accelerators, or set-control admixtures, unless approved by ENGINEER, in mix designs.
 7. Weather predictions made by the nearest NOAA station, and corrected for the local elevation and environmental conditions, may be used to determine whether cold weather protection shall be required. Thermometers will be used by ENGINEER and these readings shall determine whether cold weather protection shall be required and whether cold weather protection is adequate.
- H. Hot Weather Placing:
1. When hot weather conditions exist as any combination of high air temperature, low relative humidity and wind velocity that would seriously impair the quality and strength of concrete, place concrete as recommended by ACI 305 and as herein specified.
 2. Cool ingredients before mixing to maintain concrete temperature at time of placement below 85°F. No concrete shall be placed if its temperature exceeds 90°F. Mixing water may be chilled, or chopped ice may be used, or liquid nitrogen may be added. Ice, when introduced into the mixer shall be in such form that it will be

03300-8

- completely melted and dispersed throughout the mix at the completion of the mixing time. The addition of ice shall not increase the specified water to cement ratio.
3. Cover reinforcing steel with water-soaked burlap if it becomes too hot, so that the steel temperature will not exceed the ambient air temperature immediately before embedment in concrete.
 4. Thoroughly wet forms before placing concrete. Forms shall be free of standing water when concrete is placed.
 5. Do not use set-control admixtures, unless approved by ENGINEER in mix designs.
 6. Fog spray shall be used during finishing operations whenever necessary to avoid surface plastic shrinkage cracking. Fog spray shall also be used after finishing and before the specified curing is commenced to avoid surface plastic shrinkage cracking.
 7. Obtain ENGINEER'S approval of other methods and materials proposed for use.
- I. Removal of Forms:
1. The CONTRACTOR shall be responsible for all damage resulting from improper and premature removal of forms. Satisfy all applicable OSHA requirements with regard to safety of personnel and property.
 2. Forms and shoring for elevated structural slabs or beams shall remain in place in accordance with ACI 318, Chapter 6, and until the concrete has reached a compressive strength equal to the specified 28-day compressive strength as determined by test cylinders unless noted otherwise in Section 03100 - Concrete Formwork. Removal of all supports prior to obtaining adequate field cured cylinder results and reshoring shall not be permitted.
- J. Backfill Against Walls:
1. Do not place backfill against walls until the concrete has obtained a compressive strength equal to the specified 28-day compressive strength. Where backfill is to be placed on both sides of the wall, the backfill shall be placed simultaneously on both sides to prevent differential pressures.
 2. Since the walls of some structures are laterally restrained or supported by suspended slabs and/or slabs on grade and are not designed as cantilever retaining walls, the CONTRACTOR shall submit a schedule of wall shoring, bracing, and backfilling that is coordinated with the concrete curing, test cylinder reports and the design assumptions and obtain a review from the ENGINEER prior to proceeding.
- K. Patching:
1. Patching of concrete shall provide an acceptable and structurally sound surface finish uniform in appearance or the CONTRACTOR shall upgrade the finish by other means at no additional cost.
 2. Tie Holes: All tie holes, except where sealant is indicated, shall be filled with dry pack nonshrink grout. White cement shall be added as needed so the color of grout after curing matches the color of adjacent concrete. Tie holes shall be thoroughly sandblasted or roughened. Flush the patch area with water and allow to dry. Coat the surface of the existing concrete with an approved bonding agent prior to filling with nonshrink grout. Complete the repair in the time duration specified by the bonding agent manufacturer. The grout shall be rammed into place in thin layers and leveled to the plane of the surrounding concrete. Cure in accordance with the manufacturer's recommendations.
 3. Defective Areas: Remove all defective concrete such as honeycombed areas and rock pockets out to sound concrete. Small shallow holes caused by air entrapment at the surface of the forms shall not be considered defects unless the amount is so great as to be considered not the standard of the industry and due primarily of poor

03300-9

workmanship. If chipping is required, the edges shall be perpendicular to the surface. Feather edges shall not be permitted. The defective area shall be filled with a nonshrink, nonmetallic, grout. Use an approved bonding agent on horizontal patches prior to placing nonmetallic, non shrink grout. Since some bonding agents may not be compatible for some vertical surface patching techniques, demonstrate all methods for repair of vertical surfaces using the actual materials, methods, and curing procedures required by the manufactures of the materials on the project site. The CONTRACTOR shall consult with representatives of the bonding agent manufacturer and the nonshrink grout manufacturer, and these representatives shall be onsite and assist in the demonstration.

4. Blockouts at Pipes or Other Penetrations: Conform to details shown or submit proposed blockouts for review. Use nonshrink, nonmetallic grout.

3.4 FINISH OF FORMED SURFACES

A. Rough Form Finish:

1. Standard rough form finish is with concrete surface having the texture imparted by the form material, with tie holes and defective areas repaired and patched with mortar of 1 part cement to 1½ parts sand & all fins and other projections exceeding 1/4" in height rubbed down or chipped off.
2. Use rough form finish for the following:
 - a. Exterior vertical surfaces up to 1' below grade.
 - b. Interior exposed vertical surfaces of liquid containers up to 1' below liquid level.
 - c. Interior and exterior exposed beams and undersides of slabs.
 - d. Other areas shown.

B. Smooth Form Finish:

1. Produce smooth form finish (Class A, as defined by ACI-347) by selecting form materials that will impart a smooth, hard, uniform texture. Arrange panels in an orderly and symmetrical manner with a minimum of seams. Repair and patch defective areas as above with all fins or other projections completely removed and smoothed.
2. Use smooth form finish for surfaces that are to be covered with a coating material. The material may be applied directly to the concrete or may be a covering bonded to the concrete such as waterproofing, damp proofing, painting or other similar system.

C. Smooth Rubbed Finish:

1. Provide smooth, rubbed finish to concrete surfaces which have received smooth form finish as follows:
 - a. Rubbing of concrete surfaces not later than the day after form removal.
 - b. Moistening of concrete surfaces and rubbing with carborundum brick or other abrasive until a uniform color and texture is produced. Do not apply cement grout other than that created by the rubbing process.
2. Except where surfaces have been previously covered as specified above, use smooth rubbed finish for the following:
 - a. Interior exposed walls and other vertical surfaces.
 - b. Exterior exposed walls and other vertical surfaces down to 1' below grade.
 - c. Interior exposed vertical surfaces of liquid containers down to 1' below liquid level.
 - d. Other areas shown.

D. Related Unformed Surfaces:

03300-10

1. At tops of walls, horizontal offsets, and similar unformed surfaces occurring adjacent to formed surfaces, strike off smooth and finish with a texture matching the adjacent formed surfaces. Continue the final surface treatment of formed surfaces uniformly across the adjacent unformed surfaces, unless otherwise shown.

3.5 MONOLITHIC SLAB FINISHES

A. Float Finish:

1. After placing concrete slabs, do not work the surface further until ready for floating. Begin floating when the surface water has disappeared or when the concrete has stiffened sufficiently. Check and level the surface plane to a tolerance not exceeding 1/4" in 10' when tested with a 10' straightedge. Cut down high spots and fill all low spots. Uniformly slope surface to drains as shown. Immediately after leveling, refloat the surface to a uniform, smooth, granular texture.
2. Use float finish for the following:
 - a. Exterior below grade horizontal surfaces.
 - b. Surfaces to receive additional finishes, except as shown or specified.

B. Trowel Finish:

1. After floating, begin the first trowel finish operation using a power-driven trowel. Begin final troweling when the surface produces a ringing sound as the trowel is moved over the surface.
2. Consolidate the concrete surface by the final hand troweling operation. Finish shall be free of trowel marks, uniform in texture and appearance, and with a surface plane tolerance not exceeding 1/8" in 10' when tested with a 10' straight edge. Grind smooth surface defects that would telegraph through applied floor covering system.
3. Use trowel finish for the following:
 - a. Interior exposed slabs, unless otherwise shown or specified.

C. Non-Slip Broom Finish:

1. Immediately after trowel finishing, slightly roughen the concrete surface by brooming in the direction perpendicular to the main traffic route. Use fiber-bristle broom, unless otherwise directed. Coordinate the required final finish with ENGINEER before application.
2. Use Non-Slip Broom Finish for the following:
 - a. Exterior exposed horizontal surfaces subject to light foot traffic.
 - b. Interior and exterior concrete steps and ramps.
 - c. Horizontal surfaces which will receive a grout topping or a concrete equipment base slab.

3.6 CONCRETE CURING AND PROTECTION

A. General:

1. Protect freshly placed concrete from premature drying and excessive cold or hot temperature, and maintain without drying at a relatively constant temperature for the period of time necessary for hydration of the cement and proper hardening of the concrete.
2. Start initial curing after placing and finishing concrete as soon as free moisture and bleed water sheen has disappeared from the concrete surface. Keep concrete continuously moist during initial curing.
3. Begin final curing procedures immediately following initial curing and before the concrete has dried. The total curing duration shall not be less than ten (10) days.

03300-11

For concrete sections over 30" thick, continue curing for an additional seven (7) days, minimum. Avoid rapid drying at the end of the final curing period.

B. Use one of the following methods as approved by ENGINEER:

1. Walls:

- a. Method 1: Leave concrete forms in place and keep entire surfaces of forms and exposed concrete surfaces wet for the entire curing duration. If forms are loosened and the contact between the concrete surface and forms is broken then the entire wall shall be wet cured.
- b. Method 2: Continuously sprinkle or fog with water 100 percent of the exposed surfaces for the curing duration immediately after removal of forms.
- c. Method 3: When approved by ENGINEER and as noted below, apply curing compound immediately after removal of forms.

2. Slab and Curbs:

- a. Method 1: Protect surface by water ponding for the entire curing duration.
- b. Method 2: Cover concrete surfaces and exposed edges with the specified absorptive cover, thoroughly saturating the cover with water, and keeping the absorptive cover continuously wet with sprinklers or porous hoses during the curing duration. Lap adjacent absorptive cover sections 3-inches minimum.
- c. Method 3: Cover the concrete surfaces and exposed edges with the specified moisture-retaining cover during the curing duration. Seal edges and seams with waterproof tape, adhesive or sand berm. Water must be introduced between the moisture-retaining cover and the concrete surface whenever moist drops cannot be detected on the concrete side of the cover or the concrete surface is noticeably dry.
- d. Method 4: Continuously sprinkle or fog exposed surfaces for the curing duration.
- e. Method 5: When approved by ENGINEER and as noted below, apply liquid curing compound immediately after final finishing when surface will no longer be damaged by traffic necessary to apply curing compound.

C. Liquid curing compound:

1. Apply the specified curing compound to concrete surfaces when permitted by ENGINEER. Slabs to receive terrazzo floors, concrete/grout topping or ceramic tile, concrete of water bearing structures, and concrete that will receive coatings shall not be cured with liquid curing compound. The compounds shall be applied by power spray equipment in accordance with the manufacturer's directions. Recoat areas, which are subjected to heavy rainfall within 3 hours after initial application. Maintain the continuity of the coating and repair damage to the coat during the entire curing period. Remove curing compound from exposed surfaces at the end of the curing duration. For concrete surfaces, which will be in contact with potable water, the manufacturer shall certify that the curing compound used is NSF 61 approved.

D. Temperature of Concrete During Curing:

1. When the nighttime low temperature may drop to 40°F or below, maintain the concrete temperature between 50°F and 70°F continuously throughout the curing period, by heating, covering, insulation or housing as required.
2. When the daytime high temperature may rise to 90°F or above, maintain the concrete temperature at a minimum and reduce temperature variations by providing moist curing continuously for the concrete curing period.
3. During either of the conditions specified above, the minimum curing time shall be 10 days (240 hours), after which coverings, housings, and insulation shall remain on the

03300-12

work for an additional 3 days, to allow gradual temperature equalization with the atmosphere.

- E. Protection from Mechanical Injury: During the curing period, protect concrete from damaging mechanical disturbances including load stresses, heavy shock, excessive vibration, and from damage caused by rain or flowing water. Protect all finished concrete surfaces from damage by subsequent construction operations.

3.7 FIELD QUALITY CONTROL

- A. The OWNER will employ a testing laboratory to perform field quality control testing. ENGINEER will direct the number of tests and cylinders required. Furnish all necessary assistance required by ENGINEER.
- B. Quality Control Testing During Construction:
 - 1. Perform sampling and testing for field quality control during the placement of concrete, as follows:
 - a. Sampling Fresh Concrete: ASTM C172.
 - b. Slump: ASTM C143; one test for each concrete load at point of discharge; and one for each set of compressive strength test specimens.
 - c. Air Content: ASTM C231; one for the first concrete load, and one for every two concrete loads thereafter, or when required by an indication of change. Adjust mix if test results are unsatisfactory and resubmit for ENGINEER'S approval.
 - d. Compressive Strength Tests: ASTM C39; one set of 4 standard compression cylinders for each 100 cubic yards or fraction thereof, of each mix design placed in any one day; 1 specimen tested at 7 days, and 2 specimens tested at 28 days, 1 held. Cast, store and cure specimens as specified in ASTM C31.
 - 1) Adjust mix if test results are unsatisfactory and resubmit for ENGINEER'S approval.
 - 2) Concrete that does not meet the strength requirements is subject to rejection and removal from the Work, or to other such corrective measures as directed by ENGINEER, at the expense of CONTRACTOR.
 - e. Concrete Temperature: Test each time a slump test is made.
 - 2. Where questionable field conditions may exist during placing concrete or immediately thereafter, strength tests of specimens cured under field conditions will be required by ENGINEER to check the adequacy of curing and protecting of the concrete placed. Specimens shall be molded at the same time and from the same samples as the laboratory cured specimens.
 - a. Provide improved means and procedures for protecting concrete when the 28-day compressive strength of field- cured cylinders is less than 85% of companion laboratory-cured cylinders.
 - b. When laboratory-cured cylinder strengths are appreciably higher than the minimum required compressive strength, field-cured cylinder strengths need not exceed the minimum required compressive strength by more than 500 psi even though the 85 percent criterion is not met.
 - 3. The testing laboratory shall submit certified copies of test results directly to ENGINEER and CONTRACTOR after tests are made.
- C. Evaluation of Quality Control Tests:
 - 1. Do not use concrete delivered to the final point of placement that has slump or temperature outside the specified values, nor that which is older than specified in section 3.2.

2. Compressive strength tests for laboratory-cured cylinders will be considered satisfactory if the averages of all sets of three consecutive compressive strength tests results equal or exceed the 28 day design compressive strength of the type or class of concrete; and, no individual strength test falls below the required compressive strength by more than 500 psi.
 3. If the compressive strength tests fail to meet the minimum requirements specified, the concrete represented by such tests will be considered deficient in strength and subject to replacement, reconstruction or to other action approved by ENGINEER.
- D. Testing Concrete Structure for Strength:
1. When there is evidence that the strength of the in-place concrete does not meet specification requirements, provide the services of a concrete testing service to take cores drilled from hardened concrete for compressive strength determination at no additional expense to OWNER. Provide tests complying with ASTM C42 and the following:
 - a. Take at least three (3) representative cores from each member or suspect area at locations directed by ENGINEER.
 - b. Strength of concrete for each series of cores will be considered satisfactory if their average compressive strength is at least 85% and no single core is less than 75% of the 28 day required compressive strength.
 - c. Report test results, in writing, to ENGINEER on the same day that tests are made. Include in test reports the Project identification name and number, date, name of CONTRACTOR, name of concrete testing service, location of test core in the structure, type or class of concrete represented by core sample, nominal maximum size aggregate, design compressive strength, compression breaking strength and type of break (corrected for length-diameter ratio), direction of applied load to core with respect to horizontal plane of the concrete as placed, and the moisture condition of the core at time of testing.
 2. Fill core holes solid with non-shrink, high strength grout, and finish to match adjacent concrete surfaces.
- E. Water Leakage Tests for All Water-Holding Structures:
1. All water-holding structures shall be subjected to leakage tests after the concrete has been cured and obtained its design strength, and before backfill, brick facing, or other work which will cover the concrete surfaces of the walls is begun. Water leakage tests shall be conducted by the CONTRACTOR as follows:
 - a. All water-holding structures shall be filled with water to the maximum liquid level shown on the Drawings prior to leak testing at a rate less than 4 ft/hr. After these structures have been kept full for 3-days, it will be assumed for the purpose of the test that the absorption of moisture by the concrete in the basin is complete. All valves and gates to the structure shall then be closed and the change in water surface measured over a 48-hour period. The vertical distance to the water surface shall be measured to within 1/16-inch from a fixed point on the containment structure above the water surface. Measurements shall be recorded at 24-hour intervals.
 - b. During the test period, all exposed portions of the structure shall be examined for dampness or leaks and all visible leaks or damp spots shall be marked; such leaks or damp spots shall be later patched or corrected in a manner acceptable to the ENGINEER prior to additional leakage testing. If the drop in water surface in the 48-hour period exceeds 0.05% of the normal volume of liquid contained in the water-holding structure, after accounting for evaporation, precipitation and temperature in open basins, or if damp spots or any seepage is present on the

walls or other areas exposed to view where moisture can be picked up on a dry hand, the leakage shall be considered excessive and the leakage test will be considered to have failed. A floating, restrained, partially filled, calibrated, open container for evaporation and precipitation measurement should be positioned in open containment structures, and the water level in the container recorded. Determination of evaporation by a shallow pan-type measuring device is discouraged as the heating of the bottom of a shallow pan can cause accelerated evaporation of water when compared with that taking place from a deep containment structure.

- 1) Wet areas on top of wall footings shall not be considered cause of a qualitative failure of the leakage test unless the water can be observed to be flowing.
- c. If the leakage is excessive, and if damp spots and observed seepage is present on exposed surfaces, the water-holding structure shall be drained, all leaks and damp spots previously marked shall be patched, and the necessary repairs made, and the basin shall be retested. The CONTRACTOR's method of repair shall be subject to the requirements of these specifications and submitted for review and approval by the ENGINEER.
- d. The water-holding structure shall then be refilled and again tested for leakage and this testing and repair process shall be repeated as many times as necessary until the leakage test passes. This process shall be continued until the drop in water surface in specified test period with the basin full is less than the quantity specified above and all damp spots and seepage disappears when the structures are full of water. All repairs of faulty workmanship and materials, and additional tests, shall be made by the CONTRACTOR in an acceptable manner, at no additional cost to the OWNER. Both the correction for excessive leakage and the removal of the damp or wet spots on exposed surfaces shall be required to pass the leakage test.
- e. The purpose of this test is to determine the integrity of the finished concrete and to show that the exposed wall surfaces are visually acceptable. Therefore, all other equipment, e.g., stop gates, sluice gates, etc. or temporary bulkheads, should be made watertight prior to the test.
- f. As an alternative to having watertight bulkheads, gates or valves, the CONTRACTOR shall accurately measure the leakage through gates, valves, and bulkheads with methods acceptable to the ENGINEER.
- g. An assumed leakage through gates and valves based on the manufacturer's recommendations is not acceptable.

3.8 MISCELLANEOUS CONCRETE ITEMS

- A. Filling-In: Fill-in holes and openings left in concrete structures for the passage of work by other contractors, unless otherwise shown or directed, after the work of other contractors is in place. Mix, place and cure concrete as herein specified, to blend with in-place construction. Provide all other miscellaneous concrete filling shown or required to complete the Work.
- B. Curbs:
 1. Provide monolithic finish to interior curbs by stripping forms while concrete is still green and steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
 2. Exterior curbs shall have rubbed finish for vertical surfaces and a broomed finish for top surfaces.

03300-15

C. Equipment Bases:

1. Unless specifically shown otherwise, provide concrete bases for all pumps and other equipment. Construct bases to the dimensions shown, or as required to meet manufacturers' requirements and drawing elevations. Where no specific elevations are shown, bases shall be 6-inches thick and extend 3-inches outside the metal equipment base or supports. Bases to have smooth trowel finish, unless a special finish such as terrazzo, ceramic tile or heavy duty concrete topping is required. In those cases, provide appropriate concrete finish.
2. Include all concrete equipment base work not specifically included under other Sections.
3. In general, place bases up to 1-inch below the metal base. Properly shim equipment to grade and fill 1-inch void with non-shrink grout as specified in Section 03600, Grout.

D. Installation of embedded items

1. Install all embedded items prior to concrete placement, or, if necessary, as soon after concrete placement as possible, before concrete is set.
2. Use temporary support and bracing to keep embedded items in place while concrete cures.
3. Protect all embedded items from damage during concrete installation.

3.9 CONCRETE REPAIRS

A. Repair of Formed surfaces:

1. Repair exposed-to-view formed concrete surfaces that contain defects which adversely affect the appearance of the finish. Surface defects that require repair include color and texture irregularities, cracks, spalls, air bubbles, honeycomb, rock pockets, and holes left by the rods and bolts; fins and other projections on the surface; and stains and other discolorations that cannot be removed by cleaning.
2. Repair concealed formed concrete surfaces that may contain defects that adversely affect the durability of the concrete. Surface defects that require repair include cracks in excess of 0.01-inch wide, cracks of any width and other surface deficiencies which penetrate to the reinforcement or completely through non-reinforced sections, honeycomb, rock pockets, holes left by tie rods and bolts, and spalls except minor breakage at corner.
3. Repair structural cracks and cracks in water-holding structures.

B. Method of Repair of Formed Surfaces:

1. Repair and patch defective areas with cement mortar immediately after removal of forms and as directed by ENGINEER.
2. Cut out honeycomb, rock pockets, voids over 1/2" diameter, and holes left by tie rods and bolts, down to solid concrete but, in no case, to a depth of less than 1". Make edges of cuts perpendicular to the concrete surface. Before placing the cement mortar, thoroughly clean, dampen with water, and brush-coat the area to be patched with the specified bonding agent.
 - a. For exposed-to-view surfaces, blend white portland cement and standard portland cement so that, when dry, the patching mortar color will match the color of the surrounding concrete. CONTRACTOR shall impart texture to repaired surfaces to match texture of existing adjacent surfaces. Provide test areas at inconspicuous locations to verify mixture, texture and color match before proceeding with the patching. Compact mortar in place and strike off slightly higher than the surrounding surface.

03300-16

3. Cracks which require repair shall be pressure grouted, epoxy injected, using one of the following in accordance with Section 03740. Apply in accordance with the manufacturer's directions and recommendations.
 - a. Sikadur 35, Hi-Mod L.V. and Sikadur 31, Hi-Mod Gel, as manufactured by Sika Corporation Company.
 - b. Euco Epoxy #452 Epoxy System, as manufactured by The Euclid Chemical Company.
 - c. Or approved equal.
 4. Fill holes extending through concrete by means of a plunger- type gun or other suitable device from the least exposed face, using a flush stop held at the exposed face to ensure completely filling.
 5. Sandblast exposed-to-view surfaces that require removal of stains, grout accumulations, sealing compounds, and other substances marring the surfaces. Use sand finer than No. 30 and air pressure from 15 to 25 psi.
- C. Repair of Unformed Surfaces:
1. Test unformed surfaces, such as monolithic slabs, for smoothness and to verify surface plane to the tolerances specified for each surface and finish. Correct low and high areas as herein specified.
 2. Test unformed surfaces sloped to drain for trueness of slope, in addition to smoothness, using a template having the required slope. Correct high and low areas as herein specified.
 3. Repair finish of unformed surfaces that contain defects which adversely affect the durability of the concrete. Surface defects, as such, include crazing, cracks in excess of 0.01-inch wide or which penetrate to the reinforcement or completely through non-reinforced sections regardless of width, spalling, popouts, honeycomb, rock pockets, and other objectionable conditions.
 4. Repair structural cracks and cracks in water-holding structures.
- D. Methods of Repair of Unformed Surfaces:
1. Correct high areas in unformed surfaces by grinding, after the concrete has cured sufficiently so that repairs can be made without damage to adjacent areas.
 2. Correct low areas in unformed surfaces during, or immediately after completion of surface finishing operations by cutting out the low areas and replacing with fresh concrete. Finish repaired areas to blend into adjacent concrete. Use one of the following. Apply in accordance with the manufacturer's directions and recommendations.
 - a. Euco Poly-Patch, as manufactured by The Euclid Chemical Company.
 - b. Sikatop 122, as manufactured by Sika Corporation.
 - c. Or approved equal.
 3. Repair defective areas, except random cracks and single holes not exceeding 2" diameter, by cutting out and replacing with fresh concrete. Remove defective areas to sound concrete with clean, square cuts, and expose reinforcing steel with at least 3/4" clearance all around. Dampen all concrete surfaces in contact with patching concrete and brush with the specified bonding agent. Place patching concrete before grout takes its initial set. Mix patching concrete of the same materials and proportions to provide concrete of the same type or class as the original adjacent concrete. Place, compact and finish as required to blend with adjacent finished concrete. Cure in the same manner as adjacent concrete.
 4. Repair isolated random cracks, as approved by ENGINEER, and single holes not over 2" diameter, by the dry-pack method. Groove the top of cracks, and cut out holes to sound concrete and clean of dust, dirt and loose particles. Dampen all cleaned

03300-17

concrete surfaces and brush with the specified bonding agent. Place dry-pack before the cement grout takes its initial set. Mix dry-pack, consisting of 1 part portland cement to 2 parts fine aggregate passing a No. 16 mesh sieve, using only enough water as required for handling and placing. Compact dry-pack mixture in place and finish to match adjacent concrete. Keep patched areas continuously moist for not less than 72 hours.

5. Cracks which extend through the full member section, or any cracks determined by ENGINEER to require pressure grouting repair, shall be pressure grouted, epoxy injected, using one of the following in accordance with Section 03740. Apply in accordance with the manufacturer's directions and recommendations.
 - a. Sikadur 35, Hi-Mod L.V. and Sikadur 31, Hi-Mod Gel, as manufactured by Sika Corporation.
 - b. Euco Epoxy #452 Epoxy System, as manufactured by The Euclid Chemical Company.
 - c. Or approved equal.
 6. Assure that surface is acceptable for flooring material to be installed in accordance with manufacturer's recommendations.
- E. Other Methods of Repair:
1. Repair methods not specified above may be used if approved by ENGINEER.

+ + END OF SECTION + +

03300-18

SECTION 03320**CONTACT GROUTING****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. The work specified in this section includes requirements for developing and testing contact grout mix designs, and furnishing and injecting contact grout within the annular space between the pipe jacked tunnel support system and the native host material.

1.2 DEFINITIONS:

- A. Contact Grouting:
 - 1. Grouting between the native soil material and outside of the bore and jack steel casing to fill voids and assure the intimate contact for load transfer between the casing and soil materials.
- B. Refusal: When grout is no longer injected, i.e., 0.0 cubic feet per minute, into the grout port over a continuous 1-minute period at the applicable maximum specified injection pressure.

1.3 RELATED WORK:

- A. Section 01330 – Submittal Procedures
- B. Section 01330 – Dewatering
- C. Section 02350 – Bore and Jack Trenchless Construction
- D. Section 02441 – Microtunneling Trenchless Construction
- E. Section 02445 – Casing Pipe For Jacking Installation

1.4 REFERENCE CODE AND STANDARDS:

- A. Unless otherwise indicated, the current editions of the following specifications and standards apply to the Work of this Section.
- B. American Society for Testing and Materials (ASTM):
 - 1. C31, Practice for Making and Curing Concrete Test Specimens in the Field
 - 2. C39, Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
 - 3. C109, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (using 2-inch or 50-mm cube specimens)
 - 4. C144, Specification for Aggregate for Masonry Mortar
 - 5. C150, Specification for Portland Cement
 - 6. C937, Standard Specification for Grout Fluidizer for Preplaced Aggregate Concrete

03320-1

1.5 SYSTEM DESCRIPTION**A. Design Criteria:****1. Contact Grout:**

- a. Minimum 24-hour compressive strength of 100 psi, minimum 7-day compressive strength of 300 psi, and minimum 28-day compressive strength of 500 psi.
- b. Grout mix (water/cement) ratios shall be expressed in cubic feet of water per cubic foot of cement (94-pound bag). The water-cement ratio by volume shall be varied as needed to fill the voids outside the jacking pipe. The range of water-cement ratios shall be between 0.75:1 and 1.5:1 by volume.
Grout shall consist of ASTM C150 Portland Type II cement, not more than 2 percent bentonite by weight of cement, fluidizer as necessary, and water in the proportions specified herein or acceptable to the ENGINEER. Sand may be added to the grout mix in instances of very high grout takes as approved by the ENGINEER, but in no case shall the grout mix contain less than six sacks of cement per cubic yard of grout. The addition of sand may require the addition of fluidizer to the grout mix.
- c. Grout not placed within two hours of mixing shall be wasted.
- d. Use of cellular grout is not acceptable.

1.6 SUBMITTALS

- A. CONTRACTOR shall submit in accordance with Section 01330, but no more than 30 after Letter of Acceptance and no less than 30 days before delivery at the job site.
- B. CONTRACTOR shall submit a detailed Contact Grouting Work Plan of the proposed use. At a minimum, the following information shall be included in this submittal:
 1. Contact grouting methods, equipment, procedure, sequence, injection pressure and provisions to protect the casing and carrier pipe, and for outside of casing pipe.
 2. Details of grout mix proportions, admixtures, including manufacturer's literature, and laboratory test data verifying the strength and set time of the proposed grout mix.
 3. Design and layout of the contact grout port locations, if different from the lubrication ports. State "the same" if the lubrication and grout ports are the same.
 4. Injection pressure calculations denoting maximum injection pressure and factor of safety against casing deformation and release of grout to the ground surface.
 5. Daily logs listing by grout port, volume pumped, maximum pressure, grout mixture proportions, and crew.
 6. MSDS for all materials
 7. Notify the ENGINEER at least two working days in advance of starting contact grouting operations.
 8. Shop drawings of one-way grout injection or lubrication valve.
 9. Grout strength test results within one working after each test.
- C. Manufacturer's product data sheets shall include the following:
 1. Mixing, handling, storage, and waste disposal requirements.
 2. MSDS for all materials, submitted or brought on site.
 3. Source of supply for each grout ingredient.
 4. For each type and source of material:
 - a. Cement: Standard physical and chemical analysis.

- b. Admixtures: Documentation showing that the proposed admixtures have a history of demonstrable satisfactory performance and certification that all admixtures are compatible with the design grout mix.
- 5. Source of potable water.
- 6. Shop drawing of one-way valve assembly, grout injection header including shut-off valve, pressure gauges, and bypass/re-circulation system.

1.7 QUALITY ASSURANCE

- A. Make four samples of each proposed grout mix and determine 24-hour and 28-day strengths in accordance with ASTM C39 or C109.
- B. Grout Strength Tests:
 - 1. Prepare and test samples for 24-hour and 28-day compressive strength tests according to ASTM C39 for cylinders or ASTM C109 for cubes, except as otherwise specified herein.
 - 2. Grout samples shall be taken from the nozzle of the grout injection line. Provide at least one set of four (4) samples for each 100 cubic feet of grout injected, but not less than one set from each batch.
 - 3. Grout shall have a minimum unconfined compressive strength of 100 pounds per square inch (psi) in 24 hours, and 500 psi in 28 days.
- C. CONTRACTOR's engineer shall be a Professional Engineer licensed by the State of California.
- D. Experience shall include five projects within the last five years performing similar contact grouting calculations.
- E. Certificate, dated within the last six months, from an independent laboratory that the calibration gauge is accurate to 1 psi.

1.8 QUALITY CONTROL:

- A. Qualifications:
 - 1. Test laboratory used for calibrating and testing accuracy of gauges and meters to be used in grouting operations.
 - 2. Test laboratory performing quality assurance and testing for all grout materials, test mixes, and field testing.
 - 3. Mix design engineer.
- B. Certifications:
 - 1. Certificates of compliance for materials specified herein.
 - 2. Calibration certificates for gauges and meters to be used in grouting operations.
- C. Quality Control Plans:
 - 1. Methods for assuring uninterrupted contact grouting at pressures that do not exceed the maximum specified.
 - 2. Methods for demonstrating that grout mixes meet design criteria.
- D. Recordkeeping:
 - 1. Cumulative Records of strength tests on grout samples within two work days of performing tests.

03320-3

- a. Shift report for each grout crew and for each shift, regardless of actual progress, and submitted no later than the beginning of the following working day. Include:
 - 1) Crew size, employee name, classification, and work assignment.
 - 2) Number and type of equipment used.
 - 3) List of idle or inoperative equipment and reason for downtime.
 - 4) Daily Grout injection records for each grout port:
 - a) Location and orientation.
 - b) Mix design used and any alterations.
 - c) Time of original mix and time when injected or wasted.
 - d) Grouting time spent on each grout port broken down by quantity injected, injection pressure, total volume. And pumping rate.
 - e) Grout communication to other grout ports.
2. Notifications:
 - a. Written notification at least two workdays in advance of starting contact grouting operations.
 - b. Written notification within one workday of any proposed addition, deletion, or change to the scheduling of shift work, or mix design.
 - c. Written notification within one workday of performing gauge and meter tests.

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Cement: Cement shall be Type V Portland cement conforming to ASTM C150.
- B. Bentonite: Bentonite shall be a commercially processed powdered bentonite, Wyoming type, such as Imacco-gel, Black Hills, or equal.
- C. Sand: Sand to conform to ASTM C144; except:
 1. Fineness modulus: Between 1.5 and 2.0 and,
 2. The following grading requirements:

Sieve Sizes	Percentage Passing by Weight
No.8	100
No. 16	95 - 100
No. 30	60 - 85
No. 50	20 - 50
No. 100	10 - 30
No. 200	0 - 5

- D. Fluidizer: Fluidizers shall hold the solid constituents of the grout in colloidal suspension, be compatible with the cement and water used in the grouting work, contain an expansive shrinkage compensator, and comply with the requirements of ASTM C937. Submit product literature and data for acceptance, if planned to be used.
- E. Water: Water shall be potable.

2.2 EQUIPMENT

- A. Equipment for mixing and injecting grout shall be adequate to mix and agitate the grout to a uniform consistency and force it into the grout port in a continuous flow at the desired pressure.
- B. The grouting equipment shall be provided with:
 - 1. A volumetric meter at the point of injection.
 - 2. One-way valves.
 - 3. Two pressure gauges shall be provided, one at the grout pump and one at the grout port.
 - 4. Grouting hoses shall have an inside diameter not less than 1.5 inches or greater than 2 inches and capable of withstanding the maximum water and grout pressures to be used with adequate factors of safety.
 - 5. Injection system with a grout re-circulation hose. Arrange grouting equipment to provide for continuous circulation of grout in the system.
 - 6. A pump that provides constant pressure at variable delivery volumes.
- C. Working Drawings and Methods Statements:
 - 1. Means and methods for cleaning the internal surface of the final casing and disposing of wasted or excess grout, including grout flushed from lines.
 - 2. Layout and description of grouting equipment and facilities for performing work including:
 - a. Provide a Grouting Plan describing grouting operations including sequence of work operations including starting location, ending location, criteria for completion of contact grouting at any port, grout mixing and pumping equipment location, access port one-way grout valve configuration and operation and grout header configuration and operation. Outline provisions to protect the jacking pipe form over pressurization leading to structural damage.
 - b. Supply equipment.
 - c. Drilling equipment.
 - d. Agitators or holding tanks.
 - e. Mixers.
 - f. Pumps.
 - g. Grout delivery piping and manifolds.
 - h. Hookup details including valves, packers, and gauges.
 - i. Proportioning and mixing grout.
 - j. Measuring grout pressure and injection rate.
 - k. Maintaining grout pressure not to exceed specified limits.
 - l. Sequencing grouting and establishing basis and threshold values for modifying mixes.
 - m. Direct communication method between grout mixer operator and injection worker.
- D. Mix Designs:
 - 1. Details of grout mix, proportions and admixtures, and laboratory test data verifying the strength and set time of the proposed grout mix.

03320-5

PART 3 - EXECUTION**3.1 GENERAL**

- A. When contact grouting is required, commence contact grouting promptly within 24 hours following completion of casing installation and the casing is in its final position. Once the casing is installed and inspected thoroughly for any visual defects, perform continuous contact grouting until contact grouting for the entire drive has been completed.
- B. Inject grout through the grout injection or lubrication ports in such a manner as to completely fill all voids outside the casing.
- C. Grout pressure shall be monitored, controlled, and recorded so as to avoid damaging the pipe, avoid movement of the surrounding ground or improvements and avoid release of grout to the ground surface..
- D. A hookup shall be made to every grout or lubrication port.
- E. Re-circulate grout when any new mix is batched or after adding water, fluidizer, or sand to mix. Re-circulate mix for sufficient time so grout is consistent with batch prior to pumping grout into grout hole.

3.2 PREPARATION

- A. Prior to cleaning or flushing grout delivery lines, disconnect injection valve from grout port to avoid pressure surges.

3.3 INSTALLATION

- A. All materials shall be free of lumps when put into the mixer and the grout mix shall be constantly agitated. Grout shall flow unimpeded.
- B. Grout not injected 90 minutes after mixing shall not be used for contact grouting.
- C. Grouting shall progress sequentially in a constant up-gradient direction from one grout port to the next grout port in the sequence indicated in the approved submittals. Grouting using a lead- and lag or leapfrog manner is not acceptable.
- D. At any time during the grouting operations, sufficient contact grouting ports ahead of the grouting shall be cleaned and opened. Valves or other suitable devices shall be attached and placed in the fully open position on all ungrouted ports within the maximum grout communication distance, as determined by the CONTRACTOR and accepted by the ENGINEER.
- E. Contact grouting pressure at the injection point shall not be more than 0.5 psi per foot depth of soil overburden or maximum 5 psi, unless otherwise proposed by the CONTRACTOR, with the ENGINEER's concurrence.
- F. Grouting shall be considered completed when 0.0 cubic foot per minute of grout of the accepted mix and consistency can be pumped in 1 minute under the submitted maximum injection pressure.

03320-6

- G. Do not pump grout into more than one grout port at any time. Grout shall be continuously re-circulated after mixing and during grouting operations.
- H. Leave grout ports adjacent to a grout hookup open during grouting operations to facilitate the escape of air and water from pockets in the space surrounding the casing. When grout is found to flow from adjacent grout connections at a consistency equal to that being injected, cap such adjacent connections or install valves for bleed. until later used a grout connection. Do not close any valve, or open ungrouted grout port until grout of the same consistency as that being injected issues forth.
- I. Grout lines shall be flushed with water upon the completion of grouting or the end of shift, whichever occurs first. Flushed grout shall not be injected into the annular space.
- J. After the grouting is finished. the valve shall be closed before the grout header is removed. Grout port valve shall remain closed until grout has attained 24-hour set strength.
- K. Operator of grout mixer and grout injection valves shall be in direct, constant, and continuous communication during grout injection operation.

3.4 INSTRUMENTATION AND MONITORING

- A. Monitor pressure gauges during all grouting operations.
- B. Perform visual inspection to ensure grout does not travel or erupt on the ground surface or adjacent structures or damage adjacent utilities.

3.5 FIELD QUALITY CONTROL

- A. Equipment for mixing and injecting grout shall be adequate to mix and agitate the grout to a uniform consistency and force it into the grout port in a continuous flow at the desired pressure.
- B. Grout shall be mixed to a uniform consistency and agitated until used or disposed.
- C. The accuracy of the pressure gauges shall be checked at the start of each shift with an accurately calibrated pressure gauge.
- D. Measure and record contact grout mix proportion, injection pressure and quantities to sufficient accuracy so as to prevent excessively high pressure to cause an inadvertent return or heave.
- E. Master Gages and Meters:
 - 1. Perform testing of all field gages and meters no less often than weekly using master gages and meters.
 - 2. Perform field tests in the presence of the OWNER Representative.
 - 3. Verify accuracy of master gages and meters through the use of a test laboratory no less frequently than every two months.

3.6 CLEAN-UP

- A. Perform the following concurrently and at the end of each shift with grouting operations:
 - 1. Cleaning the surface of the casing.
- B. Install plugs in grout ports and after grout has attained 7-day strength.
- C. Promptly remove and dispose of any leakage or wastage of drill cuttings, grout, or other objectionable materials. If such materials bond to the surface of the casing, remove by chipping, bush hammering, grinding, or other acceptable means approved by the OWNER.

+ + END OF SECTION + +

03320-8

SECTION 03400**PRECAST CONCRETE****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Section includes all plant-precast products, including, but not limited to, catch basins, manholes, vaults, and wheel stops.

1.2 SYSTEM DESCRIPTION

- A. Precast products shall be designed for the indicated service, the loadings specified in the Contract Documents, and all transportation, handling, and erection loads, in accordance with requirements and recommendations of the references.
 - 1. Precast products not subjected to traffic loads shall be designed to meet and exceed the requirements of ACI 318-14.
 - 2. Precast products subjected to traffic loads shall be designed to meet and exceed the requirements of the current AASHTO LRFD Bridge Design Specifications.
 - 3. Liquid containing precast products shall be designed for the additional requirements of ACI 350-06.
- B. If precast products are proposed as substitutes for cast-in-place designed structures, such precast products shall meet the above requirements and any other requirements for which the cast-in-place structures were designed by the ENGINEER. Such products shall be designed by an engineer licensed to practice in the State where the project is performed.
- C. Items located in or adjacent to traffic areas shall be designed to resist AASHTO HL93 loading, unless otherwise indicated.
- D. Lifting inserts shall have a minimum safety factor of 4.

1.3 QUALIFICATIONS

- A. Manufacturer:
 - 1. Manufacturer shall have at least 5 years experience in the design and manufacture of precast concrete products substantially similar to those required for this project.
- B. Installer:
 - 1. Precast Items shall be installed by the Manufacturer or by an installer regularly engaged for at least 5 years in erection of precast products similar to those required on this project.

1.4 SUBMITTALS

- A. Shop Drawings:
 - 1. Submit to the Engineer for review, shop drawings of the proposed details, and design calculations; all calculations and shop drawings shall be stamped and signed by a Civil or Structural Engineer registered in the State of California.

03400-1

2. Material specifications.
 3. All dead, live and other applicable loads used in the design.
 4. Applicable standards (from "References") met by the item(s).
 5. Setting plans locating and designating all items furnished by the manufacturer, with all major openings shown and located.
 6. Details to indicate quantities, location and type of reinforcing and prestressing steel.
 7. Sections and details showing connections, edge conditions, support conditions, and connections of the items.
 8. Description of all embeds, including stripping, lifting and erection inserts, with piece mark and location, including those cast into products or sent loose to the job site.
 9. Description and drawings of all frames and covers.
 10. Dimensions and special finishes.
- B. Mix Designs: Submit all precast mix designs for approval. Mix designs shall be prepared by an independent testing facility or qualified employee of the Precast Manufacturer.
- C. Design Modifications:
1. Submit design modifications necessary to meet performance requirements and field conditions.
 2. Variations in details or materials shall not adversely affect the appearance, durability or strength of products.
 3. Maintain general design concept without altering size of members, profiles and alignment unless otherwise approved by the Engineer.

1.5 QUALITY ASSURANCE

- A. In-Plant Quality Control
1. The Manufacturer shall have an established PCI quality control program in effect prior to bidding. If requested, a copy of this program shall be submitted to the ENGINEER.
 2. Testing of materials and inspection of production techniques shall be the responsibility of the Manufacturer's Quality Control Department.
 3. Keep quality control records available for two years after final acceptance.
 4. Keep certificates of compliance available for five (5) years after final acceptance.
- B. All other testing and inspection, if any, to be provided by OWNER.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Handle and transport products in a position consistent with their shape and design in order to avoid excessive stresses or damage.
- B. Lift or support products only at the points shown on the Shop Drawings.
- C. Installer shall be responsible for the repair of damage to items except that caused by others.
- D. After items are installed in their final positions, the CONTRACTOR shall be responsible for their protection. The CONTRACTOR shall be responsible for the repair of any damage to the items caused by someone other than the Manufacturer/Installer.

PART 2 - PRODUCTS**2.1 CONCRETE MATERIALS**

- A. Portland Cement ASTM C150 Type I, II or III cement.
- B. Aggregates:
 - 1. Fine and coarse aggregate for mix shall conform to ASTM C33 or C330.
 - 2. Aggregates shall be clean, hard, strong, durable, inert, and free of staining and deleterious materials.
- C. Water Potable, free from deleterious material.
- D. Admixtures:
 - 1. Conforming to ASTM C260 and/or ASTM C494.
 - 2. Calcium chloride or admixtures containing chlorides shall not be used.
- E. Concrete Strength: Concrete strength shall be determined by design with a minimum 28 day design strength of 4,000 psi.

2.2 STEEL MATERIALS

- A. Products:
 - 1. Structural Shapes, Bars & Plates (1.6mm and thicker): ASTM A36
 - 2. Pipe: ASTM A53 Grades A or B
 - 3. Tube Steel: ASTM A500 Grades A or B
 - 4. Reinforcing Steel: ASTM A615 Grades 300 & 420 or ASTM A706
 - 5. Prestressing Strand: ASTM A416 Grade 270, low relaxation
 - 6. Deformed Steel Bar Mats: ASTM A184
 - 7. Deformed Bar Anchors: ASTM A496
 - 8. Deformed Welded Wire Fabric: ASTM A497
 - 9. Plain Welded Wire Fabric: ASTM A185
 - 10. Welded Headed Studs: AWS D1.1 Type B
 - 11. Standard Machine Bolts: ASTM A307 Grade A or SAE J429 Grade 2
 - 12. Standard Studs/Threaded Round Stock: ASTM A307 Grade C, ASTM A572 Grade 345
 - 13. Nuts for Standard Machine Bolts and Threaded Studs: ASTM A563 Grade A Hex Nuts
 - 14. High Strength Bolts: ASTM A325 Type 1, ASTM A449 Type 1, or SAE J429 Grade 5
 - 15. Nuts for High-Strength Bolts and Threaded Studs: ASTM A563 Grade DH Heavy Hex Nuts
 - 16. Coil Rods and Bolts: ASTM A108 - SAE 1016 to 1026, $F_u/F_y = 480/380$ MPa minimum
 - 17. Coil Nuts for Coil Rods and Bolts: Nuts passing a proof load stress of 80 ksi, based on the tensile stress area of the matching coil rods and bolts.
 - 18. Carbon Steel Castings: ASTM A27 Grade 415-205
- B. Protective Coatings:
 - 1. All connection hardware permanently exposed to weather after completion shall be protected. All connection hardware not exposed to weather after completion may be uncoated, except as otherwise explicitly required by the contract drawings. Fasteners can have either an electroplated zinc or cadmium coating.
 - 2. Alkyd Rust Inhibitive Primers (shop primers such as red iron oxide) :
 - a. Tnemec Series FD88 Azerox Primer
 - b. Ameron 5105

03400-3

- c. Weld-Thru Primer, Red, 2-0101 & Gray, 2-0102
- 3. Zinc Coatings:
 - a. Hot-Dip Galvanizing: ASTM A123, or ASTM A153
 - b. Electroplated Zinc for Steel Products and Steel Hardware: ASTM B633
 - c. Zinc Rich Paints: DOD-P-21035
- 4. Cadmium Coatings:
 - a. Electrodeposited Coatings of Cadmium: ASTM B766

2.3 MISCELLANEOUS PRODUCTS

- A. Grout:
 - 1. Cement Grout: Portland cement, sand and water sufficient for placement and hydration.
 - 2. Non-Shrink Grout: Premixed, packaged non-ferrous aggregate shrink resistant.
 - 3. Epoxy Resin Grout: Two-component mineral-filled resin: ASTM C881.
- B. Joint Sealing Compound: The joint sealing compound shall be a permanently flexible plastic material complying in every detail to Federal Specification SS S-00210 (GSA-FSS) dated July 26, 1965. "Quickseal", or approved equal.
- C. Frames and Covers: Catch basins, manholes, and vaults shall be provided with fabricated aluminum or steel frames and covers as specified or shown on the drawings and shall be built up so that the cover is flush with the surrounding surface unless otherwise specified.

2.4 FABRICATION

- A. Unless otherwise noted, precast concrete structure dimensions called out on the Drawings are interior dimensions.
- B. Manufacturing procedures shall be in general compliance with PCI MNL-116.
- C. Manufacturer shall provide for those openings 10 in. or larger, round or square as shown on the drawings. Other openings shall be located and field drilled or cut by the trade requiring them after the units have been erected. Openings and/or cutting of prestressing strand shall be approved by ENGINEER and manufacturer before drilling or cutting.
- D. Forms:
 - 1. Forms for precast products shall be rigid and constructed of materials that will result in finished products conforming to the profiles, dimensions and tolerances indicated by this Section, the Contract Documents and the reviewed Shop Drawings.
 - 2. Construct forms to withstand vibration method selected.
 - 3. Release agents shall be applied and used according to manufacturer's instructions.
- E. Plastic Liner:
 - 1. Where called for on the Drawings, provide cast-in-place plastic liner system.
 - 2. Install liner system per manufacturer's instructions.
 - 3. Follow all requirements of Specification Section 06640, Plastic Liner for Concrete Pipe and Structures.
- F. Concreting:

03400-4

1. Batching of Concrete shall be in accordance with approved Mix Design(s).
 2. Convey concrete by methods which will prevent separation, segregation or loss of material.
 3. Consolidate all concrete in the form to minimize honeycombing or entrapped air.
- G. Curing: Procedures sufficient to insure specified concrete strength of all products must be employed. Stripping of a panel shall not occur until concrete strength is sufficient to prevent cracking or damage of the panel.
- H. Manufacturing Tolerances:
1. Cross Sectional Dimensions:
 - a. Less than 24 inches: $\pm 1/4"$
 - b. 24 to 36 inches: $\pm 3/8"$
 - c. Over 36 inches: $\pm 1/2"$
 2. Length:
 - a. Less than 25 ft: $\pm 1/2"$
 - b. 25 to 50 ft: $\pm 3/4"$
 - c. Over 50 ft: $\pm 1"$
 3. Variation from square or designed skew (difference in length of two diagonal measurements): Max. $\pm 3/4"$
- I. Identification: Mark each precast item to correspond to identification mark on Shop Drawings for product location, and with casting date.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Access: Clear unloading areas and access roadways to point of component placement shall be provided and maintained by the CONTRACTOR. The CONTRACTOR shall provide all required traffic controls, barricades, warning lights and/or signs to insure a safe installation.
- B. Sitework: The CONTRACTOR shall excavate and prepare the subgrade, including 2 inches of clean sand, graded level and to the proper elevation.
- C. Installer Responsibility: Prior to installation of the precast products, notify the CONTRACTOR of any discrepancies discovered which affect the work under this contract.

3.2 INSTALLATION

- A. General: Precast products shall be lifted with suitable lifting devices at points provided by the Manufacturer to prevent excessive stresses or damage to the products. Brace and secure items before unhooking.
- B. Sitework:
 1. Openings or "knockouts" shall be located as shown on the drawings and shall be sized sufficiently to permit passage of the largest dimension of pipe and/or coupling flange. Upon completion of installation, all voids or openings in the vault walls around pipes shall be filled with 4,000-psi concrete or mortar, using an approved epoxy for bonding concrete surfaces.

03400-5

2. All joints between precast sections shall be made watertight using preformed mastic material. The sealing compound shall be installed according to the manufacturer's recommendations to provide a watertight joint which remains impermeable throughout the design life of the structure. All joints shall be filled with dry-pack non-shrink grout. If plastic liner system is used, after the joint has been made and is cured, install plastic liner weld strip at all joints and seams.
3. Frames and covers shall be built up so that the cover is flush with the surrounding surface unless otherwise specified. The CONTRACTOR is responsible for placing the cover at the proper elevation where paving is to be installed and shall make all necessary adjustments so that the cover meets these requirements.
4. After the structure and all appurtenances are in place and approved, and after any required disinfection or testing, backfill shall be placed to the original ground line or to the limits designated on the plans.

3.3 FIELD QUALITY CONTROL

- A. Hydrostatic Testing:
 1. All Manholes, Junction Boxes, or other water bearing structures shall be hydrostatically tested prior to acceptance.
 2. Test Procedure:
 - a. Plug all inlets and outlets with temporary plugs
 - b. Fill water bearing structure with clean, potable water
 - c. Let stand for 24 hours, if desired, to allow for "soaking-in"
 - d. Fill to rim elevation
 - e. Let stand for a minimum of 2 hours
 - f. Check distance from rim to water surface
 - g. Calculate water loss. Leakage in each manhole may not exceed 0.1-gallon per hour per foot of water depth during the test.
 3. Repair all structures which do not meet the above test requirements with a method approved by the ENGINEER and re-test until passing.

3.4 PATCHES AND REPAIRS:

- A. Patching of products, when required, shall be performed to industry standards for structural concrete. Repairs shall be sound, permanent and flush with adjacent surface.

3.5 WARRANTY:

- A. All labor and materials under the Precast Manufacturers contract shall be warranted by the Precast Manufacturer for a period of one (1) year after substantial completion.

+ + END OF SECTION + +

03400-6

SECTION 03420**PRECAST FRP-PVC MANHOLE SYSTEM****PART 1 - GENERAL****1.1 SCOPE**

- A. This specification covers all the work necessary to complete the installation of a PVC Manhole, comprising fiberglass reinforced plastic lined concrete manhole base and top sections, a polyvinyl chloride pipe riser section and all appurtenances.
- B. The PVC Manhole System shall be modular and shall include: fiberglass reinforced plastic (FRP) concrete protective liners; concrete manhole base and top sections cast around the FRP concrete protective liners; PVC pressure pipe sections which shall be AWWA C900 compliant, DR-51 pressure class PVC pipe; ASTM C990 compliant elastomeric sealant and STM C877 compliant external joint wrap; grading rings, manhole ring and cover to grade, according to local jurisdictional requirements.

1.2 REFERENCES

This specification covers polymer concrete manholes intended for use in sanitary sewers, where corrosion resistance is required

- A. ASTM C 478 (most current) Standard Specification for Precast Reinforced Concrete Manhole Sections
- B. ASTM C 497 (most current) Determining Physical Properties of Concrete Pipe or Tile
- C. ASTM D395: Standard Test Methods for Rubber Property – Compression Set
- D. ASTM D412: Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers – Tension
- E. ASTM D471: Standard Test Method for Rubber Property – Effect of Liquids
- F. ASTM D543: Standard Practices for Evaluating the Resistance of Plastics to Chemical Reagents
- G. ASTM D573: Standard Test Method for Rubber – Deterioration in an Air Oven
- H. ASTM D624: Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic Elastomers ASTM D695: Test Methods for Compressive Properties of Rigid Plastics
- I. ASTM D638: Standard Test Method for Tensile Properties of Plastics
- J. ASTM D695: Test Methods for Compressive Properties of Rigid Plastics
- K. ASTM D790: Test Method for Flexural Properties of Unreinforced and Reinforced Plastics and electrical Insulating Materials

03420-1

- L. ASTM D792: Standard Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement
- M. ASTM D1149: Standard Test Methods for Rubber Deterioration – Cracking in an Ozone Controlled Environment
- N. ASTM D2137: Standard Test Methods for Rubber Property - Brittleness Point of Flexible Polymers and Coated Fabrics
- O. ASTM D2240: Standard Test Method for Rubber Property – Durometer Hardness
- P. ASTM D2584: Test Method for Ignition Loss of Cured Reinforced Resins
- Q. ASTM D4060: Standard Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser
- R. Greenbook 2009 (or later): Standard Specifications for Public Works Construction, Chemical Resistance Test (Pickle Jar Test)

1.3 SUBMITTALS

- A. Conform to bid document requirements
- B. Submit manufacturer's data and details of following items for approval:
 - 1. Shop drawings of manhole sections, base units and construction details, jointing methods, materials, and dimensions
 - 2. Summary of criteria used in manhole design including, as minimum, material properties, loading criteria, and dimensions assumed. Include certification from manufacturer that polymer concrete manhole design meets or exceeds the load and strength requirements of ASTM C 478 and ASTM C 857, reinforced in accordance with ACI 440.1R-15. Include current ISO 9001:2008 certification
 - 3. Frames, grates, rings, and covers
 - 4. Materials to be used in fabricating pipe drop connections
 - 5. Materials to be used for pipe connections
 - 6. Materials to be used for stubs and stub plugs, if required
 - 7. Proof of independent Chemical Resistance testing conducted in accordance with the Standard Specifications for Public Works Construction (California Greenbook) Section 211-2
- C. Submitted sealed drawings by a registered Professional Engineer

PART 2 - PRODUCTS

2.1 FRP LINERS

- A. FRP liners: The resins used shall be unsaturated, supplier certified, commercial grade polyester resins. Mixing lots of resin from different manufacturers, or "odd-lotting" of resins shall not be permitted. Quality-assurance records on the resin shall be maintained.

03420-2

The reinforcing materials shall be commercial grade "E-CR" type glass, specially formulated for corrosive environments, in the form of mat, chopped roving, continuous roving, roving fabric or a combination of the above, having a coupling agent that will provide a suitable bond between the glass reinforcement and resin. Fiberglass and/or polypropylene ribs and/or structural members may be utilized to meet the design criteria.

No inert fillers shall be used. Additives, such as thixotropic agents, catalysts, promoters, etc., may be added as required by the specific manufacturing process to be used to meet the requirements of this standard.

The laminate shall consist of multiple layers of glass matting and resin. The surface exposed to the sewer/chemical environment shall be resin rich and shall have no exposed fibers.

1. Bells: Bell shall be manufactured from the same unsaturated, supplier certified, commercial grade polyester resins as the main FRP Baseline body. If available, polypropylene injection molded bells are also allowed.
 2. Gaskets: Resilient materials for connectors and filler rings shall be manufactured from natural rubber, polyisoprene, neoprene, nitrile, or ethylene propylene diene monomer (EPDM) synthetic rubber and shall conform to the material requirements prescribed in this specification. If a splice is used in the manufacture of the seal, its strength shall be such that the seal shall with-stand a 180° bend with no visible separation.
 3. Mechanical devices: Expansion rings, tension bands, and take-up devices used for mechanically compressing the resilient portion of the connector against the pipe or manhole shall be made from a material or materials in combination that will ensure durability, strength, resistance to corrosion, and have properties that will ensure continued resistance to leakage.
 4. All metallic mechanical devices and bolt assemblies used to mechanically deform resilient materials shall be constructed of corrosion resistant materials meeting the physical properties and chemical composition requirements of ASTM A493 and A666, Type 302 through Type 316.
 5. Third party accessories: Third party accessories integral to the PVC Manhole System or the FRP Manhole Liner (flow control devices, valves, gates, inside drop assembly, man entry ladder, etc.) shall be governed by the respective manufacturers' materials specifications.
- B. Precast concrete manhole sections: The manhole base and top sections shall be constructed of precast reinforced concrete, for the purpose of providing structural integrity to the FRP manhole liners. The sections shall conform to the requirements of ASTM C-478 and shall be manufactured using the wet cast method.
- C. Manhole PCV riser: The PVC riser pipe shall strictly comply with AWWA C900 and shall have DR-51 pressure rating.
- D. Grading Rings: Grade rings shall be constructed of reinforced precast concrete.
- E. Ring and Cover: Casting shall be tough gray iron, free from cracks, holes, swells, and cold shuts. All manhole casting shall be made accurately to the pattern and to the dimensions shown on Contract Documents.

03420-3

- F. Mortar: Mortar to be used in setting manhole frames shall be prepared by thoroughly mixing: one (1) volume of Type II Portland Cement with three (3) volumes of sand and sufficient clean water to produce a rich mass of approved consistency. Mixing mortar on the ground or any paved surface shall not be permitted. Sand to be used in making mortar shall be clean, well-graded, and shall pass a standard No. 4 sieve.
- G. Backfill Material: The initial backfill material, in direct contact with the PVC Manhole, shall be composed of well graded, crushed stone or gravel conforming to the following requirements, unless modified by the Contract Documents:

Crushed Stone or Gravel	Percent
Passing 1-1/2 inch sieve	100
Passing 1 inch sieve	95 to 100
Passing 3/8 inch sieve	25 to 60
Passing No. 4 sieve	0 to 10
Passing No. 8 sieve	0 to 5

2.2 DESIGN

- A. FRP Liner Exterior Surface: The exterior surface shall be finished with embedded aggregates and FRP bonding bridges to allow for adequate bonding with the surrounding concrete once cast. The exterior surface shall be free of blisters larger than 0.5" in diameter, delamination and fiber show, except in the vicinity of FRP bonding bridges where fiber show is acceptable. Gel-coat or paint or other coatings are not allowed.
- B. FRP Liner Interior Surface: The interior surfaces shall be resin rich with no exposed fibers. Interior flow surfaces shall be smooth for improved corrosion resistance and reduced sludge build-up. The surface shall be free of crazing, delamination, blisters larger than 0.25" in diameter, and wrinkles of 0.125" or greater in depth. Gel-coat shall be permitted on interior surfaces, no paint or other coatings are allowed.
- C. FRP Liner Repairs: Any manhole liner repair is required to meet all requirements of this specification. All repair must all be preapproved by the manufacturer.
- D. FRP Liner Chemical Resistance: FRP manhole liners must demonstrate having sufficient corrosion resistance by passing the "Greenbook" 2009 edition (or later), Standard Specifications for Public Works Construction, Chemical Resistance Test (Pickle Jar Test), per third-party accredited laboratory test results.
- E. FRP Liner Physical Properties:

All FRP liner material shall have the following physical properties when tested at 77-deg F +/- degrees:

Property	Standard	Units	Initial	(Par. VI.F.)
Density	ASTM D792	g/cm ³	1.02	
Thickness	--	Mm	3 min.	--
Tensile Strength	ASTM D638	psi	7,000 min.	6,500 min.
Hardness (Shore "A")	ASTM D2240		95-97	89-97
Weight change	--	--	--	0.05% max.
Flexural Strength	ASTM D790	lbf	124 avg.	--
Compressive Strength	ASTM D695	psi	13,000	--
Ignition Loss	ASTM D2584	%	52 avg.	--
Taber abrasion test (weight loss)	ASTM D4060	%	0.075	--

Tensile specimens shall be prepared and tested in accordance with ASTM D412 using Die B. Weight change specimens shall be 1 IN by 3 IN samples.

All gaskets shall have the following physical properties:

Property	Standard	Units	Requirement
Chemical resistance: 1N sulfuric acid 1N hydrochloric acid	ASTM D543 (at 24°C for 48 hr.)	% %	No weight loss No weight loss
Tensile Strength	ASTM D412	psi	1,200 min.
Elongation at Break	ASTM D412	%	350 min.
Hardness (Shore A)	ASTM D2240	--	±5 from the connector manufacturer's specified hardness
Accelerated oven aging	ASTM D573 (at 70°C for 7 days)	%	Max 15% decrease in tensile strength; Max 20% decrease in elongation
Compression set	ASTM D 395, Method B (at 70°C for 22 hr.)	%	Max 25% decrease of original deflection
Water absorption	ASTM D471 (at 70°C for 48hr.)	%	Increase of max 10% of original weight (19 by 25mm specimen)
Ozone Resistance	ASTM D1149	--	Rating 0
Low temperature brittle point	ASTM D2137	--	No fracture at -40°C
Tear resistance	ASTM D624, Die B	kN/m	34

Upon request, the manufacturer shall provide written certification that the FRP liners and gaskets used meets or exceeds the requirement of this specification.

F. FRP Liner Chemical Resistance

After conditioning to constant weight at 110 °F, FRP liner specimens shall be exposed to the following solutions for a period of 112 days at 77 °F ± 5 degrees, as prescribed in Standard Specifications for Public Works Construction, section 211-2 (Pickle Jar Test).

03420-5

At 28-day intervals, tensile specimens and weight change specimens shall be removed from each of the chemical solutions and tested. If any specimen fails to meet the 112-day requirement before completion of the 112-day exposure, the material will be subject to rejection.

Chemical Solution	Concentration
Sulfuric acid	20%*
Sodium hydroxide	5%
Ammonium hydroxide	5%*
Nitric acid	1%*
Ferric chloride	1%
Sodium hypochlorite	1%
Soap	0.1%
Detergent (linear alkyl benzyl sulfonate or LAS)	0.1%
Bacteriological	BOD not less than 700 ppm

* Volumetric percentages of concentrated C.P. grade reagents.

G. Precast Concrete Requirements

All precast manhole sections shall be manufactured by the wet cast method.

The minimum compressive strength of the concrete for all precast concrete sections shall be 4000 psi (27 MPa). The maximum allowable absorption of the concrete shall not exceed 9 percent of the dry weight.

Steel reinforcement for all manhole diameters shall be in accordance with ASTM C-478 and per Contract Documents.

2.3 MANUFACTURER

- A. FRP liner manufacturer shall have 25 year of FRP concrete protective liner manufacturing experience and shall have fabricated and delivered at least 20,000 FRP concrete protective liners for wastewater applications. Predl or equal.
- B. Precast concrete plant shall be NPCA certified.

PART 3 - EXECUTION

3.1 MATERIALS TEST METHODS

- A. All FRP Liner test methods shall be performed per corresponding ASTM standard and per "Greenbook" 2009 edition (or later), Standard Specifications for Public Works Construction, Chemical Resistance Test (Pickle Jar Test).
- B. Concrete tests, when required, shall be in accordance with ASTM C-497.

03420-6

3.2 QUALITY ASSUREANCE/QUALITY CONTROL

- A. Examination: Each FRP manhole liner shall be examined for dimensional requirements and workmanship prior to precasting.
- B. Resin Composition Control: Controls on glass and resin content shall be maintained for all manufacturing processes and for each portion of manhole liner fabrication. Records shall be maintained for these control checks. Proper glass content may be shown by glass usage checks or glass and resin application rate checks.
- C. Certified facility: FRP manhole liners shall be designed and manufactured in an ISO 9001 and 14001 certified manufacturing facility. Concrete precast plants shall be NPCA certified.

3.3 PRECASTING

- A. FRP manhole liners must not be dropped or impacted. When stored for extended periods (more than a few days) Baseliners shall be stored on a flat surface, upside down to minimize deformation.
- B. Baseliners shall not be exposed to direct sunlight for extended periods, either before or after precasting.
- C. Liners must be monolithically cast within a concrete manhole section using the wet cast method. Custom pouring supports shall be provided with FRP liners to fully support the liners during the concrete pouring process against the vertical and horizontal forces created by the concrete during casting.
- D. The poured manhole base must not be moved until adequate hydration has occurred.
- E. Lifting devices, no more than 3 per section, must not penetrate any surface of the liner. No liner may have holes or openings which will permit the intrusion of liquids or gases through the liner wall and into the concrete.

3.4 FIELD INSTALLATION

- A. PVC manhole installation should strictly follow the Manufacturer recommended installation procedures to ensure long-term corrosion resistant service. In addition, local codes may apply and should be consulted as applicable in manhole installation.
- B. Excavation at manhole location shall be wide enough to provide working room around manhole. Ensure the depth of manhole is sufficient to accommodate for at least two concrete rings for adjustment of ring and cover at top of final grade and for a minimum of 6 inches (152 mm) of crushed stone directly below the manhole base for the purpose of adequate leveling.
- C. Set and level manhole base section and connect sewer lines to manhole.
- D. Install rubber butyl sealant on manhole base spigot joint following manufacturer's installation instructions.

- E. Lift PVC riser in place using recommended lifting apparatus and set plumb and level. Ensure that a positive seal is established between the manhole base and the PVC riser.
- F. Install rubber butyl sealant on manhole top lid spigot joint following manufacturer's installation instructions.
- G. Lift manhole top section in place and set level. Ensure that a positive seal is established between the manhole top section and the PVC riser.
- H. If specified, install apply external joint wrap on joint sections, following manufacturer's installation instructions.
- I. Initial backfill material shall be used for backfilling around the manhole for a minimum distance of one foot from the outside surface and extending from the bottom of the excavation to the top of the reducer section. Secondary backfill material may be used for the remainder of the backfill. This material will be subject to approval by Engineer.
- J. Backfill shall be placed in layers of not more than 12 loose measure inches and mechanically tamped to 95% Standard Proctor Density, unless otherwise approved by Engineer. Flooding will not be permitted. Backfill shall be placed in such a manner as to prevent any wedging action against the PVC manhole structure.
- K. Bring to Grade: Construct reinforced concrete ring encasement as identified on details. The top the PVC manhole may be brought to proper grade for receiving manhole frames by using not more than four courses precast concrete grade rings.

3.5 FINAL TESTING AND ACCEPTANCE

- A. Hydrostatic Testing: Hydrostatic testing shall be conducted, as required, by plugging with approved plugs all influent and effluent pipes in the manhole and filling the manhole to the top of the manhole cone with water. Additional water may be added over a 24-hour period to compensate for evaporate losses. At the conclusion of the 24-hour saturation period the manhole shall be filled to the top of the manhole cone and observed. A loss within a 30-minute period shall be considered an unsuccessful test.
- B. Vacuum Testing: Manholes shall be tested, as required, after installation and prior to backfilling with all connections (existing and proposed) in place, in general accordance with ASTM C1244.

The lines entering the manhole shall be temporarily plugged with the plugs braced to prevent them from being drawn into the manhole. The plugs shall be installed in the lines beyond drop connections, gas sealing connections, etc. The test head shall be inflated in accordance with the manufacturer's recommendations. A vacuum of 10 inches of mercury shall be drawn, and the vacuum pump will be turned off. With the valve closed, the level vacuum shall be read after the required test time. If the drop in the level is less than 1-inch of mercury (final vacuum greater than 9-inches of mercury), the manhole will have passed the vacuum test. The required test time is determined from the table below:

03420-8

Depth (ft)	Nominal Diameter (in)								
	30	33	36	42	48	54	60	66	72
	Time (seconds)								
<4	6	7	7	9	10	12	13	15	16
6	9	10	11	13	15	18	20	22	25
8	11	12	14	17	20	23	26	29	33
10	14	15	18	21	25	29	33	36	41
12	17	18	21	25	30	35	39	43	49
14	20	21	25	30	35	41	46	51	57
16	22	24	29	34	40	46	52	58	67
18	25	27	32	38	45	52	59	65	73
20	28	30	35	42	50	53	65	72	81
22	31	33	39	46	55	64	72	79	89
24	33	36	42	51	59	64	78	87	97
26	36	39	46	55	64	75	85	94	105
28	39	42	49	59	69	81	91	101	113
30	42	45	53	63	74	87	98	108	121

- C. Acceptance: Manholes will be accepted with relation to the hydrostatic test requirements and the vacuum test requirements if they meet the criteria above. Any manhole which fails the initial test must be repaired or replaced prior to backfilling. The manhole shall be retested as described above until successful tests have been made. After the successful tests, the temporary plugs will be removed.

3.6 WARRANTY:

- A. A 10 year Warranty against corrosion shall be issued.

+ + END OF SECTION + +

03420-9

THIS PAGE IS INTENTIONALLY BLANK

SECTION 03600**GROUT****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section includes epoxy, non-metallic, non-shrink, and ordinary Portland cement-sand grouts.

1.2 REFERENCES

- A. American Society for Testing and Materials (ASTM)
 - 1. ASTM C33, Standard Specification for Concrete Aggregates.
 - 2. ASTM C150, Standard Specification for Portland Cement.
 - 3. ASTM C595, Standard Specification for Blended Hydraulic Cements.
 - 4. ASTM C1107, Standard Specification for Packaged Dry, Hydraulic-Cement Grout.

1.3 SYSTEM DESCRIPTION

- A. Furnish ordinary cement-sand grout for the following:
 - 1. Foundation grout.
 - 2. Construction joint grout.
 - 3. As shown in the Drawings.
- B. Furnish non-shrink, non-metallic grout for the following:
 - 1. Equipment bases, 25 hp or less.
 - 2. Base plates.
 - 3. Guardrail and railings.
 - 4. Through-bolt and form tie openings.
 - 5. As shown in the Drawings.
- C. Furnish epoxy grout for the following:
 - 1. Equipment bases, 26 hp or more and/or sole plates with vibration, thermal movement, etc.
 - 2. Blockouts for gate guides.
 - 3. Retrofit waterstop installation.
 - 4. As shown in the Drawings.

1.4 SUBMITTALS

- A. Product Data:
 - 1. Manufacturer's specifications and installation instructions for all proprietary materials.
 - 2. Proposed method for keeping existing concrete surfaces wet prior to placing grout.
 - 3. Forming method for fluid grout placements.
 - 4. Curing method for grout.
- B. Laboratory Test Reports and Certificates:
 - 1. For proprietary materials, submit copies of reports on quality control tests.

03600-1

2. Submit certification that materials meet specification requirements for nonproprietary materials.
3. For ordinary cement-sand grout, copies of grout mix design and laboratory strength test reports.

1.5 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Delivery of Materials: Deliver grout materials from manufacturers in unopened containers and bearing intact manufacturer's labels.
- B. Storage of Materials: Store grout materials in a dry shelter and protected from moisture.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. High-Strength Epoxy Grout.
 1. Use 100% solids, prepackaged, solvent-free, moisture insensitive, high-strength epoxy grout.
 2. Product and Manufacturer: Provide one of the following:
 - a. E³-HP, as manufactured by The Euclid Chemical Company.
 - b. Sikadur 42 Grout Pak, as manufactured by Sika Corporation.
 - c. Five Star HP Epoxy Grout by Five Star Products, Incorporated.
 - d. Or approved equal.
- B. Non-shrink, Non-metallic Grout:
 1. Prepackaged non-staining cementitious grout which shall meet the minimum requirements of ASTM C1107 and requiring only the addition of water at the jobsite.
 2. Product and Manufacturer: Provide one of the following:
 - a. NS, as manufactured by The Euclid Chemical Company.
 - b. Five Star Grout, as manufactured by Five Star Products, Incorporated.
 - c. Sika Grout 212, as manufactured by Sika Corporation.
 - d. Or approved equal.
- C. Ordinary Cement-Sand Grout: Prepare design mix for ordinary cement grout.
 1. Cement: Portland cement, ASTM C150, Type II; or blended hydraulic cement, ASTM C595, Type 1P.
 2. Aggregates: ASTM C33 and as herein specified.
 - a. Do not use aggregates containing soluble salts or other substances such as iron sulfides, pyrite, marcasite, ochre, or other materials that can cause stains on exposed concrete surfaces.
 - b. Fine Aggregate: Clean, sharp, natural sand, free from loam, clay, lumps or other deleterious substances.
 - 1) Dune sand, bank run sand and manufactured sand are not acceptable.
 - c. Coarse Aggregate: Coarse aggregate not permitted.
 3. Admixtures: Provide admixtures produced by established reputable manufacturers and use in compliance with the manufacturer's printed instruction. Do not use admixtures that have not been incorporated and tested in the accepted mixes, unless otherwise authorized in writing by ENGINEER. Refer to Section 03300 - Cast-In-Place Concrete, for additional admixture requirements.
 4. Proportioning and Design of Mixes: Mixes are subject to the following limitations:

03600-2

- a. Specified 28-day Compressive Strength: 4,000 psi.
 - b. Minimum amount of water necessary for the mixture to flow under its own weight.
 - c. Fine Aggregate meeting ASTM C33.
 - d. Air Content Percentage: $\pm 1.5\%$.
 - e. Minimum Cement Content in Pounds per Cubic Yard: 658.
 - f. Slump at point of placement: $5" \pm 1"$.
5. Proportion mix by either laboratory trial batch or field experience methods, using materials to be employed on the Project for grout required. Comply with ACI 211.1 and provide a complete report, from an independent testing laboratory, to ENGINEER, at least 30 days prior to start of Work. Do not begin grout production until ENGINEER has approved mix.
 6. Laboratory Trial Batches: When laboratory trial batches are used to select grout proportions, prepare test specimens and conduct strength tests as specified in ACI 301, Chapter 3 - Proportioning.
 7. Field Experience Method: When field experience methods are used to select grout proportions, establish proportions as specified in ACI 301, Chapter 4.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the substrate and conditions under which grout is to be placed with installer and notify ENGINEER, in writing, of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

3.2 INSTALLATION

- A. General:
 1. Mix, place and cure grout as shown and in accordance with manufacturer's instructions. If manufacturer's instructions conflict with the Specifications, do not proceed until ENGINEER provides clarification.
 2. Manufacturers of proprietary products shall make available upon 72 hours notification the services of a qualified, full time employee to aid in assuring proper use of the product under job conditions. The cost of this service, if any, shall be borne by CONTRACTOR.
 3. When placing grout conform to temperature and weather limitations in Section 03300 - Cast-In-Place Concrete.
- B. Through-bolt and form-tie holes: Fill space with dry pack dense grout hammered in with steel tool and hammer. Coordinate dry pack dense grout application with bonding agent in Section 03251 - Concrete Joints.
- C. Columns, Beams and Equipment Bases: Prepare concrete surface by sandblasting, chipping, or by mechanical means to remove any soft material prior to setting base plates and machinery. After shimming columns, beams and equipment indicated to be grouted on the plans to proper grade, securely tighten anchor bolts. Properly form around the base plates allowing sufficient room around the edges for placing the grout. Adequate depth between the bottom of the base plate and the top of concrete base must be provided to assure that the void is completely filled with grout.

03600-3

- D. Guardrails and Railings: After posts and rails have been properly inserted into holes or sleeves, fill the annular space between posts and cast-in-place sleeves and/or below base plates with non-shrink grout. Bevel grout at juncture with post so that moisture flows away from posts.
- E. Construction Joints: Ordinary cement-sand grout may be used in place of mortar over the contact surface of the old concrete at the interface of horizontal construction joints as outlined in Section 03251 - Concrete Joints, and Section 03300 - Cast-In-Place Concrete, of these Specifications.
- F. Curing: Cure all grout in accordance with manufacturer's written instructions. Wet cure ordinary cement-sand grout and non-shrink non-metallic grout for a minimum of three (3) days unless directed otherwise by the ENGINEER.

+ + END OF SECTION + +

03600-4

SECTION 03700**COMPACTION GROUTING****PART 1 - GENERAL****1.1 SUMMARY**

- A. This section includes requirements for constructing compaction grouting in the areas indicated on Drawings to reduce the impact of liquefaction and subsequent seismic settlement. The work includes mobilizing equipment for compaction grouting, determining suitable grouting procedures and grout mixes, and control, clean up, and disposal of waste materials resulting from compaction grouting.
- B. The Geotechnical Report by Yeh and Associates, Inc. is included by reference to the Contract Documents and presents available geotechnical data, compaction grouting requirements and design criteria, and a description of anticipated subsurface conditions at the project site.
- C. All ground improvement work shall be performed in accordance with all local, state, and federal safety regulations and permits required for the project.

1.2 REFERENCES

- A. Commercial Standards:
 - 1. American Society for Testing and Materials (ASTM):
 - a. C150, Specification for Portland Cement.
 - b. C494, Specification for Chemical Admixtures for Concrete.
 - c. C618, Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
- B. Geotechnical Report: Yeh Project No. 217-053.

1.3 DEFINITIONS

- A. Compaction Grouting: The process of densifying loose fills and native soils that permit adequate fluid pressure dissipation. The process involves injecting a stiff mortarlike grout into the ground at a controlled rate to displace and compact the surrounding soil. During injection, the grout displaces the soil and forces the soil grains into tighter packing, expelling air and/or water out of the effected area, and reducing pore volume. At the end of the injection the ground should contain stiff grout masses and densified soil.

1.4 PROJECT REQUIREMENTS

- A. Use extreme care to prevent discharge of grout onto the ground surface during compaction grouting operations. Provide sandbags around injection areas to contain any potential discharges. Clean up any discharge of grout immediately.
- B. Compaction grouting columns should be installed in a triangular grid pattern to provide a minimum area replacement ratio of 10 percent and be spaced no more than 12 feet on center in a triangular grid pattern.

03700-1

- C. Compaction grouting should be performed within a vertical zone between elevations 10 feet to -7 feet within the horizontal extents shown in the Construction Drawings.
- D. Compaction grout should consist of a minimum of 8 percent cement and the slump at the time of pumping should not exceed 1.5 inches.
- E. Compaction grouting should be performed in stages from the bottom of the treatment zone and working upwards in vertical stage heights of 1 to 4 feet.
- F. Grouting should be performed under pressure at each stage within the column until either the ground within 20 feet of the column heaves more than ½ inch vertically, grout pipe head pressure exceeds 200 psi, or a maximum volume of grout of 50 cubic feet is pumped.^{AD5}
- G. Structures within 50 feet should be monitored for movement during grouting. Stop grouting immediately if movement of 1/8 inch or more is measured at existing structures.

1.5 SUBMITTALS

- A. The Contractor shall submit the following with sufficient detail to allow the ENGINEER to judge whether or not the proposed equipment, material, procedures and qualifications will meet the Contract requirements.
- B. Qualifications:
 - 1. Submit the name of the compaction grouting subcontractor and written documentation summarizing the qualifications of the firm and references for five similar projects. Provide qualifications detailing the experience of the compaction grouting superintendent in the supervision of compaction grouting work.
- C. Work Plan and Grouting Methods. Submit a detailed work plan describing the proposed grouting methods and equipment to be used including the following:
 - 1. Compaction grouting procedures for constructing ground improvements.
 - 2. Description of grout mixing equipment.
 - 3. Arrangement of grout mixing, recording, and injection equipment and other details to illustrate the plan for setting up at each site to be treated.
 - 4. Certification of measurement gauges used on equipment during grout injection.
 - 5. Schedule and sequence for competing compaction grouting test columns and production compaction grouting work.
 - 6. Grout mix design, sources of mix materials and admixtures.
 - 7. Shop drawings including, but not limited to, general notes, inspection requirements, plan view layout with sections and details.
 - 8. Quality control procedures including record keeping, field testing, sampling and laboratory testing of completed columns.
- D. Compaction Grouting Reports: Prepare and submit daily shift reports for the compaction grouting test program and the production compaction grouting. The forms shall be submitted to the ENGINEER for approval prior to commencement of compaction grouting work. As a minimum the reports shall include:
 - 1. Name of grouting technician.
 - 2. Compaction grout column identification including column number, diameter, length, and location.

03700-2

3. Time and date of beginning and completion of each compaction grout column.
4. Grout mix data, including mix proportions.
5. Grout flow rates and total grout quantity used to construct each compaction grout column.
6. Water and air pressures used to construct each compaction grout column.
7. Other pertinent observations, such as compaction grout escapes, ground heave, or other unusual behavior.
8. As-built drawings indicating the locations of compaction grout columns.

1.6 QUALITY ASSURANCE

- A. Due to the specialized nature of the compaction grouting portion of the work and the strict environmental restrictions, the CONTRACTOR shall engage a specialty subcontractor who will furnish the materials and perform the work. The specialty subcontractor shall have completed at least five projects of similar scope and magnitude. The compaction grouting superintendent shall be assigned full time to the project and shall be present at the work site at all times during compaction grouting operations

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Grout: Grout shall be a mixture of Portland cement, aggregate and water and other admixtures if required. The grout shall be mixed to combine dry cement, aggregate and water in predetermined proportions. It shall be proportioned to provide adequate mixing consistency.
- B. Cement: Portland Cement ASTM C150, Type I or II
- C. Fly Ash: If used, provide ASTM C618 Class F. A substitution by weight, of the cement by fly ash, shall not exceed 20% by weight of the cement plus fly ash.
- D. Aggregates: Aggregate for grout mixes should be well graded and have grain size distributions that fall within the following gradation limits.

Sieve Size	Percent Passing
3/4"	100
No. 4	70-98
No. 10	42-90
No. 40*	22-58
No. 100	12-38
No. 200	8-28
Clay Fraction	5 maximum

* Portion of aggregate passing No. 40 sieve should have a plasticity index (PI) of no higher than 15

- E. Water: Fresh and potable water shall be used.
- F. Admixtures: Admixtures may be used as necessary to improve pumpability, to control set time, and to prevent segregation and bleeding. Admixtures shall be non-toxic and conform to ASTM C494.

03700-3

2.2 EQUIPMENT

- A. Compaction Grout Mixer: Furnish a batch or auger type continuous grout mixer, or ENGINEER approved equal, to ensure complete mixing of the stiff grout. The compaction grout mixer must be of sufficient capacity to continuously deliver grout having a slump of less than 1.5 inches at pressures up to 1,000 psi and at flow rates ranging from 0.1 to 5.0 cubic feet per minute.
- B. Pump: Furnish a positive displacement piston pump, or ENGINEER approved equal, capable of pumping stiff grout at pressures up to 1,500 psi at variable rates from 0 to 2 ft³/min.
- C. Casing: Grout casing should be of sufficient size to permit free flow of the grout with minimal head losses. Provide pipes with an internal diameter larger than 1.75 inches.
- D. Riser: Furnish a riser elbow having a minimum 1ft radius curve to minimize the potential for grout blockage.
- E. Gauges: Provide gauges at the pump and the grout pipe head to measure pressure and flow rate. Provide dial gauge or meter capable of measuring to 0.5 cubic feet, or less, to measure the amount of grout pumped into the hole. Provide a pressure gauge graduated in 10 psi increments, or less, to measure the applied pressure. All gauges must be certified accurate to within 2 percent.
- F. Spare parts and/or equipment shall be available onsite to maintain the compaction grouting equipment in satisfactorily operating conditions at all time during execution of the grouting work.

PART 3 - EXECUTION**3.1 GENERAL REQUIREMENTS**

- A. Compaction grout injection shall be sufficient to provide grout columns meeting the diameter and depth requirements specified herein and, in the Contractor's, approved work plan. Compaction grouting procedure shall also include the following:
 - 1. Excess grout and soil from compaction grouting operations shall be contained in tanks, or by other approved methods to facilitate rapid cleanup at the end of each shift.
 - 2. Equipment for mixing, holding, and pumping grout shall be in a secure location and shall be contained to prevent spillage of material. No water, waste, grout, or soil shall be allowed to discharge to finished grade.
 - 3. At the completion of daily compaction grouting operations, thoroughly clean site and dispose of all debris, water, waste grout, and spilled material.
- B. Use a drilling method that is capable of simultaneously drilling the hole and advancing the casing to prevent collapsing the hole. Install the casing in such a way that there is intimate contact with the drilled hole wall in order to prevent grout leakage and/or premature upward movement of the casing during the injection of high pressure compaction grout.

03700-4

- C. Continuously monitor grouting pressure and flow rate at the grout pipe head and at the pump by pressure gauges and flow meters.
- D. Begin compaction grouting with the primary holes. Begin the secondary hole compaction grouting after the completion of the primary holes.
- E. ~~Additional compaction grout columns shall be installed, as directed by the ENGINEER, at no additional cost to the City if the performance requirements for the compaction grout columns specified herein are not achieved.~~^{AD5}

3.2 COLUMN LOCATIONS

- A. The compaction grouted columns shall be surveyed and checked by the CONTRACTOR before the start of drilling. The CONTRACTOR shall coordinate the column locations with other construction disciplines and requirements. The column layout shall be based on the minimum column diameter designated by the subcontractor's approved work plan. The location of each column shall be noted and recorded on the daily shift report.

3.3 COLUMN INCLINATIONS

- A. Only vertical columns shall be installed.
- B. The drilling/grouting rods shall be of sufficient stiffness to ensure that the deviation of compaction grouted columns from the theoretical axis is maintained at 1:200 (horizontal to vertical) or less.

3.4 COLUMN DEPTH AND HEIGHT

- A. Column depth shall be measured with respect to ground surface by observing the length of the rods inserted. Markings shall be located on the drill mast in one-foot increments to assist the drill operator in determining the exact depth.
- B. Column length shall also be measured by observing the length of the rods withdrawn while grouting.
- C. The depth to the bottom and length of each column shall be noted and recorded on the daily shift report.

3.5 GROUT MIXING

- A. The mixing equipment shall be capable of supplying a uniform grout mixture in the quantities required for timely prosecution of the work.

3.6 PREVENTION OF GROUND HEAVE

- A. Appropriate drilling procedures and drill bit size relative to drilling/grouting rod size shall be used to prevent ground heave and discharge of grout to the ground surface.
- B. The annulus between the rods and the borehole shall be kept free at all times during grouting.

3.7 CONTAINMENT OF GROUT DISCHARGE

- A. All grout, water and other drilling/grouting waste material shall be contained within the work areas with berms or other measures to prevent discharge of grout to grade or other environmentally sensitive areas.
- B. Sandbags, or other protective measures, shall be installed around the grouting operation at all times while grouting takes place to completely contain any grout discharge. Clean up any grout discharges, spoils or other unacceptable environmental impacts immediately.

3.8 QUALITY CONTROL

- A. Inspection Notification: The ENGINEER will provide periodic, part-time inspection of compaction grout operations. The project Geotechnical Engineer will observe the placement of compaction grouting and determine whether or not the compaction grouting performed is sufficient to reduce the impact of liquefaction. The Contractor shall notify the ENGINEER at least 24 hours prior to any compaction grout injection. All compaction grout injections performed without inspection shall be subject to rejection and reinjection in the presence of the ENGINEER.

3.9 CLEANUP

- A. Cleanup of the work area after compaction grouting operations shall be completed as soon as possible. Remove all grout spillage and residue from the work area prior to shaft excavation.

+ + END OF SECTION + +

03700-6

SECTION 03900

CONCRETE RESTORATION

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: Provide all labor, materials, equipment and incidentals, as shown, specified, and required to furnish and install concrete repairs. The work includes:
1. Removal of deteriorated concrete.
 2. Providing cementitious repair materials.
 3. Fabrication and placement of reinforcement, included ties and supports.
 4. Design, erection, and removal of formwork.
 5. Building into the repairs all sleeves, frames, anchors, inserts and other items required to be embedded in the repairs.

1.2 REFERENCES

- A. American Concrete Institute (ACI)
1. 308R, Guide to Curing Concrete
 2. 318, ACI 318, Building Code Requirements for Reinforced Concrete
 3. 347, Guide to Formwork for Concrete
- B. ASTM International
1. A82, Standard Specification for Steel Wire, Plain, for Concrete Reinforcement
 2. A185, Standard Specification for Welded Steel Wire Fabric For Concrete Reinforcement
 3. A615, Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
 4. A706, Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement
 5. C33, Standard Specification for Concrete Aggregates
 6. C94, Standard Specification for Ready-Mixed Concrete
 7. C109, Standard Test Method for Compressive Strength of Hydraulic Cement Mortars
 8. C150, Standard Specification for Portland Cement
 9. C157, Standard Test Method for Length Change of Hardened Hydraulic-Cement Mortar and Concrete
 10. C171, Standard Specification for Sheet Materials for Curing Concrete
 11. C309, Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete
 12. C882, Standard Test Method for Bond Strength of Epoxy-Resin Systems Used With Concrete By Slant Shear

1.3 QUALITY ASSURANCE

- A. Qualifications:
1. System applicator:
 - a. Experienced applicator with a minimum 5 years' experience endorsed by the restoration system manufacturer.

03900-1

- B. Manufacturer:
 - 1. Manufacturer shall have a minimum 5 years' experience in production of concrete restoration products.
 - 2. System applicator shall follow all recommendations of the system manufacturer regarding storage, handling, surface preparation, application, environmental conditions during storage, preparation and application, and all other manufacturer recommendations.

1.4 SUBMITTALS

- A. Product Data:
 - 1. Manufacturer's product data sheets for each material supplied.
 - 2. Manufacturer's installation instructions for each material supplied.
- B. Shop Drawings:
 - 1. Reinforcing steel shop drawings including mechanical connections as applicable.
- C. Ready-Mix Concrete:
 - 1. Mix design data and supporting criteria.
 - 2. Laboratory Test Reports: Submit copies of laboratory test reports for materials and mix design tests.
 - 3. Delivery Tickets: Furnish to OWNER copies of all weighmaster certificate delivery tickets for each load of concrete delivered to the site. Provide items of information as specified in ASTM C94, Section 16. Delivery tickets shall be signed by a Certified Weighmaster.
- D. Work Plan: Submit a work plan detailing the CONTRACTOR'S detailed work procedure. Work plan shall include, but is not limited to:
 - 1. Examination
 - 2. Concrete removal and surface preparation
 - 3. Installation of reinforcing and embedded items
 - 4. Rebuild procedure
 - 5. Finishing and curing

1.5 PRE-REPAIR CONFERENCE

- A. Required Meeting Attendees:
 - 1. Contractor
 - 2. Repair Subcontractor
 - 3. Technical representative for repair material manufacturer
 - 4. OWNER.
- B. Schedule and conduct prior to incorporation of respective products into Project. Notify OWNER of location and times at least seven days prior to the anticipated meeting date.
- C. Agenda shall include:
 - 1. Review of field conditions. Conduct field observations of Work to be performed.
 - 2. Based on field observations, repair material manufacturer's technical representative shall make material selection and repair method recommendations.

03900-2

3. Technical representative for repair material manufacture shall review proposed surface preparation, material application, consolidation, finishing, curing, and protection of repair material from weather conditions.
4. Limitations of manufactured products shall be reviewed to ensure products are installed in accordance with the written instructions.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Inspect materials delivered to the site for damage and proper manufacturing dates. Store products in accordance with manufacturer's directions. Store products in a neat, orderly fashion and in a temperature controlled environment in accordance with the manufacturer's recommendations. Protect products from damage.

PART 2 - PRODUCTS

2.1 FORMWORK:

- A. Construct forms complying with ACI 347; to the exact sizes, shapes, lines and dimensions shown; as required to obtain accurate alignment, location and grades; to tolerances specified; and to obtain level and plumb work in finish structures. Provide for openings, offsets, keyways, recesses, moldings, rustications, reglets, chamfers, blocking, screeds, bulkheads, anchorages and inserts, and other features required. Use selected materials to obtain required finishes.
- B. Provide 3/4-inch chamfer at all external corners.

2.2 REINFORCING MATERIALS

- A. Reinforcing Bars: ASTM A615, Grade 60 for all non-welded bars. ASTM A706, Grade 60 for welded bars.
- B. Mechanical Couplers: Reinforcement bars may be spliced with a mechanical connection. Provide a full mechanical connection which shall develop in tension or compression, as required, at least 125% of specified yield strength (f_y) of the bar in accordance with ACI 318 Section 12.14.3.4. The locations of the connections are subject to the approval of the OWNER.
- C. Plain Steel Wire: ASTM A82.
- D. Welded Wire Fabric: ASTM A185. Furnish in flat sheets, not rolls.
- E. Stainless Steel Wire: 16 gauge stainless steel type 316 for shallow depth concrete repairs.
- F. Supports for Reinforcement: Bolsters, chairs, spacers and other devices for spacing, supporting and fastening reinforcement in place.
 1. Use wire bar type supports complying with CRSI recommendations, except as specified below. Do not use wood, brick, or other unacceptable materials.
 2. For slabs on unformed surfaces, use 5000 psi concrete blocks.
 3. At all formed surfaces, provide supports complying with CRSI "Manual of Standard Practice" as follows: Plastic protected or stainless steel legs.

03900-3

- G. Adhesive Dowels: Provide one of the following:
1. HIT-HY 200 as manufactured by Hilti, Inc.
 2. SET-XP as manufactured by Simpson Strong-Tie, Inc.
 3. Or approved equal meeting ACI 355.4.

2.3 BONDING AGENT AND REINFORCING PROTECTION

- A. For use in all mortar repair, concrete repair, anti-corrosion coating and for unplanned cold-joints.
- B. When bonding cementitious repair materials to existing concrete with and without exposed reinforcing:
1. Sika Armatec 110 EpoCem, as manufactured by Sika Corporation.
 2. Or approved equal.

2.4 HAND APPLIED MORTARS – HORIZONTAL APPLICATION

- A. Two-component, polymer-modified, Portland cement-based, screed mortar intended for horizontal surfaces in form and pour applications.
- B. Cured Mortar Properties:
1. Compressive Strength, ASTM C109: 5,000 psi at 28 days.
 2. Bond Strength, ASTM C882: 2,000 psi at 28 days.
 3. Shrinkage, ASTM C157: <0.05% for a 1"x1"x11-1/4" specimen size.
- C. Manufacturers and Products
1. Sika Corporation: SikaTop 111 Plus
 2. Master Builders: MasterEmaco N 1500HCR Self-Consolidating
 3. Or equal.

2.5 HAND APPLIED MORTARS – VERTICAL AND OVERHEAD APPLICATIONS

- A. Two-component, polymer-modified, Portland cement-based, non-sag mortar intended for vertical and overhead surface applications.
- B. Cured Mortar Properties:
1. Compressive Strength, ASTM C109: 5,400 psi at 28 days.
 2. Bond Strength, ASTM C882: 2,000 psi at 28 days.
 3. Shrinkage, ASTM C157: 0.05% for a 1"x1"x11-1/4" specimen size.
- C. Manufacturers and Products
1. Sika Corporation: SikaTop 123 Plus
 2. Master Builders: MasterEmaco N 1500HCR Vertical and Overhead
 3. Or equal.

2.6 PORTLAND CEMENT READY-MIX CONCRETE

- A. Ready-mix concrete. Mixes subject to the following limitations:
1. Specified 28-day Compressive Strength: 4,000 psi.
 2. Air content: 5% ± 1%.
 3. Slump, before addition of superplasticizer: 3 1/2" ± 1/2"

03900-4

4. Cementitious content-pounds per cubic yard: ASTM C150 Type II 625 min, 800 max
5. Maximum water-cement ratio: 0.375
6. Aggregates: ASTM C33
7. Fine Aggregate: Provide clean, sharp, natural sand free from loam, clay, lumps or other deleterious substances.
8. Coarse Aggregate: Provide clean, uncoated, processed aggregate containing no clay, mud, loam, or foreign matter. Size to be No 67.
9. Provide admixtures as recommended by the manufacturer for climatic conditions prevailing at the time of placing. Adjust quantities and types of admixtures as required to maintain quality control. Do not use admixtures containing calcium chloride.
10. Use an independent testing facility acceptable to OWNER for preparing and reporting proposed mix designs.
11. Only when approved by OWNER, site mixed concrete may be substituted for ready-mix concrete, provided the site mixed concrete meets the above specifications.

2.7 CONCRETE CURING MATERIALS

- A. Absorptive Cover: Burlap cloth made from jute or kenaf, weighing approximately 10 ounces per square yard and complying with AASHTO M182, Class 3.
- B. Moisture-Retaining Cover: One of the following, complying with ASTM C171.
 1. Waterproof paper.
 2. Polyethylene film.
 3. White burlap-polyethylene sheet.
- C. Curing Compound: ASTM C309 Type 1-D (water retention requirements):
 1. Product and Manufacturer: Provide one of the following:
 - a. Super Aqua Cure VOX, as manufactured by The Euclid Chemical Company.
 - b. Sealtight 1100, as manufactured by W.R. Meadows, Incorporated.
 - c. Or approved equal.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Sound existing concrete surfaces with hammer, chain, reinforcing bar, or similar metal object. Mark areas of unsound concrete.
- B. Loose, delaminated concrete should be removed until the substrate consists of sound concrete. Where corrosion of the reinforcement exists, continue bulk removal along the reinforcing steel and adjacent areas with evidence of corrosion-induced damage that would inhibit bonding of repair materials. Bulk concrete removal should include undercutting the corroded reinforcing steel by approximately $\frac{3}{4}$ inch minimum. The shape of the prepared cavity should be kept as simple as possible generally square or rectangular in shape. The edges of the patches should be sawcut perpendicular to the surface to a depth of $\frac{1}{2}$ inch to 1 inch to avoid feather edging the repair material.

03900-5

- C. Pneumatic chipping hammers shall be used for concrete removal. Nominal 30-lb class or less pneumatic chipping hammers shall be used for removal of concrete at rebuild areas. Nominal 15-lb class or less pneumatic chipping hammers shall be used for detail work and work adjacent to and beneath reinforcing steel.
 - 1. Exercise care to avoid cracking underlying sound concrete, punching through member, or damaging embedments.
 - 2. Limit chipping hammer size and impact angle to minimize damage to sound concrete. Impact angle shall be no more than 60 degrees to the surface.
 - 3. Slope the removal of the substrate to avoid abrupt changes in removal thickness.
 - 4. Remove concrete at 45-degree angles to eliminate reentrant corners.
- D. Use abrasive blasting to remove residual dust, debris, fractured concrete, and contaminants that prevent proper bonding. If abrasive blasting is not feasible, pressure washing using a minimum 3000 psi may be acceptable depending on the bond strength required. Blowing with oil-free compressed air or alternately, the use of a vacuum, may be appropriate if dust is still present after the blasting. The final surface texture should be rough, with approximately a 1/4 inch amplitude.
- E. Bond-inhibiting corrosion should be removed from the reinforcing steel by an abrasive blasting wire wheel or needle scaler. If the cross-sectional area of the reinforcing steel has been significantly reduced, greater than 10%, provide additional rebar as directed by OWNER and in accordance with the Drawings. Apply the reinforcement protection anti-corrosion coating after the reinforcing steel has been cleaned.
- F. A saturated, surface dry (SSD) surface is not recommended if an epoxy bonding agent is to be used. When using epoxy bonding agents ensure the surface is dry, follow the manufacturer's recommended surface preparation requirements. Provide epoxy bonding agent for all concrete and mortar repairs unless directed otherwise OWNER or the manufacturer.
- G. Provide reinforcement as directed by OWNER or as shown in the Drawings.

3.2 INSTALLATION

- A. Install the epoxy bonding agent in accordance with the manufacturer's printed instructions using a stiff bristle brush. Systematically coat existing concrete substrate and exposed reinforcing. Ensure that working times and pot life are not exceeded during installation and before placing repair material.
- B. Apply the repair material in accordance with the manufacturer's printed instructions. Thoroughly consolidate the repair materials into corners and around any exposed reinforcement.
- C. For repairs with a depth greater than 2-inches Portland cement ready-mix concrete is recommended. Hand applied repair mortars shall only be used at repair depths greater than 2-inches when allowed by OWNER and when the limitations of the repair mortar are not exceeded. Consult with the repair mortar manufacturer when applying repair mortars in depths greater than 2-inches.
- D. For hand applied repairs scrub a thin coat of the repair mortar into the substrate to prevent sloughing or sagging of repair on vertical and overhead surfaces. Apply the material with adequate pressure before the bond coat dries.

03900-6

- E. When using multiple lifts, apply at thickness recommended by the manufacturer, thoroughly roughen the surface of the first lift by scoring the soft mortar to achieve an aggressive finish, similar in profile to the prepared concrete substrate. Do not feather edges onto adjacent surfaces.
- F. Finish the repair material to produce a final finished appearance as required to match the existing adjacent concrete surface.
- G. Curing: Beginning curing operations immediately after final finishing. Cure intermediate layers of mortar in accordance with the manufacturer's instructions. Cure all cementitious repair materials in accordance with manufacturer's written instructions. Wet cure for a minimum of five (5) days unless directed otherwise by the OWNER or manufacturer. Conform to the curing requirements in ACI 308R. Use curing compounds only when directed by OWNER.

3.3 FIELD QUALITY CONTROL

- A. Inspect and check each repaired area for cracks, spalls, popouts and loss of bond between repaired area and surrounding concrete. Check each repaired area for voids by tapping with a hammer or steel rod and listening for dull or hollow sounds. Immediately repair defects.
- B. The OWNER may employ a testing laboratory to perform field quality control testing. OWNER will direct the number and type of tests and cylinders required. Furnish all necessary assistance required by OWNER. Test samples which fail to meet specification requirements will be rejected and replaced by CONTRACTOR and no additional costs to OWNER.

+ + END OF SECTION + +

03900-7

This Page Intentionally Left Blank

SECTION 04200

CONCRETE MASONRY UNITS

PART 1 - GENERAL**1.1 SUMMARY**

- A. Section includes: All masonry work shown on the Drawings. It also includes providing openings in masonry, to accommodate the Work under other Sections, and building into the masonry all items such as sleeves, anchor bolts, inserts and all other embedded items for which placement is not specifically provided under other Sections.

1.2 REFERENCES

- A. American Concrete Institute (ACI)
1. ACI 315, "Manual of Standard Practice for Detailing Reinforced Concrete Structures."
- B. American Society for Testing and Materials (ASTM)
1. ASTM A36, Carbon Structural Steel, Standard Specification for.
 2. ASTM A82, Steel Wire, Plain, for Concrete Reinforcement, Standard Specification for.
 3. ASTM A153, Zinc Coating (Hot Dip) on Iron and Steel Hardware, Standard Specification for.
 4. ASTM A167, Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip, Standard Specification for.
 5. ASTM A240, Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels, Standard Specification for.
 6. ASTM A366, Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality, Standard Specification for.
 7. ASTM A569, Steel, Carbon (0.15 Maximum Percent), Hot-Rolled Sheet and Strip, Commercial Quality, Standard Specification for.
 8. ASTM A580, Stainless Steel Wire, Standard Specification for.
 9. ASTM A615, Deformed and Plain Billet-Steel Bars for Concrete Reinforcement, Standard Specification for.
 10. ASTM A663, Steel Bars, Carbon, Merchant Quality, Mechanical Properties, Standard Specification for.
 11. ASTM C5, Quicklime for Structural Purposes.
 12. ASTM C67, Standard Methods of Sampling and Testing Brick.
 13. ASTM C90, Load-bearing Concrete Masonry Units, Standard Specification for.
 14. ASTM C91, Masonry Cement.
 15. ASTM C136, Sieve or Screen Analysis of Fine and Coarse Aggregates.
 16. ASTM C140, Sampling and Testing Concrete Masonry Units, Standard Test Methods of.
 17. ASTM C144, Aggregate for Masonry Mortar.
 18. ASTM C150, Portland Cement.
 19. ASTM C180, Standard Test Method for Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
 20. ASTM C207, Hydrated Lime for Masonry Purposes.
 21. ASTM C270, Mortar for Unit Masonry.
 22. ASTM C331, Lightweight Aggregates for Concrete Masonry Units, Standard Specification for.

04200-1

23. ASTM C404, Aggregates for Masonry Grouts.

24. ASTM C426, Linear Drying Shrinkage of Concrete Masonry Units, Standard Test Method for.

25. ASTM C476, Grout for Masonry.

26. ASTM C744, Prefaced Concrete and Calcium Silicate Masonry Units, Standard Specification for.

27. ASTM C1019, Standard Test Method of Sampling and Testing Grout.

28. ASTM D2240, Rubber Property - Durometer Hardness, Standard Test Method for.

29. ASTM E84, Surface Burning Characteristics of Building Materials, Standard Test Method for.

30. ASTM E119, Fire Tests of Building Construction and Materials, Standard Test Methods for.

C. Brick Institute of America

1. "Technical Notes on Brick and Tile Construction."

2. Technical Bulletin 1A, "Construction and Protection Recommendations for Cold Weather Masonry Construction."

D. National Concrete Masonry Association,

1. "Guide Specifications"

2. "Technical Bulletins."

E. Underwriters Laboratories (UL)

1. Design Numbers U901 through U914.

1.3 SYSTEM DESCRIPTION

A. Coordination:

1. Review installation procedures under other Sections and coordinate the installation of items that must be installed with the masonry Work.

2. Masonry Work advanced without built-in flashings and other items shall be removed and rebuilt, at no additional cost to OWNER, even if discovered after masonry has been completed.

3. Coordinate the work of other Sections to avoid delay of the masonry Work.

1.4 SUBMITTALS

A. Shop Drawings:

1. Complete layout of all masonry walls showing modular planning and all special shapes to be used. Show all details for each condition encountered in the Work. Provide plans and elevations drawn at 1/4-inch scale and details drawn at 1½-inch scale. Show all items required to be built into masonry.

2. Masonry control joint locations and details.

3. Fabrication, bending, and placement of reinforcing bars. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies as required for fabrication and placement of reinforcing for masonry Work.

04200-2

4. Explanation of where each masonry accessory will be used in the Work, quantities purchased and intended spacings.
- B. Samples:
1. One unit of each type of concrete masonry unit specified.
 2. One unit or one modular length of each accessory item specified.
 3. Each type of colored mortar, showing the range of color that can be expected in the Work.
- C. Product Data:
1. Complete selection of manufacturer's standard and custom colors.
 2. Mix designs for grout and mortar.
 3. Manufacturer's specifications and instructions for each manufactured product. Include data substantiating that materials comply with specified requirements.

1.5 QUALITY ASSURANCE

- A. Requirements of Regulatory Agencies:
1. Comply with the applicable requirements of International Building Code, including the requirements for Special Inspection.
 2. Wherever a fire-resistance classification is shown or scheduled for masonry Work (4-hour, 3-hour, and similar designations), comply with applicable requirements for materials and installation established by UL and other governing authorities.
- B. Source Quality Control:
1. Obtain all concrete masonry units from one manufacturer, cured by one process and of uniform texture and color or in an established uniform blend thereof. Cure units by autoclave treatment at minimum temperature of 350°F, and a minimum pressure of 125 psi.
 2. Do not change source or brands of materials during the course of the Work.
 3. No change shall be made in the proportions for mortar or grout, unless resubmitted and re-approved by the ENGINEER.
- C. Construction Tolerances:
1. Variation from Plumb: For lines and surfaces of columns, walls, and expansion joints, do not exceed 1/4-inch in 10-feet, or 3/8-inch in one story height or 20-feet maximum, nor 1/2-inch in 40-feet or more.
 2. Variation from Level: For lines of exposed lintels, sills, parapets, horizontal grooves and other conspicuous lines, do not exceed 1/4-inch in any bay or 20-feet maximum, nor 1/2-inch in 40-feet or more.
 3. Variation of Linear Building Line: For position shown and related portion of columns, walls and partitions, do not exceed 3/8-inch in any bay or 20-feet maximum, nor 1/2-inch in 40' or more.
 4. Variation in Cross-Sectional Dimensions: For columns and thickness of walls, do not exceed +1/2-inch-1/4-inch from dimensions shown.
- D. Job Mock-up: Prior to installation of masonry Work, but after ENGINEER'S approval of samples, erect job mock-up using materials, pattern bond and joint tooling shown or specified for final Work.
1. Provide special features, including finished opening 16-inchx 16-inch and finished end.

2. Build mock-up at the site, in location approved by ENGINEER, of full required wall thickness and approximately 4'x 4', unless otherwise shown.
 3. Indicate the proposed range of color, texture and workmanship to be expected in the completed Work.
 4. Obtain ENGINEER'S acceptance of the mock-up before start of Work.
 5. Retain and protect mock-up during construction as a standard for judging completed masonry. Do not alter, move or destroy mock-up until given written permission by ENGINEER.
 6. Build as many job mock-up panels as required to obtain ENGINEER'S acceptance of the Work.
 7. Masonry construction that does not meet the standards approved on the sample panel shall be removed and rebuilt as required by ENGINEER.
- E. Preconstruction Conference: Prior to the installation of masonry Work, CONTRACTOR shall schedule a Preconstruction Conference at the project site.
1. Review foreseeable methods and procedures related to the masonry Work including, but not necessarily limited to, the following:
 - a. Project requirements, including Contract Documents.
 - b. Method of sequence of masonry construction.
 - c. Special masonry details.
 - d. Required submittals, both completed and yet to be completed.
 - e. Standards of workmanship.
 - f. Quality control requirements.
 - g. Job organization and availability of materials, tradesmen, equipment and facilities needed to make progress and avoid delays.
 - h. Modular planning requirements.
 - i. Weather and forecasted weather conditions and procedures for coping with unfavorable conditions.
 - j. Required inspection, testing and certifying procedures.
 - k. Regulations concerning building code compliance.
 2. Attendance is mandatory for the following:
 - a. CONTRACTOR'S job superintendent.
 - b. Masonry subcontractor's job superintendent.
 - c. Masonry subcontractor's foreman.
 - d. Authorized representative of concrete unit masonry supplier.
 - e. ENGINEER'S authorized representative.
 3. Reconvene the meeting at the earliest opportunity if additional information must be developed in order to conclude the subjects under consideration and to resolve any outstanding issues.
 4. CONTRACTOR shall record the discussions of the conference and the decisions and agreements (or disagreements) and furnish a copy of the record to each party attending.

1.6 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Delivery of Materials:
1. Deliver concrete masonry units in original, unopened and undamaged packages and pallets, plainly marked with identification of materials and name of approved manufacturer. Delivery shall be by the manufacturer or manufacturer's agent.
 2. Deliver reinforcing to the site, bundled, tagged and marked. Use metal tags indicating size, lengths and other markings shown on approved Shop Drawings.

04200-4

3. Manufactured materials, such as cement and lime, shall be delivered and stored in their original containers plainly marked with identification of materials and manufacturer.
- B. Storage of Materials:
 1. Store materials off the ground, protected from dirt, construction traffic and contamination. Cover using tarpaulins or polyethylene sheets to prevent damage such as wetting, staining, and chipping.
 2. Do not stack concrete masonry units higher than recommended by manufacturer.
- C. Handling Materials:
 1. Handle materials in a manner that minimizes chips, cracks, voids, discolorations or other defects that might be visible or cause staining in finished Work.

1.7 JOB CONDITIONS

- A. Site Facilities: Supplemental heat sources, as may be required, should CONTRACTOR wish to continue masonry Work in cold weather if not available at the project site. The provision of all supplemental heat energy sources and equipment is the responsibility of CONTRACTOR.
- B. Environmental Requirements:
 1. Do not place any masonry Work when air temperature is below 28°F, on rising temperatures or below 36°F, on falling temperatures, without temporary heated enclosures or without heating materials or other precautions necessary to prevent freezing.
 2. No frozen materials shall be used, nor shall frozen masonry Work be built upon.
 3. Remove and replace all masonry Work damaged by frost or freezing.
- C. Protection:
 1. Protect all masonry against freezing for at least 48 hours after being placed.
 - a. Mean Daily Air Temperature 40°F to 32°F: Protect masonry from rain for 48 hours after installation.
 - b. Mean Daily Temperature 32°F to 20°F: Completely cover masonry with insulating blankets for 48 hours.
 - c. Mean Daily Air Temperature 20°F and Below: Maintain masonry above 32°F for 48 hours by enclosure and supplementary heat.
 2. Protect partially completed masonry against rapid heat loss and from water entering it when Work is not in progress, by covering top of walls with strong, waterproof, nonstaining membrane. Extend membrane at least 2' down both sides of walls and secure in place using wall cover clamps spaced at intervals of 4' and at each end and joint of covering.
 3. Do not apply distributed floor or roof loading for at least 3 days after completing masonry columns or walls.
 4. Do not apply concentrated loads for at least 7 days after completing masonry columns or walls.
- D. Cold Weather Masonry Work:
 1. All mortar for use in masonry Work, when the mean daily temperature is below 40°F, shall be portland cement- lime-sand mortars using high early strength portland cement.
 2. Air Temperature 40°F to 32°F: Heat sand or mixing water to 70°F-160°F.

04200-5

3. Air Temperature 32°F to 20°F: Heat sand and mixing water to 70°F-160°F. Provide heat on both sides of wall under construction to heat constructed masonry to 40°F. Employ wind breakers when wind is in excess of 15 mph.
 4. Air Temperature below 20°F: Heat sand and mixing water to 70°F-120°F. Provide enclosure and auxiliary heat to maintain air temperature above 32°F. Heat constructed masonry to 40°F. Temperature of masonry units when laid shall not be less than 20°F.
- E. Hot Weather Masonry Work:
1. Preparation – Prior to conducting masonry work:
 - a. When the ambient air temperature exceeds 100°F, or exceeds 90°F with a wind velocity greater than 8 mph:
 - 1) Maintain sand piles in a damp, loose condition.
 - 2) Provide necessary conditions and equipment to produce mortar having a temperature below 120°F.
 - b. When the ambient air temperature exceeds 115°F, or exceeds 105°F with a wind velocity greater than 8 mph implement the requirements above and shade materials and mixing equipment from direct sunlight.
 2. Construction – While masonry work is in progress:
 - a. When the ambient air temperature exceeds 100°F, or exceeds 90°F with a wind velocity greater than 8 mph:
 - 1) Maintain temperature of mortar and grout below 120°F.
 - 2) Flush mixer, mortar transport container, and mortar boards with cool water before they come into contact with mortar ingredients or mortar.
 - 3) Maintain mortar consistency by retempering with cool water.
 - 4) Use mortar within 2 hours of initial mixing.
 - b. When the ambient temperature exceeds 115°F, or exceeds 105°F with a wind velocity greater than 8 mph implement the requirements listed above and use cool mixing water for mortar and grout. Ice is permitted in the mixing water prior to use. Ice is not permitted in the mixing water when added to the other mortar or grout materials.
 3. Protection – When the mean daily temperature exceeds 100°F, or exceeds 90°F with a wind velocity greater than 8 mph, fog spray newly constructed masonry until damp, at least three times a day until the masonry is three days old.

PART 2 - PRODUCTS

2.1 GENERAL CONCRETE UNIT MASONRY

- A. General: Unless specifically modified by other requirements specified, provide concrete masonry units in compliance with the following classifications, weights, grades, colors, textures, scores, thermal resistance values and other features specified.
- B. Hollow Load-bearing Concrete Masonry Units: Provide the following:
 1. ASTM C90 medium weight.
 2. Minimum Compressive Strength: 1,900 pounds per square inch average of three units; 1,700 pounds per square inch minimum for an individual unit. The manufacturer shall certify that the masonry units meet all requirements of ASTM C90 including the moisture content and linear shrinkage requirements for intermediate conditions.

04200-6

- C. Color and Texture: Provide the following:
1. Manufacturer's complete selection of all standard and all custom colors. Submit preliminary color selection for review by ENGINEER.
 2. Color, surface texture and aggregate uniform within the normal range established by sample submission and as approved by ENGINEER.
- D. Special Shapes: Provide the following where required:
1. Lintels, bond beams, reinforcing units, and flush-end reinforcing units, interior and exterior corner shapes, solid jambs, sash block, coves, premolded control joint blocks, headers, and other special conditions.
 2. Split-face, scored, and other facings, and special sizes, as shown on the Drawings.
- E. Waterproofing Admixture: Manufacture all types of concrete unit masonry, used in construction of exterior walls with an integral waterproofing admixture as follows:
1. Material: Cross-linking acrylic polymer.
 2. Proportion: In strict accordance with manufacturer's instructions.
 3. Product and Manufacturer: Provide one of the following:
 - a. DRY-BLOCK Admixture by W. R. Grace & Company Construction Products Division.
 - b. Moxie Shield 1800 by Moxie International.
 - c. Or equal.

2.2 MORTAR

- A. General: Anti-freeze admixture or agents, including calcium chloride are not permitted.
- B. Mortar for All Unit Masonry: Type S. Comply with ASTM C270, Table 2, except limit materials to those specified herein.
1. Portland cement-Lime: Provide the following proportions by volume:
 - a. Portland Cement: 1 part.
 - b. Hydrated Lime or Lime Putty: 1/4 to 1/2.
 - c. Aggregate (sand in damp, loose condition): 2¼ to 3 times the sum of cementitious materials.
 - d. Pigment: as required to match approved sample.
 2. Properties:
 - a. Average Compressive Strength, ASTM C270: 1,800 pounds per square inch.
 - b. Minimum Water Retention, ASTM C270: 75%.
 - c. Maximum Air Content, ASTM C270: 12% for Portland cement - lime mortars.

2.3 MASONRY GROUT

- A. Proportion coarse grout mixes subject to the following limitations:
1. Specified 28-day Compressive Strength: 2,000 psi
 2. Minimum Cementitious Content: 550 lb/cu yd
 - a. Fly ash per ASTM C618 may be used replace cement but shall not exceed 20% by weight of cement plus fly ash.
 3. Maximum Water-Cement Ratio by Weight: 0.52
 4. Slump at point of placement: 8" to 11"
- B. Proportion mixes by either laboratory trial batch or field experience methods, using materials to be employed on the Project for grout required. Comply with ACI 211.1.

04200-7

2.4 MATERIALS

- A. Portland Cement:
 - 1. ASTM C150: Use Type II.
 - 2. Nonstaining and of natural color or as required to be compatible with the approved pigment.
- B. Hydrated Lime: ASTM C207, Type S, or lime putty ASTM C5.
- C. Aggregates: ASTM C33 and as herein specified.
 - 1. Do not use aggregates containing soluble salts or other substances such as iron sulfides, pyrite, marcasite, ochre, or other materials that can cause stains on exposed surfaces.
 - 2. Fine Aggregate: Clean, sharp, natural sand, free from loam, clay, lumps or other deleterious substances. For mortar, ASTM C144, except for mortar for joints less than 1/4-inch use aggregate graded with 100% passing the No. 16 sieve.
 - 3. Colored/ White Mortar Aggregates: Provide ground marble, granite or other sound stone, as required to match the approved sample.
 - 4. Coarse Aggregate: Clean, uncoated, processed aggregate containing no clay, mud, loam, or foreign matter, as follows:
 - a. Crushed stone, processed from natural rock or stone.
 - b. Washed gravel, natural or crushed. Use of slag and pit or bank run gravel is not permitted.
 - c. Coarse Aggregate Size: ASTM C33, No. 8 or 89.
- D. Admixtures:
 - 1. Provide admixtures produced by established reputable manufacturers and use in compliance with the manufacturer's printed instruction. Do not use admixtures that have not been incorporated and tested in the accepted mixes. Refer to Section 03300, Cast-In-Place Concrete, for additional admixture requirements.
 - 2. Waterproofing Admixture for Exterior Concrete Unit Masonry: Provide a cross-linking acrylic polymer integral waterproofing system, proportioned and mixed in strict accordance with manufacturer's instructions. Provide one of the following:
 - a. DRY-BLOCK Mortar Admix by W.R. Grace & Company Construction Products Division.
 - b. Moxie Shield 1800 by Moxie International.
 - c. Or equal.
- E. Colored Mortar Pigments:
 - 1. Commercial iron oxide, manganese dioxide, ultramarine blue, chromium oxide, or carbon black, compounded for use in mortar mixes.
 - 2. Do not exceed pigment to cement ratios, by weight, of 1 to 35 for carbon black and 1 to 7 for other pigments.
 - 3. Product and Manufacturer: Provide one of the following:
 - a. Truetone Mortar Colors by Frank D. Davis Co., subsidiary of Rockwood Industries, Inc.
 - b. Sonobrite by Sonneborn Building Products Division Rexnord Chemical Products, Inc.
 - c. Or equal.
- F. Water: Clean and free from injurious amounts of oils, acids, alkalis, or organic matter.

04200-8

2.5 REINFORCING

- A. Reinforcing Bars: ASTM A615, Grade 60 for all bars. Shop-fabricate reinforcing bars that are shown or required to be bent or hooked. Comply with ACI 315 for the fabrication of reinforcing steel for masonry Work.
- B. Wire products: Ties, and rebar positioners shall be fabricated from cold-drawn steel wire complying with ASTM A82 and hot-dipped galvanized after fabrication with 1.5 ounces per square foot of zinc coating complying with ASTM A153.
- C. Rebar Positioners: Nine gage reinforcing bar positioners which accommodate both horizontal and vertical reinforcing steel. Provide one of the following:
 - 1. #RB Series Rebar Positioners by Hohmann & Barnard, Inc.
 - 2. Or equal.

2.6 MISCELLANEOUS ACCESSORIES

- A. Compressible Filler: Provide watertight joint filler where masonry abuts structural framework members, and as shown. Provide the following:
 - 1. Polyurethane foam strip saturated with polybutylene waterproofing material which when installed at A compression ratio of 2:1 is impermeable to water.
 - 2. Resilient to -40°F with 100% movement recovery.
 - 3. Elongation of 140% with a tensile strength of not less than 53 psi.
 - 4. Product and Manufacturer: Provide one of the following:
 - a. Polyseal by Sandell Construction Solutions.
 - b. Or equal.
- B. Premolded Control Joint Strips: Provide complete selection of solid extruded rubber strips with a Shore A durometer hardness of 80 to 90 complying with ASTM D2240, designed to fit standard sash block and maintain lateral stability in masonry wall. Provide one of the following:
 - 1. #RS Series - Rubber Control Joints by Hohmann & Barnard, Incorporated.
 - 2. Or equal.
- C. Sealants: Refer to Section 07900, Joint Sealants.

PART 3 - EXECUTION**3.1 INSPECTION**

- A. CONTRACTOR and his installer shall examine areas and conditions under which masonry Work is to be installed, and notify ENGINEER, in writing, of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.
- B. Special Masonry Inspection:
 - 1. The OWNER will employ a testing laboratory to perform Special Masonry Inspections in accordance with Chapter 17 of the current Building Code.
 - 2. Masonry inspection services will be provided during the following construction activities:
 - a. During laying of units:

04200-9

- 1) During the first day of the masonry construction, inspect proportions of site prepared mortar, construction of mortar joints, location of all reinforcing and connectors, size and location of structural elements, type, size and location of anchors, protection of masonry during cold weather.
- 2) Inspection to be continuous the first full day of masonry construction which requires special inspection.
 - a) Thereafter, a minimum of 3 hours every third day of construction until the concrete masonry work is complete.
- 3) Inspection while laying masonry units may be made concurrently with other inspection duties provided all inspection duties are adequately performed.
- 4) When deficiencies are found, additional inspection shall be provided as required until deficiencies have been corrected.
- 5) If masonry crews change, an additional full day of inspection is required during the first day the new crew is on-site.
- b. Placement of reinforcing steel:
 - 1) Verification of all reinforcing including size, grade, lap lengths, and type.
 - 2) Inspection may be periodic as required to verify all reinforcing at Risk Category II and III structures. Inspection of all reinforcing shall be continuous at Risk Category IV structures.
 - 3) Inspector to be present during the concrete pour in which any dowels connecting concrete to masonry are cast to verify proper location of dowels.
- c. Prior to each grouting operation, verify that grout space is clean, reinforcing and connectors are properly placed, proportions of site-prepared grout are correct and mortar joints have been properly constructed.
 - 1) Inspection may be periodic as required to verify proper grout space at Risk Category II and III structures.
 - 2) Inspection shall be continuous prior to and during grout placement at Risk Category IV structures.
- d. Verify compliance with International Building Code and Specifications continuously during all grouting operations.
- e. Provide special inspection in accordance with ACI 530 Table 3.1.2 for Risk Category II and III structures and ACI 530 Table 3.1.3 for Risk Category IV structures including observation of masonry work for conformance to the Contract Documents:
 - 1) Provide inspection reports to the ENGINEER, Building Official and OWNER.
 - a) Notify Contractor of discrepancies for correction.
 - b) Notify ENGINEER, Building Official and OWNER, in writing, when discrepancies have been satisfactorily corrected.
 - 2) Submit final signed report stating that Work requiring special inspection was, to the best of the inspector's knowledge, in conformance to the Contract Documents and the applicable workmanship provisions of the International Building Code.

3.2 INSTALLATION, GENERAL

- A. Build chases and recesses as shown or required by others. Provide not less than 8-inch of masonry between chase or recess and jamb of openings, and between adjacent chases and recesses.
- B. Leave openings for equipment, piping, ducts, and other items to be installed subsequent to starting of masonry Work. After installation of said items, complete masonry Work to match Work immediately adjacent to openings.

04200-10

- C. Cut masonry units using motor driven saws to provide clean, sharp, unchipped edges. Cut units as required to provide pattern shown and to fit adjoining Work neatly. Use full size units without cutting wherever possible.

3.3 LAYING MASONRY WALLS

A. General:

1. Lay out walls in advance for accurate spacing of surface pattern bond with uniform joint widths and to properly locate openings, masonry control joints, returns and offsets. Avoid the use of less than half size units at corners, jambs and wherever possible at other locations.
2. Lay up walls plumb and true to comply with specified tolerances, with courses level, accurately spaced and coordinated with other Work.
3. Pattern Bond:
 - a. Lay all concrete masonry Work in running bond with vertical joints in each course centered on units in courses above and below unless otherwise shown.
 - b. Bond and interlock each course of each wythe at corners.
 - c. Do not use units with less than 8-inch horizontal face dimensions at corners or jambs.

B. Mortar Bedding and Jointing:

1. Lay hollow concrete masonry units with full mortar coverage on horizontal and vertical face shells. Bed webs in mortar in starting course of piers, columns and pilasters, and where adjacent to cells or cavities to be reinforced or filled with concrete or grout.
 - a. Lay walls with 3/8-inch joints.
2. Cut joints flush for masonry walls that are to be concealed or to be covered by other materials, except paint, unless otherwise shown.
3. Tool exposed joints when mortar is "thumbprint" hard, slightly concave, unless otherwise required to match existing joint treatment. Rake out mortar in preparation for application of caulking or sealants where required.
4. Concave-tool exterior joints below grade.
5. Do not use mortar that has begun to set or if more than 30 minutes have elapsed since initial mixing. Do not retemper mortar.
6. Remove masonry units disturbed after laying; clean and reset in fresh mortar. Do not pound corners at jambs to fit stretcher units which have been set in position. If adjustments are required, remove units, clean off mortar and reset in fresh mortar.

- C. Stopping and Resuming Work: Rack back 1/2-unit masonry length in each course, and do not tooth. Clean exposed surfaces of set masonry, wet units lightly, if required, and remove loose masonry units and mortar prior to laying new masonry.

- D. Built-in Work: As the Work progresses, build in items shown, specified or required by others. Fill cores in one block width solidly with masonry grout around built-in items.

E. Structural Reinforced Masonry:

1. Shape and dimension reinforcement as shown and are required by governing codes.
2. Position reinforcing accurately at the spacing shown. Support and secure vertical bars against displacement with rebar positioners.
3. For columns, piers and pilasters, provide a clear distance between vertical bars as shown, but not less than 1½-inch. Provide lateral ties.

04200-11

4. For horizontal bars, provide fully-lapped "L" shaped corner bars at corners and intersections.
 5. Provide lapped splices with reinforcing steel placed in contact with rebar positioners or tied. Provide 48 bar diameter lap length, unless otherwise shown.
- F. Grouting Structural Reinforced Masonry:
1. Place grout within 1.5 hours from introducing water in the mixture and prior to initial set. Discard grout that does not meet the specified slump, has exceeded the 1.5 hour timeframe or has reached initial set.
 2. Solid grout all walls, beams, piers and pilasters, unless noted otherwise.
 3. Provide temporary dams where required or barriers to control horizontal flow of grout at ends of wall sections. Build dams full height of grout pour. If masonry units are used, do not bond into permanent masonry wythes. Remove temporary dams after completion of grout pour.
 4. Grout pour height shall not exceed 5.33 feet for grouting cells of hollow units with dimensions equal to or greater than 2.5"x3".
 5. Grout pour height shall not exceed 1 foot for grouting cells of hollow units with dimensions less than or equal to 1.5"x3".
 6. Terminate pour 1½-inch below top of highest course in pour.
 7. Provide metal wall ties, if required, to prevent blow outs.

3.4 ANCHORING MASONRY WORK:

- A. Anchor masonry to structural members where masonry abuts or faces, such members to comply with the following:
1. Provide an open space, not less than 1/2-inch in width, between masonry and structural member, unless otherwise shown. Keep open space free of mortar or other rigid materials.
 2. Anchor masonry to structural members with metal ties embedded in masonry joints and attached to structure. Provide anchors with flexible tie sections, unless otherwise shown.
 3. Space anchors as shown, but not more than 8-inch on center vertically and 36-inch on center horizontally.
 4. Provide end blocks, where masonry abuts structural support, to facilitate installation of compressible filler, backer rod and sealant.
- B. Lintels and Bond Beams: Provide masonry lintels and bond beams where shown. Use specially formed "U" shaped lintel and bond beam units with reinforcing bars placed as shown, filled with grout. Temporarily support formed-in-place lintels and bond beams.

3.5 REPAIR, POINTING AND CLEANING

- A. Remove and replace masonry units which are loose, chipped, broken, stained or otherwise damaged, or if units do not match adjoining units as intended. Provide new units to match adjoining units and install in fresh mortar or grout, pointed to eliminate evidence of replacement.
- B. Pointing: During the tooling of joints, enlarge any voids or holes, except weep holes, and completely fill with mortar. Point up all joints at corners, openings and adjacent Work to provide a neat, uniform appearance, properly prepared for application of sealant compounds.

- C. Cleaning Exposed, Unglazed Masonry Surfaces:
1. Wipe off excess mortar as the Work progresses. Dry brush at the end of each day's Work.
 2. Final Cleaning: After mortar is thoroughly set and cured, clean sample wall area of approximately 20-square feet as described below. Obtain ENGINEER'S acceptance of sample cleaning before proceeding to clean remainder of masonry Work.
 - a. Dry clean to remove large particles of mortar using wood paddles and scrappers. Use chisel or wire brush if required.
 - b. Presoak wall by saturating with water and flush off loose mortar and dirt.
 - c. Acid type cleaners shall not be permitted.
 - d. Protect other Work from cleaning operations.
- D. Protection: Protect the masonry Work from deterioration, discoloration or damage during subsequent construction operations.

+ + END OF SECTION + +

04200-13

THIS PAGE IS INTENTIONALLY BLANK

SECTION 05051**ANCHORS, INSERTS, AND DOWELS****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section includes all post-installed anchors and inserts required to anchor parts of the Work to supporting concrete or masonry construction, and plaster. This Section also includes adhesives for anchoring reinforcing dowels into existing concrete.

1.2 REFERENCES

- A. American Society for Testing and Materials
 - 1. ASTM A36, Standard Specification for Carbon Structural Steel.
 - 2. ASTM A320, Standard Specification for Alloy-Steel and Stainless Steel Bolting for Low-Temperature Service.
 - 3. ASTM D746, Standard Test Method for Brittleness of Temperature of Plastics and Elastomers by Impact
 - 4. ASTM D1505, Standard Test Method for Density of Plastics by the Density-Gradient Technique
 - 5. ASTM D1525, Standard Test Method for Vicat Softening Temperature of Plastics
- B. 2016 California Building Code (CBC)
- C. American Concrete Institute (ACI)
 - 1. ACI 355.2, Qualification of Post-Installed Mechanical Anchors in Concrete
 - 2. ACI 355.4, Qualification of Post-installed Adhesive Anchors in Concrete

1.3 SYSTEM DESCRIPTION

- A. Provide the size, type, and length of anchor shown on the drawings or, if not shown, as specified in the detailed sections of these specifications.
- B. When the size, length or load carrying capacity of an anchor bolt, expansion anchor, toggle bolt, or concrete insert is not shown or specified, provide the size, length and capacity required to carry the design load times a minimum safety factor of 4.
- C. For equipment anchors, if the design load is not specified by the manufacturer, provide anchors of diameter no less than the diameter of the hole minus 3/16 inch. When the design load is not specified by the manufacturer, provide structural calculations in accordance with Section 01610.

1.4 SUBMITTALS

- A. Product Data: Submit for approval copies of material certification, manufacturer's specifications, load tables, dimension diagrams and installation instructions for the devices.

05051-1

- B. Installer's Qualifications: When installing adhesive anchors subject to sustained tension loading or when specifically noted in the Drawings, submit for approval copies of the installer's qualifications certified by the ACI/CRSI Adhesive Anchor Installer Certification program.

1.5 QUALITY ASSURANCE

- A. Post-installed concrete anchors shall be ICC approved for seismic applications in cracked concrete and prequalified in accordance with ACI 355.2 or ACI 355.4.

PART 2 - PRODUCTS

2.1 ANCHOR BOLTS

- A. Nonsubmerged Use in areas of wet use, washdown areas, or areas outside heated buildings:
1. Stainless steel Type 316, unless otherwise shown.
 2. Diameter, Length and Bend Dimensions: As required by equipment or machinery manufacturer. Unless otherwise required, provide 3/4-inch minimum diameter by 12-inches long and other geometry as shown.
 3. Furnish A320 nuts and washers of same material for each bolt, unless otherwise shown.
 4. Provide sleeves as required or as shown for location adjustment.
- B. Submerged Use:
1. Submerged use is defined as any connection 1 foot 6 inches below the normal water surface elevation in a water holding basin.
 2. As specified for nonsubmerged use, for equipment, machinery or other connections except as follows:
 - a. Coating of anchor bolt threads is not required.
 - b. Where threads are covered with fusion bonded coating, provide nut of proper size to fit and provide connection of equal strength to embedded bolt.
- C. For anchoring fabricated metalwork, structural steel, or other components where connections will be protected or dry:
1. Galvanized Steel, 36 ksi, minimum.
 2. Minimum Size: 3/4-inch diameter by 12-inch long, unless otherwise shown.
 3. At base plates with grout pads, furnish two nuts and two washers per bolt of same material as bolt, unless otherwise shown.

2.2 ANCHOR BOLT SLEEVE

- A. High Density Polyethylene Plastic:
1. Single unit construction with deformed sidewalls such that the concrete and grout lock in place.
 2. The top of the sleeve shall be self-threading to provide adjustment of the threaded anchor bolt projection.
 3. Material requirements shall conform to the following:
 - a. Plastic: High density polyethylene.
 - b. Density: 0.956, ASTM D1505.
 - c. Vicant Softening Point: 256°F, ASTM D1525

05051-2

d. Brittleness Temperature: -180°F, ASTM D746

B. Fabricated Steel Sleeve:

1. Material: A36 steel.
2. Dimensions, welding, and sizes as shown.

2.3 STAINLESS STEEL FASTENERS LUBRICANT (ANTISEIZING)

- A. Provide for stainless steel nuts and machined bolts, anchor bolts, concrete anchors, and all other threaded fasteners.
- B. Lubricant shall contain substantial amounts of molybdenum disulfide, graphite, mica, talc, or copper as manufactured by:
1. Loc Tite Co., Permatex.
 2. Or equal

2.4 ADHESIVE (EPOXY) ANCHORS AND DOWELS

- A. Provide adhesive anchors where specifically shown and where adhesive anchors are allowed. Unless otherwise shown, adhesive anchors are allowed for anchoring:
1. Supports for pipe, conduit, and electrical boxes, devices, and panels, on floors and walls
 2. Handrails, guardrails, sunshades, stairs,
 3. Fixtures and equipment on floors and walls, and
 4. Single pipes and conduits <2 inch in diameter to ceilings and soffits.
- B. Adhesive shall be epoxy resin. Vinylester resin anchors are NOT allowed.
- C. Product and Manufacturer: Provide one of the following:
1. Installation to Concrete:
 - a. HIT-HY 200 as manufactured by Hilti, Inc.
 - b. SET-3G as manufactured by Simpson Strong-Tie, Inc.
 - c. Or approved equal meeting ACI 355.4.
 2. Installation to solid-grouted Masonry:
 - a. HIT-HY 270 as manufactured by Hilti, Inc.
 - b. SET as manufactured by Simpson Strong-Tie, Inc.
 - c. Or approved equal.

2.5 EXPANSION ANCHORS

- A. Provide expansion anchors only where specifically shown and where expansion anchors are allowed. Unless otherwise shown, and except as noted below, expansion anchors are allowed for anchoring:
1. Supports for pipe, conduit, and electrical boxes, devices, and panels, to floors and walls.
 2. Handrails, guardrails, and sunshades.
 3. Fixtures and equipment which have no moving parts, to floors and walls.
- B. Expansion anchors are NOT allowed in any submerged or chemical containment areas.
- C. Leveling nuts shall not be used with expansion anchors. If leveling nuts are required, provide adhesive anchors, unless otherwise shown.

05051-3

- D. Wedge anchors: Provide one of the following:
1. Installation to Concrete:
 - a. Hilti Kwik Bolt TZ by Hilti, Inc.
 - b. Strong-Bolt 2 by Simpson Strong-Tie, Inc.
 - c. Or approved equal meeting ACI 355.2.
 2. Installation to solid-grouted Masonry:
 - a. Hilti Kwik Bolt-3 by Hilti, Inc.
 - b. Wedge-All by Simpson Strong-Tie, Inc.
 - c. Or approved equal.

2.6 SCREW ANCHORS

- A. Provide screw anchors only where specifically shown. Provide ICC approved screw anchors suited for seismic and cracked concrete applications.
- B. Installation to Concrete or Masonry:
1. KH-EZ by Hilti, Inc.
 2. Titen HD by Simpson Strong-Tie, Inc.
 3. Or approved equal.

2.7 ACCESSORIES

- A. Provide Belleville washers, or approved equal, at anchorage connections used to transfer anchorage loads at sheet metal equipment housings.

PART 3 - EXECUTION

3.1 INSTALLATION OF ANCHORS

- A. Obtain anchor bolts in sufficient time so as not to delay concrete or masonry work.
- B. Adhesives shall be stored and installed at the service temperature ranges recommended by the manufacturer.
- C. Locate and accurately set the anchor bolts using templates or other devices as necessary.
- D. Protect threads and shank from damage during installation of equipment and structural steel.
- E. Post-installed anchors are NOT acceptable substitutes for cast-in-place anchor bolts.
- F. Assure that embedded items are protected from damage and are not filled in with concrete.
- G. Unless otherwise shown, the minimum diameter of anchor bolts for structural steel is $\frac{3}{4}$ inch, and for other applications, $\frac{3}{8}$ inch.
- H. Unless otherwise shown, provide the following minimum embedment, where "d" is the nominal anchor diameter:
1. Cast-in-place anchors: 12d.

05051-4

2. Adhesive anchors: 12d.
 3. Expansion anchors: 8d.
- I. Unless otherwise shown, provide a minimum edge distance equal to six times the bolt diameter for adhesive anchors, eight times the bolt diameter for expansion anchors and a bolt spacing equal to twelve times the bolt diameter.
 - J. Concrete shall have a minimum age of 21 days at the time of post-installed anchor installation.
 1. Concrete temperature at the time of adhesive anchor installation shall be at least 50°F.
 - K. Existing reinforcing bars in the concrete structure may conflict with specific anchor locations. Unless noted on the Drawings that the bars can be cut, the contractor shall review the existing structural drawings and shall undertake to locate the position of the reinforcing bars at the locations of the concrete anchors by ferroskan, ground penetrating rebar (GPR), x-ray, chipping or other means.
 - L. Drilling equipment used and installation of post-installed anchors shall be in accordance with the manufacturer's printed instructions.
 - M. For the adhesive and expansion anchors, CONTRACTOR shall comply with the manufacturer's printed installation instructions on the drilled hole diameter and depth.
 - N. CONTRACTOR shall properly clean out the hole utilizing a wire brush and compressed air in accordance with the manufacturer's printed installation instructions to remove all loose material from the hole, prior to installing adhesive or expansion anchors. Drilled and cleaned anchor holes shall be protected from contamination until the anchor is installed. A drilled anchor hole shall be re-cleaned assuming the hole was just drilled, if in the opinion of ENGINEER or Inspector that the hole has become contaminated after initial cleaning.
 - O. Unless otherwise indicated by the manufacturer, adhesive shall be dispensed through a tube or cartridge extension, beginning at the maximum depth of the hole and withdrawn as adhesive is injected, followed by insertion and rotating the anchor to the specified depth. Where necessary, spaces around anchors at the surface shall be sealed at horizontal to vertically overhead locations to prevent loss of the adhesive during curing.
 - P. Anchors to be installed in the adhesive shall be clean, oil-free, and free of loose rust, paint, or other coatings.
 - Q. Installed anchors shall be securely fixed in-place to prevent displacement. Unless shown otherwise on the Drawings, anchors shall be installed perpendicular to the concrete surface.
 - R. Reinforcing adhesive dowel bars or all-threaded adhesive bars shall not be bent after being adhesively embedded in hardened, sound concrete.
 - S. In lieu of the use of stacked standard washers, if threads of an anchor bolt protrude beyond the attachment, the installers shall use a fabricated filler plate of equal or greater size of the washer. Hole on the filler plate shall be 1/16" (or 2 to 3 mm) greater than the

05051-5

bolt size. Coat as appropriate in accordance with the material and installation location requirements.

3.2 FIELD QUALITY CONTROL

- A. Anchors shall be installed by qualified personnel in accordance with the manufacturer's printed installation instructions. Installation of adhesive anchors shall be performed by personnel trained to install adhesive anchors.
- B. Installation of adhesive anchors horizontally or upwardly inclined to support sustained tension loads shall be performed by personnel certified by the ACI/CRSI Adhesive Anchor Installer Certification program.
- C. OWNER shall employ a special inspector to perform field inspection services in accordance with Chapter 17 of the CBC for all post-installed anchors.
 - 1. The special inspector must be periodically on the jobsite during post-installed anchor installation.
 - 2. Adhesive anchors installed to resist sustained tension loads shall be continuously inspected during installation by an inspector specially approved for that purpose by the building official.
- D. CONTRACTOR shall correct improper workmanship, remove and replace, or correct as instructed by the ENGINEER, all anchors or bars found unacceptable or deficient, at no additional cost to the OWNER.
- E. The independent testing and inspection agency shall complete a report on each area. The report should summarize the observations made by the inspector and be submitted to ENGINEER.
- F. Provide access for the testing agency to places where Work is being produced so that required inspection and testing can be accomplished.

+ + END OF SECTION + +

05051-6

SECTION 05500**MISCELLANEOUS METALS****PART 1 - GENERAL****1.1 SUMMARY**

- A. Work necessary to furnish and install, complete, fabricated metalwork and castings as shown or as required to secure various parts together and provide a complete installation.

1.2 SUBMITTALS

- A. Shop Drawings: Submit Shop Drawings for the fabrication and erection of the miscellaneous metal Work. Include plans, elevations and details of sections and connections. Clearly show all field connections. Show anchorage and accessory items.
- B. Product Data: Submit copies of manufacturer's specifications, load tables, dimensions, diagrams, anchor details, and installation instructions for manufactured products.
- C. Samples: Submit representative samples of manufactured products.

1.3 QUALITY ASSURANCE

- A. Field Measurements: Take field measurements prior to preparation of Shop Drawings and fabrication to ensure proper fitting of the Work.
- B. Shop Assembly: Preassemble items in the shop to the greatest extent possible, so as to minimize field splicing and assembly of units at the project site. Disassemble units to the extent necessary for shipping limitations. Clearly mark units for reassembly and coordinated installation.
- C. Qualifications: Qualify welding operators in accordance with requirements of current AWS Standard Performance Qualification Procedures in the applicable structural welding code.
 - 1. Qualification Tests: Performed by a recognized testing laboratory.
- D. Certification: Certify welders of structural and reinforcing steel for all positions of welding in accordance with such procedure.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Like Items of Materials: Provide end products of one manufacturer in order to achieve standardization for appearance, operation, maintenance, replacement, and manufacturer's service.
- B. Lifting Lugs: Provide on equipment and equipment components weighing over 100 pounds.

05500-1

- C. Furnish miscellaneous items:
 - 1. Miscellaneous metalwork and castings as shown, or as required to secure various parts together and provide a complete installation.
 - 2. Items specified herein are not intended to be all-inclusive. Provide metalwork and castings shown, specified, or which can reasonably be inferred as necessary to complete the project.

2.2 MATERIALS

- A. Carbon steel structural shapes:
 - 1. Wide flange sections: ASTM A992 Grade 50.
 - 2. Steel pipe columns: ASTM A53 Grade B.
 - 3. Hollow Structural Sections (HSS): ASTM A500 Grade B.
 - 4. Plates, Angles, Channels, and S Shapes: ASTM A36.
- B. Stainless Steel:
 - 1. Plates and Sheets: ASTM A240, Type 304L or 316
 - 2. Structural shapes: ASTM A276, A479 or A1069, Type 304L or 316.
 - 3. Fasteners and fittings: ASTM A320, Type 316
 - a. Where stainless steel bolts are in contact with dissimilar metals provide insulating sleeves and phenolic washers to electrically isolate the bolts and nuts.
- C. Aluminum, Structural Shapes and Plates: Alloy 6061-T6, meeting Aluminum Assoc. Specification for Aluminum Structures
- D. Cast Iron: A48, Class 30
- E. High-Strength Threaded Fasteners: Heavy hexagonal structural bolts, heavy hexagon nuts, and hardened washers, as follows:
 - 1. Quenched and tempered medium carbon steel bolts, nuts and washers, complying with ASTM A325 or:
 - 2. Quenched and tempered alloy steel bolts, nuts and washers, complying with ASTM A490.
 - 3. Provide two ASTM F436 washers for all bolts.
 - 4. Provide beveled washers at connections of sloped/tapered sections.
 - 5. Unless noted otherwise, high-strength fasteners shall be used for all non-stainless steel fasteners.
- F. Cast-in-Place Anchor Rods:
 - 1. ASTM F1554, Grade 36 with weldability supplement S1, galvanized, unless shown otherwise.
 - 2. Provide ASTM F436 washers at all nuts unless shown otherwise.
 - 3. Provide anchor bolt sleeves as required or as shown for location adjustment.
 - 4. Provide stainless steel anchors where shown on the Drawings or listed in another specific specification section.
- G. Galvanizing:
 - 1. Zinc coated hardware: ASTM A153.
 - 2. Fabrications: ASTM A123.
 - 3. Members designated as galvanized on the drawings or as directed by ENGINEER shall be galvanized after fabrication in accordance with ASTM A385. Weight of zinc coating shall not be less than 2.5 ounces per square foot of actual surface and have a coating

05500-2

thickness of 0.0042 inch. Coating weight will be subject to verification by ENGINEER. Thickness of coating will be measured by means of a magnetic thickness gauge.

4. Each fabricated assembly shall be totally immersed in the galvanizing bath. The galvanizing procedure shall be such as to avoid distortion of the assembly. Straightening of members after galvanizing will not be permitted. Assemblies shall be held in the galvanizing bath until the temperature of the assembly is equal to the temperature of the bath. All deviations shall require approval by ENGINEER.
5. Any galvanized surface which has the coating removed for any cause shall be touched up with a zinc-rich cold galvanizing compound so that the entire surface has a uniform coating of 2.5 ounces of zinc per square foot.
6. Galvanized work shall be subject to inspection by ENGINEER at any time to ensure strict compliance with this specification. Any areas found to show defects or signs of improper galvanizing application will be rejected. Repairs shall be made by CONTRACTOR without additional cost to OWNER.

H. Surface preparation and Finish:

1. Steel: Where not indicated to be galvanized, steel shall be primed in the shop. Comply with Section 09900, Painting.

2.3 ANCHOR BOLT SLEEVE

A. High Density Polyethylene Plastic:

1. Single unit construction with deformed sidewalls such that the concrete and grout lock in place.
2. The top of the sleeve shall be self-threading to provide adjustment of the threaded anchor bolt projection.
3. Material requirements shall conform to the following:
 - a. Plastic: High density polyethylene.
 - b. Density: 0.956, ASTM D1505.
 - c. Vicant Softening Point: 256°F, ASTM D1525
 - d. Brittleness Temperature: -180°F, ASTM D746

B. Fabricated Steel Sleeve:

1. Material: A36 steel.
2. Dimensions, welding, and sizes as shown.

2.4 FABRICATIONS

A. Miscellaneous Framings and Supports:

1. Fabricate units to the sizes, shapes, and profiles shown, or if not shown, of the required dimensions to receive the adjacent gratings, plates, tanks, doors, or other work to be retained by the framing.
2. Except as otherwise shown, fabricate from structural shapes, plates, and bars of compatible material, all-welded construction, using mitered corners, welded brackets and splice plates, and a minimum number of joints for field connection. Cut, drill, and tap units to receive hardware and other items to be anchored to the work.
3. Equip units with integrally welded anchors for casting into concrete or integrating into masonry. Furnish inserts for casting in, if units must be installed after concrete or grout is placed. Anchor spacing shall be 24" on-center, unless otherwise shown.
4. Galvanize where shown.

B. Miscellaneous Fabricated Metals:

05500-3

1. The following additional items are listed as a guide. Some items on list may not be required, and list may not be all-inclusive. Submittal data for materials and products must be approved before they are incorporated in the work.
 - a. Float Switch Supports
 - b. Lifting Eyes.
 - c. Pipe Supports.
 - d. Steel Bases and Anchors.
- C. Stainless Steel Fabrication: Following welding fabrication all stainless steel assemblies shall be cleaned, descaled and passivated in accordance with ASTM A380.
- D. Anchors, Fasteners, and Fittings: Provide zinc-coated carbon steel for steel fabrications, and stainless steel for aluminum and stainless steel fabrications, unless shown otherwise.
- E. Pipe Sleeves
 1. Provide as follows:
 - a. Hot-dip galvanized, Schedule 40 steel pipe sleeves where shown for piping passing through concrete or masonry.
 - b. Holes drilled with rotary drill may be provided in lieu of sleeves in existing walls.
 - c. Provide a center flange for water stoppage on sleeves in exterior or water-bearing walls.
 - d. Provide a rubber caulking sealant or a modular mechanical unit to form a watertight seal in the annular space between pipes and sleeves.

PART 3 - EXECUTION

3.1 FABRICATION

- A. General:
 1. Exposed Surfaces Finish: Smooth, sharp, well-defined lines.
 2. Provide necessary rabbets, lugs, and brackets so work can be assembled in neat, substantial manner.
 3. Conceal fastenings where practical.
 4. Drill metalwork and countersink holes as required for attaching hardware or other materials.
 5. Fabricate materials as specified.
 6. Weld connections, except where bolting is directed.
 7. Methods of fabrication not otherwise specified or shown shall be adequate for stress and as approved.
 8. Grind exposed edges of welds smooth on walkways, guardrails, handrails, stairways, channel door frames, steel column bases and where shown.
 9. Round sharp edges to 1/8-inch minimum radius. Grind burrs, jagged edges, and surface defects smooth.
- B. Aluminum:
 1. Fabricate as shown, and in accordance with the Aluminum Association Standards and manufacturer's recommendations as approved.
 2. Grind smooth sheared edges exposed in finished work.

05500-4

3.2 WELDING

A. General

1. Meet codes for Arc and Gas Welding in Building Construction of the AWS and AISC for techniques of welding employed, appearance, quality of welds made, and the methods of correcting defective work.
2. Welding Surfaces: Free from loose scale, rust, grease, paint, and other foreign material, except mill scale which will withstand vigorous wire brushing may remain.
3. A light film of linseed oil may likewise be disregarded.
4. Do not weld when temperature of base metal is lower than zero degrees F.
5. Finished members shall be true to line and free from twists.
6. Prepare welds and adjacent areas such that there is:
 - a. No undercutting or reverse ridges on the weld bead.
 - b. No weld spatter on or adjacent to the weld or any other area to be painted.
 - c. No sharp peaks or ridges along the weld bead.
7. Grind embedded pieces of electrode or wire flush with adjacent surface of weld bead.

B. Welding Operators: As specified in PART 1, Article 1.3 QUALITY ASSURANCE.

3.3 INSTALLATION

- A. Set units accurately in location, alignment, and elevation, level, plumb, true, and square, measured from established lines and levels. Brace or anchor temporarily in formwork where units are to be built into concrete, masonry, or similar construction.
- B. Anchor securely as shown or as required for the intended use, using concealed anchors wherever possible.
- C. Fit exposed edges accurately together to form tight, hairline joints. Do not weld, cut, or abrade the surfaces of galvanized or anodized units which are intended for bolted or screwed connections.
- D. Field Welding: Where field welding is necessary, grind joints smooth and touch-up the shop paint. Comply with the applicable provisions of AWS D1.1 for the procedures of manual shielded metal-arc welding, the appearance and quality of welds made, and the methods used in correcting welding.
- E. Field Coat all miscellaneous ferrous and steel metals per Specification Section 09900 - Painting, System 300.
- F. Where aluminum is in contact with dissimilar metals, or embedded in masonry or concrete, protect surfaces as specified in Section 09900 - Painting, System 305.

+ + END OF SECTION + +

05500-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 05605**GALVANIZED STEEL HANDRAILS AND RAILINGS****PART 1 - GENERAL****1.1 SCOPE**

- A. This section covers the supply and installation of galvanized steel handrails and guardrails.

1.2 SUBMITTALS

- A. Shop Drawings: Submit for approval the following:
1. Drawings for the fabrication and erection of handrail and railing systems with sizes of members, components and anchorage devices, all based on specified requirements.
 - a. Include copies of manufacturer's specifications, standard and custom detail drawings and installation instructions for handrail and railing systems.
 - b. Include all plans and elevations identifying the location of all handrail and railing systems, and details of sections and connections.
 - c. Show all anchorage items.
 2. Profiles of handrail and railing systems components, and the details of forming, jointing, sections, connection, internal supports, trim, and accessories. Provide details drawn at 1-1/2-inch scale.
 3. All calculations for complete structural analysis of the handrail and railing systems including calculations showing compliance with system performance criteria specified. The calculations shall be prepared, signed and sealed by a Registered Professional Engineer licensed in the State of California.
- B. Product Data: Submit copies of manufacturer's specifications, dimensions, anchor details, and installation instructions for manufactured products.
- C. Certification: Furnish certification by manufacturer that loading tests have been performed on the handrail, and that it conforms to all applicable OSHA and ANSI requirements for load and deflection.

1.3 QUALITY ASSURANCE

- A. Reference Standards:
1. ASTM A36: Specification for Carbon Structural Steel
 2. ASTM A47: Specification for Ferritic Malleable Iron Castings
 3. ASTM A48: Specification for Gray Iron Castings
 4. ASTM A123: Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
 5. AWS D1.1: Structural Welding Code
 6. ANSI A1264.1: Safety Requirements for Workplace Floor and Wall Openings, Stairs and Railing Systems
 7. OSHA Part 1910.23: Ladders
 8. OSHA Part 1910.25: Stairways
 9. OSHA Part 1910.29: Fall protection systems and falling object protection-criteria and practices.

05605-1

B. Qualifications for Welding Work:

1. Qualify welding processes and welding operators in accordance with AWS D1.1, Section 5.
2. Provide certification that all welders employed on the Work have satisfactorily passed AWS qualification tests within the previous 12 months. Ensure that all certifications are kept current.
3. All welds will be subject to visual inspection. Where visually deficient welds are observed, the welds will be tested using non-destructive methods by a certified testing laboratory. If welds are found to be satisfactory, OWNER will pay for testing. Where welds are found unacceptable or deficient, pay for testing, correct improper workmanship, remove and replace, or correct as instructed, all welds found unacceptable or deficient. Responsibility belongs to CONTRACTOR to pay for all corrections and subsequent tests required to confirm the integrity of the weld.

C. Obtain all handrails and railings systems components and accessories from the same manufacturer.**1.4 DELIVERY, STORAGE AND HANDLING**

- A. Protect galvanized steel Work from abuse, staining, or damage during shipment, storage, erection and installation.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Where posts are shown on the Drawings at straight walkways and other locations where railing is provided on each side, locate railing system posts opposite each other.

2.2 DESIGN CRITERIA

- A. Fabricate units to support a live load of 50 pounds per linear foot and a non-concurrent load of 200 pounds at the top of the railing, in any direction.
- B. Bending stresses shall not exceed 60 percent of the yield stress of the material. Applied loads shall not produce permanent deflection in the completed Work when loads are removed.
- C. Expansion/Contraction:
 1. Provide linear expansion joints at a maximum spacing of 24'-0" designed for 1/4" expansion and 1/4" contraction.
 2. Provide expansion joints in handrail and railing systems where systems cross expansion joints in structure.

2.3 MATERIALS

- A. Handrails and Railings
 1. Use a steel, welded pipe railing system with posts, top and intermediate rails, and welded joints.
 2. Rails and Posts
 - a. Conform to ASTM A53, Type E or Type S, Grade A

05605-2

- b. 1-1/2" nominal diameter
 - c. Provide Schedule 40 pipe minimum for rails and posts, unless conditions of detail and fabrication require heavier pipe weights to comply with performance criteria specified.
- B. Castings:
 - 1. Gray iron castings: ASTM A48, Class 30
 - 2. Malleable iron castings: ASTM A47, grade as required
- C. Fittings and Accessories
 - 1. Steel plates, shapes, and bars: ASTM A36
 - 2. Provide mechanical fittings to join rail and post components, using bolted connections.
 - 3. Provide floor flanges where indicated.
 - 4. Provide wall brackets with 2-inch minimum clearance between handrail and finished wall surface and as indicated for ladder rails.
 - 5. Fasteners and anchors shall be Type 304 stainless steel and of type as required by substrate
- D. Toeboard (Kick Plate)
 - 1. Carbon steel, ASTM A36, 4-inch height
 - 2. Furnish required clamps and fasteners for complete installation.
- E. Weep Holes:
 - 1. Fabricate joints which will be exposed to the weather so as to exclude water.
 - 2. Provide 15/64-inch diameter weep holes at the lowest possible point on all handrail and railing systems posts.
 - 3. Provide pressure relief holes at closed ends of handrail and railing systems.

2.4 FABRICATION

- A. General:
 - 1. All fabricated Work shall be shop-fitted together as much as practicable, and delivered to the field, complete and ready for installation. All miscellaneous items necessary for a complete installation shall be provided.
 - 2. Form exposed Work true to line and level with accurate angles and surfaces and straight sharp edges.
 - 3. Form bent-metal corners to the smallest radius possible without causing grain separation or otherwise impairing the Work.
- B. Allowable Tolerances:
 - 1. Limit variation of cast-in-place inserts, sleeves and field-drilled anchor and fastener holes to the following:
 - a. Spacing: $\pm 3/8$ -inch.
 - b. Alignment: $\pm 1/4$ -inch.
 - c. Plumbness: $\pm 1/8$ -inch.
 - 2. Minimum Handrails and Railings Systems Plumb Criteria:
 - a. Limit variation of completed handrail and railing system alignment to 1/4-inch in 12' – 0" with posts set plumb to within 1/16-inch in 3' – 0".
 - b. Align rails so variations from level for horizontal members and from parallel with rake of stairs and ramps for sloping members do not exceed 1/4-inch in 12' – 0".

05605-3

- C. Connections:
 - 1. Mechanically Fastened:
 - a. Use pipe and fittings of the same finish to assemble entire railing.
 - b. Shop welding will not be permitted for mechanically fastened rail.
 - 2. Welded:
 - a. Cope intersections of rails and posts, weld joints and grind smooth.
 - b. Butt weld end-to-end joints of railings or use welding connectors.
 - c. Weld corners and seams continuously in accordance with AWS D1.1, Section 10.
- D. Toeboards shall be provided on railings and handrails around openings, platforms, and balconies.
- E. Brackets, Flanges, and Anchors:
 - 1. Provide brackets, flanges, and anchors for railing posts and for handrail supports.
 - 2. Furnish inserts and sleeves as required for anchorage to concrete and masonry.
 - 3. Components shall be in accordance with Manufacturer's recommendations.
- F. After fabrication, all steel Work shall be hot-dip galvanized in accordance with ASTM A123.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. No field welding of galvanized steel is permitted.
- B. Fastening to In-Place Construction: Provide anchorage devices and fasteners where necessary for securing handrails and railings to in-place construction, including threaded fasteners for concrete and masonry inserts, toggle bolts, through-bolts, lag bolts, and other connectors, as required. Use devices and fasteners that are compatible with installed material.
- C. Fitting and Placement:
 - 1. Set the Work accurately in location, alignment and elevation, plumb, level, true, and free of rack, measured from established lines and levels.
 - 2. Fit exposed connections accurately together to form tight hairline joints. Do not weld, cut, or abrade galvanized surfaces.
 - 3. Adjust railing prior to securing in place to ensure proper matching at butting joints and correct alignment throughout their length. Plumb posts in each direction.
 - 4. Space posts at a maximum of 6'-0" on center, except when a different spacing is indicated on the Drawings.
 - 5. Install toeboards and anchor to each post with clamps and bolts. Securely fasten toeboard in place with not more than 1/4-inch space between bottom of toeboard and top of floor surface.
 - 6. Install handrail to walls with brackets spaced not greater than 5'-0" on center, except where otherwise indicated.
 - 7. For connecting to concrete walls, use anchors as indicated.
 - 8. For connecting to hollow masonry walls, use toggle bolts having square heads.

05605-4

- D. Any damage to the galvanized steel surfaces incurred during transport or installation, including scratches, nicks, and dents, shall be repaired in the field using galvanizing repair paint with high zinc-dust content.
- E. Cleaning: After installation, clean all galvanized steel surfaces, free of smudges, stains, or other deleterious substances.

+ + END OF SECTION + +

05605-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 05610**ALUMINUM HANDRAILS AND RAILINGS****PART 1 - GENERAL****1.1 SCOPE**

- A. This section covers the supply and installation of welded or non-welded mechanical construction aluminum handrails and guardrails.

1.2 SUBMITTALS

- A. Shop Drawings: Submit Shop Drawings for the fabrication and erection of the handrails and guardrails. Include plans, elevations and details of sections and connections. Clearly show all field connections. Show anchorage and accessory items.
- B. Product Data: Submit copies of manufacturer's specifications, dimensions, anchor details, and installation instructions for manufactured products.

1.3 QUALITY ASSURANCE

- A. Reference Standards:
1. Aluminum Associate (AA)
 - a. Aluminum Standards and Data
 - b. Specifications for Aluminum Structures
- B. Design Criteria:
1. Fabricate units to support a live load of 20 pounds per linear foot and a non-concurrent load of 200 pounds at the top of the railing, in any direction.
 2. Expansion/Contraction:
 - a. Provide linear expansion joints at a maximum spacing of 20'-0" designed for 1/4" expansion and 1/4" contraction.
 - b. Provide expansion joints in handrail and railing systems where systems cross expansion joints in structure.
- C. Allowable Tolerances:
1. Limit variation of cast-in-place inserts, sleeves and field-drilled anchor and fastener holes to the following:
 - a. Spacing: $\pm 3/8$ -inch.
 - b. Alignment: $\pm 1/4$ -inch.
 - c. Plumbness: $\pm 1/8$ -inch.
 2. Minimum Handrails and Railings Systems Plumb Criteria:
 - a. Limit variation of completed handrail and railing system alignment to 1/4-inch in 12' - 0" with posts set plumb to within 1/16-inch in 3 foot - 0 inches.
 - b. Align rails so variations from level for horizontal members and from parallel with rake of stairs and ramps for sloping members do not exceed 1/4-inch in 12' - 0 inches.
- D. Obtain all handrails and railings systems components and accessories from the same manufacturer.

05610-1

1.4 DELIVERY, STORAGE AND HANDLING

- A. Protect aluminum work from abuse, staining, or damage during shipment, storage, erection and installation.
- B. Store in a manner to prevent warping of materials.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Fabricate aluminum to conform to AA standards.
- B. Handrails and railings may be either of welded construction, or non-welded mechanical construction.

2.2 MANUFACTURERS AND PRODUCTS

- A. Golden Railings, Inc.; TCF Bolted System.
- B. Superior Aluminum Products; Series 800 Pipe Railing.
- C. Or Equal.

2.3 MATERIALS

- A. Rails and Posts:
 - 1. Conform to ASTM B221.
 - 2. 1-1/2" nominal diameter, minimum
 - 3. Provide Schedule 40 pipe minimum for rails and Schedule 80 pipe minimum for posts, unless conditions of detail and fabrication require heavier pipe weights to comply with performance criteria specified.
 - 4. All rail, posts and components shall be Aluminum Alloy 6005-T5 or 6063-T6
 - 5. Clear satin anodized finish, 0.7 mil minimum (AA-M10-C22-A41).
- B. Fittings and Accessories:
 - 1. Either weld rail and post components, or provide mechanical fittings to join rail and post components using bolted connections.
 - 2. Provide floor flanges where indicated
 - 3. Provide wall brackets with 3-inch minimum clearance between handrail and finished wall surface and as indicated for ladder rails.
 - 4. Fasteners and anchors shall be Type 304 stainless steel and of type as required by substrate
- C. Weep Holes:
 - 1. Fabricate joints, which will be exposed to the weather so as to exclude water.
 - 2. Provide 15/64-inch diameter weep holes at the lowest possible point on all handrail and railing systems posts.
 - 3. Provide pressure relief holes at closed ends of handrail and railing systems.

05610-2

PART 3 - EXECUTION**3.1 GENERAL**

- A. Conform to applicable AA standards.
- B. At locations where welds will be made (if applicable), the anodizing shall be ground off to ensure a proper weld is made. The weld shall then be ground smooth and burn marks removed. Completed welds shall be painted to match the anodizing of the pipe.
- C. Bituminous Coating:
 - 1. Protect aluminum in contact with other metals, grout and concrete by a heavy brush coat of alkali-resistant bituminous coating or a non-porous tape or gasket.
 - 2. Coating is not required for aluminum in contact with stainless steel bolts.
 - 3. Apply bituminous coating at 15-mil minimum dry film thickness.
 - 4. Manufacturer/Product:
 - a. Carboline – Bitumastic No. 50
 - b. Tnemec – Series 46-465
 - c. Or Equal.

3.2 INSTALLATION

- A. Space posts at a maximum of 4'-0" on center, except when a different spacing is indicated on the Drawings.
- B. Install handrail to walls with brackets spaced not greater than 5'-0" on center, except where otherwise indicated.
 - 1. For connecting to concrete walls, use anchors as indicated.
 - 2. For connecting to hollow masonry walls, use toggle bolts having square heads.
- C. Cleaning: Clean all aluminum surfaces, after installation, free of smudges, stains, or other deleterious substances.
- D. Protect aluminum, after cleaning, with clear methacrylate lacquer coating.

+ + END OF SECTION + +

05610-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 05620**GRATING AND CHECKERED PLATE****PART 1 - GENERAL****1.1 SCOPE**

- A. Furnish all materials, labor and equipment required to provide all gratings and floor plates in accordance with the Contract Documents.

1.2 SUBMITTALS

- A. Shop Drawings: Submit Shop Drawings for the fabrication and erection of all gratings and checkered plate specified herein. Include plans, elevations and details of sections and connections.
- B. Setting drawings and templates for location and installation of anchorage devices.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Grating, including support frames, fastenings and all necessary appurtenances for a complete installation shall be furnished as indicated on the Drawings.
- B. All exposed bearing ends of grating shall be enclosed in a perimeter band of the same dimensions and material as the main bars, including ends at all cutouts.
- C. Grating shall be fabricated into easily removable sections and shall be fastened at each corner and as required with fasteners provided by the grating manufacturer. No fasteners shall be permitted to project above the walking surface.
- D. Grating and Checkered Plate shall be designed for a loading of 150 psf, with a maximum deflection of $L/360$, unless otherwise required by the Drawings.
- E. Minimum grating depth shall be as shown on the drawings. Space bearing bars at 1-3/16 inch center to center. Band all edges with minimum 3/16 inch thick banding bar.
- F. Openings in Grating:
 - 1. Cut gratings for penetrations as indicated and as required for installing and operating equipment. Layout grating units to allow grating removal without disturbing items penetrating grating.
 - 2. At openings, notches, and cuts in grating, provide banding of same material and size as bearing bars, unless otherwise indicated. Weld band to each bearing bar.
- G. Notching of bearing bars at supports to maintain elevations will not be permitted.

05620-1

2.2 ALUMINUM GRATING

- A. I-bar type consisting of extruded bearing bars positioned and locked by cross bars.
- B. Material:
 - 1. All supports, cross members, etc. shall be aluminum.
 - 2. Bearing Bars: Alloy 6061-T6 or Alloy 6063-T6, conforming to ASTM B221
 - 3. Cross Bars or Bent Connecting Bars: Alloy conforming to either ASTM B221 or ASTM B210.
- C. Plank clips for grating hold-downs or other required attachments shall be aluminum or Type 304 stainless steel.
- D. Bolts shall be stainless steel Type 316. Where stainless steel bolts are in contact with dissimilar metals provide insulating sleeves and phenolic washers to electrically isolate the bolts and nuts.
- E. Manufacturer/Product:
 - 1. Grating Pacific, "I-Bar 19-SG-4"
 - 2. Borden Grating, "Squeeze Locked Grating"
 - 3. Ohio Grating, "I-Bar 19-SG-4"
 - 4. Or Equal.

2.3 GALVANIZED STEEL GRATING

- A. Weld forged rectangular design (spaced approximately 1-3/16 x 4 inches on center)
- B. Grating Size and Design:
 - 1. Main bars to be 3/16 inches thick.
 - 2. Depth as indicated on the drawings.
 - 3. Cross bars to be twisted square steel and resistance welded at right angles to the main bars.
 - 4. No notching or cutting of bearing bars before welding is permissible.
- C. Material:
 - 1. Galvanized steel: ASTM A36, hot dipped galvanized per ASTM A123 after fabrication
- D. Manufacturer/Product:
 - 1. Grating Pacific W-19-4
 - 2. Ohio Grating 19-W-4
 - 3. Or Equal.

2.4 CHECKERED PLATE

- A. Minimum thickness: As shown on the drawings
- B. Material:
 - 1. Plate to conform to ASTM B209 with anodized finish.
 - 2. Stainless steel support angles: Type 316 unless otherwise shown.
- C. Raised Pattern Floor Plate: Provide pattern standard with the manufacturer to provide non-slip surface.

05620-2

- D. Plates shall be stiffened by angles welded to the underside as shown on the drawings.
- E. Lifting Handles:
 - 1. Each checkered plate shall be provided with four lifting handles, as shown on the drawings.
- F. Maximum weight of each checkered plate shall be 150 pounds.

PART 3 - EXECUTION**3.1 FABRICATION**

- A. All measurements and dimensions shall be based on field conditions and shall be verified by the CONTRACTOR prior to fabrication. Such verification shall include coordination with adjacent work.
- B. All fabricated work shall be shop-fitted together as much as practicable, and delivered to the field, complete and ready for installation. All miscellaneous items such as stiffeners, fillets, connections, brackets and other details necessary for a complete installation shall be provided.
- C. All work shall be fabricated and installed in a manner that will provide for expansion and contraction, prevent shearing of bolts, screws, and other fastenings, ensure rigidity, and provide a close fit of sections.
- D. Finished members shall conform to the lines, angles and curves shown on the Drawings and shall be free from distortions of any kind.
- E. All shearings shall be neat and accurate, with parts exposed to view neatly finished. Flame cutting is allowed only when performed utilizing a machine.
- F. All shop connections shall be welded unless otherwise indicated on the Drawings or specified herein. All fastenings shall be concealed where practicable.

3.2 INSTALLATION

- A. Assembly and installation of fabricated system components shall be performed in strict accordance with manufacturer's recommendations.
- B. All gratings shall be erected square, plumb and true, accurately fitted, adequately anchored in place, and set a proper elevations and positions.

+ + END OF SECTION + +

05620-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 06100**ROUGH CARPENTRY****PART 1 - GENERAL****1.1 SUMMARY**

- A. Section Includes: Lumber, plywood, and other wood products for building framing and sheathing and miscellaneous supports. Items include wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 REFERENCES

- A. American Forest and Paper Association (AFPA):
1. National Design Specification for Wood Construction (NDS)
- B. American Institute of Timber Construction (AITC):
1. A190.1 Structural Glued Laminated Timber
- C. The Engineered Wood Association (APA):
1. E30 – APA Engineered Wood Construction Guide
- D. American Society of Mechanical Engineers (ASME):
1. B18.2.1A Square and Hex Bolts and Screws
2. B18.2.2 Square and Hex Nuts
3. B18.6.1 Wood Screws
4. B18.6.4 Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws
- E. American Society for Testing And Materials (ASTM):
1. A47 Ferritic Malleable Iron Castings
2. A48 Gray Iron Castings
3. A653 Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
4. C954 Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch to 0.112-inch in thickness
5. C1002 Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases
6. D143 Small Clear Specimens of Timber, Method of Testing
7. D1760 Pressure Treatment of Timber Products
8. D2559 Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions
9. D3498 Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems
10. E84 Test Method for Surface Burning Characteristics of Building Materials
11. F844 Washers, Steel, Plan (Flat) Unhardened for General Use
12. F1667 Nails, Spikes, and Staples
- F. American Wood Preservers Association(AWPA):
1. AWPA Book of Standards

06100-1

- G. Federal Specifications (Fed. Spec.):
 - 1. MM-L-736CLumber; Hardwood H. Commercial Item Description (CID):
 - 2. TT-W-571 Wood Preservation Treating Practices
 - 3. A-A-55615 Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)
- H. International Code Council (ICC):
 - 1. California Building Code (CBC)
- I. Military Specification (Mil. Spec.):
 - 1. MIL-L-19140E Lumber and Plywood, Fire-Retardant Treated

1.3 SUBMITTALS

- A. Product Data: Provide product data for fasteners, connectors, adhesives, fire-retardant treatment, and preservative treatment.
- B. Certification: Submit certificates of compliance for preservative treated lumber, fire retardant treated lumber and lumber grades.
- C. Manufactured Wood Trusses: Submit for approval complete design calculations for the manufactured wood trusses:
 - 1. Calculations shall be signed and sealed by a registered Civil or Structural Engineer licensed to practice in California.
 - 2. Shop drawings shall indicate the framing system layout, loads, bearing details and framed openings.
 - 3. Obtain approval by the ENGINEER prior to manufacturing.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Storage and Protection: Store lumber indoors at the site on raised platforms. If outdoor storage is temporarily incorporated, set the material on raised platforms and cover with suitable weatherproof protective coverings, such as tarpaulins or heavy polyethylene film. Batten down covers with sufficient weights, ties or anchors to prevent blowoffs.

PART 2 - PRODUCTS

2.1 LUMBER:

- A. Product Standards: Unless otherwise indicated, provide materials conforming to the requirements of the National Design Specification for Stress Grade Lumber as recommended by the National Forest Products Association.
- B. Maximum Moisture Content: 19%.
- C. Grading: Provide visually graded dimension lumber, timbers and decking of the following minimum grades unless otherwise shown or specified.

	<u>Minimum Grade</u>
Douglas Fir-Larch 2x4	No. 2
Douglas Fir-Larch 2x6 and larger	No. 1

06100-2

D. Preservative Treatment:

1. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 24 inch from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
2. Treat other members specified as preservative treated (PT).
3. Provide pressure-treated lumber complying with the requirements established in the latest AWWA P5 and TT-W-571. Use water-borne preservative with 0.25% retainage. Brand all lumber accordingly.

2.2 PLYWOOD AND STRUCTURAL-USE PANELS

- A. Product Standards: Provide material conforming to the requirements of The Engineered Wood Association (APA), with the appropriate DFPA grade mark.

2.3 ENGINEERED WOOD PRODUCTS

- A. Parallel Strand Lumber (PSL):
1. Columns and Posts: 1.8E Parallam (PSL).
 2. Beams and Headers: 2.0E Parallam (PSL).

2.4 MANUFACTURED WOOD TRUSSES (PLATE CONNECTED)

- A. Loads:
1. Roof Dead Load: 15 psf (3 psf min applied at bottom chord, 12 psf min applied at top chord)
 2. Roof Live Load: 20 psf (applied to top or bottom chord, non-concurrent)
 3. Wind Uplift: 35 psf (ASD factored gross uplift)
 4. Axial Seismic: 800 lbs (ASD factored)
- B. Limited Deflection:
1. Live Load: L/360
 2. Wind Load: L/360
 3. Dead Load + Live Load: L/240

2.5 FASTENERS:

- A. Nails:
1. Size and type best suited for purpose unless noted otherwise.
 2. Use zinc-coated or stainless steel nails, for nailing wood work exposed to weather and on roof blocking.
 3. Wood-wood: Common nails (ASTM F1667, Type I, Style 10) unless otherwise noted.
- B. Screws: ANSI B18.6.1 (Wood screws) or ASTM C1002 (Drywall Screws).
- C. Framing and Timber Connectors:
1. Provide connectors as manufactured by Simpson Strong-Tie Co., Inc. (Simpson) or approved equal. Designations on the drawings are those of Simpson.
 2. Use the number and type of fastener recommended by the connector manufacturer for full load value, unless otherwise shown.

- D. Anchor Bolts, Bolts, Nuts, & Washers:
 - 1. Anchor Bolts - F1554, galvanized where exposed to weather.
 - a. Provide 3" square by 0.229" minimum thickness washers at all anchor bolts.
 - 2. Common Bolts - A307.
 - a. Provide standard cut washers where nut and bolt head contacts wood.
 - 3. Square-headed bolts, or "L" anchors with bend of 5 times bolt diameter.
 - 4. Embed a minimum of 12 times the bolt diameter, unless otherwise shown.
 - 5. Size: 5/8 inch diameter unless otherwise shown.
- E. Wedge Anchors and other post-installed anchoring devices.
 - 1. As required by Section 05051 - Anchors, Inserts, and Dowels.
 - 2. Post-installed anchors shall not replace cast-in-place anchors.

PART 3 - EXECUTION

3.1 INSTALLATION-GENERAL

- A. Conform to applicable requirements of the following:
 - 1. AFPA National Design Specification for Wood Construction for timber connectors.
 - 2. AITC Timber Construction Manual for heavy timber construction.
 - 3. IBC, International Building Code for nailing and framing unless specified otherwise.
 - 4. APA for installation of plywood or structural use panels.
 - 5. ASTM F 499 for wood underlayment.
 - 6. TPI for metal plate connected wood trusses.
- B. Fasteners:
 - 1. Nails. Nail in accordance with IBC Table 2304.9.1, unless otherwise shown.
 - 2. Bolts:
 - a. Fit bolt heads and nuts bearing on wood with washers.
 - b. Countersink bolt heads flush with the surface of nailers.
 - c. Embed in concrete and solid masonry.
 - d. Use toggle bolts to hollow masonry or sheet metal.
 - e. Use bolts to steel over 11 gage in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 24 inch intervals between end bolts.
 - 3. Screws
 - a. Use to join wood to steel less than 11 gage thick.
 - b. May be used instead of nails to join wood to wood, at same spacing as nails.
 - c. Provide minimum 1 inch penetration into anchorage member.
 - 4. Powder actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
 - 5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal inserts or similar fastening.
- C. Set sills or plates level in full bed of mortar on masonry or concrete walls.
 - 1. Space anchor bolts within 9 inch of ends and 4 feet on center unless shown otherwise. Stagger bolts from side to side on plates over 6 inch in width.
 - 2. Use shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.
 - 3. Closely fit, and set to required lines.

06100-4

3.2 BLOCKING NAILERS, AND FURRING:

- A. Use longest lengths practicable.
- B. Blocking: Furnish blocking required for the attachment of ADA appurtenances, copings, roof ventilators, ducts and other sheet metal work and wood grounds for other work and as shown and required.
- C. Layers of Blocking or Plates:
 - 1. Stagger end joints between upper and lower pieces.
 - 2. Nail at ends and 16 inch on center.
 - 3. Stagger nails from side to side of wood member over 4 inch in width.
- D. Furring: Unless otherwise shown, use 1"x3" continuous wood strips installed plumb on walls, using wood shims where necessary so face of furring forms a true, even plane. Space furring 16 inch on center, butt joints over bearings and rigidly secure in place. Anchor furring on 16 inch centers.
- E. Preservative Coating: Liberally coat all field-cut edges and surfaces of treated lumber with a concentrated solution of preservative.
- F. Use fire retardant treated wood blocking where shown at openings and where shown or specified.

3.3 ROOF FRAMING:

- A. Set trusses in accordance with the manufacturer's instructions and installation details.
- B. Connect trusses to wall plate with framing connectors.

+ + END OF SECTION + +

06100-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 06640

PLASTIC LINER FOR CONCRETE PIPE AND STRUCTURES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: This Section covers pre-molded self-anchoring plastic sheet linings (plastic liner) to be applied to the following interior surfaces of precast and cast-in-place reinforced concrete structures.
 - 1. Reinforced concrete manhole barrels and cones.
 - 2. Reinforced concrete pipe.
 - 3. Vertical wall surface of precast or cast-in-place reinforced concrete structures
 - 4. Underside of top slab of precast or cast-in-place reinforced concrete structures.
- B. Provide plastic liner wherever called for on the drawings or in the specifications.

1.2 QUALITY ASSURANCE

- A. The manufacturer of the sheet lining shall furnish an affidavit attesting to the successful and completely satisfactory use of the materials as a lining for the service intended for a period of 5 years, minimum.
- B. The accepted plastic sheet manufacturer's standard printed specifications covering the installation of the lining in concrete structures shall be considered as being incorporated herein, and all work for and in connection with said plastic lining installation shall be strictly in accordance therewith. Such manufacturer's specifications shall include and cover application of sheets to concrete forms, including preparation of forms, joint welding and removal of forms; miscellaneous requirements covering transportation, handling, storing, and inspection; and necessary precautions with respect to ventilation and protection of workers.
- C. All work for and in connection with the installation of plastic sheet lining, the preparation of surfaces, and the sealing and welding of joints shall be performed by the manufacturer of the lining or by a firm or individual who has been trained and certified by said manufacturer.
 - 1. Training certification shall be submitted by manufacturer in writing.

1.3 SUBMITTALS

- A. Shop Drawings:
 - 1. Provide detailed layout and installation drawings including the following:
 - a. Sheet layout
 - b. Attachment to forms
 - c. Arrangement of butt and corner joints
 - d. Sealing and welding details
 - e. Repair details
 - f. Acceptable solvents, adhesives and cleaning agents
- B. Product Data:

06640-1

1. Provide complete specifications and data describing the materials to be furnished
- C. Precast Certification
 1. Provide certification from precast pipe, manhole, or structure manufacturer that the specified product has been used and installed per this specification.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Per Manufacturer's standard instructions, specifications and recommendations.

PART 2 - PRODUCTS

2.1 PRODUCT AND MANUFACTURER:

- A. Plastic liner shall be Amer-Plate "T-Lock", not less than 0.065 inch thick, as manufactured by Ameron, Corrosion Control Division, Brea, California.
- B. Or Equal.

2.2 SERVICE CONDITIONS AND PERFORMANCE

- A. Plastic liner will be used in applications in contact with raw sewage and the air space above the raw sewage. Hydrogen sulfide off-gassing from the sewage will potentially result in sulfuric acid accumulation on the surface of the plastic liner.
- B. Plastic liner shall be resistant to up to 20% sulfuric acid and other chemicals which may be expected to exist in the gas space above wastewater.

2.3 MATERIALS

- A. The material used in the plastic liner, welding strips and other accessory items, shall be a combination of poly vinyl chloride resin, pigments and plasticizers, specially compounded to remain flexible. Poly vinyl chloride resin shall constitute not less than 99 percent by weight, of the resin used in the formulation. Copolymer resins will not be permitted. Material shall be white.
- B. Physical Properties:
 1. All plastic liner plate sheets, welding strips and other accessory items, shall have the following minimum physical properties when tested at 77°F±5° (25°C±3°):
 - a. Tensile Strength: 2200 psi
 - b. Elongation at break: 200%
 - c. Shore Durometer, Type D: 50-60 (1 second), 35-50 (10 seconds)
 2. Following exposure to 20% sulfuric acid and other chemicals which simulate the conditions found in the air space above wastewater, the physical properties of the plastic liner shall not change significantly
 3. Plastic liner shall have good impact resistance, shall be flexible and shall have an elongation sufficient to bridge up to 1/4-inch (6 mm) settling cracks, which may occur in the pipe or in the joint after installation, without damage to the lining.
 4. Plastic liner shall be repairable at any time during the life of the pipe or the structure
- C. Plastic Liner Sheet Design:

06640-2

1. Plastic liner sheets shall be provided in a minimum width of 4-feet
2. Plastic liner sheets shall be a minimum of 0.065 inch thickness.
3. Locking extensions (T-shaped) of the same material as that of the plastic liner shall be integrally extruded with the sheet. Locking extensions shall be designed to provide a mechanical connection between the plastic liner and the concrete.
4. Locking extensions shall be approximately 2 1/2 inches (64 mm) apart and shall be at least 0.375-inch (9.5 mm) high.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Concrete formwork to which plastic liner is fastened for installation, whether at a concrete precasting facility or on-site for cast-in-place concrete, shall be clean and free of debris, oils, or other materials which may stain, alter or affect the plastic liner in any way or leave impressions in the plastic liner subsequent to placing concrete. Any form release agents or other materials applied to the formwork shall be approved by the plastic liner manufacturer as being compatible with the plastic liner material.

3.2 INSTALLATION

- A. General, Precast Structures and Pipe:
 1. All Work in connection with the installation of the plastic lining in precast manhole sections and concrete pipe shall be performed in strict conformity with the lining manufacturer's recommendation.
 2. Plastic liner sheets shall be fastened in place securely in the forms for the manhole sections and concrete pipe before reinforcing steel or concrete is placed.
 3. Care shall be taken in handling and transporting plastic lined manhole sections, precast structures and pipe to prevent damage to the plastic liner.
 - a. No interior hooks or other interior lifting device shall be used in handling the manhole sections and pipe; all handling requiring lifting or suspension shall be done by using exterior slings.
 - b. No manhole sections, precast structures or pipe with damaged lining will be accepted until and unless the damage has been satisfactorily repaired.
- B. Manholes, Risers and Precast Structures:
 1. Where designated on the drawings or in the specifications, manholes, precast vertical risers and cones, and precast structures shall have plastic lining installed on all interior surfaces.
 2. The entire circumference of these structures shall be covered with the plastic lining with the longitudinal edges of the lining joined with an overlapping flap or 4-inch wide strip and welding strips.
 3. Welding shall provide a continuous joint equal in corrosion resistance and impermeability to the plastic liner material.
- C. Reinforced Concrete Pipe:
 1. The upper 300° portion of the interior of all reinforced concrete sanitary sewer pipe shall be sealed and protected with plastic lining.
 2. All outlets and connections within the designated limits of the plastic pipe lining shall be completely sealed and protected with the plastic pipe lining. Joints shall be kept at a minimum.

06640-3

3. Except where outlets are required, the plastic lining for each length of pipe shall consist of a single sheet of material.
4. Where joints occur between individual sheets or sections of plastic liner, they shall be continually heat-welded, either by lapping adjacent sheets or with the use of auxiliary welding strips cut from the same thickness material as the plastic liner plates.
5. At outlets, the lining shall be turned back into the joint or otherwise suitably terminated so that the edges are adequately protected and anchored.
6. The lining for each pipe section shall be furnished to the pipe manufacturer as a single sheet.
7. The plastic liner shall extend to the end of the interior concrete surface at both bell and spigot end of the pipe.
8. Unless otherwise authorized, a 4-inch joint strip shall be molded integral with the plastic liner as furnished for installation in the pipe.
 - a. This joint shall have no ribs on the back of the strip and is intended to lap over the lining of the adjacent pipe for field welding thereto.
 - b. These joint extensions shall be made of the same material as used in the specified plastic liner plates.
 - c. The joint strip shall overlap the plastic liner plate of the downstream pipe a minimum of 1 inch.
 - d. All adhesive, welding materials, separate strips of lining material for field joints (where authorized) shall be furnished by the lining material manufacturer.
 - e. All welding shall be performed by a welder certified by the manufacturer.

D. Cast-in-Place Concrete Structures (Walls):

1. Plastic sheets for wall linings shall be set and properly secured to the concrete contact faces of the forms which form the surfaces to be lined.
2. The sheets shall be placed with the smooth face next to the form and so that the line of tees on the back side of the sheets will be vertical in the walls.
3. The sheets shall be butt jointed without more than 1/8 inch opening in any joint between adjacent sheets and the sheets held in place with small-headed finishing nails placed within 1/4 inch of the edge of the sheets.
4. After all sheets are in place on the form being lined, the joints between sheets shall be sealed on the back side with a one inch wide welding strip heat-welded over the joints.
5. A termination strip shall be provided at the intersection of the walls and bottom slab or one inch below top of concrete fill.
6. Where possible, the form to be lined (inner form) shall be set in place, the lining attached, and all lining joints covered before the reinforcing steel is installed.
7. The outer form shall then be set in place and the form ties installed through the plastic liner in the normal manner.
8. The number of form ties used shall be held to the minimum required for form integrity.
9. The lining installation and sealing shall be such that a continuous plastic lining is provided and that entrance of concrete or mortar between the lining and the form is prevented.
10. Forms shall be removed in a careful manner and not before the concrete has attained sufficient strength and has been properly cured. Finishing nails used to hold the plastic liners in place on the forms may pull out with the forms but if not, shall be removed afterwards. Damage to the plastic liner caused by nail removal shall be limited as much as possible.

06640-4

11. After the forms have been removed, the exposed butt joints in the plastic liner, including nail and form tie holes, shall be sealed with welding strip, heat-welded over the areas involved. Sealing shall be such that a continuous plastic lining is provided.
12. Workmanship shall be neat and of the highest quality.

E. Cast-in-Place Concrete Structures (Ceilings):

1. Plastic sheets for the ceiling surface shall be set properly secured, and joints sealed in accordance with the requirements specified above for wall surfaces, and other requirements as may be required to conform to the manufacturer's accepted instructions and recommendations.

3.3 FIELD JOINTS

- A. The joint between plastic lined pipes or manhole sections shall be prepared in the following manner before making the lining joints:
1. The inside joint shall be filled and carefully pointed with cement mortar for the full circumference of the pipe or manhole section.
 2. The mortar shall not, at any point, extend into the pipe or manhole section beyond a straight line connecting the surfaces of the adjacent pipe or manhole sections.
 3. No lining joint shall be made until after the trench has been backfilled.
 4. Pipe and manhole joints must be dry before lining joints are made.
 5. All mortar and other foreign material shall be removed from lining surfaces adjacent to the pipe or manhole joint.
 6. Field joints in the lining at pipe or manhole joints may be either of the following described types:
 - a. The joint shall be made with a separate 4-inch wide joint strip and two, 1-inch wide welding strips. The 4-inch strip shall be centered over the joint, secured to the lining with a manufacturer approved adhesive compound and welded along each edge to adjacent plastic liner sheets. The width of the space between the ends of pipe lining material shall not exceed 2 inches. The 4-inch joint strip shall overlap the lining in each pipe a minimum of 1 inch.
 - b. The joint shall be made with a lining flap extending about three inches beyond the spigot end of the pipe. One welding strip is required. The joint flap shall overlap the lining in the adjacent pipe a minimum of one inch. A manufacturer approved adhesive compound shall be used to hold the flap in place during welding. The flap shall be protected from damage during installation. Excessive tension and distortion in bending back the strip to expose the pipe joint during laying and joint mortaring shall be avoided.
 7. All joints between pipe and wall fittings in manholes and between wall fittings and lining of manhole walls, where lining is required, shall be made by one of the two ways described above.
 8. All welding of joints and the adhesive compound shall be in strict conformity with the recommendations of the lining manufacturer.

3.4 TESTING AND REPAIRING

- A. After the pipe, manhole, or structure is installed and backfilled, all surfaces covered with plastic lining, including welds, shall be tested with an electric holiday detector. The voltage and specific methods of testing shall be as recommended by the manufacturer of the lining material.
- B. In addition, all welds shall be physically tested by non-destructive probing.

06640-5

- C. All patches over holes, or repairs to the plastic liner wherever damage has occurred, shall be installed in conformity with the instructions and recommendations of the plastic liner manufacturer.
- D. Each transverse welding strip which extends to a lower edge of the plastic liner shall be tested. The welding strip shall extend 2 inches below the plastic liner to provide a tab. A force shall be applied to the welding strip normal to the face of the structure by means of a spring balance. Plastic liner adjoining the welding strip shall be held against the concrete during application of the force. The 10-pound pull shall be maintained if a weld failure develops, until no further separation occurs. Defective welds shall be retested after repairs have been made. Tabs shall be trimmed away neatly after the welding strip has passed inspection. Inspection shall be made within two days after joint has been completed.
- E. Repairs:
 - 1. All repairs to damaged portions of the linings shall be made and all holes in the linings sealed before final acceptance of the work, in conformity with the lining manufacturer's instructions and recommendations. The requirement for neat, high quality work is emphasized.

+ + END OF SECTION + +

06640-6

**SECTION 07211
BUILDING INSULATION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Scope:
1. CONTRACTOR shall provide all labor, materials, tools, equipment and incidentals as shown, specified and required to furnish and install all building insulation.
 2. Extent of each type of building insulation is shown.
 3. Types of products required include the following:
 - a. Glass fiber batt insulation.
 - b. Fire-stop sealants and other fire-stop system components.
 - c. Miscellaneous materials and accessories.
- B. Coordination:
1. Review installation procedures under other Sections and coordinate the installation of items that must be installed with the building insulations.
 2. Notify other contractors in advance of the installation of the building insulations to provide other contractors with sufficient time for the installation of items included in their contracts that must be installed before the building insulations.

1.2 QUALITY ASSURANCE

- A. Manufacturer/Installer Qualifications:
1. Engage single installers for each type of building insulation who are skilled, trained and have a record of successful experience in the application of each product and who have a successful record of performing work in accordance with the recommendations and requirements of the manufacturer or who can submit evidence in writing of being acceptable to the manufacturer for production of guaranteed construction and who agree to employ only tradesmen with specific skill and successful experience in each type of Work.
- B. Source Quality Control:
1. Obtain building insulations, requiring a hydrochlorofluorocarbon blowing agent, from manufacturers who manufacture specified insulation using a blowing agent acceptable for use until the year 2020 complying with the requirements of the Copenhagen Amendments to the Montreal Protocol in all ways.
 2. Provide a manufacturer who will provide complete technical services including preparation and review of Shop Drawings, installation methods and proposed detailing for the Work.
- C. Performance Criteria:
1. Thermal Conductivity: The thicknesses shown are for the thermal conductivity, k-value at 75 F, specified for each material.

07211-1

2. Provide adjusted thicknesses, based on thicknesses shown or specified for building insulations, as required to comply with required thermal resistances for use of material having a different thermal conductivity.
- D. Requirements of Regulatory Agencies: Comply with fire-resistance and flammability ratings as shown and specified; and comply with code interpretations by governing authorities.
- E. Reference Standards: Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified:
1. ASTM C 165, Measuring Compressive Properties of Thermal Insulations, Test Method for.
 2. ASTM C 177, Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus, Standard Test Methods for.
 3. ASTM C 203, Breaking Load and Flexural Properties of Block-Type Thermal Insulation, Test Method for.
 4. ASTM C 236, Steady-State Thermal Performance of Building Assemblies by Means of a Guarded Hot Box, Standard Test Method for.
 5. ASTM C 272, Water Absorption of Core Materials for Structural Sandwich Constructions, Standard Test Method for.
 6. ASTM C 303, Dimensions and Density of Preformed Block-Type Thermal Insulation, Standard Test Method for.
 7. ASTM C 518, Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of Heat Flow Meter Apparatus, Standard Test Method for.
 8. ASTM C 520, Density of Granular Loose Fill Insulations, Standard Test Method for.
 9. ASTM C 531, Linear Shrinkage and Coefficient of Thermal Expansion of Chemical-Resistant Mortars, Monolithic Surfacing, and Polymer Concrete, Standard Test Method for.
 10. ASTM C 549, Perlite Loose Fill Insulation, Standard Specification for.
 11. ASTM C 553, Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications, Specification for.
 12. ASTM C 578, Rigid, Cellular Polystyrene Thermal Insulation, Standard Specification for.
 13. ASTM C 612, Mineral Fiber Block and Board Thermal Insulation, Specification for.
 14. ASTM C 665, Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing, Standard Specification for.
 15. ASTM C 764, Mineral Fiber Loose-Fill Thermal Insulation, Specification for.
 16. ASTM D 696, Coefficient of Linear Thermal Expansion of Plastics between -30 Degrees C and 30 Degrees C, Standard Test Method for.
 17. ASTM D 1621, Compressive Properties of Rigid Cellular Plastics, Standard Test Method for.
 18. ASTM D 1622, Apparent Density of Rigid Cellular Plastics, Standard Test Method for.
 19. ASTM D 2126, Response of Rigid Cellular Plastics to Thermal and Humid Aging, Standard Test Method for.

07211-2

20. ASTM D 2842, Water Absorption of Rigid Cellular Plastics, Standard Test Method for.
21. ASTM E 84, Surface Burning Characteristics of Building Materials, Standard Test Method for.
22. ASTM E 96, Water Vapor Transmission of Materials in Sheet Form, Standard Test Method for.
23. ASTM E 119, Standard Methods of Fire Tests of Building Construction and Materials.
24. Underwriters Laboratories, Incorporated, UL 1479, Fire Tests of Through-Penetration Firestops.

F. Codes: Comply with the applicable requirements of the 2016 California Building Code for types of building insulation work specified.

1.3 SUBMITTALS

- A. Test Reports: Submit for approval the following:
1. Copies of test reports verifying compliance with physical properties and environmental features specified herein.
 2. Copies of testing agencies background and experience in performing similar tests to those specified.
- B. Certificates: Submit for approval copies of certificates stating that the manufacturer of the foam-type rigid board insulation has used an environmentally safe blowing agent complying with specified requirements.

1.4 PRODUCT DELIVERY STORAGE AND HANDLING

- A. Delivery of Materials:
1. Deliver building insulation products in manufacturer's original, unopened, factory-sealed containers, bearing manufacturer's name and labels, accurately representing container contents as shown on approved Shop Drawings.
 2. Damaged materials shall be permanently removed from Site by CONTRACTOR.
 3. Do not deliver insulation materials to the Site before the time of installation.
 4. Deliver materials in sufficient quantities to allow uninterrupted continuity of the Work.
- B. Storage of Materials:
1. Store materials in original, undamaged containers with manufacturer's labels and seals intact.
 2. Store all materials in a dry, enclosed area, off the ground and away from all possible contact with water, ice or snow.
 3. Prevent damage to materials during storage, primarily by minimizing the amount of time they are stored on-Site before being incorporated into construction systems. Store only sufficient quantity of building insulation materials on-Site as necessary for the continuous advancement of the Work without causing delay.
- C. Handling of Materials:

07211-3

1. Handle materials carefully in order to avoid damage and breakage or compressing of boards to less than their specified thickness, or other damage.
2. Do not open containers, or expose materials to detrimental conditions or physical damage. Materials which are so exposed shall be removed from the Site and shall not be incorporated into the Work. If incorporated into the Work they shall be removed at no additional expense to OWNER.
3. Do not open packages or containers until all necessary preparatory Work is complete and installation will begin immediately.

1.5 JOB CONDITIONS

A. Protection:

1. Do not allow building insulation materials to become wet or soiled, or covered with ice or snow. Provide continuous protection of materials against damage, wetting and moisture absorption primarily by storing materials under cover and above ground and away from all other construction traffic.
2. Do not allow building insulations to come into contact with welding operations or other fire or ignition sources.
3. Do not overload the building structure or damage in-place construction system with the weight of stored materials or use of equipment.
4. Protect materials against damage by construction activities.

B. Scheduling:

1. Proceed with building insulation Work only when preceding Work is ready to receive the Work of this Section.
2. Proceed with the building insulation and associated Work only after curbs, blocking, substrate board, nailer strips, vents, drains and other projections through the substrates have been installed, and when the substrate construction and framing of openings is complete.
3. Proceed with and complete the Work only when materials, equipment and tradesmen required for the installation of the building insulation and backfilling operations are at the Site and are ready to follow with the Work in a manner which will not leave the Work vulnerable to damage or deterioration.
4. Do not advance the installation of building insulation materials beyond that which is necessary for proper sequencing of the Work. Do not advance Work when there is no proper and secure protection from damaging weather and construction activities.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Glass Fiber Insulations: Provide the following types:

1. General: Provide insulations formed from glass fibers and resinous binders fabricated into flexible blankets, semi-rigid and rigid sheets complying with ASTM C665, ASTM C553, and ASTM C612.
2. Unfaced Batt Insulation: Provide unfaced thermal batt insulation complying with ASTM C665, Type I.

07211-4

- a. Physical Properties.
 - 1) R-value, ASTM C518: Reference Drawings. If not specified on the Drawings, provide the maximum R-value corresponding to the framing member thickness.
 - 2) Density, provide standard density unless high-density is required to achieve the specified R-value.
 - 3) Flame Spread, ASTM E 84: 25 maximum for insulation.
 - 4) Smoke Developed, ASTM E 84: 50 maximum for insulation.
 - b. Thickness: Match the framing thickness shown on the Drawings.
 - c. Width: 16-inches, or as required based on framing member spacing.
 - d. Product and Manufacturer: Provide one of the following:
 - 1) Thermal Batt Insulation by Owens-Corning Fiberglas Corporation.
 - 2) Thermal Batt Insulation by CertainTeed.
 - 3) Thermal Batt Insulation by Johns Manville.
 - 4) Or equal.
- B. Fire-Stop Sealants and Other Fire-Stop System Components: Provide the following:
- 1. Complete selection of fire stop manufacturer's recommended silicone rubber fire stop systems. Provide complete systems complying with UL 1479 with a two or three hour fire rating. Provide equal fire protection as provided by fire-rating of construction penetrated.
 - 2. Provide multiple component systems coordinated to meet actual conditions encountered in the Work and as recommended by the fire stop manufacturer. In addition to providing fire-resistance, the fire stop systems shall also be gas and watertight.
 - 3. Product and Manufacturer: Provide one of the following:
 - a. 3M Fire Stop Systems by 3M Incorporated.
 - b. Or equal.
- C. Miscellaneous Materials and Accessories: Provide the following:
- 1. Mechanical Anchors: Type and size shown or, if not shown, as recommended by the insulation manufacturer for the type of application shown and condition of substrate.
 - 2. Wire Mesh Insulation Support: 2-inch by 24-gage galvanized steel wire hexagonal woven mesh.
 - 3. Adhesive Tapes: Complete selection of insulation manufacturer's recommended taping materials.

PART 3 - EXECUTION

3.1 INSPECTION

- A. CONTRACTOR and his installer shall examine the substrate and the conditions under which the building insulation Work is to be performed, and notify ENGINEER in writing of unsatisfactory conditions. Do not proceed with the Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

07211-5

3.2 SUBSTRATE PREPARATION

- A. Verify that surfaces to receive building insulation are clean of all debris, dirt and other contamination before installation begins in any area.

3.3 INSTALLATION

- A. General:
 - 1. Comply with manufacturer's instructions for the particular conditions of installation in each case. If printed instructions are not available or do not apply to Site conditions, submit to ENGINEER specific recommendations from manufacturer for approval before proceeding with the Work.
 - 2. Extend all insulations full thickness over entire surface to be insulated. Cut and fit tightly around obstructions, and fill voids with insulation.
 - 3. Apply the number of layers of insulation specified, each of the required thickness, or the required thickness to provide the thermal value indicated, unless otherwise shown or required, to make up the total thickness.
- B. Safing Insulations and Fire Stop Systems:
 - 1. Install safing insulation and fire stop systems to present a continuous fire-rated fire barrier in areas shown and at the perimeter of all fire-rated partitions and poke through floor and wall penetrations to maintain the continuity of fire-rated construction whether or not shown.
 - 2. Install fire stop sealants and other fire stop system components in thicknesses recommended by the manufacturer at all locations where poke through penetrations occur, at all locations where other penetrations such as ducts, pipe cables, cable trays and conduit occur and at the perimeter of all fire rated walls.
 - 3. Include all components of manufacturer's fire/smoke stop systems for complete system responsibility installed in accordance with manufacturer's written recommendations and specifications.
- C. Batt-Type Insulation:
 - 1. Install batt insulation above ceilings and between studs and rafters as shown. Extend insulation full width, length and height in all areas shown.
 - 2. Fit tightly around obstructions to form a uniform insulated barrier.

3.4 PROTECTION

- A. All components of the Work shall be protected from detrimental weather conditions and until construction operations including, but not limited to, backfilling, framing and sheathing, aluminum siding and concrete unit masonry Work, is completed and acceptable to ENGINEER.
- B. Work which cannot for reasons acceptable to ENGINEER be covered with complete construction system before onset of weather detrimental to the Work, shall be completely covered and protected in such a manner as to deflect precipitation from the installation without damaging adjacent Work.

- C. Protect building insulations from all damage and abuse from all other contractors and installers involved on the Site until final acceptance by OWNER.

3.5 FIELD QUALITY CONTROL

- A. Submit results of all testing to ENGINEER along with recommendations for remedial Work. Do not delay job progress. Coordinate the submission of tests and remedial Work in a manner which does not impact the acceptability of substrate and which permits expeditious completion of finishing Work.

3.6 ADJUSTMENT AND CLEANING

- A. System components which are dislodged, damaged, expanded, broken, penetrated, or crushed by subsequent installation operations or damaged by detrimental weather shall be immediately replaced with undamaged material in compliance with the Specifications and properly protected as specified.
- B. Only the original installer shall repair or replace deteriorated or defective Work.

3.7 INSPECTION AND ACCEPTANCE

- A. Do not allow construction traffic which is not associated with the installation of building insulation in the area of Work. Protect the area from access by other installers and contractors until the Work of this Section has been incorporated into finished construction systems.
- B. Building insulations which have become wet, damaged, or deteriorated shall be promptly removed from the Site and replaced with materials meeting the requirements of this Specification.

+ + END OF SECTION + +

07211-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 07320**STANDING SEAM METAL ROOF****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: This Section applies to design, manufacture and installation of standing seam metal roof paneling and associated materials.

1.2 QUALITY ASSURANCE

A. References

1. American Society for Testing and Materials (ASTM)
 - a. ASTM A653: Steel Sheet, Zinc-Coated by the Hot Dip Process
 - b. ASTM A792: Steel Sheet, Aluminum-Zinc Alloy Coated by the Hot Dip Process
 - c. ASTM B209: Aluminum and Aluminum Alloy Sheet and Plate
2. Underwriters Laboratory
 - a. UL Building Materials Directory
3. Sheet Metal and Air Condition Contractors National Association, Inc. (SMACNA)
 - a. SMACNA Architectural Sheet Metal Manual, 1993 Edition
4. American Iron and Steel Institute (AISI)
 - a. AISI Cold Formed Steel Design Manual
5. Aluminum Association
 - a. Aluminum Design Manual
6. Metal Construction Association (MCA)
 - a. Preformed Metal Wall Guidelines
7. Code References:
 - a. ASCE 7, Minimum Loads for Buildings and Other Structures
 - b. IBC, International Building Code

B. Experience:

1. Manufacturer shall have a minimum of ten (10) years experience in manufacturing standing seam metal roofing.
2. Panel installer shall have a minimum of two (2) years experience in the installation of standing seam metal roofing and shall show evidence of successful completion of at least three (3) projects of similar size, scope, and complexity.

1.3 SUBMITTALS

- A. Shop Drawings: Submit Shop Drawings showing roof plan with layout of panels, clips, clip attachment, underlayment and sections of each flashing/trim condition for approval prior to fabrication. Drawings shall contain material type, metal thickness and finish. Drawings shall distinguish between factory and field fabrication.
- B. Product Data: Submit manufacturer's specifications, standard profile sheet, product data brochure and finish warranty.
- C. Samples:

07320-1

1. Submit sample 12" long x full panel width showing proposed metal gauge, seam profile and specified finish.
 2. Submit manufacturer's standard colors for OWNER's selection. If design or bid documents specify a color, submit color specified.
- D. Test Reports: Submit the test reports prepared by Underwriters Laboratory indicating wind uplift rating of the proposed roof system. The manufacturer must be listed by name in the UL Directory.
- E. Certification: Submit manufacturer's certification that materials and finishes meet specification requirements.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Panels and flashings shall be protected and properly packaged to protect against transportation damage in transit to the jobsite.
- B. Upon delivery, exercise care in unloading, stacking, moving, storing and erecting panels and flashings to prevent twisting, bending, scratching or denting.
- C. Store panels and flashings in a safe, dry environment under a waterproof covering to prevent water damage. Allow adequate ventilation to prevent condensation. Panels and flashings with strippable film shall not be stored in direct sunlight.
- D. Upon installation immediately remove strippable film from panels and flashings. Protect panels and flashings from foot traffic and from all other trades.

1.5 WARRANTY

- A. Standing seam metal roof manufacturer shall provide a twenty (20) year warranty on the paint finish covering chalking, cracking, checking, chipping, blistering, peeling, flaking, and fading.
- B. Applicator shall furnish written warranty for a two (2) year period from date of substantial completion of building covering repairs required to maintain roof and flashings in watertight condition.

PART 2 - PRODUCTS

2.1 PRODUCT DESCRIPTION

- A. Performance Requirements: Provide factory formed, prefinished, snap-together, concealed clip structural standing seam metal roof system that has been pretested and certified by manufacturer to comply with specified requirements under installed conditions.
 1. Roof system shall meet the wind uplift test requirements in accordance with UL 580 Class 90 when the panels are attached to a substructure meeting the assembly requirements of UL 580.

07320-2

- B. Structural Requirements: Engineer panels for structural properties in accordance with the latest edition of American Iron and Steel Institute's *Cold Formed Steel Design Manual* using "effective width" concept and Aluminum Association's *Aluminum Design Manual*.

2.2 SERVICE CONDITIONS AND PERFORMANCE

- A. System shall be designed to withstand service conditions described in 01610 – General Equipment Requirements and be in compliance with all applicable codes and regulations.

2.3 COMPONENTS

A. Roof Panels:

1. Panels shall be constructed from 24 gauge, Grade 50 (50 ksi yield strength) structural steel with AZ50 (0.50 oz./ft.²) aluminum-zinc alloy coating, both conforming to ASTM A792.
2. Each panel shall be formed with a 1-1/2" to 2-1/2" seam height
3. Panel width will be between 12- and 18-inches from seam to seam. Between seams, each panel shall have two or more equally spaced ridges, or stiffeners running parallel with seams.
4. Each panel shall be designed to be screwed to the roof substrate, then have the adjacent panel mechanically seamed with a field-operated, electric- seaming machine provided by the manufacturer in such a way that all screws are concealed.
5. Roof panels shall use a standard UL 90 one-piece roof clip allowing for thermal movement of the panel system.
6. The maximum panel length shall be 48'.
7. The panel system shall be a true standing seam shape requiring no trapezoidal foam closures, plugs, or fillers at eaves.
8. Texture: panels shall be smooth or have striations to eliminate oil canning potential.

B. Underlayment:

1. Asphalt-saturated organic felt meeting ASTM D226, Type II (No. 3).
2. Ice and Water Shield Waterproofing Membrane: 40 mil self-adhered roofing underlayment meeting ASTM E96.

C. Flashing, Roof Jacks, and Trim

1. All flashing, roof jacks, and trim shall be of the same material, gauge, finish, and color as the roof panels and fabricated in accordance with standard SMACNA procedure and details.
2. Provide transition rib covers where roofing changes pitch or Z-closure made from the same material.
3. Provide rake and eave trim at the roof perimeter.
4. Provide roof jacks at all roof penetrations.
5. Fabricate gutters and downspouts in the same gauge, material, finish and color as the roof panels.
6. Flashings shall be designed and installed to allow thermal expansion of the roofing system.

D. Closures:

1. Ridge and hip closures shall be protected and supported by a formed metal closure manufactured from the same material, color and finish as the panels.
2. Metal closures shall be factory fabricated and field-cut as needed.

07320-3

E. Finish:

1. Metal Preparation: all metal shall have the surfaces carefully prepared for painting on a continuous process coil coating line by alkali cleaning, hot water rinsing, application of chemical conversion coating, cold water rinsing, sealing with an acid rinse, and thorough drying.
2. Prime Coating: a base coat of epoxy paint, specifically formulated to interact with the top-coat, shall be applied to the prepared surfaces by roll coating to a dry film thickness of 0.20 ± 0.05 mils. This prime coat shall be oven cured prior to application of finish coat.
3. Exterior Coating: a Kynar® 500/Hylar® 5000 finish coating shall be applied over the primer by roll coating to a dry film thickness of 0.80 ± 0.05 mils for a total dry film thickness of 1.00 ± 0.10 . This finish coating shall be oven-cured.
4. Interior Finish Coating: a washcoat shall be applied on the reverse side over the primer by roll coating to a dry film thickness of 0.30 ± 0.05 mils for a total dry film thickness of 0.50 ± 0.10 mils. The washcoat shall be oven-cured.
5. Color: Color shall be as noted on Drawings, or as selected by OWNER.

F. Fasteners:

1. Clips to Substrate: screws shall be #10 diameter, self-tapping type, zinc-plated steel, with Phillips style pancake head.
2. Flashings to Panels: exposed screws shall be zinc plated with a #14 x 1" combination steel and neoprene washer, color to match panel.

G. Sealants:

1. Shall not contain oil, asbestos or asphalt.
2. Field applied panel end sealant shall be mastic tape sealant.
3. Exposed sealant shall be one-part polyurethane joint sealant, color to coordinate with roof panels.

2.4 FABRICATION

- A. Field dimensions shall be taken prior to fabrication to verify jobsite conditions.
- B. Roof panels shall be formed in continuous lengths. End-laps will not be allowed.
- C. Panels shall be roll formed on a stationary industrial type rolling mill. Portable roll formers, rented or owned by the installer, are not acceptable.
- D. Fabricate flashings from the same material as the roof system.
- E. Follow tolerances in MCA's Preformed Metal Wall Guidelines.

2.5 PRODUCT AND MANUFACTURER:

- A. ATAS International: Field-Lok FLS
- B. Fabral: Stand'N Seam
- C. MBCI: SuperLok
- D. Or Equal.

07320-4

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Examine roof deck for conditions that would prevent proper application of roofing. Immediately notify Contractor and Engineer of defects, and do not proceed with roofing operation until defects are corrected.
- B. Verify that surfaces to receive roofing are smooth, sound, clean and dry.

3.2 INSTALLATION

- A. Conform to manufacturers written instructions, the standard set forth in the SMACNA architectural sheet metal manuals and the approved shop drawings detailed for the project.
- B. Underlayment:
 - 1. Provide a double layer of underlayment.
 - 2. Provide 18" wide starter strip of underlayment at the eaves, followed by a 36" wide strip of underlayment which completely overlaps the 18" wide starter strip.
 - 3. Continue with consecutive 36" wide strips of underlayment, overlapping 19" at each course, shingle-style.
 - 4. Total of a double layer of underlayment plus 2" overlap at the horizontal seams is required.
 - 5. Overlap vertical seams 6" and minimize their occurrence.
 - 6. Provide ice and water shield membrane at all valley and eave conditions as well as any area at less than a 3:12 slope.
- C. Panel Installation:
 - 1. Install panels straight with the seams parallel, conforming to the design as indicated.
 - 2. Install panel system so it is watertight, without waves, warps, buckles or distortions, and allow for thermal movement considerations.
 - 3. Abrasive devices shall not be used to cut on or near the roof panel system.
 - 4. Apply sealant tape or caulking as necessary at flashing and panel joints to prevent water penetration.
 - 5. Remove any strippable film immediately upon exposure to direct sunlight.

3.3 CLEANING

- A. Dispose of any excess materials and debris from jobsite.
- B. Remove filings, grease, stains, marks, or excess sealants from roof panel system to prevent staining.
- C. Protect work from damage from other trades until final acceptance.

+ + END OF SECTION + +

07320-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 07600**METAL FLASHING, GUTTERS, DOWNSPOUTS AND OTHER ROOFING SPECIALTIES****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings: Provide documentation showing the gutter, gutter guard, scupper, conductor head, and downspout profiles, dimensions and material properties. Show joints, types and location of fasteners, and special shapes.

1.2 DELIVERY, HANDLING, AND STORAGE

- A. Package and protect during shipment.
- B. Inspect for damage, dampness, and wet storage stains upon delivery to the Work site.
- C. Remove and replace damaged or permanently stained materials that cannot be restored to like-new condition.
- D. Carefully handle to avoid damage to surfaces, edges, and ends.
- E. Do not open packages until ready for use.
- F. Store materials in dry, weathertight, ventilated areas until immediately prior to installation.

PART 2 - PRODUCTS**2.1 METAL**

- A. Galvanized Sheet Steel: ASTM A653, G90, commercial quality copper bearing steel, thickness 24 gauge, unless otherwise shown.

2.2 DOWNSPOUTS, GUTTERS, SCUPPERS, AND CONDUCTOR HEADS

- A. Same as galvanized metal flashing.

2.3 ANCILLARY MATERIALS

- A. Solder: ASTM B32, alloy composition Sn 50.
- B. Soldering Flux: ASTM B32, Type RA.
- C. Sealer Tape: Polyisobutylene sealer tape as specified in Section 07900, JOINT SEALANTS.
- D. Isolation Paint: As specified in Section 09900, PAINTING AND PROTECTIVE COATINGS, System No. 27.

07600-1

- E. Isolation Tape: Butyl or polyisobutylene, internally reinforced, or 20-mil thick minimum polyester.
- F. Plastic Roof Cement: ASTM D4586, Type II.
- G. Fasteners:
 - 1. For Galvanized Steelwork: Steel, galvanized per ASTM A153 or stainless steel fasteners.
 - 2. Nails: Roofing nailhead, 10-gauge spiral or ring shank, lengths as required to penetrate wood at least 3/4-inch.
- H. Gutter Guard (Cover): Provide low profile perforated metal gutter guards compatible with the gutter style supplied. Gutter guards shall be riveted or screwed to the lip of the gutter.

2.4 FABRICATION OF FLASHING

- A. Field measure prior to fabrication.
- B. Fabricate in accordance with SMACNA Architectural Sheet Metal Manual.
- C. Accurately form flashings to shapes shown and detailed, with angles and lines in true alignment.
- D. Form angles true to line and surfaces free of waves and buckles.
- E. Form bends to 1/16-inch inside radius.
- F. Hem exposed edges.
- G. Reinforcements and Supports: Provide same material as flashing unless other material is shown. Steel, where shown or required, shall be galvanized or stainless.
- H. Rigid Joints and Seams: Make mechanically strong. Solder galvanized and stainless steel metal joints. Do not use solder to transmit stress.
- I. At exposed ends of counterflashing furnish weathertight closures.
- J. Neutralize soldering flux.
- K. Solvent clean sheet metal. Surfaces to be in contact with roofing or otherwise concealed shall be coated with isolation paint.

2.5 FABRICATION OF DOWNSPOUTS AND GUTTERS

- A. Fabricate in accordance with SMACNA Architectural Sheet Metal Manual.
- B. Form downspouts and gutters in maximum lengths as practicable to sizes and shapes indicated on Drawings or to field-fit the locations shown on the drawings.
- C. Telescope end joints 1-1/2 inches and lock longitudinal joints of downspouts.

07600-2

- D. Furnish elbows at bottom where downspouts empty onto splash blocks.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Flashing:
1. Coordinate flashing Work with roofing Work for weathertight and watertight assembly.
 2. Isolate metal from wood and concrete and from dissimilar metal with isolation tape or two coats of isolation paint.
 3. Use only stainless steel fasteners to connect isolated dissimilar metals.
 4. Set flanges of flashings and roof accessories on continuous sealer tape or in plastic roof cement on top of deck. Nail flanges through sealer tape and at 3-inch maximum spacing. Touch up isolation paint on flanges.
 5. Joints, Fastenings, Reinforcements, and Supports: Sized and located as required to preclude distortion or displacement due to thermal expansion and contraction.
 6. Provide continuous holddown clips at counterflashing and edge drips.
 7. Conceal fastenings wherever possible.
 8. Set flashing and sheet metal to straight, true lines with exposed faces aligned in proper plane without bulges or waves.
- B. Downspouts and Gutters: Anchor downspouts to wall with straps of same material as downspouts. Install gutters, scuppers, and conductor heads as indicated on Drawings.

3.2 FINISH

- A. Exposed Surfaces of Flashing and Sheet Metalwork: Free of dents, scratches, abrasions, or other visible defects, and clean and ready for painting where applicable.

+ + END OF SECTION + +

07600-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 07900**JOINT SEALANTS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Product Data: Surface preparation and installation instructions. Indicate where each product is proposed to be used.
- B. Samples: Material proposed for use showing color range available.
- C. Quality Control Submittals:
 - 1. Applicator Qualification: Documentation showing minimum of 5 years' experience installing sealants in projects of similar scope.
 - 2. Certificates of Compliance: Proposed materials meet Specification requirements.

1.2 ENVIRONMENTAL REQUIREMENTS

- A. Ambient Temperature: Between 40 and 80 degrees F (4 and 27 degrees C) when sealant is applied. Consult manufacturer when sealant cannot be applied within these temperature ranges.

PART 2 - PRODUCTS**2.1 SEALANT MATERIALS**

- A. Sealant Characteristics:
 - 1. Uniform, homogeneous.
 - 2. Free from lumps, skins, and coarse particles when mixed.
 - 3. Nonstaining, nonbleeding.
 - 4. Hardness of 15 minimum and 50 maximum, measured by ASTM C661 method.
 - 5. Immersible may be substituted for nonimmersible.
- B. Sealant Color: To match adjacent surfaces or as selected by ENGINEER.
- C. One-Part Polyurethane, Immersible:
 - 1. Polyurethane base, single-component, moisture curing; ASTM C920, Type S, Grade NS or P, Class 25.
 - 2. Capable of being continuously immersed in water.
 - 3. Designed to be used where the maximum depth of sealant will not exceed 1/2 inch.
 - 4. Provide sealant certified to NSF/ANSI Standard 61 where sealant is in direct contact with potable water.
 - 5. Manufacturers and Products for Nonsag:
 - a. Sika Construction: Sikaflex-1a.
 - b. Tremco: Vulkem 116.
 - c. Or approved equal.
 - 6. Manufacturers and Products for Self-Leveling:
 - a. Sika Construction: Sikaflex-1C SL.

07900-1

- b. Tremco: Vulkem 45 SSL.
 - c. Or approved equal.
- D. Two-Part Polyurethane, Immersible:
 - 1. Polyurethane elastomeric, two-part, self leveling (or gun grade), non-staining, which cures at ambient temperature and conforms to ASTM C920.
 - 2. Designed to be used where the maximum depth of sealant will exceed 1/2 inch or where chemical curing is required.
 - 3. Manufacturers and Products:
 - a. Sika Construction: Sikaflex-2C.
 - b. Tremco: Dymeric 240FC.
 - c. Or approved equal.

2.2 BACKUP MATERIAL

- A. Nongassing, extruded, closed-cell round polyethylene foam rod, compatible with sealant used, and as recommended by sealant manufacturer.
- B. Size: As shown or as recommended by sealant material manufacturer. Provide for joints greater than 1/2-inch deep. Backup material should be sized to maintain 2:1 width to depth ratio to the greatest extent possible.
- C. Manufacturers and Products:
 - 1. Dow Corning; Ethafoam SB.
 - 2. Sonneborn; Sonofoam.
 - 3. Or approved equal.

2.3 ANCILLARY MATERIALS

- A. Bond Breaker: Pressure sensitive tape as recommended by sealant manufacturer to suit application. Provide bond breaker tape in the bottom of joints to prevent 3-sided joint sealant adhesion when backup material is not used.
- B. Joint Cleaner: Noncorrosive and nonstaining type, recommended by sealant manufacturer; compatible with joint forming materials.
- C. Primer: Nonstaining type recommended by sealant manufacturer to suit application

PART 3 - EXECUTION

3.1 GENERAL

- A. Use of more than one material for the same joint is not allowed unless approved by the sealant manufacturer.
- B. Install joint sealants in accordance with ASTM C1193.
- C. Horizontal and Sloping Joints of 1 Percent Maximum Slope: Use self-leveling (Grade P) joint sealant.

07900-2

- D. Steeper Sloped Joints, Vertical Joints, and Overhead Joints: Use nonsag (Grade NS) joint sealant.

3.2 PREPARATION

- A. Verify that joint dimensions, and physical and environmental conditions, are acceptable to receive sealant.
- B. Surfaces to be sealed shall be clean, dry, sound, and free of dust, loose mortar, oil, and other foreign materials.
 - 1. Mask adjacent surfaces where necessary to maintain neat edge.
 - 2. Starting of work will be construed as acceptance of subsurfaces.
 - 3. Apply primer to dry surfaces as recommended by sealant manufacturer.
- C. Verify that joint shaping materials and release tapes are compatible with sealant.
- D. Examine joint dimensions and size materials to achieve required width/depth ratios.
- E. Carefully follow manufacturer's instructions for mixing multi-component products.

3.3 INSTALLATION

- A. Use joint filler to achieve required joint depths, to allow sealants to perform intended function.
 - 1. Install backup material as recommended by sealant manufacturer.
 - 2. Where possible, provide full length sections without splices; minimize number of splices.
 - 3. Tape sealant may be used as joint filler if approved by sealant manufacturer.
- B. Use bond breaker where recommended by sealant manufacturer and in the bottom of joints to prevent 3-sided joint sealant adhesion.
- C. Seal joints around window, door and louver frames, expansion joints, and elsewhere as indicated.
- D. Joint Sealant Materials: Follow manufacturer's recommendation and instructions, filling joint completely from back to top, without voids.
- E. Joints: Tool slightly concave after sealant is installed.
 - 1. When tooling white or light color sealant, use a water wet tool.
 - 2. Finish joints free of air pockets, foreign embedded matter, ridges, and sags.
- F. Tape Sealant: Compress to 50 percent of expanded thickness and install in accordance with manufacturer's instructions.

3.4 CLEANING

- A. Clean surfaces next to the sealed joints of smears or other soiling resultant of sealing application.
- B. Replace damaged surfaces resulting from joint sealing or cleaning activities.

CONFORMED SET

DECEMBER 2020

+ + END OF SECTION + +

07900-4

CITY OF MORRO BAY
WRF LIFT STATION & OFFSITE PIPELINES
17-082

BID SET
MAY 2020

SECTION 08100**METAL DOORS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Provide and install metal doors.

1.2 SUBMITTALS

- A. Shop Drawings: Applicable information for each type of door and frame, including:
1. Frame conditions, complete anchorage details, dimensions, glazing, fire ratings, etc.
 2. Reference door numbers used on Drawings and in Door Schedule on shop drawings.

1.3 DELIVERY, STORAGE, AND HANDLING

- A. Identify each door with number used on Drawings and in Door Schedule.
- B. Store doors upright, in protected dry area and provide for air circulation around each door. Store doors at least 4-inches off of the floor to prevent water damage and wear of door bottom on floor. Do not cover doors in plastic tarps or other storage provisions which promote water damage and rust. If door packaging becomes wet, remove it immediately.

PART 2 - PRODUCTS**2.1 HOLLOW STEEL DOORS**

- A. General:
1. Doors and Frames shall conform to SDI 100, except as modified herein.
 2. Doors and Frame cutouts, anchors and reinforcement shall conform to SDI 107 and ANSI A115 to receive hardware as specified elsewhere.
- B. Materials:
1. Doors, frames and frame components shall be manufactured from commercial quality carbon steel conforming to ASTM designation A366, with an A60 zinc-iron alloy coating conforming to ASTM designation A653.
- C. Hollow Metal Doors:
1. Flush Panel Doors: 16-gauge, Grade III, Model 1, with honeycomb or polyurethane core.
 2. Trim for doors with glass cutouts shall be 18-gauge galvanized steel. If the trim is installed using screws, screws shall be only visible from the non-secure side of the door. Trim shall be flush or shall protrude no more than 1/16" from the door face, and shall be the same on both sides of the door.
 3. All doors shall have flush end closure at top of doors to eliminate moisture penetration. Door tops shall no have holes or openings.

08100-1

4. All doors shall include a self-adjusting, concealed door sweep installed in the bottom channel. The bottom seal shall not include springs.
 5. Glass Lites
 - a. Provide door with a narrow lite (N) located along the lock edge of the door with exposed glass dimensions of approximately 4" x 25" where indicated in the door schedule.
 - b. Provide door with a half glass (G) where indicated in the door schedule.
 - c. Glazing:
 - 1) All glass shall be ¼" thick fully tempered safety glass, manufactured by a horizontal process.
 - 2) The tempered glass shall meet, at the time of installation, quality and strength requirements of ASTM C-1036 and ASTM C-1048 and the safety criteria of CPSC 16 CFR 1201 and ANSI Z97.1-1984.
 - 3) Glass shall be appropriate for service in environmental conditions from -10 degrees Fahrenheit air temperature to 130 degrees Fahrenheit air temperature.
 - 4) Glass shall be labeled as follows: Each pane of safety glass shall be identified by a label specifying the labeler, whether the manufacturer or installer, the type and thickness of glass, and the safety glazing standard with which it complies. Label shall be acid etched, sand blasted, ceramic fired or an embossed mark or otherwise written so that it cannot be removed without destroying the glass.
 6. Louvers
 - a. Provide door with a louver and louver type as shown in the door schedule.
 - 1) Louvers are of the insert type designed to be mounted into a cutout in the door and an overlapping frame. Insert type louvers shall be securely fastened to the door to provide security.
 - 2) Frames for louvers, 20-Gauge minimum.
 - 3) Blades for louvers, 24-Gauge minimum.
 - 4) Provide bird or insect screen.
 - 5) Provide prime painted, except when the louver is used in a factory prefinished door, in which case the louver will be finished painted with a color to match the door.
 - 6) Provide zinc coated louvers in exterior doors.
 7. Door swing shall be as shown on Drawings.
- D. Metal Frames:
1. Products of hollow metal door manufacturer, constructed to coordinate with hollow metal door.
 2. Frames for Doors 14-Gauge: Welded type, of cross-section shown.
 3. Finished size, shape, and profile of frame members as shown.
 4. Concealed fasteners or welding are preferred to through-the-face fasteners.
 5. Identification: Stamp opening number, as shown on Drawings and in Door Schedule, on center hinge reinforcement of each frame.
- E. Finish:
1. Doors and frames shall be cleaned and phosphate treated.
 2. Doors and frames shall be galvanized with A60 or G60 zinc coating in accordance with ASTM A525 (Wipe Coat galvanized coating is not acceptable).
 3. Doors and frames shall be finished with a baked-on rust-inhibiting primer in accordance with ANSI A250.3. Doors shall be field finished in accordance with Section 09900.

08100-2

- F. Manufacturers and Models:
1. Steelcraft L series with F series frame
 2. Curries 727 series with M type frame
 3. Or equal.

PART 3 -**PART 3 - EXECUTION****3.1 PREPARATION**

- A. Clean and prepare rough opening to accept metal frame. Identify and report any deficiencies in rough opening to Engineer prior to installing metal frame.

3.2 INSTALLATION

- A. Metal Frames:
1. Set all frames in accordance with SDI 105.
 2. Set welded frames in position prior to beginning partition work.
 3. Brace frames until permanent anchors are set.
 4. Set anchors for frames as work progresses.
 5. Install anchors at hinge and strike levels.
 6. Use temporary setting spreaders at all locations.
 7. Use intermediate spreaders to assure proper door clearances and header braces for grouted frames.
 8. Install frames in prepared openings in concrete and masonry walls using countersunk bolts and expansion shields.
- B. Hollow Metal Doors:
1. Install hollow metal doors in frames using hardware specified in Section 08700 Door Hardware.
 2. Clearances at edge of doors
 - a. Between door and frame at head and jambs: 1/8 inch.
 - b. At meeting edges pairs of doors and at mullions: 1/8 inch.
 - c. At transom panels, without transom bars: 1/8 inch.
 - d. At sills without thresholds: 5/8 inch maximum above finish floor.
 - e. At sills with thresholds: 1/8 inch above threshold.

3.3 ADJUSTMENT AND CLEANING

- A. Remove dirt and excess sealants, mortar or glazing compounds from exposed surfaces.
- B. Adjust moving parts for smooth operation. Use shims if necessary to allow for proper closing.
- C. Fill all dents, holes, etc. with metal filler and sand smooth and flush with adjacent surfaces - Reprime/paint to match finish.

+ + END OF SECTION + +

08100-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 08305
ACCESS HATCHES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Scope: Provide all materials, equipment, and accessories to furnish and install the following access hatches:
 - 1. Flush floor hatches

1.2 QUALITY ASSURANCE

- A. Warranty: Provide a 1-yr warranty on all hatches from date of installation. Warranty shall cover defects in workmanship, design, and materials. If any component should fail during the warranty period, it shall be corrected and the unit restored to service at no expense to the OWNER.

1.3 DESIGN REQUIREMENTS

- A. In Rights-of-way, service roads, and driveways, and where designated on the drawings, hatches shall be designed for H20 wheel loading.
- B. In other locations and where designated as "Standard" hatches shall be designed for a live load of 300 pounds per square foot.
- C. Hatches shall include a recessed hasp to allow for installation of a padlock.

1.4 SUBMITTALS

- A. Shop Drawings:
 - 1. Detailed drawings showing component and assembly dimensions, location of connections, weights of all equipment, installation details, and accessory details.
- B. Product Data:
 - 1. Descriptive literature, specifications, and engineering data.
 - 2. Materials of construction for all components and accessories.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. All equipment and accessories shall be properly protected during shipment such that no damage or deterioration shall occur between shipment and installation.
 - 1. Finished surfaces shall be protected by wooden blanks.
 - 2. Finished ferrous metal surfaces not painted shall be protected from corrosion.
 - 3. Each box and package shall be clearly marked with the contents and total weight.
- B. Manufacturer shall provide any special storage and handling instructions.

08305-1

PART 2 - PRODUCTS**2.1 MANUFACTURERS**

- A. General: Acceptable manufacturers are listed below. Other manufacturers of equivalent products may be submitted.
 - 1. Aluminum hatches:
 - a. The Bilco Co.
 - b. Babcock-Davis, Inc.
 - c. Or Equal.
 - 2. Steel hatches:
 - a. The Bilco Co.
 - b. Babcock-Davis Hatchways, Inc.
 - c. Or Equal.

2.2 MATERIALS

- A. Unless otherwise noted, all access hatches shall be constructed of aluminum.
- B. Aluminum hatches shall be provided with aluminum frames and stainless-steel hardware.
- C. Steel hatches and frames shall be galvanized and provided with galvanized or cadmium-plated hardware.

2.3 FLUSH FLOOR HATCHES

- A. General
 - 1. Doors shall be pre-assembled from the manufacturer.
 - 2. Covers shall open 90 degrees and be equipped with a hold open arm which automatically locks the cover in the open position.
 - 3. Covers shall be fitted with the required number and size of compression spring operators. Springs shall have an electrocoated acrylic finish. Spring tubes shall be constructed of a reinforced nylon 6/6-based engineered composite material.
 - 4. A removable exterior turn/lift handle with a spring loaded ball detent shall be provided to open the cover and the latch release shall be protected by a flush, gasketed, removable screw plug.
 - 5. Hardware:
 - a. Hinges shall pivot so that the cover does not protrude into the channel frame.
 - b. A Type 316 stainless steel snap lock with fixed handle shall be mounted to the underside of the cover.
 - 6. Entire door and all hardware components shall be highly corrosion resistant.
 - 7. Doors shall be sealed with an EPDM gasket for odor control purposes.
- B. Fall Protection Grating:
 - 1. Provide all hatches with Fall Protection Grating. Refer to specifications section 10520 for Fall Protection Grating requirements.
- C. **H06-001**: Double leaf flush floor hatch for use in driving areas (over 42-inch by 42-inch)
 - 1. Furnish and install where indicated on drawings flush floor access hatch. The hatch shall be double leaf. The door shall be pre-assembled from the manufacturer.
 - 2. Service: Floor hatch for use in off-street locations receiving vehicular traffic.
 - 3. Features:

08305-2

- a. Material:
 - 1) Cover: ¼-in aluminum diamond pattern plate or ¼-in steel diamond pattern plate
 - 2) Frame: ¼-in extruded aluminum or ¼-in steel
 - b. The cover shall be reinforced to support AASHTO H-20 wheel load with a maximum deflection of 1/150th of the span. Manufacturer to provide structural calculations stamped by a registered professional engineer upon request.
 - c. Hinges:
 - 1) Aluminum hatch: Provide heavy forged aluminum hinges with a minimum ¼-in diameter Type 316 stainless steel pin.
 - 2) Steel hatch: Provide heavy forged brass hinges with a minimum 3/8-in diameter Type 316 stainless steel pin
- D. **H06-002:** Double leaf flush floor hatch for use in driving areas (over 42-inch by 42-inch)
- 1. Furnish and install where indicated on drawings flush floor access hatch. The hatch shall be double leaf. The door shall be pre-assembled from the manufacturer.
 - 2. Service: Floor hatch for use in off-street locations receiving vehicular traffic.
 - 3. Features:
 - a. Material:
 - 1) Cover: ¼-in aluminum diamond pattern plate or ¼-in steel diamond pattern plate
 - 2) Frame: ¼-in extruded aluminum or ¼-in steel
 - b. The cover shall be reinforced to support AASHTO H-20 wheel load with a maximum deflection of 1/150th of the span. Manufacturer to provide structural calculations stamped by a registered professional engineer upon request.
 - c. Hinges:
 - 1) Aluminum hatch: Provide heavy forged aluminum hinges with a minimum ¼-in diameter Type 316 stainless steel pin.
 - 2) Steel hatch: Provide heavy forged brass hinges with a minimum 3/8-in diameter Type 316 stainless steel pin
- E. **H06-003:** Single leaf flush floor hatch for use in driving areas (up to 42-inch by 42-inch)
- 1. Furnish and install where indicated on drawings flush floor access hatch. The hatch shall be single leaf.
 - 2. Service: Floor hatch for use in off-street locations receiving vehicular traffic.
 - 3. Features:
 - a. Material:
 - 1) Cover: ¼-in aluminum diamond pattern plate or ¼-in steel diamond pattern plate
 - 2) Frame: ¼-in extruded aluminum or ¼-in steel
 - b. The cover shall be reinforced to support AASHTO H-20 wheel load with a maximum deflection of 1/150th of the span. Manufacturer to provide structural calculations stamped by a registered professional engineer upon request.
 - c. Hinges:
 - 1) Aluminum hatch: Provide heavy forged aluminum hinges with a minimum ¼-in diameter Type 316 stainless steel pin.
 - 2) Steel hatch: Provide heavy forged brass hinges with a minimum 3/8-in diameter Type 316 stainless steel pin
- F. **H10-001:** Double leaf flush floor hatch for use in driving areas (over 42-inch by 42-inch)
- 1. Furnish and install where indicated on drawings flush floor access hatch. The hatch shall be double leaf. The door shall be pre-assembled from the manufacturer.

08305-3

2. Service: Floor hatch for use in off-street locations receiving vehicular traffic.
 3. Features:
 - a. Material:
 - 1) Cover: ¼-in aluminum diamond pattern plate or ¼-in steel diamond pattern plate
 - 2) Frame: ¼-in extruded aluminum or ¼-in steel
 - b. The cover shall be reinforced to support AASHTO H-20 wheel load with a maximum deflection of 1/150th of the span. Manufacturer to provide structural calculations stamped by a registered professional engineer upon request.
 - c. Hinges:
 - 1) Aluminum hatch: Provide heavy forged aluminum hinges with a minimum ¼-in diameter Type 316 stainless steel pin.
 - 2) Steel hatch: Provide heavy forged brass hinges with a minimum 3/8-in diameter Type 316 stainless steel pin
- G. **H20-001**: Double leaf flush floor hatch for use in driving areas (over 42-inch by 42-inch)
1. Furnish and install where indicated on drawings flush floor access hatch. The hatch shall be double leaf. The door shall be pre-assembled from the manufacturer.
 2. Service: Floor hatch for use in off-street locations receiving vehicular traffic.
 3. Features:
 - a. Material:
 - 1) Cover: ¼-in aluminum diamond pattern plate or ¼-in steel diamond pattern plate
 - 2) Frame: ¼-in extruded aluminum or ¼-in steel
 - b. The cover shall be reinforced to support AASHTO H-20 wheel load with a maximum deflection of 1/150th of the span. Manufacturer to provide structural calculations stamped by a registered professional engineer upon request.
 - c. Hinges:
 - 1) Aluminum hatch: Provide heavy forged aluminum hinges with a minimum ¼-in diameter Type 316 stainless steel pin.
 - 2) Steel hatch: Provide heavy forged brass hinges with a minimum 3/8-in diameter Type 316 stainless steel pin

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install in accordance with the manufacturer's recommendations and approved shop drawings. Install level and square with other construction, without warp or rack.
- B. Unless otherwise shown, hatches shall be cast integrally with concrete decks, and shall not be grouted in later.
- C. Coordinate precise location with equipment to be accessed thereby.
- D. Aluminum surfaces shall be protected with two heavy coats of asphaltic or zinc chromate paint, where they are in contact with concrete or masonry.

+ + END OF SECTION + +

08305-4

SECTION 08700
DOOR HARDWARE

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: Provide all materials, equipment, and accessories to furnish and install door hardware.

1.2 SUBMITTALS

- A. Shop Drawings:
1. Product Data: Manufacturers' literature for each item of finish hardware required herein, clearly marked.
 2. Finish Hardware Schedule: Furnish complete and detailed schedule, show product items, numbers, and finishes for all hardware for each separate opening.
 3. Special Tools: Provide listing and description of usage.

1.3 QUALITY ASSURANCE

- A. Qualifications of Supplier: A recognized supplier of architectural finish hardware, with warehousing facilities, who has been furnishing hardware in the vicinity of the Project for not less than 5 years, and who is, or who employs, an architectural hardware consultant.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Provide secure storage for all finish hardware until installation is made.
- B. Before delivery, clearly identify and tag each item of hardware with respect to specified description and location of installation.

1.5 SPECIAL TOOLS

- A. Provide two sets of special tools for installation and maintenance of hardware.

PART 2 - PRODUCTS**2.1 DOOR HARDWARE**

- A. Provide all door hardware from a single manufacturer in order to have consistency in appearance, function and maintenance procedures.
- B. Fasteners:
1. All fasteners shall be type 304 stainless steel.
- C. Butt Hinges:
1. Conforming to ANSI A156.1-88.
 2. Quantity per Door Leaf (Minimum):

08700-1

DOOR HEIGHT	MINIMUM NUMBER OF HINGES PER LEAF
Up to 5'-0"	2 ea
5'-0" to 7'-7"	3 ea
7'-7" to 10'-0"	4 ea
10'-0" to 12'-6"	5 ea
Over 12'-6"	One for every 30" of door height, rounding up

3. Hinge Size: Except as otherwise specified or as required to comply with UL and NFPA, provide hinges of the following sizes:
 - a. Up to 36" wide: 4½" heavy weight.
 - b. Over 36" to 48" wide: 5" heavy weight.
 - c. Over 48" wide: 6" heavy weight.
 4. Types of Hinges: Full-mortise type, ball-bearing hinges swaged for mortise applications, inner leaf beveled, square cornered.
 5. Width: Minimum for clearance of trim and 180-degree swing.
 6. Exterior Hinges: Non-removable pin.
 7. Joint Tolerance: 0.012-inch maximum, gauged in CLOSED position.
 8. Material: type 304 stainless steel.
 - a. Finish: Satin stainless steel No. 630.
 9. Hinge Manufacturers and Models:
 - a. Stanley FBB191-32D
 - b. McKinney TB2314
 - c. Or Equal.
- D. Locks and Latch Sets:
1. Tactile Warning: Knurl knob backs and lever handles for touch identification; ANSI A117.1, Section 4.29.3.
 2. Materials: Type 304 stainless steel.
 - a. Finish: Satin stainless steel No. 630.
 3. Lock and Latch Set Manufacturers and Models:
 - a. Sargent; 8245-J.
 - b. Schlage; L9456P-03.
 - c. Or Equal.
- E. Coordinator:
1. Provide coordinator at all double doors.
 2. Coordinator Manufacturers and Models:
 - a. Ives COR7G.
 - b. Or Equal.
- F. Closers:
1. Provide closers on all exterior doors or as indicated in the door schedule which comply with ANSI A156.4.
 2. Size closers in accordance with manufacturer's standards. Mount regular arm closers on pull side of doors. Mount parallel arm closers on push side of doors. On pair of doors provide closer on active leaf only, unless noted otherwise.
 3. Closer Manufacturers and Models:
 - a. LCN 4110 Series
 - b. Sargent 351 Series
 - c. Or Equal.
- G. Thresholds:

08700-2

1. Provide threshold at each door as indicated in the door schedule or shown on the drawings: One-piece full width of opening; extend beyond jamb where indicated.
 2. Provide with stainless steel machine screws in threaded expansion anchors at concrete.
 3. Coordinate thresholds with the door shoes.
 4. Finish: Mill finish aluminum, unless indicated otherwise.
 5. Threshold Manufacturers and Models:
 - a. Pemko 274X4AFG
 - b. Reese Enterprises, Inc. S407A
 - c. Or approve equal
- H. Door Shoes:
1. Provide door shoes at each door indicated to have a threshold. Provide vinyl or neoprene seal with a depth coordinated with the threshold. Provide an integral drip cap at exterior doors. Attach door shoes to doors in accordance with the manufacturer's installation instructions.
 2. Finish: Mill finish aluminum, unless indicated otherwise.
 3. Door Shoe Manufacturers and Models:
 - a. Pemko 216 at exterior doors and 217 at interior doors
 - b. Reese Enterprises, Inc. DB595 at exterior doors and DB594 at interior doors
 - c. Or approved equal
- I. Weatherproofing:
1. Provide complete weatherstrip system including rubber or vinyl at jambs and head at exterior doors and interior doors required to be sealed or airtight.
 2. Provide astragal seal for 2-leaf doors.
 3. All other weatherstripping necessary to provide a weather-sealed door system which does not allow air or moisture movement through the gap between the door and frame.
- J. Rain Drip:
1. Provide overhead rain drip guard attached to the top of the door frame at all exterior doors. Attach to the door frame in accordance with the manufacturer's installation instructions.
 2. Finish: Clear anodized aluminum, unless indicated otherwise.
 3. Drip Cap Manufacturers and Models:
 - a. Pemko 346
 - b. Reese Enterprises, Inc. R201
 - c. Or approved equal
- K. Stops and Holders:
1. Provide stops and holders for all doors with closers in accordance with ANSI A156.16.
 2. Finish: Satin chromium-plated No. 626.
 3. Stop/Holder Manufacturers and Models:
 - a. Ives WS445
 - b. Hager Companies 256
 - c. Or Equal.

2.2 KEYING

- A. Coordinate Keying System with OWNER. Provide master-keying and local-keying to match OWNER's keying system.

08700-3

- B. Provide removable construction core system for use during construction.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. In accordance with manufacturer's written instructions.
- B. Make Work neat and secure, develop full strength of components, and provide proper function.
- C. Prevent marring, scratching, or otherwise damaging adjacent finishes during hardware installation.
- D. Latchbolts: Install to engage in strikes automatically, whether activated by closers or manually. In no case shall additional manual pressure be required to engage latchbolt in strike.
- E. Wall Mounted Hardware: Install over solid structural backing or solid blocking in hollow walls.
- F. Thresholds:
 - 1. Cope ends neatly to profile of jamb.
 - 2. Set in sealant and seal ends to jambs.
- G. Hardware: Adjust for easy, noise-free operation.
- H. Replace damaged hardware items.

3.2 MOUNTING DIMENSIONS

- A. Standard Door Hardware Locations: As recommended and published by the Door and Hardware Institute, except as noted or detailed otherwise.
- B. Door Silencers: Install 3 inches from top and bottom of jamb and 1 inch above strike at single doors, and 3 inches from edges of doors in head for pairs of doors.

3.3 MANUFACTURER'S SERVICES

- A. Deliver permanent lock cores to the site.
- B. Remove temporary construction cores and insert permanent cores.
- C. Inspect each lock set to ensure permanent cores are operating satisfactorily.
- D. Deliver to OWNER change and control keys for the permanent system.
- E. Return temporary construction cores to the manufacturer.

3.4 PROTECTION

- A. Cover and protect exposed surfaces of hardware during installation and until Substantial Completion.
- B. Fit, dismantle, and reinstall finish hardware as required for finish painting work.
- C. Protect and prevent staining of hardware during construction in accordance with manufacturer's recommendations.
- D. Remove protective measures and permanent lock cylinders installed prior to final cleaning.

+ + END OF SECTION + +

08700-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 09250**GYPSUM WALLBOARD****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Furnish all materials, labor, equipment and incidentals required to install gypsum wallboard.

1.2 QUALITY ASSURANCE

- A. General: Regardless of the minimum specifications herein, utilize materials and applications recommended by the manufacturer.
- B. Applicator's Qualifications: Use only workers regularly employed in this type of work who can show experience in the application of similar materials and the specific systems specified.

1.3 SUBMITTALS

- A. Shop Drawings:
 - 1. Control joint pattern proposed for gypsum wallboard.
 - 2. Control joint pattern proposed for gypsum soffit.
 - 3. Manufacturer's list of items and materials proposed for use, with descriptive literature for each system used.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Delivery of Materials:
 - 1. Deliver materials to the project site with manufacturer's labels intact and legible.
 - 2. Deliver fire rated materials bearing testing agency label and required fire classification numbers.
- B. Storage and Handling of Materials:
 - 1. Store materials inside under cover, stack flat, off floor.
 - 2. Stack gypsum wallboard so that long lengths are not over short lengths.
 - 3. Avoid overloading floor system.
 - 4. Store adhesives and finishing compounds in dry areas, and protect against freezing at all times.

1.5 ENVIRONMENTAL REQUIREMENTS

- A. Temperature:
 - 1. In areas receiving gypsum wallboard installation, maintain temperature range between 55 and 70 degrees F for 24 hours before, during, and after gypsum wallboard and joint treatment application.
 - 2. In areas receiving veneer plaster, where outside air temperature is less than 50 degrees F, maintain interior temperature range between 50 degrees F and 80

09250-1

degrees F for a period of 1 week before, during, and 1 week after application of veneer plaster, base, and joint treatment.

B. Ventilation:

1. Provide ventilation during and following adhesives and joint treatment applications.
2. Use temporary air circulators in enclosed areas lacking natural ventilation.
3. Keep air circulation at a minimum level during veneer plastering to avoid excessive drying.
4. Under slow drying conditions, allow additional drying time between coats of joint treatment.
5. Protect installed materials from drafts of ambient air during hot, dry weather.

PART 2 - PRODUCTS

2.1 GYPSUM WALLBOARD

- A. Regular Board: ASTM C36, Type X, 5/8 inch thick with tapered edges.
- B. Mold and Moisture Resistant Board: ASTM C1396, 1/2 inch thick with tapered edges.

2.2 FASTENERS FOR GYPSUM WALLBOARD

- A. Screws: ASTM C1002, self-drilling, self-tapping, bugle head, for use with power-driven tool.
1. Type S, 1-inch long for gypsum wallboard to sheet metal.
 2. 1¾-inch long for gypsum wallboard to wood framing.
- B. Nails: ASTM C514, F547, F1667
1. Reference IBC section 2508 for nail sizes in wood framing.

2.3 JOINT TREATMENT

- A. Joint Tape for General Interior Applications: ASTM C475, perforated paper tape.
- B. Joint Compound for General Interior Applications: ASTM C475, all-purpose, ready-mixed compound.

2.4 ANCILLARY MATERIALS

- A. Adhesives: As recommended by gypsum wallboard manufacturer for intended use.

2.5 TRIM ACCESSORIES

- A. Zinc-Coated Metal, ASTM C1047:
1. Corner Bead: 1-1/4 inch by 1-1/4 inch:
 - a. United States Gypsum; Dur-A-Bead.
 - b. Award Metals; standard corner beads.
 - c. Clark Dietrich; standard corner beads.
 2. Edge Trim:
 - a. United States Gypsum; L-Trim and J-Trim.
 - b. Award Metals; L-Bead and J-Bead.

09250-2

- c. Clark Dietrich: L-Trim and J-Trim.
- 3. Metal Control Joint:
 - a. United States Gypsum: No. 093.
 - b. Phillips: 093 control joint.
 - c. Clark Dietrich: No. 093.
- B. Vinyl Wall Base, ASTM F1861:
 - 1. Profile: Standard Cove
 - 2. Gauge: 1/8-inch
 - 3. Height: 4-inch
 - 4. Provide factory corners and all inside and outside corners.
 - 5. Adhesive: As recommended by manufacturer of wall base.
 - 6. Manufacturer:
 - a. Roppe Corporation
 - b. Johnsonite
 - c. Or approved equal

2.6 LIGHT-GAUGE METAL FRAMING ACCESSORIES

- A. Z Furring: Galvanized 20-gauge, 1-1/2 inch depth.

2.7 NONSTRUCTURAL FRAMING MEMBERS

- A. ASTM C645, 20-gauge galvanized C-studs with 1-5/8 inch flanges, and ancillary items for interior wall framing, shaft walls, and ceiling framing.
- B. Dry wall studs, tracks, shaft wall studs, Z-furring channels, and accessories.
 - 1. Cemco.
 - 2. Clark Dietrich
 - 3. United Metal Products.

2.8 SPRAY TEXTURE

- A. Interior Walls and Ceilings:
 - 1. United States Gypsum; Texture I sand finish.
 - 2. Gold Bond; Wall Spray texture finish.

2.9 FIBERGLASS-MAT FACED GYPSUM BACKING BOARD

- A. Fiberglass-Mat Faced Gypsum Backing Board: ASTM C1178:
- B. Water-resistant treated core with glass mat moisture protectant coating and embedded glass mats, both sides, and face side surfaced with heat-cured copolymer water- and vapor-retarding coating.
- C. Thickness: 1/2-inch
- D. Fasteners:
 - 1. Screws: 1-1/4 inch, type S, Hi-Lo for wood or 22- to 25-gauge steel framing. 1 1/4-inch, Type S-12, for 14- to 20-gauge steel framing. 1-15/16 inch, type S-12, Pilot Point for steel joists.

- 2. Nails: 1-1/4 inch galvanized roofing nail with 7/16-inch diameter head for wood framing.
- E. Joint Reinforcement: 2 inches wide, glass fiber, open weave tape, as recommended by manufacturer.
- F. Joint Compound: Chemically curing, polyindurate type material, as recommended by manufacturer.
- G. Manufacturer and Product: G-P Gypsum Corp., DENS-SHIELD TILE BACKER.

2.10 ACCESS PANELS

- A. Architectural grade prime coated flush steel panel and frame with concealed hinges and screwdriver-operated locking device.
- B. Provide frame type and anchors to suit opening conditions.
- C. Sizes Not Indicated on Drawings:
 - 1. Smallest standard size that will permit ready access and removal of working parts required for maintenance.
 - 2. Not less than 8 inches square.
- D. Manufacturers:
 - 1. Milcor.
 - 2. Acudor.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Inspect surfaces to receive gypsum wallboard and related materials before beginning work and report to ENGINEER any defects in such work which will adversely affect the quality of work specified herein.

3.2 PREPARATION

- A. General: Provide, install, and maintain necessary scaffolding, staging, trestles, planking, and temporary heating, lighting, and ventilation as necessary for the duration of the gypsum wallboard work.
- B. Protection: Protect work of other trades.
- C. Coordination:
 - 1. Coordinate work with that of other trades. Check specifications and drawings of other trades to determine parts of work requiring coordination.
 - 2. Cut and repair gypsum wallboard systems for installation of omitted work.
- D. Surface Preparation: Repair defective surfaces prior to starting work. Prepare as specified for application of specific materials.

09250-4

3.3 APPLICATION OF GYPSUM WALLBOARD

- A. Inspection and Preparation:
 - 1. Check framing for accurate spacing and alignment.
 - 2. Verify that spacing of installed framing does not exceed maximum allowable for thickness of gypsum wallboard to be used.
 - 3. Verify that frames are set for thickness of gypsum wallboard to be used.
 - 4. Do not proceed with installation of gypsum wallboard until deficiencies are corrected and surfaces to receive gypsum wallboard are acceptable.
 - 5. Protrusions from framing, twisted framing members, or unaligned members must be repaired before installation of gypsum wallboard is started.
- B. General:
 - 1. Meet requirements of ASTM C840 and GA-216.
 - 2. Joints: Use gypsum wallboard of maximum lengths to minimize end joints. Stagger end joints when they occur. Locate end joints as far as possible from center of wall or ceiling. Abut gypsum wallboard without forcing. Neatly fit ends and edges of gypsum wallboard. Do not place butt ends against tapered edges.
 - 3. Support ends and edges of gypsum wallboard panels on framing or furring members except for face layer of double layer and where ends are back blocked and floated.
 - 4. Use metal edge trim where gypsum wallboard abuts another material and where shown or noted on Drawings.
 - 5. Use gypsum fiberglass-mat faced gypsum backing board in toilet and shower walls, behind ceramic tile, and elsewhere as indicated on Drawings.
 - 6. Follow manufacturer's recommendation of good practice.
- C. Over Framing:
 - 1. Apply gypsum wallboard first to ceiling and then to walls for single layer horizontal application.
 - 2. Use vertical application for fire-rated walls.
 - 3. Fasten gypsum wallboard securely to framing using double nailing, screw, or adhesive method.

3.4 JOINT SYSTEM

- A. Interior Gypsum Wallboard: Conform to ASTM C840.
- B. Required: On exposed gypsum wallboard, under ceramic tile and wall covering, and behind casework.
- C. Prefill: Fill V-grooves formed by abutting rounded edges of gypsum wallboard with prefill joint compound. Fill V-joint flush and remove excess compound beyond groove. Leave clear depression to receive tape. Permit prefill joint compound to harden prior to application of tape.
- D. Taping and Finishing Joins:
 - 1. Taping or Embedding Coat: Apply compound in thin, uniform layer to joints and angles to be reinforced. Apply reinforcing tape immediately. Center tape over joint and seat tape into compound. Leave approximately 1/64-inch to 1/32-inch compound under tape to provide bond. Apply skim coat immediately following tape embedment but not to function as fill or second coat. Fold tape and embed in angles to provide true angle. Dry embedding coat prior to application of fill coat.

09250-5

2. Filling Coat: Apply joint compound over embedding coat. Fill taper flush with surface. Apply fill coat to cover tape. Feather out fill coat beyond tape and previous joint compound line. For joints with no taper, feather out at least 4 inches on either side of tape. Do not apply fill coat on interior angles. Allow fill coat to dry prior to application of finish coat.
 3. Finishing coat: Spread joint compound evenly over and beyond fill coat on joints. Feather to smooth uniform finish. Apply finish coat to tapes angles to cover tape and taping compound. Sand final application of compound to provide surface ready for decoration.
 4. Filling and Finishing Depressions:
 - a. Apply joint compound as first coat to fastener depressions. Apply at least two additional coats of compound after first coat is dry. Leave filled and finished depressions level with plane of surface.
- E. Finishing Beads and Trim:
1. First Fill Coat: Apply joint compound to bead and trim. Feather out from ground to plane of the surface. Dry compound prior to application of second fill coat.
 2. Second Fill Coat: Apply joint compound in same manner as first fill coat. Extend beyond first coat onto face of gypsum wallboard. Dry compound prior to application of finish coat.
 3. Finish Coat: Apply joint compound to bead and trim. Extend beyond second fill coat. Feather finish coat from ground to plane of surface. Sand finish coat to provide flat surface ready for decoration.

3.5 FINAL FINISHES

- A. Levels of Finish: Conform to GA-214.
- B. Level 4:
 1. Taping, filling, and finishing coats plus two separate coats applied over joints, angles, fastener heads, and trim accessories.
 2. Sand between coats and after last coat.
- C. Level 5:
 1. Same as Level 4, plus a thin, smooth, uniform skim coat of joint compound, or product specially formulated for this purpose, over entire surface.
 2. Produce surfaces free of tool marks and ridges, ready for decoration.
 3. Use on surfaces not indicated otherwise, those indicated to receive gloss, semi-gloss, and nontextured flat paints, and where indicated.

3.6 ADJUST AND CLEAN

- A. Clean: Remove droppings or texture overspray from walls, windows, and floor, leaving room clean for following trades.

3.7 ACCESS PANELS

- A. Install in accordance with manufacturer's printed instructions.

+ + END OF SECTION + +

09250-6

SECTION 09875**CONCRETE COATINGS FOR WASTEWATER STRUCTURES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Provide and install coatings on all interior concrete surfaces – including ceilings, as indicated herein, in the Specifications and on the Drawings.
- B. System shall be a multi-component resin-based mortar lining system specifically designed to protect the concrete surfaces of municipal wastewater structures from chemical attack. The main purpose of this membrane is to offer protection of the substrate from chemicals or gases that might cause deterioration.

1.2 QUALITY ASSURANCE

- A. Experience: Both coatings manufacturer and coatings installer shall have a minimum 5 years' experience in production and application, respectively, of specified products. Coatings installer shall be approved and endorsed, in writing, by coatings manufacturer.
- B. Regulations: Meet federal, state, and local requirements which apply to the work, including, but not limited to those regulations limiting the emission of volatile organic compounds.
- C. Coatings Manufacturer Recommendations: Coatings installer shall follow all recommendations of the coatings manufacturer regarding storage, handling, surface preparation, application of coatings, re-coat times, environmental conditions during storage, preparation and application of coatings, and all other coatings manufacturer recommendations.
- D. Warranty: Both Coatings Manufacturer and Coatings Installer shall provide a 1-year complete replacement warranty for all coatings. Manufacturer shall provide 5-year warranty for long-term performance of coatings in addition to 1-year warranty.

1.3 SUBMITTALS

- A. Shop Drawings: Coatings Manufacturer shall submit for approval the following:
 - 1. Copies of manufacturer's technical information and application instructions for each material proposed for use. Specify exactly which product is being proposed for each coating type (as specified below). This may be accomplished through a reference table along with information on the various products, or by a separate, tabbed section with information on products being submitted for each system in a separate tab of a binder. Submittal of general manufacturer's literature without detailing which product is proposed for each paint system will be unacceptable.
 - 2. Letter from the Coatings Manufacturer certifying the Coatings Installer as factory trained and qualified.
 - 3. Furnish copies of the final, approved submittal to the coatings installer so that it is clear which product is to be used for which each system.

4. Test reports from an independent testing laboratory confirming chemical resistance of coating for chemicals common to municipal wastewater treatment facilities.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Protection: Protect all pre-coated items from coating damage during shipping.
- B. Store products in accordance with manufacturer's directions.
- C. Store products in a neat, orderly fashion. Protect products from damage. Protect storage area from damage from stored products.

PART 2 - PRODUCTS

2.1 PRODUCT AND MANUFACTURER:

- A. Coating Systems
 1. Hydro-Pox, Inc.
 - a. Primer: Hydro-Pox 251
 - b. Surface Material: Hydro-Pox 212 GL
- B. Global Ecotechnologies, Inc.
 1. Underlayment: Endura-Flex 1200P with 1200F Filler
 2. Primer: Endura-Flex 1200P
 3. Surface Material: Endura-Flex 1988
- C. Environmental Coatings, LLC
 1. Surface Material: Sewer Shield 100 trowelable grade
- D. Sauereisen SewerGard
 1. Underlayment: Sauereisen Filler Compound No. 209
 2. Surface Material: Sauereisen No. 210S
- E. Sherwin Williams
 1. Underlayment: Duraplate 2300
 2. Surface Material: Duraplate 6100
- F. Or equal.

2.2 SERVICE CONDITIONS AND PERFORMANCE

- A. Provide a 100% solids, VOC-free resin based coating system specifically formulated for wastewater applications.
 1. The lining system shall be a non-sagging application permitting repair of vertical, horizontal, and overhead surfaces.
 2. The lining system shall provide an impermeable, high-strength, corrosion-resistant, monolithic lining for manholes, grit chambers, wetwells, wastewater channels, and related structures subject to attack from hydrogen sulfide and acid generated by microbiological sources.

09875-2

- B. The lining system, including underlayment, primer and surface materials, shall be from a single manufacturer.
- C. Chemical Resistance (ASTM D 1308):
 - a. Reagent: 6% sulfuric acid solution.
 - b. Film Integrity: Unaffected.
- D. Coating Thickness: 125 mils thick, minimum.
- E. Texture: Semi-smooth for all surfaces.

2.3 PROPERTIES

- A. Either trowel or spray application is acceptable provided the Installer follow all Manufacturer recommendations.
- B. Physical Properties
 - 1. Bond strength to dry or damp concrete: Failure in concrete per ASTM C4541
 - 2. Compressive strength: >6,700 psi per ASTM C579
 - 3. Flexural strength: >4,600 psi per ASTM C580
 - 4. Tensile strength: >2,400 psi per ASTM C580
 - 5. Moisture absorption: <0.2% per ASTM C413

PART 3 - EXECUTION

3.1 STORAGE, MIXING, AND THINNING OF MATERIALS

- A. Manufacturer's Recommendations: Unless otherwise specified herein, the coating manufacturer's printed recommendations and instructions for thinning, mixing, handling, applying, and protecting its coating materials, for preparation of surfaces for coating, and for all other procedures relative to coating shall be strictly observed.
- B. All protective coating materials shall be used within the manufacturer's recommended shelf life.
- C. Storage: Coating materials shall be protected from exposure to inclement weather, and shall be thoroughly stirred, strained, and kept at a uniform consistency during application.
- D. Mixing:
 - 1. Coatings of different manufacturers shall not be mixed together.
 - 2. Mixing of multi-component coating systems shall be performed in accordance with Manufacturer's recommendations. Components must be mixed in complete batches only and used immediately.

3.2 INSPECTION

- A. Contractor and his installer shall examine the areas and conditions under which concrete coatings are to be placed and notify Engineer, in writing, of any conditions which could be detrimental to the proper and timely installation of the Work. Do not proceed with

the Work until any unsatisfactory conditions have been corrected in a manner acceptable to the Engineer.

3.3 SURFACE PREPARATION

- A. Surface preparation shall not begin until at least 7 days after new concrete has been placed. Chemical resistant coatings shall not be applied until at least 28 days after new concrete has been placed.
- B. All oil, grease, and form release and curing compounds shall be removed by detergent cleaning in accordance with SSPC-SP1 before abrasive blast cleaning. Surface preparation shall be performed in accordance with the latest editions of the following standards:
 - 1. ASTM D-4258: Standard Practice for Surface Cleaning Concrete for Coating
 - 2. ASTM D-4259: Standard Practice for Abrading Concrete
- C. Concrete surfaces and deteriorated concrete surfaces to be coated or lined shall be abrasive blast cleaned in accordance with SSPC SP13 to remove existing coatings, laitance, deteriorated concrete, and to roughen the surface equivalent to the surface of the No. 60 grit flint sandpaper (surface profile of 2.5 to 4 mils).
 - 1. Evaluation of blast cleaned surface preparation work will be based upon comparison of the blasted surfaces with the standard samples available from the NACE, using NACE Standard TM-01-70.
 - 2. The air compressor must be equipped with efficient oil and water traps to ensure that the compressed air is clean and free of oil particles. Refer to NACE procedure for "Blotter Testing" of compressed air.
- D. Concrete surfaces requiring repairs in excess of one-quarter inch ($\frac{1}{4}$ ") depth shall be restored with underlayment, and brought flush with the surface, in accordance with the coating manufacturers' recommendations to provide a continuously smooth and even surface for application of top coat.
- E. Surfaces shall be clean and as recommended by the coating manufacturer before coating or lining is started.
- F. Unless required for proper adhesion, surfaces shall be dry prior to coating. The presence of moisture shall be determined with a moisture detection device such as Delmhorst Model DB, or equal.
- G. All surfaces to be coated shall be completely dry, clean, and contaminant-free prior to application. For polyurethane lining system, after completing surface preparation, surface dryness shall be verified according to ASTM D4263. Any indication of moisture will require an appropriate corrective measure. The surface shall be re-tested after taking the corrective measure.
- H. The concrete surface shall be notched to a depth equal to the total lining thickness with a power grinding tool on the perimeter of all lining termination points. The notch shall be clean and neat.

3.4 APPLICATION

- A. Coatings shall be installed on all surfaces described in Paragraph 1.1.A of this Section, with the systems indicated.
- B. Contractor shall give the Engineer a minimum of 3 days advance notice of the start of any field surface preparation work or coating application Work. All such Work shall be performed only in the presence of the Engineer.
- C. All concrete surfaces shall be coated before installation of any equipment in the area to be protected, including chemical storage tanks, pumps, pipe supports and stands, etc.
- D. Contractor shall supply all temporary heating, cooling or night-time work, if required, and provide protection from the sun, heat, or other environmental conditions which may adversely affect the coatings. Moisture content of concrete, air temperature, relative humidity, and all other conditions shall be within limits recommended by coatings manufacturers.
- E. Contractor shall fill all "bug holes" and other defects in the concrete to which the chemical resistant coatings are applied prior to application of the chemical resistant coatings system in accordance with the recommendations of the coatings manufacturer approved for use in each area. Filler shall be allowed to cure in accordance with manufacturers recommendation.
- F. All surfaces receiving the polyurethane membrane lining shall be visually dry and at least 5°F (3°C.) above the Dew Point prior to starting the installation to prevent moisture entrapment. The Relative Humidity must be below 85%.
- G. Contractor shall apply coating to prepared concrete surface. Contractor shall repeat coating application as recommended by manufacturer for complete coverage. Application and mixing shall be by the method recommended by the coatings manufacturer with the equipment recommended as the best for installing the coating system supplied. Apply the materials in the recommended quantities to provide the dimensional requirements and chemical resistance specified for the system. Successive topcoats shall be applied within 24 hours so as to not exceed the recoat window.
- H. Contractor shall apply termination and expansion joint strips at the junction of the chemical resistant coating with other surfaces and at expansion joints as recommended by the coatings manufacturers.
- I. Wet film thickness shall be monitored throughout the installation by means of frequent measurements with a high-range wet film thickness gage.
- J. Whether spray or trowel application is used, the application shall be according to the principles of good workmanship outlined in SSPC-PA1-82 and shall provide a finish which is continuous, uniform in thickness, and verified free of pores or other defects using electrical discontinuity testing (high voltage spark testing).

3.5 CURING OF COATINGS

- A. Contractor shall provide curing conditions in accordance with the conditions recommended by the coating material manufacturer or by this Section, whichever is the highest requirement, prior to placing the completed coating system into service.
- B. In the case of enclosed hydraulic structures, forced air ventilation, using heated or cooled air if necessary, is required for the application and curing of coatings on the interior surfaces.
 - 1. During curing periods continuously exhaust air from the lowest level of the structure using portable ducting. After all interior coating operations have been completed provide a final curing period for a minimum of 10 days, unless a shorter period is recommended by the coating manufacturer, during which the forced ventilation system shall operate continuously.

3.6 FIELD TESTING

- A. Inspection by the Engineer, or the waiver of inspection of any particular portion of the work, shall not relieve Contractor of its responsibility to perform the Work in accordance with this Specification.
- B. Proper, safe access shall be provided in locations where requested by the Engineer to facilitate inspection. Additional illumination shall be furnished when the Engineer requests. Proper ventilation and atmospheric monitoring shall be provided as well as all other safety equipment and precautions required by OSHA for a safe inspection in all areas.
- C. The Engineer will conduct wet-film thickness testing. Contractor shall recoat any areas found deficient in thickness.
- D. Holiday Testing:
 - 1. Engineer will visually inspect coverage for blisters, sags, and holidays. Contractor shall repair areas identified by this inspection prior to conducting holiday test.
 - 2. Contractor shall holiday test, in the presence of the Engineer, all coated surfaces which will be submerged in water or other liquids, or surfaces which are enclosed in a vapor space in such structures and surfaces coated with any of the submerged and severe service coating systems.
 - a. Holiday testing equipment and procedures shall be done in strict accordance with the latest edition of the NACE "Standard Recommended Practice Discontinuity (Holiday) Testing of Protective Coatings."
 - b. Areas that contain holidays shall be marked and repaired or recoated in accordance with the coating manufacturer's printed instructions and then retested.
 - 3. Holiday detectors shall be of the following type:
 - a. High voltage pulse-type holiday detector such as Tinker & Rasor Model AP-W, D.E. Stearns Co. Model 14/20, or equal shall be used. The unit shall be adjusted to operate at a voltage of at least 110 volts/mil desired thickness.
- E. Any damaged areas, faulty areas, or discontinuities (pinholes) found during quality control inspection shall be repaired in accordance with the Manufacturer's recommendations.

3.7 ADJUSTMENT AND CLEANING

- A. At the completion of the Work, Contractor shall remove all material and debris associated with the Work of this Section.
- B. At the completion of the Work, Contractor shall clean all surfaces to which coatings were applied, as well as all adjacent, uncoated surfaces in a manner acceptable to the Engineer.
- C. Coatings shall be protected from damage until Final Acceptance of all Work in the area that was coated. Coatings damaged in any manner by Contractor prior to Final Acceptance of all Work in that area shall be repaired or replaced in a manner acceptable to the Engineer at no additional cost to the Owner.
- D. Just prior to Final Acceptance of all Work in the area that was coated, Contractor shall clean all coatings, as recommended by the manufacturer, to provide a finished product acceptable to the Owner.

+ + END OF SECTION + +

09875-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 09900

PAINTING

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: Provide and install coatings on all exposed surfaces as indicated herein, in other Specification Sections, and on the Drawings.

1.2 QUALITY ASSURANCE

- A. Experience: Both Coatings Manufacturer and Coatings Installer shall have a minimum 5 years' experience in production and application, respectively, of specified products. Coatings Installer shall be approved and endorsed, in writing, by Coatings Manufacturer.
- B. Regulations: Meet federal, state, and local requirements which apply to the work, including, but not limited to those regulations limiting the emission of volatile organic compounds.
- C. Coatings Manufacturer Recommendations: Coatings Installer shall follow all recommendations of the Coatings Manufacturer regarding storage, handling, surface preparation, application of coatings, recoat times, environmental conditions during storage, preparation and application of coatings, and all other Coatings Manufacturer recommendations.
- D. Warranty: Both Coatings Manufacturer and Coatings Installer shall provide a 1-year complete replacement warranty for all coatings. Manufacturer shall provide 5-year warranty for long-term performance of coatings in addition to 1-year warranty.

1.3 SUBMITTALS

- A. Shop Drawings: Coatings Manufacturer shall submit for approval the following:
1. Copies of Manufacturer's technical information and application instructions for each material proposed for use. Specify exactly which product is being proposed for each coating type (as specified below). This may be accomplished through a reference table along with information on the various products, or by a separate, tabbed section with information on products being submitted for each system in a separate tab of a binder. Submittal of general Manufacturer's literature without detailing which product is proposed for each paint system will be unacceptable.
 2. Copies of Manufacturer's complete color charts for each coating system.
 3. Letter from the Coatings Manufacturer approving and endorsing Coatings Installer.
 4. Furnish copies of the final, approved submittal to the Coatings Installer so that it is clear which product is to be used for which each system.
- B. Reference Samples:
1. Provide reference samples of paint colors and textures as required by the ENGINEER. Reference samples will show the color and texture of the final paint to be applied and shall be approved by the ENGINEER prior to painting. Reference samples should be applied to similar substrates to the final surfaces to be painted. If ENGINEER chooses

09900-1

to forego reference samples, CONTRACTOR must receive the allowance to forego reference samples before painting begins or all painted surfaces will be re-painted at the ENGINEER's discretion and at no additional cost to the OWNER.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Protection: Protect all pre-coated items from coating damage during shipping.
- B. Store products in accordance with Manufacturer's directions.
- C. Store products in a neat, orderly fashion. Protect products from damage. Protect storage area from damage from stored products.

PART 2 - PRODUCTS

2.1 PRODUCT AND MANUFACTURER:

- A. Provide coating types as listed in the following table. The systems referenced in the table are those provided by Tnemec. Sherwin-Williams, or Equal are also acceptable manufacturers. If manufacturers other than Tnemec are desired, the CONTRACTOR shall submit equivalent paint systems.

COATING TYPE	DESCRIPTION	Sherwin Williams	TNEMEC SERIES
Clear Polyamine Epoxy	Clear Polyamine Epoxy, high solids, moisture resistant, designed as a one-coat wood sealer.	GP3477	Series 201, Epoxoprime
Acrylic Filler	Waterborne Cementitious Acrylic designed for application on porous surfaces such as rough-faced concrete masonry units	CementPlex 875	Series 130, Envirofill
Acrylic Latex	Single component, finish as required	ProMar 200	N/A
Industrial Acrylic	Single component, high density acrylic finish for interior, exterior surfaces	Shercryn HPA	Series 1029
Latex Primer/Sealer	Waterborne vinyl acrylic primer/sealer for interior gypsum wallboard/plaster. Capable of providing uniform seal and suitable for use with specified finish coats.	ProMar 200 Primer	Series 115
Polyamine Epoxy Sealer	Waterborne Polyamine Epoxy, penetrating, flexible and low-odor primer designed for sealing porous substrates.	Macropoxy 5000	Series 151, Elasto-Grip FC
Acrylate	Modified Waterborne Acrylate designed for application on porous surfaces such as rough-faced concrete masonry units or wood surfaces. Flexible and breathable, moisture and UV resistant. Matte Finish	Loxon XP	Series 156, Enviro-crete
Amine Epoxy	Polyamidoamine Epoxy designed for	Sherglass FF	Series V69, Hi-

09900-2

	use on steel or other ferrous metals not in contact with potable water but submerged or immersed in wastewater or non potable water.		Build Epoxoline II
	Polyamidoamine Epoxy designed for use on steel or other ferrous metals in contact with potable water.	Macropoxy 5500	Series 140, Pota-Pox Plus
Polyurethane	Aliphatic Acrylic Polyurethane designed for exterior weathering, abrasion and corrosion resistance	Hi Solids Polyurethane-100	Series 750, Endura-Shield
Silane Water repellent Sealant	Silane/Siloxane penetrating water repellent blend designed for application on above-grade concrete, stucco, block, masonry and stone surfaces	Loxon 40% Silane	Series 636, Dur A Pell 20
Wood Sealer / Stain	Single component, 250 g/l wood stain in clear or standard colors	Minwax 250	
Wood Varnish Finish	Single component polyurethane varnish	Minwax	
Anti-Graffiti Coating	Single component, siloxane coating intended for graffiti resistance for concrete surfaces	B97C150	

2.2 COLOR

- A. Color Pigments: Pure, nonfading, lead-free applicable types to suit the substrates and service indicated.
- B. Provide colors as described in the drawings or specifications, or as selected by ENGINEER from standard color palette. For piping system colors, reference pipe schedule.
- C. Where existing colors are to be matched or satisfactory color is not available from standard color palette, provide custom-mixed colors.
- D. Provide samples of each color on the substrate to be coated for approval by the ENGINEER prior to beginning coating application.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Coatings Installer shall prepare all surfaces to be painted in strict accordance with Coatings Manufacturer's recommendations.
- B. Coatings Manufacturer representative shall observe Coatings Installer's methods of preparing surfaces and approve of the work prior to Coatings Installer beginning coating installation. If, after a period of time, Coatings Manufacturer is satisfied with Coatings Installers methods, Coatings Manufacturer can allow Coatings Installer to proceed without inspection following surface preparation. Coatings Manufacturer and installer will still both be held equally accountable for any coatings failure.

09900-3

C. Wood surface preparation

1. Coatings Installer shall clean and prepare all wood surfaces in accordance with the Coating Manufacturer's recommendations. Patching may be required where approved by the Engineer. All joints in wood members including trim, siding, soffits, and joints between wood and dissimilar materials shall be filled with joint sealant prior to coating.

3.2 PROTECTION

- A. Protect all adjacent surfaces from overspray, dripping or other transfer of coatings not intended for those surfaces. Use masking, tape, drop cloths, plastic and other protective materials as appropriate.
 1. Remove, mask, or otherwise protect hardware, lighting fixtures, switchplates, aluminum surfaces, stainless steel surfaces, machined surfaces, couplings, shafts, bearings, nameplates on machinery, and other surfaces not intended to be painted.
 2. Protect working parts of mechanical and electrical equipment from damage during surface preparation and painting process. Mask openings in motors, fan housings, etc. to prevent coatings from falling inside.
 3. Correct all damages by cleaning, repairing or replacing, and repainting, as acceptable to ENGINEER.
- B. Completely remove all masking, tape, drop cloths, plastic and other protective materials within 48 hours of completion of application of finish coat. Take special care to remove masking and plastic which cover tank vent openings, HVAC registers, vents, motor vents, and other areas where airflow is critical to proper operation.

3.3 APPLICATION

- A. Paint all exposed surfaces not specifically excluded in 3.3.C, below. Provide and install Coatings in accordance with the following Table, unless otherwise specified in other Sections:

COATING SYSTEM NO.	SURFACE TO BE COATED	PRIMER COATING	NO OF PRIMER COATS	PRIME COAT THICKNESS (EACH COAT)	FINISH COATING	NO OF FINISH COATS	FINISH COAT THICKNESS (EACH COAT)
100	Concrete Masonry Units (Interior)	Acrylic Filler	1	70 SF/Gal Application Rate	Acrylate	2	135 SF/Gal Application Rate
101	Concrete Masonry Units (Exterior)	Silane Waterproofing Sealant	1	250 SF / Gal Application Rate	Anti-Graffiti Coating (only for perimeter wall of site)	1	12 MWFT
102	Concrete Roof Slab (Exterior)	Silane Waterproofing Sealant	1	250 SF/Gal Application Rate	None		
200	Wood (Interior and Exterior)	Polyamine Epoxy	1	250 SF/Gal Application Rate	Acrylate	2	135 SF/Gal Application Rate

09900-4

COATING SYSTEM NO.	SURFACE TO BE COATED	PRIMER COATING	NO OF PRIMER COATS	PRIME COAT THICKNESS (EACH COAT)	FINISH COATING	NO OF FINISH COATS	FINISH COAT THICKNESS (EACH COAT)
202	Gypsum Board (Interior)	Latex Primer/Sealer	1	350 SF/Gal Application Rate	Acrylic Latex (Semigloss)	2	400 SF/Gal Application Rate
300	Exposed Ferrous Pipe Systems and Exposed Steel Items	Polyamidoamine Epoxy	2	4-6 MDFT	Polyurethane	2	2-3 MDFT
301	Exposed, Non-metallic Pipe Systems	Polyamidoamine Epoxy	1	350 SF/Gal Application Rate	Polyurethane	2	3-5 MDFT
302	Immersed Ferrous Pipe Systems and Steel Items	Polyamidoamine Epoxy*	1	6-10 MDFT	Polyamidoamine Epoxy	1	6-10 MDFT
303	Immersed Non-metallic Pipe Systems	Polyamidoamine Epoxy	1	4-6 MDFT	Polyamidoamine Epoxy	1	4-6 MDFT
304	Buried Ferrous and Steel Items	Polyamidoamine Epoxy	1	8-10 MDFT	Polyamidoamine Epoxy	1	8-10 MDFT
305	Aluminum Surfaces in Contact with Concrete	Polyamidoamine Epoxy	1	4-6 MDFT	None		
	Steel Tank	Per 09871, Coating of Steel Water Storage Tank					
	Pumps	Touch up factory applied coatings, per Pump Specifications					

* Where in contact with potable water, coating shall be NSF-61 certified.

B. Items Delivered with Factory Applied Primer:

1. For items delivered with a factory applied primer and requiring painting under this Section, the factory applied primer may be used in lieu of field applied primer only under the following conditions:
 - a. The ENGINEER approves the use of the factory applied primer in lieu of field applied primer.
 - b. The factory applied primer is certified by the Coatings Manufacturer as compatible with the field applied finish coat.
 - c. The Coatings Manufacturer's recommended recoat time for the factory applied primer has not been exceeded.
2. If all of the above conditions are not met, the Coatings Installer shall re-prepare all surfaces to be painted in strict accordance with Coatings Manufacturer's recommendations and primer applied, in accordance with this Section.

09900-5

C. Table Definitions:

1. SF/Gal: Square foot of coverage per gallon of coating used.
2. MDFT: mil dry film thickness
3. mil: 1/1000 of an inch paint thickness
4. Ferrous Pipe: Includes Ductile Iron, Cast Iron, Steel, and Galvanized Steel piping
5. Steel Items: Includes steel and galvanized steel items such as structural steel, doors, window frames, overhead coiling doors, bollard posts, steel gates, steel fences, and all other steel and galvanized steel items.
6. Non-Metallic Pipe: Polyvinyl Chloride, Chlorinated Polyvinyl Chloride, Fiberglass Reinforced Plastic, High Density Polyethylene
7. Exposed: Located above grade, exposed to the atmosphere not submerged. Includes surfaces inside and outside of buildings.
8. Submerged: In an area which normally is under water or other liquid or is intermittently under water or other liquid.
9. Buried: Located below grade, surrounded by backfill.

D. Surfaces Not Requiring Painting:

1. Unless otherwise stated or shown below or in other sections, the following areas or items will not require painting or coating:
 - a. Concrete surfaces.
 - b. Reinforcing steel.
 - c. Copper, bronze, brass, Monel, aluminum, chromium plate, and stainless steel surfaces, except where:
 - 1) Required for electrical insulation between dissimilar metals.
 - 2) Aluminum and stainless steel are embedded in concrete or masonry, or aluminum is in contact with concrete or masonry.
 - 3) Color coding of equipment and piping is required.
 - d. Pipe unions or portions of piping systems where painting would make disassembly difficult or impossible.
 - e. Prefinished electrical, mechanical and architectural items such as motor control centers, switchboards, switchgear, panelboards, transformers, disconnect switches, HVAC equipment enclosures, ductwork, acoustical tile, cabinets, louvers, and wall panels.
 - f. Electrical conduits.
 - g. Cathodic protection anodes.
 - h. Insulated piping and insulated piping with jacket will require prime coat only.
 - i. Fiberglass reinforced plastic (FRP) surfaces with an integral ultra-violet resistant colored gel coat do not require painting, provided the color is as selected.
 - j. Glass, plexiglass or other transparent or translucent material intended to allow passage of light.
 - k. Civil/site materials such as asphalt, gravel, rock, chain-link fence, and plantings.

3.4 RECOAT TIMES:

- A. Coatings Installer shall observe all requirements of the Coatings Manufacturer regarding recoat times.

3.5 PAINT LOG

- A. Coatings Installer shall keep a paint log
 1. Specific details of the contents and format paint log shall be determined by the Coatings Installer and approved by the ENGINEER.

09900-6

2. At a minimum, paint log shall record, on a daily basis for any day when coating work is performed:
 - a. Weather conditions, including 3-day forecast
 - b. Which surfaces were prepared for coating
 - c. Approval of surface preparation by the Coatings Manufacturer representative
 - d. Which surfaces or systems were coated that day
 - e. Who the installer was (specific names of persons on crew)
 - f. Which coating type was used
 - g. Which coat was installed
 - h. What the application rate or MDFT was (as approved by ENGINEER)
3. Paint log shall be kept on-site. Paint log shall be signed on a daily basis, for any day when coating work is performed, by the supervisor of the coatings installer field crew and by the ENGINEER.
4. Any painted surface which was not recorded in the paint log shall be stripped, re-prepared, and recoated at the ENGINEER's discretion.

3.6 WARRANTY INSPECTION

- A. Warranty inspection shall be conducted during the eleventh month following completion of the Work. All defective Work shall be repaired by the CONTRACTOR in accordance with this Specification and to the satisfaction of the ENGINEER and at the CONTRACTOR'S expense.
- B. Any location where paint has peeled, bubbled, or cracked and any location where rusting is evident shall be considered to be a failure of the system. The CONTRACTOR shall make repair at all points where failures are observed by removing the deteriorated paint, cleaning the surface, and recoating or repainting with the same system. If the area of failure exceeds 25 percent of the total coated or painted surface, the entire coating or paint system may be required to be removed and repainted in accordance with this specification as determined by the ENGINEER.
- C. All costs for CONTRACTOR'S inspection, Manufacturer's inspection and all costs for repair shall be borne by the CONTRACTOR.

+ + END OF SECTION + +

09900-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 10400**IDENTIFICATION DEVICES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Furnish and install signs, placards, and labels for safety equipment, hazards, and equipment and piping identification.

1.2 SUBMITTALS

- A. Shop Drawings:
 - 1. Provide manufacturer's literature showing available letter sizes and styles, standard and custom colors, and standard mounting details.
 - 2. Provide drawings showing layouts, actual letter sizes and styles, colors, and project-specific mounting details.

PART 2 - PRODUCTS**2.1 FIRE EXTINGUISHER LOCATION SIGNS**

- A. Material:
 - 1. Subsurface silkscreened graphics on a transparent acrylic sheet, 0.08" thick with Helvetica Medium alphabet and matching arrows type face.
 - 2. Provide 2" high upper case letters and 1" high lower case letters.
- B. Fire Extinguisher Identification Sign:
 - 1. Provide 15"x 15" with 1" radiused corners, unframed.
 - 2. Provide one for each surface mounted fire extinguisher.
 - 3. Background color shall be red with white lettering.
 - 4. Signs shall incorporate a white directional arrow as located by ENGINEER.
- C. Product and Manufacturer: Provide one of the following:
 - 1. ASI/SPE MH (Four Corners) Plaque by ASI Sign Systems, Incorporated.
 - 2. Or equal.

2.2 FIRE PROTECTION PLACARDS

- A. Fire Protection Placards:
 - 1. Provide diamond-shaped placards: 15" square of 0.125" rigid polyethylene.
 - 2. The placard shall meet NFPA 704.
- B. Product and Manufacturer: Provide one of the following:
 - 1. W.H. Brady Company
 - 2. Seton Name Plate Company
 - 3. Or Equal
- C. Provide fire protection placards in accordance with the following schedule:

10400-1

DRAWING REFERENCE NUMBER	MATERIAL	HEALTH	FLAMMABILITY	REACTIVITY	SYMBOL
S-XXX					

2.3 MISCELLANEOUS SAFETY SIGNAGE

- A. Safety signs shall comply with the following standards:
1. Occupational Safety and Health Administration (OSHA), Standards for General Industry, Subparts 1910.200 Hazard Communication (July, 1986).
 2. National Fire Protection Association (NFPA) Standard No. 704 - Label System.
 3. California Fire Code, Latest Edition.
- B. Safety signs shall be of height and width required by layout and shall be formed from semi-rigid butyrate, polyethylene or fiberglass. Lettering shall be 3-inches high and 1/2-inch in stroke.
- C. Provide the following safety signs:

DRAWING REFERENCE NUMBER	TEXT	BACKGROUND COLOR	LETTERING COLOR
S-XXX	CAUTION: EQUIPMENT STARTS AUTOMATICALLY	Yellow	Black
S-XXX	DANGER: HIGH VOLTAGE	Yellow	Black
S-XXX	MAXIMUM AXLE LOAD 32,000 LBS	Yellow	Black

2.4 EXIT SIGNS

- A. Material: Plastic, 1/8-inch minimum thickness.
- B. Lettering: 6 inches high, 3/4-inch stroke, white letters on red background.

2.5 FLOOR AND ROOF DESIGN LOADS

- A. Provide a conspicuously posted sign at the lift station roof formed from semi-rigid butyrate, polyethylene or fiberglass with 3-inch high lettering and 1/2-inch in stroke in accordance with the California Building Code.
- B. Text shall read: THIS ROOF IS DESIGNED FOR LIVE LOAD OF 125 PSF.

2.6 IDENTIFICATION LABELS

- A. Pipe Labels and Flow Direction Arrows:
1. Label, Lettering Color, Size and Placement: In accordance with ANSI A13.1, and as listed below.
 2. Label Colors:

Fluid Service	Background Color	Letter Color
Fire quenching fluids	Safety red	White
Toxic and corrosive fluids	Safety orange	Black
Flammable fluids	Safety yellow	Black
Combustible fluids	Safety brown	White
Potable, cooling, boiler feed, and other water	Safety green	White
Compressed air	Safety blue	White

3. Label Size:

Outside Diameter of Pipe Covering, inches	Length of Color Field, inches	Size of Letters, inches
3/4 to 1-1/4	8	1/2
1-1/2 to 2	8	3/4
2-1/2 to 6	12	1-1/4
8 to 10	24	2-1/2
Over 10	32	3-1/2

4. Label Placement:

- a. Labels shall be positioned on the pipes so they can be easily read. Proper label placement is on the lower side of the pipe if the employee has to look up to the pipe, on the upper side of the pipe if the employee has to look down towards the pipe, or directly facing the employee if on the same level as the pipe. Labels should be located near valves, branches, where a change in direction occurs, on entry/re-entry points through walls or floors, and on straight segments with spacing between labels that allows for easy identification.
5. Material: Manufacture from or encase in outdoor grade plastic or vinyl that will resist damage or fading from washdown, sunlight, mildly corrosive atmosphere, dirt, grease, and abrasion.
6. Message: See Piping Schedule.
7. Labels:
 - a. Snap-Around Type: Size for finished outside diameter of pipe and insulation.
 - b. For 6 Inches and Over Diameter Pipe: May furnish strap-on type fastened without use of tools with plastic or stainless steel straps.
 - c. Firmly grip pipe so labels remain fixed in vertical pipe runs.
8. Manufacturers and Products:
 - a. T & B/Westline, Rariton, NJ, Model WSS Snap-Around.
 - b. Seton Name Plate Corp., New Haven, CT, Setmark Series.
 - c. Or equal.

B. Equipment Labels:

1. Applies to equipment with assigned tag numbers wherever specified.
2. Lettering: Black bold face, 3/4-inch minimum high.
3. Background: OSHA safety yellow.
4. Materials: Either of the following:
 - a. Aluminum or stainless steel base with a baked-on finish that is suitable for use on wet, oily, exposed, abrasive, and corrosive areas.
 - b. Fiberglass with fiberglass-encased lettering.

10400-3

5. Furnish 1-inch margin on each end of label for mounting. On fiberglass labels furnish grommets at each end for mounting.
6. Size:
 - a. As appropriate for lettering provided.
 - b. Provide same-size labels for equipment series which are adjacent.
7. Message: Equipment names and tag numbers as used in Sections where equipment is specified and/or on Drawings.
8. Manufacturers and Products:
 - a. T & B/Westline Co., Rariton, NJ; Type KQ.
 - b. Seton Name Plate Corp., New Haven, CT; Style EB.
 - c. Or equal.

PART 3 - EXECUTION

3.1 INSTALLATION OF SIGNS

- A. Install Fire Extinguisher location signs at all fire extinguisher locations, approximately 12" above fire extinguisher mounting bracket.
- B. Install Exit Signs mounted to each door which leads to the outside of the building, on the panic bar side of the door, mounted to the door approximately 5'-6" above finished floor.
- C. Install all other signs at locations as shown on the drawings. Signs should be installed approximately 5'-6" off of finished floor, attached to doors where appropriate. Where two signs are indicated in the same location, signs should be mounted side-by-side, where possible.
- D. Install all signs plumb and level. They shall be attached with four stainless steel screws or anchor bolts as required for substrate. Provide theft/tamper-resistant fasteners on all signs.

3.2 INSTALLATION OF PIPE IDENTIFICATION LABELS

- A. Provide pipe identification label with flow arrows on all exposed piping systems as follows:
 1. At all connections to equipment, valves, tees or wall penetrations.
 2. At intervals along piping not greater than 18 feet on center with at least one label applied to each exposed horizontal and vertical run of pipe.
- B. Install pipe identification labels after all painting has been completed.

3.3 INSTALLATION OF EQUIPMENT IDENTIFICATION LABELS

- A. Install equipment identification labels on all equipment which has been given an equipment number in the Drawings or Specifications. Provide identification label which includes equipment name and tag number.
- B. Where no damage will be caused to equipment, mount equipment identification label directly to equipment. Otherwise, mount equipment identification labels to concrete equipment base or wall space. Install equipment identification label such that it is clear which piece of equipment is being labeled.

C. Anchor to equipment or base for easy removal and replacement with ordinary hand tools.

+ + END OF SECTION + +

10400-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 10520
SAFETY EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope:
1. The following safety equipment is to be provided and installed by CONTRACTOR so that it may be integrated into OWNER's safety program for operation of the facility into which it is installed.
 2. The following safety equipment does not represent a complete package of safety equipment required to operate the facility. Refer to OWNER's safety program for all required safety equipment and procedures.

1.2 SUBMITTALS

- A. Shop Drawings: Provide manufacturer's product data for each item including sizes, ratings, UL listings, OSHA certifications or other certifications, and mounting/installation information.
- B. Warranty: Provide manufacturer's 5-year warranty on all products provided.

1.3 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Protect all equipment provided from all damage until such time as it is turned over to the OWNER.
- B. Safety equipment provided under this specification shall not be used by the CONTRACTOR in the construction of the facility. Safety equipment shall be turned over to the OWNER in new condition.

PART 2 - PRODUCTS**2.1 FIRE EXTINGUISHERS**

- A. Provide at all locations labeled "FEXT" on Drawings.
- B. Provide Fire Extinguishers which Conform to NFPA-10 and as follows:
1. Tri-class dry chemical extinguishing agent.
 2. Pressurized, red enameled steel shell cylinder.
 3. Activated by top squeeze handle.
 4. Agent propelled through hose or opening at top of unit.
 5. For use on A, B, and C class fires.
 6. Minimum UL Rating: 4A-60B:C, 10-pound capacity.
- C. Mounting Hardware:
1. Furnish heavy-duty brackets with clip-together strap for wall mounting.

10520-1

2. Use all stainless steel fasteners for attaching brackets to wall.

D. Manufacturers:

1. Walter Kidde.
2. Master Protection Enterprises.
3. Or Equal.

2.2 FALL PROTECTION EQUIPMENT

A. Hatch Safety Grating:

1. Standards:
 - a. Comply with all applicable OSHA, UL, ANSI and other applicable standards.
 - 1) Including, but not limited to, OSHA 29 CFR 1910.23, guarding floor and wall openings and holes.
2. General Purpose:
 - a. Designed to allow visual inspection and wash down of confined space through grating while preventing falls into open hatches. Designed to be easily removed for confined space entry once entrant is properly harnessed and utilizing proper retrieval system.
3. Features:
 - a. Materials:
 - 1) Metallic parts shall be Aluminum
 - 2) Grating shall have powder coat finish that is safety yellow.
 - b. Grating panel(s) shall be equipped with a hold open device to lock the grading panel(s) in the open position.
4. Manufacturer and Product:
 - a. Bilco, Fall protection grating
 - b. Or equal.

B. Portable Davit Arm Retrieval System:

1. Standards:
 - a. Comply with all applicable OSHA, UL, ANSI and other applicable standards.
2. General Purpose:
 - a. Designed to retrieve an entrant into a confined space using a standard personnel harness system.
3. Features:
 - a. 60-inch high center post with winch mounting assembly
 - b. Allows for either 18" or 24" reach on offset arm
 - c. Weight rating of 350 lbs
 - d. Safety factor of 10:1
4. Accessories:
 - a. Winch
 - 1) Designed to attach to a person that is entering or exiting from a confined space.
 - 2) Built with an internal braking system to prevent the accidental pay out of line, as well as a back-up locking pawl system to prevent "free-wheeling" of the winch.
 - 3) Cable extension (payout) should occur ONLY when the handle is turned counterclockwise AND a force of AT LEAST 10 lbs. (4.5 kg.) is applied to the line.

10520-2

- 4) The winch frame back plate attaches to a mounting plate which can then be mated to the Portable Davit Arm Retrieval System. Coordinate winch and Portable David Arm Retrieval System.
- 5) Weight rated to 350 lbs.
- 6) 10:1 safety factor
- 7) 5.5:1 gear ratio single speed drive
- 8) Retrieval rate of 23 feet per minute
- 9) Continuous braking drive prevents free wheeling
- 10) Double pawls on friction brake provide back up safety
- 11) Low wear, high temperature brake pads
- 12) Anti-friction drive bearings
- 13) Three permanent wraps of cable on the drum
- 14) Level wind springs to prevent loosening of cable lays
- 15) Slip clutch drive to prevent back-winding of cable drum
- 16) Galvanic zinc coating of all metal parts
- 17) Double action locking swivel snap hook
- 18) Provide with 70 feet of stainless steel cable
5. Flush Floor Mounted Davit Sleeve:
 - a. Provide flush floor mounted davit sleeve by same manufacturer as davit crane.
 - 1) Sleeve shall be designed specifically for davit crane and shall allow for full functionality and load rating of crane
 - 2) Sleeve and anchor bolts shall be stainless steel
 - 3) Sleeve to be designed for installation in concrete after concrete placement by core drilling a hole in the concrete and bolting sleeve to concrete floor using stainless steel chemical anchors, per manufacturers instructions.
 - 4) Provide stainless steel debris cap with sleeve.
6. Manufacturer and product:
 - a. Davit Crane: T.A. Pelsue Company, Model PNUH1824, or equal
 - b. Winch: T.A. Pelsue Company, Model PLPS806MR-70, or equal
 - c. Davit Sleeve: T.A. Pelsue Company, Model PNUS102B-SS, or equal
 - d. Debris Cap: T.A. Pelsue Company, Model PNUS106-SS, or equal
 - e. Or equal.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install all safety equipment per manufacturers written instructions.
- B. Install fire extinguishers where "FEXT" is called out on the drawings, 48" above finished floor or adjacent grade.

+ + END OF SECTION + +

10520-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 11100

FABRICATED SLIDE GATES

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: This Section describes the design, fabrication, and supply of fabricated stainless steel slide gates, including wall thimbles (if applicable), pipe adapters (if applicable), discs, guide frames, stem guides, seats, operating stem, operator, and anchorage. Gate supplier shall provide all materials, equipment, and accessories necessary to furnish and install slide gates as described herein and as shown on Drawings.

1.2 QUALITY ASSURANCE

- A. Reference Standards: Comply with requirements and recommendations of the following references, except as otherwise specified:
1. AWWA C561-04, Fabricated Stainless Steel Slide Gates
 2. NSF/ANSI 61, Drinking Water System Components Health Effects
 3. ASTM A 276, Specification for Stainless Steel Bars and Shapes
 4. American Gear Manufacturers Association (AGMA)
 5. Anti-Friction Bearing Manufacturers Association (ABMA)
- B. Manufacturer's Qualifications: Gate manufacturer shall have a minimum of five years of experience of producing substantially similar equipment and shall be able to show evidence of at least ten installations in satisfactory operation for at least five years.
- C. Unit Responsibility: All equipment specified herein shall be coordinated and provided by a single gate manufacturer. Manufacturer assumes full responsibility for coordination of all components.
- D. Source Quality Control:
1. Shop Tests:
 - a. Test each slide gate fully assembled for proper seating, operation, and for leakage.
 - b. Fully open and close gate disc in its guide system to ensure that it operates freely.
- E. Warranty: Provide a 1-year warranty on all equipment from date of start-up. Warranty shall cover defects in workmanship, design, and materials. If any component should fail during the warranty period, it shall be corrected and the unit restored to service at no expense to the OWNER.

1.3 SUBMITTALS

- A. Shop Drawings:
1. Detailed drawings showing component and assembly dimensions, location of mechanical connections, weights of all equipment, installation details, and accessory details.

11100-1

2. Drawings, templates and directions for installation of anchor bolts and stem couplings.

B. Product Data:

1. Descriptive literature, specifications, and engineering data.
2. Materials of construction for all components and accessories.
3. Force calculations for gate operator and stem, including seismic loading calculations.
4. Shipping, storage, protection and handling instructions.
5. Installation directions.
6. Operation and Maintenance Manual.

C. Shop Test Results:

1. Submit results of the required shop tests.

D. Field Test Results:

1. Submit a written report giving the results of the field tests required.

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Gate manufacturer shall provide any special unloading, storage and handling instructions.

PART 2 - PRODUCTS

2.1 PRODUCT AND MANUFACTURER:

- A. Golden Harvest - GH-46-NRS
- B. Fontaine-Aquanox
- C. Whipps, Inc.
- D. Or equal

2.2 GOVERNING STANDARD

- A. Except as modified or supplemented herein, fabricated slide gates and their appurtenances shall conform to the applicable requirements of AWWA C561.

2.3 SERVICE CONDITIONS AND PERFORMANCE

- A. Gate Schedule:

Tag	G-10-101	G-05-101
Location	PUMP STATION B	AIR RELIEF STRUCTURE
Service	SEWAGE	SEWAGE
Operation	Open-Close	Open-Close
Size (W x H)	24"x24"H	30"Wx36"H
Self-Contained	YES	NO. ALLOW FULL REMOVAL OF GATE VIA MANUAL OPERATION
Seating Head	9.15' (MAX)	13.07 +/-M
Unseating Head	8'	11.55' +/-1
Inv. Elevation	-7.13 +/-	11.81 +/-
Embedded Inv.	N/A	N/A
Operating Floor Elevation	21.0 +/-	N/A
Mounting	WALL MOUNTED	WALL MOUNTED
Top Seal	NO	NO
Actuator	Nut	NO. HANDLE ONLY
Gate Opening Direction	UPWARD	UPWARD.
Stem Movement	N/A	N/A
Stem Cover Type	N/A	N/A
Limit Switches	N/A	N/A

B.

C. Performance:

1. Closed leakage shall not exceed 0.05 gallons per minute (GPM) per foot of gate periphery under seating or unseating head conditions.

2.4 COMPONENTS

A. General:

1. Slide gates and all appurtenances shall be provided by one gate manufacturer.
2. All components of the gates shall have a minimum thickness of ¼-inch.
3. Gates shall be either self-contained non-rising configuration as indicated on the gate schedule.
4. The gates for this Project will be wall mounted over plain-end wall fittings provided by the CONTRACTOR or over openings in concrete walls, as shown on the Drawings. No wall thimbles or pipe adaptors are required.

B. Frame:

1. Frame Material: ASTM A-276 Type 316L SS.
2. Designed for maximum rigidity as column to take the thrust developed during the slide gate operation under maximum head.
3. Bolt-together guide frames are not allowed.
4. Guide frame corners shall be factory welded.
5. The guides shall extend above or beneath the opening a sufficient amount to support the disc in the fully open or closed position.
6. The frame configuration shall be of the flush-bottom type and shall allow the replacement of the top and side seals without removing the gate frame from the wall.
7. Provide bolt holes in upper portion of sides of frame for connection to supporting angle.

11100-3

C. Disc:

1. Material: ASTM A-240 Type 316L SS.
2. Disc shall be reinforced as necessary to limit deflection under the design operating head to less than 1/360 of the gate span.
3. Reinforcing members shall be 316L SS angle or channels welded to the plate.

D. Guides and Seals:

1. The guides shall be provided with frame mounted ASTM D-4020 ultra high molecular weight polyethylene (UHMWPE) seals that contact both sides of the slide disc and shall be of such length as to retain and support two thirds of the vertical height of the slide in the fully open position.
2. Side and top seals shall be ASTM D-4020 UHMWPE, and shall be mechanical and fully adjustable in the field, or shall be self-adjusting type with a continuous compression cord.
3. Lower seals shall be flush bottom resilient neoprene, mounted to the bottom of the disc or to the frame.

E. Fasteners and Anchor Bolts:

1. All fasteners necessary for installation and operation shall be furnished by the gate manufacturer.
2. Fasteners shall be Type 316 stainless steel
3. Fasteners shall be 1/2-inch diameter minimum, and adequately sized to withstand all operational stresses.
4. Provide Type 316 stainless steel anchor bolts as required for stem guides, floorstands, and all equipment or appurtenances which must be secured to concrete walls or floors. Anchor bolts shall be of ample size and strength for the purpose intended, and shall be furnished by the gate manufacturer. Anchor bolts shall have a minimum diameter of 1/2-inch. Anchor bolts shall conform to the requirements of Specification Section 05051 – Anchors, Inserts, and Epoxy Dowels.

F. Identification:

1. Identify each slide gate with gate manufacturer's nameplate stamped with the approved designation as shown in the Gate Schedule. Manufacturer's nameplate shall be permanently fastened to the gate at the factory.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be as shown on the Drawings and in accordance with gate manufacturer's written instructions.

3.2 FIELD QUALITY CONTROL

- A. Conduct functional and performance tests under approved simulated operating conditions.
- B. Functional Tests:
 1. Each slide gate with appurtenances shall be field tested. Tests shall demonstrate to ENGINEER that each part and all parts together function in the manner intended. All necessary testing equipment and manpower shall be provided by CONTRACTOR at his

expense. OWNER will furnish all power, and incidental material and labor required for the tests.

C. Leakage Tests:

1. Maximum permissible leakage shall be in accordance with the requirements of Sub-Section 2.2, above. Excess leakage shall be reduced to meet specified requirements by adjusting the gate, or replacement will be required.

- D. In the event that the gate manufacturer is unable to demonstrate to ENGINEER that his equipment meets the requirements of the tests, the deficient equipment will be rejected, and adjustments and/or modifications shall be made. Retest the equipment as often as necessary to meet the specified requirements. No separate payments shall be made for adjustments and/or modifications.

3.3 MANUFACTURER'S FIELD SERVICES:

1. Minimum 2 trips for Manufacturer's Field Services:
 - a. 1 person-day for installation assistance
 - b. 1 person-day for inspection, testing, alignment, and training

+ + END OF SECTION + +

THIS PAGE IS INTENTIONALLY BLANK

SECTION 11300**SUBMERSIBLE SEWAGE PUMPS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Provide all materials, equipment, and accessories necessary to furnish and install wet-pit submersible sewage pumps. The pumping units shall be vertical, non-clogging, centrifugal sewage pumps with bottom inlet and centerline discharge. The pumps shall be direct driven by integral squirrel cage, electric induction motors. Each pump shall include motor, bearings, protective control devices, and all accessories specified herein.
- B. The following equipment numbers have been assigned to the equipment that shall be provided. See attached Pump and Motor Data Sheets for detailed descriptions:
 - 1. P-10-101
 - 2. P-10-201
 - 3. P-10-301
 - 4. P-20-101
 - 5. P-20-201
 - 6. P-20-301

1.2 QUALITY ASSURANCE

- A. Reference Standards: Comply with requirements and recommendations of the following references, except as otherwise specified:
 - 1. Hydraulic Institute (HI)
 - 2. American Water Works Association (AWWA)
 - 3. National Electric Code (NEC)
 - 4. National Electrical Manufacturers Association (NEMA)
 - 5. American National Standards Institute (ANSI)
 - 6. ASTM International (ASTM)
- B. Quality Certification: Manufacturer supplying equipment furnished under this section shall hold current ISO 9001 certification.
- C. Unit Responsibility: All equipment specified herein shall be coordinated and provided by the pump manufacturer. Manufacturer assumes full responsibility for coordination of all components.
- D. Warranty: Provide a 5-yr warranty on all equipment from date of start-up. Warranty shall cover defects in workmanship, design, and materials. If any component should fail during the warranty period, it shall be corrected, and the unit restored to service at no expense to the OWNER.

1.3 SUBMITTALS

- A. Product Data:
 - 1. Make, model, weight, and horsepower of each equipment assembly.

11300-1

2. Complete catalog information, descriptive literature, specifications, and identification of materials of construction.
 3. Dimensional outline and installation drawing. Full installation instructions.
 4. Performance data curves showing head, capacity, horsepower demand, pump efficiency, and net positive suction head required over the entire operating range of the pump, from shutoff to maximum capacity. Indicate separately the head, capacity, horsepower demand, overall efficiency, and minimum submergence required at the guarantee point.
 5. Power and control wiring diagrams, including terminals and numbers.
 6. Data on the moisture detecting device, thermal switches, and RTDs.
 7. Complete motor nameplate data, as defined by NEMA, motor manufacturer, and including any motor modifications.
 8. Factory finish system.
- B. Motor Tests and Data:
1. For each motor furnish an inspection report for the motor or for a previously manufactured electrically duplicate motor that has been tested. Provide the following minimum data:
 - a. Running current
 - b. Winding resistance measurement
 - c. High potential test
- C. Operation and Maintenance Manuals: Submit complete manuals including: copies of all approved Shop Drawings, test reports, maintenance data and schedules, description of operation, and spare parts information.
- D. Guarantee: Submit Guarantee.
- E. Pump Tests:
1. The submersible pumps shall be tested at the factory for compliance with the specifications for electrical, mechanical, and physical characteristics. Each pump shall be tested at each of the test operating points at 60 Hz.
 2. Pump Curve Testing:
 - a. A total of five (5) points shall be documented to establish the pump curve. All tests shall be run in accordance with the American Hydraulic Institute Level A Standards.
 - b. Provide the following results in table form and curve form for all duty points:
 - 1) Flow: gpm
 - 2) Head: ft
 - 3) Power input: kW
 - 4) Overall efficiency: XX%
 - 5) Motor current: amps
 - 6) Motor voltage: volts
 3. Vibration Testing:
 - a. Each pump shall be tested for vibration compliance with the specified vibration limits per HI 11.6.9.4b (2012).
 - b. Vibration tests and vibration signatures shall be performed by a professional qualified in acquisition and analysis of vibration data.
 - c. Each pump and variable speed drive system shall be tested separately without duplicate equipment running. Tests shall be conducted at various speeds between maximum and minimum. Each pump and motor shall be tested for vibration in the field during Functional Testing.

11300-2

- d. Test results shall be documented in accordance with HI requirements. Copies of test results shall be submitted to the ENGINEER for review.
- 4. Testing shall also include the following:
 - a. Impeller, motor rating and electrical connections shall be checked for compliance to the specifications.
 - b. The motor insulation and power cable shall be tested for moisture content or insulation defects.
 - c. Prior to submergence, the pump shall be run dry to establish correct rotation and mechanical integrity.
 - d. The pump shall be run for a minimum of 30 minutes submerged to bring the motor to operating temperature.
 - e. After the operational test, the insulation test shall be accomplished again as well as a mechanical and electrical inspection of the pump and motor.
- 5. Test Data: Pumps shall not be shipped until the ENGINEER has approved the test reports. Submit four copies of the certified pump tests.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Pump equipment shall consist of pumps complete with motors, guide rails and supports, inlet base elbows, anchoring brackets, power cables, pump lifting cables, and protective control system.
- B. Provide pumps with performance curves that demonstrate constantly increasing head from maximum capacity to shut-off head.
- C. Balancing: Pump assemblies shall be dynamically and statically balanced to ISO G6.3. Vibration at any point of pump operation shall not exceed the upper limits of the Hydraulic Institute Standards.

2.2 PRODUCT AND MANUFACTURER:

Design was based on the following pumps. The Contractor shall be responsible for making any necessary changes to the mechanical and electrical layouts for other Pump Manufacturer and models.

- A. Manufacturer:
 - 1. Pumps P-10-101, P-10-201 and P-10-301:
 - a. Flygt Model NP 3202
 - b. Or Equal
 - 2. Pumps P-20-101, P-20-201 and P-20-301:
 - a. Flygt Model NP 3231 with 745 motor
 - b. Or Equal

2.3 DESIGN

- A. See attached Pump and Motor Data Sheets.
- B. Pump Features:
 - 1. Service: Raw Sewage

11300-3

2. Type: Non-clog centrifugal submersible sewage pump
3. Discharge flanges shall be 125# and meet ANSI standard B16.1
4. Capacity: Passing 2" ball, minimum
5. Volute: ASTM A48 CL35B Grey Cast Iron
6. Shaft: ANSI 431 stainless steel
7. Bearings: The pump shaft shall rotate on at least three anti-friction, grease or oil lubricated bearings
8. Impeller: ASTM A532 (Alloy IIIA) 15% chrome cast iron and minimum Rockwell C hardness of 38. Surface hardening is not an acceptable alternative a harder metal throughout
9. External Hardware: All bolts, nuts and cap screws shall have hexagon heads and be of Type 316 stainless steel
10. Sealing:
 - a. Where watertight sealing is required, critical mating surfaces shall be machined and fitted with Nitrile or optional Viton rubber O-rings
 - b. Joint sealing will be a result of controlled compression of rubber O-rings in two planes and O-ring contact of four sides without the requirement of a specific bolt torque limit.
 - c. Rectangular cross sectioned rubber, paper, or synthetic gaskets that require specific torque limits to achieve compression shall not be considered as adequate or equal.
 - d. No secondary sealing compounds, elliptical O-rings, grease, or other devices shall be used
11. Mechanical Seals:
 - a. Tandem mechanical shaft seal system consisting of two independent seal assemblies:
 - 1) Lower seal shall contain one stationary and one positively driven rotating corrosion resistant tungsten-carbide seal ring
 - 2) Upper seal shall be a leakage-free seal and shall contain one stationary and one positively driven rotating corrosion resistant tungsten-carbide seal ring
 - b. Seals shall require no maintenance or adjustment and shall be able of operating in either clockwise or counter-clockwise direction
 - c. Shaft seals without positively driven rotating members, or conventional double mechanical seals containing either a common single or double spring acting between the upper and lower seal faces shall not be considered acceptable or equal to the dual independent seal specified.
 - d. No system requiring a pressure differential to offset pressure and to affect sealing shall be used.
12. Each pump/motor unit shall be provided with an integral, self-supplying cooling system utilizing the pumped media for cooling
 - a. Motor Water Jacket: ASTM A48 CL35B Cast Iron
13. Cable entry junction chamber and motor shall be sealed from each other. Epoxies, silicones, or other secondary sealing systems shall not be considered acceptable.

C. Accessories:

1. Inlet Base Elbow: ASTM A48, CL35B Cast Iron, one per pump
2. Guide Rails: Type 316 Stainless Steel, coordinate length with drawings, 3-inch diameter, two per pump
3. Upper Guide Rail Brackets (one per pump):
 - a. Type 316 Stainless Steel
 - b. Mount to wetwell hatch opening
4. Intermediate Guide Rail Brackets (one per pump):

11300-4

- a. Type 316 Stainless Steel
 - b. Provide if guide rails are longer than 20-feet
 - c. Brackets shall mount to discharge piping
- 5. Pilot Cable (one per pump):
 - a. SUBCAB
 - b. Multi-conductor type, shielded
 - c. Cable length shall be adequate to land in the junction box without the need for splices
- 6. Safety Hooks and Cable Holders: 316 Stainless Steel, provide one of each per pump
- D. Motors:
 - 1. NEMA B design, induction type with a squirrel cage rotor, shell type design, housed in an air filled, watertight chamber
 - 2. Connected load shall not exceed 100 percent of motor nameplate horsepower.
 - 3. Furnish motors suited for operation in a Class 1, Division 1, Group D explosion-proof atmosphere and certified as such by Factory Mutual.
 - 4. Vertical mounting
 - 5. Solid shaft
 - a. Shaft seal: Tandem mechanical seals
 - 6. Service factor: 1.15
 - 7. Stator windings shall be insulated with moisture resistant Class H insulation
 - 8. VFD compatible to NEMA MG1, Part 31.
 - 9. Thermal Protection: Normally closed thermal switch in stator housing
 - 10. Moisture Protection: Leakage Sensor in stator housing and junction chamber
 - a. The junction chamber shall be sealed off from the stator housing and shall have a mechanical float switch to signal if there is water intrusion.
 - b. Use of voltage sensitive solid-state sensors shall not be allowed.
 - 11. Motor shall be capable of:
 - a. Pump Station A, NP 3202: 30 starts per hour
 - b. Pump Station B, NP 3231: 15 starts per hour
 - 12. Motor capable of continuous full-load operation while unsubmerged without overheating or voiding Class 1, Division 1, Group D compliance.
 - 13. Pump and motor shall be by the same manufacturer and manufactured at the same location.
 - 14. Provide motor lifting lug
 - 15. Provide motor power and control cables with connections made at the motor inside a junction chamber. Cable entry shall be sealed and provided with means of strain relief. Cables shall comply with applicable code requirements. Coordinate pump cable length with distance between pump and control panel, per drawings and field installation.
- E. Controls:
 - 1. Provide moisture protection/thermal protection relay for connection to leakage sensor and thermal switch on each motor for installation in an external control panel by others.
 - 2. Solid-state pump memory unit, thermal switches, and two float leakage sensor switches, lower bearing temperature monitor, and stator temperature monitor shall all be connected to a monitoring and status unit.
- F. Spare Parts:
 - 1. Provide the following spare parts for each pump:
 - a. One complete set of upper and lower bearings

11300-5

- b. One complete set of seals, gaskets and O-rings
 - c. One complete set of mechanical seals
 - d. One impeller
 - e. One wear ring
2. Special tools required for normal operation and maintenance of the equipment shall be furnished with the equipment by the manufacturer.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be in complete accordance with manufacturer's instructions.
- B. Check and align all pumps, motors, etc. after pump assemblies have been installed to ensure alignment and assembly has been unchanged from factory assembly conditions. Make adjustments required to place system in proper operating condition. Pump installation shall place no strain on adjacent piping systems.

3.2 FIELD QUALITY CONTROL

- A. Installation Test: Performed by manufacturer's representative in the presence of the ENGINEER or OWNER.
- 1. The tests shall demonstrate that the equipment has been properly installed, aligned and connected, is free of mechanical defects, electrical defects, excessive vibration, overheating or overloading, and that the control system performs as specified and meets all operating criteria. All parts shall operate satisfactorily in all respects and in accordance with the specified requirements for the full duration of the test period. If any part of a unit shows evidence of unsatisfactory or improper operation during the test period, correction or repairs shall be made by the Contractor and the full operational test shall be redone for that unit after all parts operate satisfactorily.
 - 2. Contractor shall monitor bearing and motor temperatures during all tests and correct overheating.
- B. Functional Test: Conduct on each pump.
- 1. Alignment: Test complete assemblies for correct rotation, proper alignment and connection, and quiet operation.
 - 2. If excessive vibration is observed during the functional test, Contractor shall be responsible for correcting the issue at no additional cost to the OWNER. Excessive vibration shall be determined at the sole discretion of the ENGINEER.

3.3 MANUFACTURER'S FIELD SERVICES

- A. A factory trained representative shall be provided for start-up and test services and operation and maintenance personnel training services. The representative shall make one (1) one-day visit to the site for performing these services.

+ + END OF SECTION + +

11300-6

Section 11300 Pump and Motor Data Sheet	
Project	Pump Station A
Equipment Numbers	P-10-101, P-10-201, P-10-301
Equipment Location	Submersible
Drive Description:	
Drive Type	Variable Speed
Motor	3 PH 460V 60 HZ
Motor Horsepower	60 hp
Minimum L-10 Bearing Life	50,000 hours
Pump Description:	
Pump Type	Wet-pit submersible non-clog
Suction Diameter	10 in
Discharge Diameter	8 in
Operating Conditions:	
Liquid Pumped	Raw sewage
Pumped Fluid Temperature	40 to 80 degrees F, 60 deg average
Ambient Temperature	32 to 85 degrees F
Site Altitude	21 ft
Pump Operating Conditions:	
Pump Rated Speed	1170 rpm
Minimum NPSHR	13 ft
Minimum Continuous Stable Flow	347 gpm
Minimum Shutoff Head	111 ft
Pump Design Points:	
1 st Operating Point:	
Capacity (gpm) → 1 pump, FM1	1,345
Total Dynamic Head (ft)	81
Minimum Overall Efficiency	63%
2 nd Operating Point:	
Capacity (gpm) → 2 pumps, FM1 & FM2	4,420 (2,210 each)
Total Dynamic Head (ft)	67
Minimum Overall Efficiency	72%

11300-7

Section 11300 Pump and Motor Data Sheet	
Project	Pump Station B
Equipment Numbers	P-20-101, P-20-201, P-20-301
Equipment Location	Submersible
Drive Description:	
Drive Type	Variable Speed
Motor	3 PH 460V 60 HZ
Motor Horsepower	250 hp
Minimum L-10 Bearing Life	100,000 hours
Pump Description:	
Pump Type	Wet-pit submersible non-clog
Suction Diameter	10 in
Discharge Diameter	8 in
Operating Conditions:	
Liquid Pumped	Raw sewage
Pumped Fluid Temperature	40 to 80 degrees F, 60 deg average
Ambient Temperature	32 to 85 degrees F
Site Altitude	34.5 ft
Pump Operating Conditions:	
Pump Rated Speed	1780 rpm
Minimum NPSHR	16 ft
Minimum Continuous Stable Flow	347 gpm
Minimum Shutoff Head	235 ft
Pump Design Points:	
1 st Operating Point:	
Capacity (gpm) → 1 pump, FM1	2,100
Total Dynamic Head (ft)	274
Minimum Overall Efficiency	63%
2 nd Operating Point:	
Capacity (gpm) → 2 pumps, FM1 & FM2	5,634 (2,817 each)
Total Dynamic Head (ft)	251
Minimum Overall Efficiency	70%

11300-8

SECTION 12100**MISCELLANEOUS FURNISHINGS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings:
 - 1. Provide manufacturer's information for each Miscellaneous Furnishing provided.

PART 2 - PRODUCTS**2.1 DESK (DSK-01)**

- A. Construction/Features:
 - 1. Meets all Business and Institutional Furniture Manufacturer's Association (BIFMA) standards
 - 2. Size: 30-inch wide by 60-inch long by 30-inch high
 - 3. Arrangement: Double pedestal
 - a. Three equal drawers on the right
 - b. Two drawers on the left, one sized and equipped for hanging files. File drawer shall be lockable. Provide 2 keys.
 - 4. Materials: Steel
 - 5. Legs: 1" square tube steel, chrome plated, with leveling guides
 - 6. Color: Grey
- B. Manufacturer and Model:
 - 1. Steelcase DP6030-GY
 - 2. Or equal

2.2 CHAIR (CHR-01)

- A. Materials:
 - 1. Steel Core
 - 2. Tubular steel base
 - 3. Nylon glides
 - 4. Polyurethane foam cushions
 - 5. Color: Black
- B. Construction: comply with ANSI/BIFMA standards.
- C. Features:
 - 1. Pneumatically adjustable seat height.
 - 2. 360 degree swivel
 - 3. Back tilt
 - 4. Seat tilt
 - 5. Waterfall edges on seat pad
- D. Size:

12100-1

1. Seat width: 18-1/2"
2. Seat depth: 17"
3. Seat height: 17 to 35"
4. Back width: 15-1/2"
5. Back height: 12"
6. 26" footprint base
7. 2-1/2" nylon glides.

- E. Manufacturer and Model:
1. Taskmaster 5120
 2. Or equal

2.3 STORAGE CABINET (SC-01)

- A. Materials:
1. Minimum 22 Gauge Steel Construction
 2. Sides: 20 Gauge Steel
 3. Color: Grey
- B. Construction:
1. All-Welded Construction
 2. Cabinet shall have sides, a back, a top and a bottom, with doors on the front. With the doors closed, cabinet shall be completely enclosed and dust proof.
 3. 2" minimum toe-kick to raise bottom shelf off of floor
- C. Features:
1. Four adjustable shelves, 200 lb capacity
 2. Adjustable shelf rails with shelf positions in 2-inch increments
 3. Hinged doors to provide a completely enclosed cabinet
 - a. Three hinges per door
 - b. Three Point Lock System on both doors
 - c. Locking recessed paddle handle with key
- D. Size: 78" High x 36" Wide x 18" Deep
- E. Manufacturer and Model:
1. Sandusky, Model EA4R361878-05

PART 3 - EXECUTION

3.1 PREPARATION

- A. Assemble all Miscellaneous Furnishings in accordance with manufacturers instructions.

3.2 INSTALLATION

- A. Install plumb, level and without damaging adjacent surfaces or item being installed.
- B. Clean all furnishings prior to final acceptance.

+ + END OF SECTION + +

12100-2

SECTION 13100

ODOR CONTROL UNIT

PART 1 - GENERAL**1.1 DESCRIPTION**

A. Scope:

1. Provide all labor, equipment, materials, and incidentals as required to furnish, install, calibrate, test, document, start-up, and place in satisfactory operation the Odor Control Unit as shown on the Drawings and as specified.
2. The Odor Control Unit shall include, but not be limited to the following:
 - a. FRP Vessel
 - b. Media (Stage 1 Biological and Stage 2 Activated Carbon)
 - c. Fan and Motor Assembly
 - d. Nutrient System
 - e. Electrical Control Panel

B. General:

1. Descriptions contained hereinafter are for guidance and to show the functions desired. They do not describe or specify all components to interface equipment. All parts and equipment necessary to meet functional requirements shall be provided and fit within the dimensions and configuration shown on the Drawings.
2. Complete responsibility for the proper operation and functions of the Odor control unit herein specified, belongs to CONTRACTOR. Responsibility for coordination of all interfaces with other contractors to achieve the required Odor control unit operation belongs to CONTRACTOR.
3. Odor control equipment outdoor areas are considered corrosive areas. All mechanical and electrical equipment and material shall conform to NEMA 4X, non-metallic requirements.

C. Related Divisions and Sections:

1. Section 01610 – General Equipment Requirements
2. Section 01750 – Training, Testing and Start-up
3. Section 16010 – Electrical General

1.2 REFERENCES

A. American Society of testing and Materials (ASTM):

1. ASTM D-3299-88 Standard Specification for Filament Wound Glass Fiber Reinforced Thermosetting Resin Chemically Resistant Tanks.
2. ASTM C 582- "Standard Specification for Contact-Molded Reinforced Thermosetting Plastic (RTP) Laminates for Corrosion-Resistant Equipment"
3. ASTM D-4097-82: "Standard Specifications for Contact Molded Glass Fiber Reinforced Thermoset Resin Chemical Resistant Tanks"
4. Voluntary Product Standard PS 15-69

1.3 QUALITY ASSURANCE

A. Odor control unit Manufacturer's Qualifications:

13100-1

1. Manufacturer shall have minimum of five years' experience in producing substantially similar equipment with 2-stage (biological and carbon) and shall be able to show evidence of at least ten installations in operation for 5 years.
- B. When two or more units of equipment for the same purpose are required, they shall be the product of one manufacturer.
- C. Inspection and Testing Requirements: The visual inspection of the equipment shall comply with ASTM D 2563, Visual Acceptance Level II.
- D. Requirements of Regulatory Agencies: Meet federal, state, and local requirements which apply to the work.
- E. Products used in the Work of this Section shall be produced by manufacturers regularly engaged in the production of such items and have a successful history of product acceptability, as interpreted by ENGINEER.
- F. Listing, labeling or marking, as conforming to the Standards of Underwriters Laboratories, Inc., American National Standards Institute, Inc., United States Bureau of Mines, or other nationally recognized testing organization as applicable.
- G. Warranty: The manufacturer shall warrant that the equipment provided shall be free of defects in material and workmanship for a period of 12 months from beneficial occupancy. The warranty period shall not extend beyond 18 months from delivery of the system to the jobsite. The warranty does not apply to the carbon media.

1.4 SUBMITTALS

- A. Shop Drawings: Submit for approval the following:
 1. Submit for review to ENGINEER:
 - a. Manufacturer's literature, detailed specifications, and drawings, including equipment cross-sections
 2. Submittals shall clearly show:
 - a. Dimensions, weights, type, speed, and materials of construction for odor control equipment
 - b. Horsepower, service factors, speed, efficiency, and materials of construction for electrical motors
 - c. Special design features and any other information required by ENGINEER for review of all odor control equipment
- B. Operation and Maintenance Manuals:
 1. Submit complete installation, operation and maintenance manuals.
 2. The manuals shall include the following information, at a minimum: test reports, maintenance data and schedules, description of operation and spare parts information.
- C. Documentation to demonstrate that the manufacturer has been regularly engaged in fabricating packaged 2-stage (biological and carbon) odor control units for at least 5 years and provide documentation of at least 10 installations.
- D. Field Assembly Instructions: Provide instructions on proper assembly of odor control unit.

1.5 GUARANTEE

- A. Manufacturer shall provide a guarantee stating that the hydrogen sulfide (H₂S) removal efficiency (with an average inlet of 50-100 ppmv H₂S) will be greater than 99% (or 0.1 ppm outlet, whichever is greater).

PART 2 - PRODUCTS2.1 PRODUCTS

- A. Odor Control Unit
1. The purpose of the odor control unit shall be to remove H₂S and other odor-causing compounds or VOCs emanating from ambient sewage emission. Each odor control unit shall include the following:
 - a. Two-stage odor control:
 - 1) Biological stage
 - 2) Adsorption stage
 - b. Media
 - 1) Biological media
 - 2) Activated carbon
 - c. Fan and Motor Assembly
 2. Design of the odor control unit has been based on Integrity Municipal Systems, LLC, i-BOx system.
 3. Design and Performance Criteria:
 - a. Each odor control unit shall be designed for the following operating conditions and shall meet the following performance criteria when put in service:
 - b. Air Flow Rate
 - 1) **FA-10**, Pump Station A: 333 cfm
 - 2) **FA-20**, Pump Station B: 371 cfm
 - c. Average Inlet H₂S Concentration, ppmv: 50-100
- B. FRP Vessel
1. The biological odor control vessel shall be manufactured of fiberglass reinforced plastic (FRP). No other material of construction is acceptable.
 2. The system vessel shall have all components pre-mounted and piped.
 3. The biological odor control system shall be manufactured with the following material of construction according to following fabrication method:
 - a. Vessel and accessories shall be contact molded and manufactured in accordance with NBS PS15-69, ASTM 4097.
 - b. Any material of construction other than FRP with premium grade resin shall not be acceptable.
 - c. Reinforcement: Glass fiber reinforcement used shall be commercial grade corrosion resistant borosilicate glass.
 - d. Fabrication:
 - 1) General: In accordance with NBS PS 15-69, ASTM D 3299 and ASTM D-4097.
 - 2) Corrosion Liner: The inner surface of all laminates shall be resin rich and reinforced with one NEXUS 111-00010 with a minimum thickness of 10 mils. The total corrosion liner thickness shall be a minimum of 100 mils.
 - 3) Structural Laminate: Structural laminates shall consist of alternating layers of chopped glass and woven roving applied to reach a designed thickness. The

exterior shall be surface coated with white gel coat containing ultraviolet light inhibitors.

4. Access Manways: The vessel shall be provided with access manways to allow access to the internals of the odor control system. At a minimum, access manways shall be provided between stages.
5. Media support and screen: The system vessel shall be provided with an HDPE and FRP support system with polypropylene screen to accommodate the biological media and carbon media beds.
6. Vessel Accessories: The system shall be provided with all piping, valves and internals. Air inlet, air outlet, spray headers, drain and all vessel fittings shown on the drawings shall be provided by the Manufacturer.
7. Hardware and Gaskets: All hardware and anchor lugs shall be Type 316 stainless-steel. All bolts shall be designed for the specified loads. Gaskets shall be a minimum of 1/8" thick, full face, EPDM, suitable for the intended service.
8. Neoprene Pad: Provide a 1/4" thick, 60 durometer neoprene pad and place it underneath the scrubber vessel during installation.

C. Media

1. The media utilized by the reactor vessel shall be provided by the system supplier and installed in the vessel before shipping.
2. Media:
 - a. Stage 1 – inorganic expanded clay biological media as the support substrate for selectively growing sulfur-oxidizing autotrophic bacteria.
 - 1) Media shall be randomly dumped in the vessel to allow a low pressure drop.
 - 2) Media shall be porous and resistant to hydrogen sulfide and acidic conditions.
 - 3) Media shall be non-proprietary and commercially available.
 - b. Stage 2 – coal based activated carbon media to adsorb residual H₂S and other odor compounds.
 - c. Total media depth shall be a minimum of 48 inches.

D.

D. Fan and Motor Assembly

1. Fan: The fan shall be a centrifugal fan of FRP construction with a radial blade wheel. Wheel shall be statically and dynamically balanced. All parts of the fan that are exposed to the airstream shall be epoxy coated. The Fan shall bear the AMCA seal.
 - a. All fans shall be equipped with the following features and accessories:
 - 1) Inlet shall be slip type.
 - 2) Outlet shall have a flanged nozzle.
 - 3) Shaft seal shall be double lip type.
 - b. Fan shall be New York Blower, Hartzell, or equal.
 - c. Fan shall be designed for the following specifications:

	FA-10	FA-20
Airflow Rate, cfm	333	371
S.P. up to System Inlet, in w.c.	2.0	2.0
Total Pressure Drop, in w.c.	5.0	5.0
Motor, HP	1.5	1.5

2. Motor:
 - a. The motor shall be a TEFC direct drive unit, with a 1.15 service factor
 - b. Power to the motor shall be up to 1.5 HP 3 phase, 60 Hz, 230-460 Volt.

E. Integrated Nutrient Reservoir and Nutrient Pump

1. Nutrient Addition: The biological odor control system shall use a non-proprietary, commercially available fertilizer to provide essential nutrients to optimize the growth of sulfur-oxidizing bacteria. Nutrients supplied as a coating to the support media or proprietary nutrients shall not be allowed. The system shall be equipped with a nutrient addition system that provides a controlled dosage of nutrients that is automatically fed to the irrigation water during each irrigation cycle with the help of a nutrient pump.
2. The Nutrient reservoir shall be integral to the system. The nutrient reservoir shall be made of FRP. The nutrient reservoir shall have a float-type level switch to detect a low level. Loose nutrient tanks shall not be acceptable.
3. The Nutrient pump shall be solenoid type and shall be mounted in the water cabinet.

F. Electrical Control Panel

1. The electrical control panel shall house all required controls for the entire system. The electrical control panel shall be mounted onto the system by the odor control supplier. The power supply shall be 480V/3ph/60 Hz.
2. The panel shall be rated NEMA 4X and shall be made of FRP. The panel shall be factory tested with all other components prior to shipment.
3. The electrical control panel shall be provided with the following:
 - a. "ON-OFF" switch for fan
 - b. "Fan Running" indicator light
 - c. VFD for fan
 - d. "Hand-Off-Auto" switch for Nutrient Pump
 - e. "Nutrient Pump Running" indicator light
 - f. "Nutrient Tank Low" indicator light
 - g. Push button switch with status lights for water valve
 - h. Timer relay for on/off control of water valve
 - i. Control Transformer (480V to 120V)

G. Instrumentation and Water Controls

1. The water irrigation controls shall be mounted in a completely separate FRP water cabinet on the vessel and shall consist of the following components:
 - a. Ball valves
 - b. Pressure reducing valve
 - c. Pressure gauge
 - d. Solenoid valve
 - e. Gate control valve
 - f. Rotameter: Variable area type with a Teflon float, EPR O-rings and PVC fittings. The rotameter shall have a direct reading scale.
 - g. Nutrient injection connection
 - h. Water fill piping for nutrient
 - i. Nutrient pump
2. An independent media irrigation system is incorporated into Stage 1 to provide the biological media with adequate moisture. The system shall be designed to irrigate the top of the first media bed with complete and even coverage via spray nozzles. Potable water or plant effluent water can be used provided that residual chlorine concentrations are less than 5 ppm.

H. Piping

1. All make-up water and drain piping shall be Schedule 80 PVC.

- I. Manufacturers/Models:
 - 1. Biological Odor Control System: i-BOx 4000 and 5000: Integrity Municipal Systems
 - 2. Or Approved Equal

2.2 SURFACE PREPARATION AND PAINTING

- A. Motors, drives, and appurtenances shall receive shop primer and shop coating conforming to requirements of Section 09900 – Painting. If any damage to the paint system occurs, the equipment shall be repainted as directed by the ENGINEER.
- B. Surface preparation and painting shall conform to the requirements of Section 09900 – Painting.
- C. All gears, bearing surfaces, machined surfaces and other surfaces which are to remain unpainted shall receive a heavy application of grease or other rust-resistant coating. This coating shall be maintained during storage and until the equipment is placed into operation.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Equipment shall be installed as specified herein, as indicated on the Drawings, and in accordance with the manufacturer's recommendations and instructions.
- B. All equipment shall be installed with Type 316L stainless steel anchor bolts as specified in Section 05051 – Anchors, Inserts and Dowels.
- C. It is the CONTRACTOR's responsibility to provide:
 - 1. FRP inlet piping from pick-up point source to fan inlet connection.
 - 2. Wiring to/from system control panel to remote-mounted equipment, plant SCADA, etc.
 - 3. Power to system control panel (480V, 3 ph, 60 Hz, 25 Amps)
 - 4. Suitable concrete mounting pads and other incidentals as necessary to complete the installation
 - 5. Drain- a minimum of 2 inches PVC gravity drain to sewer with a barometric trap
 - 6. Water Supply- a ¾ inch water supply with backflow preventer is required.

3.2 MANUFACTURER'S FIELD SERVICES

- A. The manufacturer shall provide one (1) person-day for installation inspection, system start up, flow balancing, air testing, and training.

+ + END OF SECTION + +

13100-6

SECTION 13110**ODOR CONTROL UNIT
(PASSIVE ADSORBENT MEDIA FOUL AIR SCRUBBER)****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope:
1. Provide all labor, equipment, materials, and incidentals as required to furnish, install, check and place in satisfactory operation the Passive Odor Control Units for combination air relief and air relief valves as shown on the Drawings and as specified.
 2. The Odor Control Unit shall include, but not be limited to the following:
 - a. Odor Control Unit Body with Internal Components
 - b. Media
 - c. Spare parts as specified herein
- B. General:
1. Descriptions contained hereinafter are for guidance and to show the functions desired. They do not describe or specify all components to interface equipment. All parts and equipment necessary to meet functional requirements shall be provided and fit within the dimensions and configuration shown on the Drawings.
 2. The design has been based on odor control units manufactured by Wager Company. The cost of any changes and modifications to mechanical, structural, necessary to adapt equipment to the layout and design shown shall be borne by CONTRACTOR. Clearances shown on the Drawings shall be maintained. Any such proposed changes or modifications are subject to review and acceptance by the ENGINEER in accordance with the Special Provisions.
 3. Complete responsibility for the proper operation and functions of the Odor control unit herein specified, belongs to CONTRACTOR. Responsibility for coordination of all interfaces with other contractors to achieve the required Odor control unit operation belongs to CONTRACTOR.

1.2 REFERENCES

- A. American Society of testing and Materials (ASTM):
1. ASTM-D6646 – 03 (2014) - Standard Test Method for Determination of the Accelerated Hydrogen Sulfide Breakthrough Capacity of Granular and Pelletized Activated Carbon.

1.3 QUALITY ASSURANCE

- A. Odor control unit Manufacturer's Qualifications:
1. Manufacturer shall have minimum of five years experience of producing substantially similar equipment for combination air relief valve (CARV) or air relief valve passive odor (ARV) control, and shall be able to show evidence of at least ten installations.
- B. When two or more units of equipment for the same purpose are required they shall be the product of one manufacturer.

13110-1

- C. Requirements of Regulatory Agencies: Meet federal, state, and local requirements which apply to the work.
- D. Products used in the Work of this Section shall be produced by manufacturers regularly engaged in the production of such items and have a successful history of product acceptability, as interpreted by ENGINEER.
- E. Listing, labeling or marking, as conforming to the Standards of Underwriters Laboratories, Inc., American National Standards Institute, Inc., United States Bureau of Mines, or other nationally recognized testing organization.

1.4 SUBMITTALS

- A. Shop Drawings: Submit for approval the following:
 - 1. Submit for review to ENGINEER, sufficient literature, detailed specifications, and drawings to show dimensions, make, style, , size, type, , service factors, efficiency, materials used, design features, internal construction, weights, and any other information required by ENGINEER for review of all passive odor control equipment.
- B. Operation and Maintenance Manuals:
 - 1. Submit complete installation, operation and maintenance manuals, including, test reports, maintenance data and schedules, description of operation and spare parts information.
- C. Documentation to demonstrate that the manufacturer has been regularly engaged in fabricating odor control units for at least 5 years and provide documentation of at least 10 installations.
- D. Field Assembly Instructions: Provide instructions on proper assembly of odor control unit.
- E. Manufacturer shall provide laboratory analysis from certified laboratory for the engineered dry odor control media verifying the hydrogen sulfide capacity. The analysis shall be performed within six months of the date of submittal.

1.5 GUARANTEE

- A. Manufacturer shall provide a guarantee stating that the hydrogen sulfide (H₂S) removal efficiency (with an average inlet of 25 ppmv H₂S) will be greater than 99% prior to carbon media being spent.

PART 2 - PRODUCTS

2.1 PRODUCTS

- A. Odor Control Unit
 - 1. The purpose of the odor control unit shall be to remove H₂S and odors or VOCs in ambient sewage emissions emanating from combination air relief valves and air relief valves installed on a sewer force main. Each odor control unit shall include the following:
 - a. A fabricated aluminum plate odor control unit body, powder coated grass green. Minimum 450 lb. dry odor control media capacity

- b. 450 lbs. of odor scrubbing media engineered in pellet form.
 - c. Flanged inlet connection and size as indicated on drawings.
 - d. Tamper proof lockable hook and security latches.
 - e. Disposable media corrugated plastic inserts.
 2. Design of the odor control unit has been based on Wager 2050-450i Vent Scrubber System, Drawing No. 2050FAPC-IWS-450.
 3. Design and Performance Criteria:
 - a. Each odor control unit shall be designed for the following operating conditions and shall meet the following performance criteria when put in service with fresh dry odor control media:
 - b. The odor control unit airflow shall be designed for passive applications. The configuration shall be arranged so that the contaminated air shall flow into the inlet flange and be forced upward through the media bed and discharged through the ventilated openings.
 - c. Average Inlet H₂S Concentration, ppmv: 25.
 - d. Instantaneous Peak Inlet H₂S Concentration, ppmv: 100
 - e. H₂S Removal Efficiency, (With an average inlet of 25 ppmv H₂S): Greater than 99% prior to Carbon media being spent.
- B. Odor Control Unit Body
 1. The odor control unit body shall be manufactured of Fabricated Aluminum Plate and powder coated grass green.
 2. Nine corrugated plastic canisters that measure 11.6" by 18" shall be outfitted into the odor control unit body. Each canister contains 50 lb of dry odor control media for a total of 450 lbs. of media.
 3. Latches and Hooks shall be 316 stainless steel
 4. Equipment Tags: From the factory, vessel shall be provided with Type 316L stainless steel equipment tags with the following minimum information:
 - a. Media Type.
 - b. Odor Control Unit Dimensions.
 - c. Date of Manufacture.
 - d. Design Conditions.
- C. Air Admittance Valves
 1. Scrubber Unit Body shall contain eight air admittance valves to provide process airflows during pumping sequences as required for air relief valve installations and to allow outside fresh air intake for combination air relief valve installations.
 2. Required Air Intake Flow Rates:
 - a. PFA-1 – 2000 CFM
 - b. PFA-2 – 2000 CFM
 - c. PFA-3 – 2000 CFM
 - d. PFA-4 – 2000 CFM
- D. Dry Odor Control Media
 1. The media utilized shall be of engineered type and provided by the odor control unit supplier..
 2. The media will consist of the following physical properties:
 - a. Maximum Moisture Content: 35%
 - b. Average Crush Strength: 35% min – 70% max
 - c. Average Abrasion: 4.5% Max
 - d. Pellet Diameter: 1/16" (1.5mm-6.5mm)
 - e. H₂S Removal Capacity: 0.30 g/cc min

13110-3

f. New Media must be non-hazardous.

* System supplier shall provide a test report from an independent laboratory using ASTM-D6646 test method for hydrogen sulfide capacity.

E. Manufacturers/Models:

1. Wager Company Model 2050-450 Vent Scrubber
2. Or equal

2.2 SPARE PARTS AND MAINTENANCE MATERIALS

- A. Each odor control unit shall be furnished with a manufacturer's repair kit which shall include as a minimum the following:
1. Special tools required for maintenance and operation.
- B. Spare parts shall be packed in sturdy containers with clear indelible identification markings and shall be stored in a dry, warm location until transferred to the OWNER at the conclusion of the Project.

2.3 ODOR CONTROL UNIT SCHEDULE

A. Schedule

TAG	LOCATION
PFA-1	Morro Creek Utility Bridge - 33+30
PFA-2	Main St - 56+75
PFA-3	Roundabout - 94+30
PFA-4	Quintana HPT - 114+30

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Equipment shall be installed as specified herein, as indicated on the Drawings, and in accordance with the manufacturer's recommendations and instructions.
- B. All equipment shall be installed with Type 316L stainless steel anchor bolts as specified in Section 05051, Anchors, Inserts and Epoxy Dowels.

3.2 MANUFACTURER'S FIELD SERVICES

- A. The manufacturer shall provide one (1) person-day for installation inspection, system start up, and training.

+ + END OF SECTION + +

13110-4

SECTION 13122

PRE-ENGINEERED PIPE BRIDGE

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: Design, manufacture and installation of prefabricated steel pipe bridge, including but not limited to primary framing, decking, lateral support system, railing, pipe supports, bearings and painting, to the dimensions shown on the Construction Drawings.

1.2 QUALITY ASSURANCE

- A. Reference Standards: Bridges and appurtenances shall be designed, fabricated, installed and inspected to the latest edition of the following standards:
1. AASHTO Guide Specifications for Design of Pedestrian Bridges
 2. American Institute of Steel Construction (AISC)
 3. American Society of Testing Materials (ASTM)
 4. American Welding Society (AWS) Bridge Welding Code
- B. Qualifications:
1. Designer: Licensed Professional Civil or Structural Engineer valid in California.
 2. Fabricator: Qualified suppliers must have at least five years experience constructing/fabricating bridges of similar size and complexity.
- C. Qualifications for Welding Work:
1. Qualify welding processes and welding operators in accordance with AWS "Structural Welding Code" D1.1, Section 5, Qualification.
 2. Provide certification that all welders employed on or to be employed for the Work have satisfactorily passed AWS qualification tests within the previous 12 months. Ensure that all certifications are kept current.
 3. All welds will be subject to visual inspection. Where visually deficient welds are observed, the welds will be tested using non-destructive methods by a certified testing laboratory. If welds are found to be satisfactory, OWNER will pay for testing. Where welds are found unacceptable or deficient, CONTRACTOR shall pay for testing, correct improper workmanship, remove and replace, or correct as instructed, all welds found unacceptable or deficient. Responsibility belongs to CONTRACTOR to pay for all corrections and subsequent tests required to confirm the integrity of the weld.

1.3 SUBMITTALS

- A. Shop Drawings: Stamped and signed by the manufacturer's engineer per paragraph 1.2.B and prepared specifically for this Project. Show the following items, at minimum:
1. Design load criteria and bridge reactions
 2. Material specifications for members and connections
 3. Framing plan
 4. Bearing plate details showing anchor bolt size and layout

5. Sections showing framing and bracing
 6. Instructions for temporary bracing, as required
 7. Details for joining framing members and railing
 8. Details for pipe supports
 9. Sections and details for all components and accessories
- B. Structural Calculations: Stamped and signed by the manufacturer's engineer per section 1.2.B. Show the following items, at minimum:
1. Complete analysis and design of structural components and connections in accordance with the design requirements indicated and codes specified.
 2. Submit calculations for approval prior to fabrication.
- C. Product Data:
1. Manufacturer's written instructions for shipping, handling, storage, protection and erection or installation
 2. Manufacturer's literature and technical data
 3. Painting System: Specifications including paint manufacturer's name, product trade-name and preparation for shop and field coats

1.4 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Protect components and accessories from corrosion, deformation and other damage during delivery, storage, handling and installation.
- B. Deliver to site with parts individually tagged. Store on wood blocking, flat and off ground, to keep clean and to prevent any damage or permanent distortion. Support bundles so there is no danger of tipping, sliding, rolling, shifting, or material damage.

1.5 WARRANTY

- A. The manufacturer shall provide a warranty against defects in material and workmanship for a period of ten years.

PART 2 - PRODUCTS

2.1 MANUFACTURER

- A. Bridges manufactured or supplied by the following manufacturers, and meeting these Specifications, shall be used on this Project:
1. Big R Bridge
 2. Contech Engineered Solutions
 3. Gator Bridge
 4. Or equal

2.2 SERVICE CONDITIONS AND DESIGN CRITERIA

- A. General:
1. All loads shall be proportioned and applied in accordance with the current AASHTO Guide Specifications for Design of Pedestrian Bridges.
 2. Vertical Live Load deflection shall be limited to L/360. Horizontal Wind Load deflection shall be limited to L/360.

3. Assembly shall permit movement of components without buckling, failure of joints, undue stress on fasteners or other detrimental effects, when subject to temperature range of 110°F.
4. ~~Bridge shall be cambered for all Dead Loads on the bridge plus 1% of the overall span length.~~ Bridge shall have a vertical camber dimension at midspan equal to one hundred percent (100%) of the full dead load deflection.^{AD2}

B. Load Designation:

1. Dead Load:
 - a. Bridge self-weight plus pipelines full of water as shown on the Drawings.
2. Live Load:
 - a. 60 pounds per square foot.
3. Wind Load:
 - a. As specified by AASHTO Signs, Articles 3.8 and 3.9, but not less than 30 pounds per square foot applied to the full vertical projected area of the bridge as if enclosed, at right angles to the longitudinal axis of the structure.
4. Seismic Load, Mapped Acceleration Parameters:
 - a. $S_1 = 0.426$
 - b. $S_s = 1.153$
 - c. $PGA = 0.457$
5. Top Chord / Rail Load:
 - a. 50 plf applied in any direction and a non-concurrent load of 200 pounds in any direction.

2.3 COMPONENTS

- A. Bridge shall be fabricated from corrosion resistant high-strength steel material meeting, ASTM A242, A588 or A847.
 1. All open ends of posts and floor support tube shaped beams shall be capped.
 2. Drain holes shall be provided for all sections at the low point of the member that may become filled with water.
 3. Minimum thickness of primary hollow structural shapes (HSS) and rolled shapes shall be 1/4-inch.
- B. Bridge Walkway: Grating
 1. Weld forged rectangular design spaced approximately 1-3/16 inches x 4 inches on center.
 2. Grating Size and Design:
 - a. Main bars to be 3/16 inches thick.
 - b. Depth as determined by the designer/manufacturer to support loads specified, 1-1/2 inches minimum.
 - c. Cross bars to be twisted square steel and resistance welded at right angles to the main bars.
 3. Material:
 - a. Galvanized steel: ASTM A36, hot dipped galvanized per ASTM A123 after fabrication
 4. Plank clips for grating hold-downs or other required attachments shall be galvanized steel or Type 304 stainless steel.
 5. No notching or cutting of bearing bars is permissible.
 6. All exposed bearing ends of grating shall be enclosed in a perimeter band of the same dimensions and material as the main bars, including ends at all cutouts.

7. Grating shall be fabricated into easily removable sections and shall be fastened at each corner and as required with fasteners provided by the grating manufacturer. No fasteners shall be permitted to project above the walking surface.
- C. Bolts: Galvanized ASTM A325 with nuts and washers.
- D. Guardrail: Provide guardrail on both sides of the bridge over the full length that extends 3'-6", minimum, above the walking surface. Clear opening between members shall reject the passage of a 21-inch diameter sphere.
- E. Bearing Pads: Elastomeric pads shall be designed for a full temperature range from 20°F to 120°F. Elastomeric pads shall be designed as steel reinforced where necessary. Cotton duct or fiberglass reinforcement shall not be permitted.
- F. Anchor Rods: Cast-in-place galvanized ASTM F1554, Grade 36, minimum, unless noted otherwise. Diameter shall be determined by the bridge manufacturer.
- G. Concrete Foundations: Any changes needed to modify the foundations shown on the Drawings to accommodate contractor initiated design changes shall be designed and seal by a Professional Civil or Structural Engineer registered in the state of the project at no additional cost to the OWNER.
- H. Pipe Supports:
1. In addition to the pipe supports specifically called for on the Drawings, CONTRACTOR shall provide pipe supports as required to fully support all piping systems.
 2. CONTRACTOR shall design, supply and install pipe support system. Support design shall include allowances for thermal expansion and contraction.
 3. Pipe supports shall, at a minimum, be installed along straight runs of pipe with a maximum distance between supports as listed below:

Pipe Diameter	Maximum Distance Between Supports	Minimum Hanger Rod Diameter (if Hanger Rods are used)
2" and smaller	6-feet	1/2"
2-1/2" to 6"	8-feet	3/4"
8" to 12"	10-feet	2 @ 3/4"
14" to 18"	10-feet	2 @ 1"
Over 18"	Custom Design	

I. ~~Fence~~

- ~~1. Bridge design shall include the chain link fence shown in the contract drawings. Reference Section 02830, CHAIN LINK FENCES AND GATES for the required product data and additional design requirements. Provide connections to the bridge as required for fence posts and/or fence fabric. The post sizes shown in Section 02830 can be modified as required to be coordinated with the bridge design provided the posts sections used meet or exceed the section modulus of the posts sizes shown in Section 02830.~~^{AD2}

2.4 FABRICATION

- A. Verify all field dimensions prior to bridge fabrication.

- B. Factory fabricate to manufacturer's written standards and AISC Specifications accurately and dimensionally correct to facilitate bridge erection without field alteration.
- C. All welding shall be in accordance with the current addition of the AWS D1.1 Structural Welding Code using the Gas Metal Arc or Flux Cored Arc Welding Processes.
- ~~D. Paint all surfaces of structural steel in accordance with Section 09900 -- Painting.~~^{AD2}

PART 3 - EXECUTION**3.1 PREPARATION**

- A. Inspect mechanical piping and electrical conduit, where occurs, supporting concrete foundations, and anchorage systems for compliance with requirements for installation tolerances. Notify ENGINEER in writing of conditions detrimental to proper and timely completion of Work. Do not proceed with Work until unsatisfactory conditions have been corrected in a manner acceptable to ENGINEER.

3.2 INSTALLATION

- A. General: Comply with AISC Specifications and AASHTO LRFD Bridge Design Specifications and as herein specified.
- B. Surveys: Provide services of a registered surveyor to check lines and elevations of concrete bearing surfaces, location of anchor bolts and similar devices before bridge erection proceeds. Discrepancies shall be reported immediately to ENGINEER, in writing. Do not proceed with erection until corrections have been made, or until compensating adjustments to the structural steel have been agreed upon with ENGINEER.
- C. Anchor Bolts: Furnish anchor bolts and other connectors required for securing structural members to the foundation and other in-place Work.
 - 1. Furnish templates and other devices as necessary for presetting bolts and other anchors to accurate locations.
- D. Setting Bases and Bearing Plates: Clean concrete bearing surfaces. Set bearing plates loose and attach structural members. Tighten anchor bolts after the supported members have been positioned and plumbed.
- E. Install bridge sections in the order shown on the shop drawings.

3.3 FIELD QUALITY CONTROL

- A. Correct deficiencies in Work that inspection and/or laboratory test reports indicate do not comply with the Specifications. Perform additional tests, as may be required to reconfirm any non-compliance of the original Work, and as may be required to show compliance of corrected Work.

- B. Welding inspections shall be in accordance with AWS "Structural Welding Code" D1.1, Section 6, Inspection. OWNER reserves the right to conduct a separate independent visual inspection, by a Certified Welding Inspector (CWI). Any additional defects found by the OWNER's CWI shall be repaired.

+ + END OF SECTION + +

SECTION 13250**SURGE TANK SYSTEM****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Scope: Provide surge tank, air compressor, automatic level control system, instrumentation and all appurtenances required to provide a complete fully functional system.
- B. All equipment specified in this Section shall be supplied by a single system supplier or Manufacturer.

1.2 QUALITY ASSURANCE

- A. Quality Control Submittals:
 - 1. Tank Manufacturer's written instructions.
 - 2. Manufacturer's Certificate of Compliance that tank is certified and stamped in accordance with ASME Section VIII, Division 1.
 - 3. All local Plumbing Codes shall be met.
 - 4. The system and anchorage of the surge tank shall conform to the 2016 California Building Code (2015 International Building Code (IBC), as amended by the State of California).
 - 5. The National Electric Code (NEC) shall be used for all wiring.
 - 6. Manufacturer's Certificate of Proper Installation.
 - 7. Statements of Qualification: Tank welders. Tank welders shall be ASME certified.
 - 8. Test Reports:
 - a. Date and time of testing.
 - b. Description of method of testing, including pumping combinations and pressure records.
 - c. Description of any observed leaks or failures and method and date of repair.
 - d. Description of catastrophic failures.
 - e. Signature of the CONTRACTOR and Manufacturer's representative.

1.3 SUBMITTALS

- A. Shop Drawings:
 - 1. Complete dimensional fabrication drawings of surge tank and accessories certified correct by system supplier.
 - 2. Complete piping schematic drawings showing air and liquid piping and flows directly associated with surge tank.
 - 3. Complete control panel drawings, including ladder logic diagram, component schedule and component cut-sheets, wiring diagram, terminal strip identification, etc.
 - 4. Structural design calculations, sealed and signed by a Civil or Structural engineer, licensed in the State of California.
- B. Field Assembly Instructions: Provide instructions for unloading and installing surge tank and appurtenances.

13250-1

- C. Operation and Maintenance Manuals: Submit complete manuals including copies of all approved Shop Drawings, test reports, maintenance data and schedules, description of operation, and spare parts information. Include a copy of ASME Pressure Vessel Code Form U-1A.

PART 2 - PRODUCTS**2.1 PRODUCT AND MANUFACTURER:**

- A. Pulsco Corporation, VT-72-2500
- B. Or equal.

2.2 DIMENSIONAL AND PHYSICAL DATA

- A. Physical Data for ST-20:
1. Total Volume: 2,500 gallons
 2. Initial Air Volume (high pressure): 875 gallons (35% of Total Volume)
 3. Working Volume: 1,500 gallons (60% of Total Volume)
 4. Configuration: Vertical cylinder
 5. Shell Diameter: 6'-0"
 6. Design Minimum Pressure: 25 psi
 7. Design Maximum Pressure: 120 psi
 8. Water Seal at Minimum Pressure: 15% of Total Volume
 9. Design Pressure Rating: 150 psi
 10. Design Temperature: 85°F
 11. Liquid Service: Wastewater

2.3 STRUCTURAL DESIGN

- A. The surge tank and its major components, including anchor bolts and other supporting and restraining parts, shall be designed by a Civil or Structural engineer, licensed in the State of California, to resist lateral forces in accordance with the 2016 California Building Code, latest edition. Forces shall be based on the empty, operating, or flooded weights, whichever is greatest.
- B. Support Saddles:
1. Surge tank supplier shall supply steel support saddles as required to support tank.
 2. Support saddles shall be integral with tank.
 3. Support saddle shall be designed to keep the bottom flange of the tank 12-inches off of the ground.
 4. Surge tank supplier shall size and provide stainless steel anchor bolts for installation into concrete footings provided by others.
 5. Surge tank supplier shall provide transfer-load values to the ENGINEER for the design of the concrete footings.
- C. Design Criteria:
1. Snow: No snow load.
 2. Basic Wind Speed: 115 mph, Exp. C.
 3. Seismic:
 - 1) S_s (maximum short-term spectral response acceleration) = 0.798

- 2) S_1 (maximum 1-second spectral response acceleration) = 0.426
- 3) S_{Ds} (design short-term spectral response acceleration) = 0.798
- 4) S_{D1} (design 1-second spectral response acceleration) = 0.447
- 5) I (Seismic Importance Factor) = 1.25
- 6) Seismic Use Group = II

D. Proof of Compliance:

1. Structural integrity and anchorage shall be certified by an approved calculation that demonstrates the adequacy of the anchorage system for seismic forces. This calculation may be based on principles of structural analysis and engineering mechanics.
2. The CONTRACTOR shall submit for review and approval test data or calculations certified by a Civil or Structural Engineer registered in the State of California to show compliance with the above requirements.

2.4 FABRICATION

- A. Fabricate tank in accordance with ASME Boiler and Pressure Vessel Code, Section VIII, latest edition.
- B. Plate Thicknesses: Determine in accordance with allowable stresses listed in the Code for material, pressure, and temperature specified.
- C. Heads: As specified in ASME Code, Section VIII, Division 1.
- D. Corrosion Allowance:
 1. For Liquid Service of Wastewater, increase the shell and head thicknesses to provide a minimum corrosion allowance of 0.125 inch.
- E. Stamp and certify tank in accordance with ASME Code Section VIII, Division 1.

2.5 COATINGS

- A. The interior of the tank shall have two coats of the following, suitable for wastewater:
 1. Tnemec 22
 2. Tnemec 61
 3. Or Equal
- B. Exterior of tank shall be painted as follows. Prepare surfaces to be painted per coating manufacturer's requirements. Color to be selected by OWNER.
 1. Primer: 3 mils of zinc-rich primer
 - a. Tnemec-Zinc
 - b. Or Equal
 2. Middle: 4 mils of epoxy
 - a. Tnemec, Series N69, Hi-Build Epoxoline II
 - b. Or Equal
 3. Polyurethane Top Coat: 1 coat Aliphatic Acrylic Polyurethane designed for exterior weathering, abrasion and corrosion resistance, 3-4 mil thickness
 - a. Tnemec, Series 73, Endura-Shield
 - b. Or Equal

2.6 COMPONENTS AND APPURTENANCES

- A. Surge Tank (ST-20): Components of the surge tank are shown on the Drawings and described below. Generally, components are as follows:
1. Manway(s): One minimum, size as shown, design and fabricate in accordance with ASME Boiler and Pressure Vessel Code, Section VIII, Article D-10.
 2. Nozzles:
 - a. As shown and in accordance with ASME Code, Section VIII, Article D-6.
 - 1) Sizes 2-1/2 Inches and Larger: Class 150 flanged or as shown, ANSI B16.5.
 - 2) Sizes 2 Inches and Smaller: Class 3000 threaded, ANSI B16.11 (weld-o-let)
 - b. Nozzles, size and purpose:
 - 1) INLET/OUTLET NOZZLE: 12-inch, flanged
 - 2) BLOW OFF VALVE NOZZLE: 3/4-inch, threaded
 - 3) AIR FILL/RELIEF NOZZLE: 3/4-inch, threaded
 - 4) LEVEL SENSOR NOZZLES: Two x 1-inch, threaded
 - 5) PRESSURE SENSOR NOZZLE: 1-inch
 - 6) LEVEL GAUGE NOZZLES: Two x 3/4-inch, threaded
 3. Inlet/Outlet piping shall enter the tank from the bottom, as shown on Drawings.
 4. Blow Off Valve:
 - a. In accordance with Boiler and Pressure Vessel Code, Section VIII, GENERAL REQUIREMENTS, UG-125 and 126.
 - b. Size and setting per tank manufacturer.
 5. Integral support legs for bolting to concrete foundation as shown on the Drawings.
 6. Mounting brackets for all tank-mounted appurtenances and controls.
 7. Magnetic Level Gauge:
 - a. Magnetic level gauge using a 316SS tube shall sized for a 2,500 gallon vertical tank, have a pressure rating at least equal to the tank and 3/4-inch pipe connections.
 - b. Manufacturers and Products:
 - 1) GemsSensors, Mini SureSite Type BM
 - 2) Or equal.
 8. Lifting Lugs: Provide suitably attached for equipment assemblies and components weighing over 100 pounds.
 9. Equipment Identification Plates:
 - a. Provide 16-gauge Type 304 stainless steel identification plate securely mounted on each separate equipment component and control panel in a readily visible location.
 - b. Plate shall bear 3/8-inch high block type black enamel filled equipment identification number and letters as indicated in this Specification.
 10. Anchor Bolts: Type 304 stainless steel, sized and furnished by supplier of surge tanks according to design criteria listed in this Specification.
 11. Piping and valves: Surge tank manufacturer shall supply all piping and valves required for a complete surge tank assembly.
 - a. Piping: All piping shall be stainless steel conforming to the following:
 - 1) Schedule 40S: ASTM A312/A312M, Type 304 or 316 seamless, pickled and passivated.
 - 2) Fittings: Threaded Forged: 1,000 CWP, ASTM A182/A182M Rev C Grade F304L or F316L.
 - 3) Unions: Provide as necessary to allow for disassembly of piping system. Threaded Forged: ASTM A182/A182M Rev C Grade F304 or F316, 2,000-pound or 3,000-pound WOG, integral ground seats, AAR design meeting the requirements of ANSI B16.11, bore to match pipe.

- 4) Provide reducers, tees, unions, nipples, etc. as required to connect to equipment, valves, nozzles, etc.
- b. Valves: Provide the following valves where shown and specified:
 - 1) Solenoid Valve
 - a) Service: Air
 - b) Features:
 1. Two-way internal pilot operated diaphragm type electrically actuated solenoid valve
 2. CLOSED when de-energized.
 3. Stainless steel body
 4. Resilient seat suitable for air or water
 5. Solenoid coil molded epoxy
 6. Solenoid enclosure NEMA 250, Type 4
 7. Electrical: NEMA Class A, 120 volts ac, 60 Hz
 8. Minimum operating pressure differential no greater than 0 psig, maximum operating pressure differential not less than 350 psig.
 - c) Manufacturers:
 1. ASCO.
 2. Or equal.
 - 2) Stainless Steel Ball Valve 2 Inches and Smaller for Equipment Air System:
 - a) Service: Air
 - b) Features:
 - c) Threaded ends
 - d) Rated minimum 800 psig WOG (Water-Oil-Gas)
 - e) Stainless steel body
 - f) Polished stainless steel ball
 - g) Teflon seat
 - h) Stainless steel lever-type handle
 - i) Manufacturers and Products:
 1. Apollo, Type 76
 2. Or Equal
 - 3) **Stainless Steel Ball Check Valves**
 - a) Manufacturers and Products:
 1. Swagelok
 2. Or Approved Equal
- B. Air Compressor (COM 20)
 1. The air compressor package shall include a positive displacement, lubricated rotary screw air compressor system for use with the Surge Tank, supplied as a packaged system. Motor shall be at least 5 hp. Power supply shall be 230/460 volts, 3 phase and 60 hertz.
 2. Compressor unit shall include a factory-installed pressure relief valve for system protection and flexible pipe connectors at the outlet connection.
 3. The controls are microprocessor based with factory-set adjustable time delay and factory installed adjustable pressure switch for load/unload and auto start operation. The controller integral on the compressor enclosure shall have start and stop manual controls, power on and ready to start status indicators, pressure gauge and hour meter.
 4. The air compressor shall start and stop based on pressure in the air receiver. Dry contacts shall be provided in the panel for remote indication of running conditions for the compressor. Safety shutdowns for high discharge air temperature and motor overload and NEMA Type 4 enclosure shall be provided.

13250-5

5. The surge tank supplier shall select the compressor volumetric capacity and discharge pressure. The capacity and discharge pressure selected shall be sufficient for operation.
 6. The air receiver shall be a minimum of 80-gallon capacity and shall be provided with a Blow Off Valve in accordance with Boiler and Pressure Vessel Code, Section VIII, GENERAL REQUIREMENTS, UG-125 and 126.
 7. Manufacturer and Products
 - a. Quincy
 - b. Gardner Denver
 - c. Or Equal
- C. Instrumentation:
1. Level Sensor/Transmitter **(LE/LIT 455)**
 - a. Function: Measure and transmit the level in a closed process tank.
 - b. Type: Direct sensing, capacitance type differential pressure cell isolated from the process fluid by a diaphragm.
 - c. Mounting: Flange Mounted
 - d. Service: suitable for compressed air, potable water or wastewater
 - e. Temperature Range: Negative 20 to positive 200 degrees F minimum.
 - f. Accuracy: Plus or minus 0.25 percent of span.
 - g. Features:
 - 1) Zero: Suppressed or elevated when noted.
 - 2) Damping: Time Constant adjustable between 0.4 and 2.2 seconds with silicone oil fill.
 - 3) Transmitter: Two-wire, powered from a remote power supply.
 - 4) Range Adjustments: External non-interacting zero and span adjustable over full range.
 - 5) Fill Fluid: Silicone oil, unless otherwise noted.
 - 6) Materials: Wetted parts Type 316 stainless steel, unless otherwise noted.
 - h. Calibration: Factory calibrated.

2.7 LEVEL CONTROL PANEL AND OPERATIONAL PARAMETERS

- A. The purpose of the level control system is to control the air volume in the surge tank. This is accomplished by maintaining the water level within a designed operating range. When water level is above the normal operating range, air shall be added to the surge tank from the air compressor, through the add air solenoid valve. When water is below the normal operating range, air shall be vented from the surge tank through the vent air solenoid valve. High and Low alarm signals shall be generated when the water level is out of range. Time delays shall be used to prevent false alarms and avoid adding or venting air during start up and shutdown or during minor fluctuations.
- B. The Automatic Level Control System includes Level Controller, Level Transmitter, Solenoid Valves, and Air Compressor.
 1. The PLC based level controller shall be a PULSCO Skypark Series or approved equal.
 - a. All electronics shall be housed in a 304 SS NEMA 4X enclosure.
 - b. Controller shall be equipped with a door mounted 12" HMI touch screen display with a built in proximity sensor that will put the display to sleep if no movement is detected for several minutes.
 - c. HMI shall contain screens that have continuous indication of water level and corresponding tank water volume in real time that displays current water level in relation to solenoid and alarm level set points.

- d. HMI shall contain screens that display and allow changes to current solenoid and alarm level set points and timers.
 - e. A button on the HMI shall be provided that resets all values to pre-programmed O&M values.
 - f. Vent and Add air solenoid control shall be selectable from hand, off, and auto from the controller display.
 - g. HMI shall contain an alarm screen that lists the alarms that have occurred and the number of occurrences that each alarm has had.
 - h. Controller shall log and save locally all alarms and input signals for a minimum 3 months.
 - i. All field wiring to the controller shall be done through heavy duty connectors. There shall be no field wiring to components inside of the controller.
 - j. Multiple heavy duty connectors shall be provided to separate AC and DC voltages.
 - k. Electrical surge suppression devices shall be installed on all analog input signals.
 - l. Dry contacts shall be available for all alarm and solenoid relays.
 - m. Controller shall contain a managed Ethernet switch to allow Ethernet communication with site PLC or SCADA system.
- C. The NEMA 4X Control Panel shall include all the components necessary for operation of the surge system. The control panel shall operate on 120 volt, 60 Hz, 20-amp electrical service. It shall be factory wired and tested and UL listed.
- 1. Components shall be labeled and include the following:
 - a. Main circuit, breaker and through the door disconnect.
 - b. HOA hand switch for add air solenoid valve.
 - c. HOA hand switch for vent air solenoid valve.
 - d. Power on light (white-Push-to-test)
 - e. High and low pressure alarm lights (red-Push-to-test).
 - f. High and low level alarm lights (red-Push-to-test).
 - g. Reset push button (black).
 - h. Level control relays.
 - i. Time delay relays
 - j. Wire and terminal strip.
 - k. Virtual switches or buttons on the HMI screen are acceptable alternatives to physical switches
 - 2. One dry contact shall be provided for remote indication of any of the following conditions: high or low surge tank water level, high or low surge tank pressure.
 - 3. The control system shall include adjustable water level set point relays and adjustable pressure set point relays. The levels shall be adjusted to four different set points within the tank.
 - a. LOW water level set point: 15% of tank volume.
 - b. HIGH water level set point: 65% of tank volume.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Manufacturer shall provide written installation instructions.

3.2 FIELD QUALITY CONTROL

- A. Field Static Test:

13250-7

1. Hydrostatically test installed surge tank for 4 hours minimum at 1.3 times design pressure, before dynamic testing.
 2. Repair leaks detected during testing.
- B. Functional Test:
1. Dynamic Test: Perform control functions described in response to simulated pressure fluctuations in the system.
 2. Inspect and test components for alignment, operation, and connection, and performance.
- C. Manufacturer's Field Services: A Manufacturer's representative for the surge tank shall be present at the jobsite for the minimum person-days listed for the services hereinunder, travel time excluded:
1. 1 person-day, per surge tank, for installation assistance, inspection, certification of the installation, and functional testing.
 2. 1 person-day, per surge tank, for startup and operator's training

+ + END OF SECTION + +

SECTION 15010**PIPING SUPPORT SYSTEMS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings:
 - 1. Details of each pipe support type used.

PART 2 - PRODUCTS**2.1 SUPPORT SYSTEMS:**

- A. Channel-type support systems
 - 1. 304 Stainless Steel
 - a. Unistrut
 - b. B-Line
 - c. Or Equal.
 - 2. Non-metallic
 - a. Aikenstrut
 - b. CLIC
 - c. Or Equal.
- B. Hanger- and Clevis-type support systems
 - 1. B-line
 - 2. Anvil
 - 3. Or Equal
- C. Stanchion-type support systems
 - 1. B-Line
 - 2. Anvil
 - 3. Or Equal
- D. Adjustable Pipe Saddle Support
 - 1. B-Line, Figure B-3092
 - 2. Or Equal
- E. Wall Bracket (14-inch to 24-inch pipe)
 - 1. B-Line Figure B-3067 Heavy Duty Angle Bracket
 - 2. Or Equal
- F. Wall Bracket (8-inch to 12-inch pipe)
 - 1. B-Line Figure B-3066 Medium Duty Angle Bracket
 - 2. Or Equal
- G. Wall Bracket (4-inch to 6-inch pipe)
 - 1. B-Line Figure B-3065 Light Duty Angle Bracket
 - 2. Or Equal

15010-1

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. In addition to the pipe supports specifically called for on the drawings, CONTRACTOR shall provide pipe supports as required to fully support all piping systems.
- B. CONTRACTOR shall design, supply and install pipe support system using manufacturer's standard available pipe support hardware.
- C. Pipe supports shall, at a minimum, be installed at the following locations:
 - 1. On both sides of each valve, piece of equipment or other appurtenance, such that allowance is made for removal of the valve, piece of equipment, or other appurtenance while leaving the pipe system fully supported. Support piping connections to equipment by pipe support and not by the equipment.
 - 2. Along straight runs of pipe, the maximum distance between supports shall be as listed below:

Pipe Diameter	Maximum Distance Between Supports	Minimum Hanger Rod Diameter (if Hanger Rods are used)
2" and smaller	6-feet	1/2"
2-1/2" to 6"	8-feet	3/4"
8" to 12"	10-feet	2 @ 3/4"
14" to 18"	10-feet	2 @ 1"
Over 18"	Custom Design	

- 3. Directly supporting valves 8-inch in diameter and larger.
- 4. At least two supports on each side of flexible couplings or flanged coupling adapters to provide that no load is applied to the flexible coupling.
- 5. On the pipe within two pipe diameters of each side of elbows and each branch of tees and crosses.
- 6. Where piping passes through walls, such that no load is transferred to the wall.
- D. Install support systems in accordance with MSS SP 69, Pipe Hangers and Supports-Selection and Application and MSS SP 89, Pipe Hangers and Supports-Fabrication and Installation, unless shown otherwise.
 - 1. Support no pipe from the pipe above it.
 - 2. Do not install pipe supports and hangers in equipment access areas or bridge crane runs.
- E. Bracing and lateral support:
 - 1. Provide lateral sway bracing on 10-foot maximum centers
 - a. Brace hanging pipes against horizontal movement by both longitudinal and lateral sway bracing.
 - 2. Install lateral supports for seismic loads at all changes in direction.
- F. Thermal expansion and thrust restraint
 - 1. Install pipe anchors where required to withstand expansion thrust loads and to direct and control thermal expansion.
- G. Support types:
 - 1. Horizontal Suspended Piping:
 - a. Single Pipes: Adjustable swivel-ring, splint-ring or clevis hangers.

- b. Grouped Pipes: Trapeze hanger systems.
 - c. For insulated piping, furnish galvanized steel protection shields, welding insulation saddles, or precut sections of rigid insulation (with vapor barrier) at all hanger locations.
- 2. Horizontal Piping Supported From Walls:
 - a. Single Pipes: Wall brackets or wall clips attached to wall with anchors. Clips attached to wall-mounted framing also acceptable.
 - b. Stacked Piping:
 - 1) Wall-mounted framing system and clips acceptable for piping smaller than 3-inch minimal diameter.
 - 2) Piping clamps that resist axial movement of pipe through support not acceptable.
 - c. Insulated piping shall have the insulation removed in the vicinity of wall brackets and piping clips to allow only direct pipe wall contact with the support system.
- 3. Horizontal Piping Supported From Floors:
 - a. Stanchion Type:
 - 1) Pedestal type; adjustable with stanchion, saddle, and anchoring flange.
 - 2) Use yoked saddles for piping whose centerline elevation is 18 inches or greater above the floor and for all exterior installations.
 - 3) Provide neoprene waffle isolation pad under anchoring flanges, adjacent to equipment or where otherwise required to provide vibration isolation.
 - b. Floor-Mounted Channel Supports:
 - 1) Use for piping smaller than 3-inch nominal diameter running along floors and in trenches at piping elevations lower than can be accommodated using pedestal pipe supports.
 - 2) Attach channel framing to floors with anchor bolts.
 - 3) Attach pipe to channel with clips or pipe clamps.
 - c. Concrete Cradles:
 - 1) Use for piping larger than 3-inch along floor and in trenches at piping elevations lower than can be accommodated using stanchion type.
- 4. Vertical Pipe:
 - a. Support with wall brackets and base elbow or riser clamps on floor penetrations.
 - b. Insulated piping shall have the insulation removed in the vicinity of wall brackets and riser clamps, to allow only direct wall contact with the support system.
- H. Standard Attachments:
 - 1. To Concrete Ceilings: Concrete inserts.
 - 2. To Steel Beams: I-beam clamp or welded attachments.
 - 3. To Wooden Beams: Lag screws and angle clips to members not less than 2-1/2 inches thick.
 - 4. To Concrete Walls: Concrete inserts or brackets or clip angles with anchor bolts.
 - 5. Existing Walls and Ceilings: Install as specified for new construction, unless shown otherwise.
 - 6. Repair mounting surfaces to original condition after attachments are made.
- I. Isolation:
 - 1. Install elastomeric inserts designed to isolate piping from pipe supports where copper pipe is run in stainless steel supports, or where other dissimilar metals are in contact with pipe supports.
- J. Materials:

1. Channel-type, hanger-type and trapeze-type support systems and pipe racks constructed of channel systems:
 - a. Provide non-metallic support systems in all chemical storage and feed areas or as otherwise noted on the Drawings. Provide type 316 stainless steel fasteners.
 - b. Provide type 304 stainless steel support systems and fasteners in all other areas.
2. Stanchion-type support systems
 - a. Provide steel and ductile iron stanchion components
 - b. Coat stanchions after assembly per specification Section 09900, Painting.

+ + END OF SECTION + +

15010-4

SECTION 15100**PIPE AND FITTINGS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings:
 - 1. Product data sheets for each piping system.
 - a. Include information on pipe, fittings and joint systems.
 - 2. Complete catalog information, descriptive literature, specifications, and identification of materials of construction.
 - 3. Complete descriptions and data for all coatings and linings.
 - 4. Tests and inspection data for pipe and coatings/linings.
 - 5. Qualifications for welders and/or technicians performing joining processes that requires specialized equipment to perform the work or as specifically identified herein.
- B. Operation and Maintenance Data as specified in Section 01330, SUBMITTAL PROCEDURES.

1.2 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. In accordance with manufacturer's directions.

PART 2 - PRODUCTS**2.1 PIPING SYSTEM DATA SHEETS**

- A. Piping system data sheets (PSDS) have been attached to this Specification and are incorporated herein by reference. Provide piping systems in accordance with piping system data sheets.

2.2 THRUST RESTRAINT

- A. Provide rigid or restrained joints and fittings for all piping systems specified with a test pressure in the Pipe Schedule.
- B. Unless otherwise specified in the Pipe Schedule or shown on the Drawings, thrust blocks shall not be used.

PART 3 - EXECUTION**3.1 PIPE SCHEDULE**

- A. A Pipe Schedule has been attached to this Specification and is incorporated herein by reference. Install piping systems in accordance with Pipe Schedule.

- B. For pipe which is shown on the Drawings, but not referenced in the Pipe Schedule, CONTRACTOR to provide pipe material and fittings which are appropriate for the intended service and acceptable to the ENGINEER.

3.2 PREPARATION

- A. Inspect pipe and fittings before installation, clean ends thoroughly, and remove foreign matter and dirt from inside.
- B. Repair any coatings or linings which were damaged during shipping and handling using manufacturer-approved coating and lining repair materials in accordance with manufacturer's instructions.

3.3 INSTALLATION

- A. General:
 - 1. Join pipe and fittings in accordance with manufacturer's instructions, unless otherwise shown or specified.
- B. Joint Assembly:
 - 1. Flanged Joints (FLG):
 - a. Bolt Holes: Straddle vertical centerlines, aligned with connecting equipment flanges or as shown.
 - b. Follow a bolt tightening pattern which produces uniform bearing pressure.
 - c. Do not over-tighten bolts. Follow manufacturer's recommendation for bolt torque.
 - d. Provide gasket at every flanged joint.
 - e. Provide insulating flange kit where indicated on Drawings and required in this Specification.
 - 2. Threaded and Coupled Joints (THR):
 - a. Conform to ANSI B1.20.1.
 - b. Produce sufficient thread length to ensure full engagement when screwed home in fittings.
 - c. Ream pipe ends and clean chips and burrs after threading.
 - d. Make connections with not more than three threads exposed.
 - e. Lubricate male threads only with thread lubricant or tape as specified on Piping Data Sheets.
 - f. PVC Threaded Joints:
 - 1) Provide Schedule 80 threaded nipple where necessary to connect to threaded valve or fitting.
 - 2) Use strap wrench for tightening threaded plastic joints. Do not overtighten fittings.
 - g. HDPE Threaded Joints:
 - 1) Joining HDPE pipe with threaded connections is not allowed unless specifically approved by the ENGINEER
 - h. Provide dielectric union or insulating coupling where indicated on Drawings and required in this Specification.
 - 3. Grooved-End Joints (GRV):
 - a. Type: Rigid, except where joints are used to correct misalignment, to provide flexibility, and where shown otherwise, in which case provide flexible type.
 - b. Grooved end joints are not allowed for plastic pipes unless approved by the ENGINEER.
 - 4. Soldered Joints (SLD):

- a. Before soldering, remove stems and washers from solder joint valves.
- b. Use only solder specified for particular service.
- c. Cut pipe ends square and remove fins and burrs.
- d. Protect adjacent surfaces from damage during soldering.
 - 1) Protect from high temperatures due to flame
 - 2) Protect from damage due to dripping flux or solder
- e. After thoroughly cleaning pipe and fitting of oil and grease using solvent and emery cloth, apply noncorrosive flux to the male end only.
- f. Solder Joint
- g. Wipe excess solder from exterior of joint before hardened.
- 5. Solvent Welded Joints (SLV):
 - a. Use only solvent cement which is rated for use in the service intended. Check compatibility of solvent cement with service, especially in pipelines which carry chemicals.
 - b. Observe all manufacturer's requirements for environmental conditions for use of solvent cement.
 - c. Cut pipe ends square and remove fins and burrs.
 - d. Apply appropriate primer.
 - e. Apply solvent cement and assemble joint.
 - 1) Hold in place long enough for solvent cement to set-up and hold joint, as assembled, until solvent cement has cured.
 - f. Wipe excess solvent cement from exterior of joint before hardened.
- 6. Proprietary Restrained Mechanical Joints (PRJ):
 - a. PRJ piping shall be furnished with factory-fabricated retainer weldment on spigot end.
 - b. If PRJ piping is field cut, the pipe joint shall be restrained using Restrained Mechanical Joint (RMJ) Glands as specified in Section 15120, Piping Specialties. Field welding of retainer weldment will not be allowed.
- 7. Welded Steel and Stainless Steel Joints (WLD)
 - a. Field welded joints shall be in accordance with AWWA C206
 - b. Welder Qualifications:
 - 1) All welding shall be done by skilled welders, welding operators, and tackers who have had adequate experience in the methods and materials to be used.
 - 2) Welders shall be qualified by the CONTRACTOR under the provisions of ASME BPVC for shop welds and ANSI/AWS D1.1 for field welds.
 - 3) Furnish all material and bear the expense of qualifying welders.
 - c. Backing rings will not be permitted for 30-inch and smaller pipe. Single field-welded butt joints with outside backing rings may be used for pipe larger than 30 inches in diameter.
 - d. Where exterior welds are performed, adequate space shall be provided for welding and inspection of the joints.
 - e. Butt Straps
 - 1) Butt straps shall be used as closure pieces and where shown on the Drawings.
 - 2) Where used or required, shall be as shown on the Contract Drawings or as approved during shop drawing review.
 - 3) When fitting up the ends of pipe to be welded or fitting butt-strap pieces, minor jacking or clamping will be allowed. Cold working the metal and sledges or localized application of heat and working the metal and sledges will not be allowed. If field displacement of joints, where butt strap joints are indicated, does not allow proper fit-up with the tolerances indicated, special closure butt straps or mitered pieces shall be shop fabricated and installed.

- 4) Butt straps shall be welded on both the inside and outside of the pipe and at each end of the pipe and strap to avoid stress multiplication.
 - f. Prior to the backfilling or beginning the welding procedure, any tack welds or joint stops used to position the pipe during laying shall be removed. Any annular space between the faying surfaces of the bell and spigot shall be equally distributed around the circumference of the joint by shimming, jacking, or other suitable means. The weld shall then be made in accordance with ANSI/AWWA C206. Where more than one pass is required, all dirt, slag, and flux shall be removed before the succeeding bead is applied.
 - g. Repair of Welds: All welds that are defective shall be repaired by the CONTRACTOR to meet the requirements of this section at no additional cost to the OWNER. Defects in welds or defective welds shall be removed, and that section of the joint shall then be re-welded. Only sufficient removal of defective material that is necessary to correct the defect is required. After the repair is made, the joint shall be checked by repeating the original test procedure. Welds deficient in size shall be repaired by adding weld metal.
8. Thermally butt fused (BF) HDPE joints
- a. In general, the individual performing thermal butt fusion and electrofusion and the equipment used shall meet the requirements of the Plastic Pipe Institute (PPI), Technical Note (TN) 42, Recommended Minimum Training Guidelines for PE Pipe Butt Fusion Joining Operators and the requirements of Title 49, CFR Subpart F, 192.282 and 192.285.
 - b. Specific requirements that apply when joining HDPE pipe using butt fusion shall be as follows:
 - 1) Submit documentation in accordance with Section 01330, that the fusion technician has been qualified and trained by the fusion equipment manufacturer or pipe manufacturer in the operation and procedures of the butt fusion process. All qualifications and training shall have been received within 1-year from the date of submitting the information. If acceptable documentation cannot be provided, sample joints shall be made and tested in accordance with TN-42. If pipe wall thickness is greater than 1-inch, submit in accordance with Section 01330, an acceptable method recommended by the pipe manufacturer that will be used to test the sample joint. All costs associated with the sample joint testing and any retesting shall be borne by the CONTRACTOR.
 - 2) Each 2" NPS and larger butt fusion joint shall be documented using a data logging device or written log that records the following minimum parameters per completed joint:
 - a) Date and time
 - b) OWNER's project number and/or name
 - c) Fusion Machine model
 - d) Pipe size, rating and PE type code (i.e. PE4710)
 - e) Heater plate surface temperature (minimum 2 values for each side of the heater plate per joint)
 - f) Recorded drag pressure
 - g) Gauge pressure and associated interfacial pressure (psi)
 - h) Heating time
 - i) Transfer time between heater plate being removed from the face of the opposing pipe ends and when the pipe ends are butted together
 - j) Cooling time

- 3) Provide log records at the end of each day in hardcopy format or as agreed upon with the OWNER and/or ENGINEER. Submit one (1) copy as a minimum to the OWNER's Representative or ENGINEER.
- 4) At the completion of the work, provide all data log records on a compact disc that can be accessed using the data log manufacturer's software or if using written logs, all individual written daily logs are transferred into a pdf format and identified by day as a separate file. Submit the records in accordance with Section 01330.
- c. All joints that are determined to be defective visually or as a result of pressure testing shall be repaired using a thermal fusion method unless otherwise approved by the OWNER's Representative or ENGINEER.
- d. Install buried HDPE pipe in accordance with ASTM D2774 and the pipe manufacturer's specific recommendations.
9. Insulating Flanges, Couplings, and Dielectric Unions:
 - a. Applications: Provide insulating flange, coupling or di-electric union for all joints at the following locations:
 - 1) Dissimilar metal piping connections.
 - 2) Cathodically protected piping penetration to buildings.
 - 3) Submerged to unsubmerged metallic piping connections.
 - 4) Where required for electrically insulated connection.
 - b. Installation:
 - 1) Insulating joints connecting immersed piping to non-immersed piping shall be installed above maximum water surface elevation.
 - 2) Align and install insulating joints according to manufacturer's recommendations to avoid damaging insulating materials.
- C. Exposed Piping Installation:
 1. Piping Runs:
 - a. Parallel to building or column lines and perpendicular to floor, unless shown otherwise.
 - b. Piping upstream and downstream of flow measuring devices shall provide straight lengths as required for accurate flow measurement.
 2. Supports: As specified in Section 15010, PIPING SUPPORT SYSTEMS.
 3. Group piping wherever practical at common elevations; install to conserve building space and not interfere with use of space and other work.
 4. Provide unions or flanges at each piping connection to equipment or instrumentation on equipment side of each block valve to facilitate installation and removal.
 5. Install piping so that no load or movement in excess of that stipulated by equipment manufacturer will be imposed upon equipment connection;
 6. Install piping to allow for contraction and expansion without stressing pipe, joints, or connected equipment.
 7. Piping clearance, unless otherwise shown:
 - a. Over Walkway and Stairs: Minimum of 7 feet 6 inches, measured from walking surface or stair tread to lowest extremity of piping system including flanges, valve bodies or mechanisms, insulation, or hanger/support systems.
 - b. Between Equipment or Equipment Piping and Adjacent Piping: Minimum 3 feet 0 inch, measured from equipment extremity and extremity of piping system including flanges, valve bodies or mechanisms, insulation, or hanger/support systems.
 - c. From Adjacent Work: Minimum 1 inch from nearest extremity of completed piping system including flanges, valve bodies or mechanisms, insulation, or hanger/support systems.

- d. Do not route piping in front of or to interfere with access ways, ladders, stairs, platforms, walkways, openings, doors, or windows.
- e. Headroom in front of openings, doors, and windows shall not be less than the top of the opening.
- f. Do not install piping containing liquids or liquid vapors in transformer vaults or electrical equipment rooms.
- g. Do not route piping over, around, in front of, in back of, or below electrical equipment including controls, panels, switches, terminals, boxes, or other similar electrical work.

D. Buried Pipe Installation:

1. Pipe Placement:

- a. Keep trench dry until pipe laying and joining are completed.
- b. Exercise care when lowering pipe into trench to prevent twisting or damage to pipe.
- c. Prevent foreign material from entering pipe during placement.
 - 1) Close and block open end of last laid pipe section when placement operations are not in progress and at close of day's work.
- d. Lay pipe upgrade with bell ends pointing in direction of laying.
- e. Deflect pipe at joints for pipelines laid on a curve using unsymmetrical closure of spigot into bell. Utilize a maximum of 75 percent of manufacturer's recommended allowable joint deflection.
 - 1) If joint deflection of standard pipe lengths will not accommodate horizontal or vertical curves in alignment, provide:
 - a) Shorter pipe lengths.
 - b) Fittings/bends.
- f. Secure pipe which has been placed from movement or damage while placing the next section of pipe.
- g. Prevent uplift and floating of pipe prior to backfilling.

E. Cleaning:

- 1. Following assembly and testing, and prior to disinfection and final acceptance, flush pipelines with water at 2.5 fps minimum flushing velocity until foreign matter is removed. At a minimum, flush for a period of time which will flush the entire pipeline volume three times.
 - a. If impractical to flush large diameter pipe at 2.5 fps, clean in-place from inside by brushing and sweeping, then flush line at lower velocity. If lower velocity is used, flush the entire pipeline volume five times.
- 2. Provide temporary means of removing flushing water from pipeline during flushing.
- 3. Provide means for removal/screening of debris from the flushing water, disposal of debris and disposal of flushing water.

3.4 TESTING

- A. Pressure test piping in accordance with the Pipe Schedule, and Section 15990, Pressure Testing of Piping Systems.

3.5 SUPPLEMENTS

- A. The following supplements are attached to this Specification section and incorporated herein by reference:
 - 1. 15100 PS – Pipe Schedule

15100-6

2. 15100 PSDS COP – Copper Pipe
3. 15100 PSDS DIP – Ductile Iron Pipe
4. 15100 PSDS HDPE1 – High Density Polyethylene Drainage Pipe
5. 15100 PSDS HDPE2 – High Density Polyethylene Pressure Pipe
6. 15100 PSDS PVC1 – Solvent Welded Polyvinyl Chloride Pipe
7. 15100 PSDS PVC2 – PVC Pressure Pipe
8. 15100 PSDS PVC3 – Polyvinyl Chloride Drain, Waste and Vent Pipe
9. 15100 PSDS PVC4 – PVC Sewer Pipe
10. 15100 PSDS RCP – Reinforced Concrete Pipe
11. 15100 PSDS WSP – Welded Steel Pipe
12. 15100 PSDS WSSTP – Welded Stainless Steel Pipe

+ + END OF SECTION + +

15100-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PS**PIPE SCHEDULE****1.1 DESCRIPTION****A. General:**

1. This schedule is provided for the convenience of the CONTRACTOR. Some flow streams may be shown on the drawings, but not listed here.

B. Flow Stream IDs:

1. DR – Drain
2. SD – Storm Drain
3. SS – Sanitary Sewer
4. SSFM – Sanitary Sewer Forcemain
5. FM1 – Sanitary Sewer Forcemain
6. FM2 – Sanitary Sewer Forcemain
7. LS2 – Sanitary Sewer Forcemain
8. Reloc W – Relocated Water
9. W – Water
10. BYP – Bypass
11. OF – Overflow
12. IPR – Indirect Potable Reuse
13. BR – Brine
14. V – Vent (to ARV or CARV)
15. Vent – Vent (to ARV or CARV)
16. FA – Foul Air
17. FO – Fiber Optic Conduit
18. RO DISCHARGE – Reverse Osmosis Discharge

C. Service:

1. SS – Sanitary Sewer
2. W – Water
3. RW – Recycled Water
4. AIR – Air

D. Pipe Materials:

1. CHE – Chemical Tubing
2. COP – Copper Pipe
3. DIP – Ductile Iron Pipe
4. PVC1 – Solvent Welded Polyvinyl Chloride Pipe
5. PVC2 – PVC Pressure Pipe
6. PVC3 – Polyvinyl Chloride Drain, Waste, and Vent Pipe
7. PVC4 – PVC Sewer Pipe
8. PVC6 – PVC Storm Drain Pipe
9. SSP – Stainless Steel Pipe
10. SST – Stainless Steel Tubing
11. WSP – Welded Steel Pipe
12. FPVC – Fusible Polyvinyl Chloride Pipe (C900)
13. HDPE – Fusible High Density Polyethylene Pipe (IPS PE4710)
14. RCP – Reinforced Concrete Pressure Pipe

15100 PS-1

E. Joint Types:

1. FLG – Flanged
2. GRV – Grooved End
3. GC – Grooved Coupling
4. MJ – Mechanical Joint
5. PO – Push On
6. PRJ – Proprietary Restrained Mechanical Joint
7. RMJ – Restrained Mechanical Joint
8. S – Swagelok stainless steel compression type
9. SLV – Solvent Welded Socket
10. SLD – Soldered Socket
11. THR – Threaded
12. WLD – Butt Welded

F. Lining Systems:

1. CM – Cement Mortar
2. PROTECTO-401
3. PVC

G. Coating Systems: As described in Section 09900

1.2 PIPE SCHEDULE

Contractor shall install piping systems in accordance with the following pipe schedule

OFFSITE PIPELINES AND RELATED PIPELINES (FACILITIES 5, 6, & 7)									
FLOW STREAM I.D.	DESCRIPTION	SERVICE	EXPOSURE	PIPE MATERIAL	JOINT TYPE	TEST PRESSURE	LINING	COATING SYSTEM/ COLOR	NOTES
FM1	SSFM1	SS	BURIED	FPVC OR FUSED HDPE	WLD	See PSDS	N/A	SEE PSDS	
FM1 (BRIDGE)	SSFM1	SS	EXPOSED	DIP	PRJ; RMJ; FLG	Reference 05-PP-07	PROTECTO-401	Black, Coating System 300, Spec 09900	
FM2	SSFM2	SS	BURIED	FPVC OR FUSED HDPE	WLD	See PSDS	N/A	SEE PSDS	
FM2 (BRIDGE)	SSFM2	SS	EXPOSED	DIP	PRJ; RMJ; FLG	Reference 05-PP-07	PROTECTO-401	Black, Coating System 300, Spec 09900	
LS2	SSFM	SS	BURIED	FPVC OR FUSED HDPE	WLD; MJ	See PSDS	N/A	SEE PSDS	
IPR	INDIRECT POTABLE REUSE	RW	BURIED	FPVC OR FUSED HDPE	WLD; MJ	See PSDS	N/A	SEE PSDS	
BR	BRINE / OUTFALL	SS	BURIED	FPVC OR FUSED HDPE	WLD; MJ	See PSDS	N/A	SEE PSDS	
BR (BRIDGE)	BRINE / OUTFALL	SS	EXPOSED	DIP	PRJ; FL	Reference 05-PP-07	PROTECTO-401	Black, Coating System 300, Spec 09900	
RELOC W	RELOCATED WATER	W	BURIED	FPVC (DR-18)	WLD; MJ	Contact OWNER	N/A	N/A	Restrain connection location with existing utility via thrust blocks per City Std. Det. W-2
RELOC W	RELOCATED OR REPLACED WATER	W	BURIED	PVC2 (DR-18)	PO; MJ	CONTACT OWNER	N/A	N/A	

15100 PS-3

FLOW STREAM I.D.	DESCRIPTION	SERVICE	EXPOSURE	PIPE MATERIAL	JOINT TYPE	TEST PRESSURE	LINING	COATING SYSTEM/ COLOR	NOTES
SS BYP	SS BYPASS	SS	EXPOSED	FUSED HDPE	WLD; MJ	Contact OWNER	N/A	N/A	
W BYP	W BYPASS	W	EXPOSED	FUSED HDPE	WLD; MJ	Contact OWNER	N/A	N/A	
DR	DRAIN	SS	BURIED	PVC3	PO	N/A	N/A	N/A	
SS	SS LATERAL	SS	BURIED	PVC4	PO	N/A	N/A	N/A	
RO DISCHARG E	CONNECTED TO DESAL CONCENTRATE DRAINS	SS	BURIED	PVC2 (DR-18)	MJ	MATCH CONNECTED BRINE LINE	N/A	N/A	
VENT	CARV/ARV SERVICE	RW/SS	BURIED	FUSED HDPE		MATCH CONNECTED MAIN LINE PIPELINE PSDS	N/A	N/A	
VENT	CARV/ARV SERVICE IN VAULT	SS	EXPOSED	PVC1	SLV	MATCH CONNECTED MAIN LINE PIPELINE PSDS	N/A	N/A	
VENT	VENT	SS	EXPOSED	SST 316	WLD; GRV; FLG	MATCH CONNECTED MAIN LINE PIPELINE PSDS	N/A	N/A	
VENT	VENT ODOR CONTROL	PER MANUFACTURER'S RECOMMENDATION							
PUMP STATION RELATED PIPELINES (FACILITIES 10 & 20)									
FLOW STREAM I.D.	DESCRIPTION	SERVICE	EXPOSURE	MATERIAL	JOINT TYPE	TEST PRESSURE	LINING	COATING SYSTEM/ COLOR	NOTES
FM1	SSFM1	SS	BURIED	FPVC OR FUSED HDPE	WLD	See PSDS	N/A	SEE PSDS	
FM1 (PUMP STATIONS)	SSFM1	SS	EXPOSED	DIP	PRJ; RMJ; FLG	Match FPVC/HDPE PSDS	PROTECTO- 401	Black, Coating System 300, Spec 09900	
FM2	SSFM2	SS	BURIED	FPVC OR FUSED HDPE	WLD	See PSDS	N/A	SEE PSDS	

15100 PS-4

FLOW STREAM I.D.	DESCRIPTION	SERVICE	EXPOSURE	PIPE MATERIAL	JOINT TYPE	TEST PRESSURE	LINING	COATING SYSTEM/ COLOR	NOTES
FM2 (PUMP STATIONS)	SSFM2	SS	EXPOSED	DIP	PRJ; RMJ; FLG	Match FPVC/HDPE PSDS	PROTECTO- 401	Black, Coating System 300, Spec 09900	
SS	GRAVITY SEWER	SS	BURIED	PVC4	PO	Contact OWNER	N/A	See PSDS	
DR	DRAIN	SS	BURIED	PVC3	PO	Contact OWNER	N/A	N/A	
W	UTILITY WATER	W	BURIED	PVC1	SLV	Contact OWNER	N/A	N/A	
			EXPOSED	COP	SLD	Contact OWNER	N/A	N/A	
SD	STORM DRAIN	SD	BURIED	PVC6	PO	Contact OWNER	N/A	N/A	
BYP	BYPASS	SS	BURIED	DIP	FLG	Match FPVC/HDPE PSDS	PROTECTO- 401		
FA	FOUL AIR	AIR	BURIED	PVC1	SLV	Per Manufacturer Recommend ation	N/A	N/A	
OF	OVERFLOW	SS	BURIED	RCP (96")	PO	Contact OWNER	PVC (Spec 06640)	N/A	
				PVC4 (Up to 12")	PO	Contact OWNER	N/A	N/A	
VENT	VENT	SS	EXPOSED	PVC3	SLV		N/A	N/A	
IPR	INDIRECT POTABLE REUSE	RW	BURIED	DIP	FLG	Match FPVC/HDPE PSDS	CM		
RO FLUSHING	CONNECTION TO RO FOR FLUSHING WATER	RW	BURIED	DIP	FLG	Contact OWNER	CM		

15100 PS-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS COP

PIPING SYSTEM DATA SHEET – COPPER PIPE

ITEM	DESCRIPTION
Tubing	Seamless, conforming to ASTM B88 as follows: Potable water (buried)Type K, soft or hard temper Potable water (exposed)Type L, hard drawn Compressed air serviceType L, hard drawn P-Trap priming serviceType L, soft temper
Fittings	Commercially pure wrought copper, socket joint, conforming to ASTM B75, dimensions conforming to ANSI B16.22.
Flanges	Commercially pure wrought copper, socket joint, conforming to ASTM B75, faced and drilled 150-pound ANSI B16.24 standard.
Bolting	ASTM A307, carbon steel, Grade A hex head bolts, and ASTM A563 Grade A hex head nuts.
Gaskets	1/16-inch thick nonasbestos compression type, full face, Cranite, John Manville.
Solder	<p>Joints 2-1/2 Inch and Smaller: Wire solder (95 percent tin), conforming to ASTM B32 Alloy Grade Sn95. Do not use cored solder.</p> <p>Joints Larger Than 2-1/2 Inch: Wire solder, melt range approximately 440 degrees F to 660 degrees F, conforming to ASTM B32 Alloy Grade HB or HN. Do not use cored solder.</p>

15100 PSDS COP-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS DIP

PIPING SYSTEM DATA SHEET – DUCTILE IRON PIPE

ITEM	DESCRIPTION
Pipe	<p>Buried Piping: Pressure class as indicated in the pipe schedule. If not indicated:</p> <ul style="list-style-type: none"> • All pipe 12" diameter and smaller shall be pressure class 350. • All pipe 14" through 20" shall be pressure class 250. • All pipe larger than 20" shall be pressure class 200. <p>Flanged Piping: Special Thickness Class 53</p> <p>Pressure class shall be per AWWA C150/A21.50 and AWWA C151/A21.51</p> <p>All buried pipes designed to carry recycled water shall be distinctively wrapped in purple tape.</p>
Lining	<p>Water and Reclaimed Water: Cement-Mortar: AWWA C104/A21.4.</p> <p>Wastewater: Ceramic epoxy as follows:</p> <ol style="list-style-type: none"> 1. Amine cured novalac epoxy containing at least 20% by volume of ceramic quartz pigment. 2. Permeability rating of 0.00 when tested per Method A of ASTM E 96, Procedure A with a test duration of 30 days. 3. Minimum lining thickness: 40 mils nominal dry film thickness. 4. The following tests must be run on coupons from factory lined Ductile Iron pipe: <ol style="list-style-type: none"> a. ASTM B 117 Salt Spray (scribed panel). Results to equal 0.0 undercutting after two years. b. ASTM G 95 Cathodic Disbondment (1.5 volts at 77°F). Results to equal no more than 0.5 mm undercutting after 30 days. c. Immersion Testing rated using ASTM D 714. <ol style="list-style-type: none"> i. 20% Sulfuric Acid: No effect after two years. ii. 140°F 25% Sodium Hydroxide: No effect after two years. iii. 160°F Distilled Water (scribed panel): No effect after two years. iv. 120°F Tap Water (scribed panel): 0.0 undercutting after two years with no effect. v. Abrasion Resistance: Less than .075 mm (3 mils) loss after one million cycles on a $\pm 22.5^\circ$ sliding aggregate slurry abrasion tester using a sharp natural siliceous gravel with a particle size between 2mm and 10 mm (European Standard SN598). 5. Manufacturer and Product: <ol style="list-style-type: none"> a. Protecto 401 Ceramic Epoxy Lining; Or Equal.

15100 PSDS DIP-1

ITEM	DESCRIPTION
Coating	<p>Unless otherwise specified in the Pipe Schedule, piping shall be coated as follows:</p> <p>Buried Piping:</p> <ul style="list-style-type: none"> • AWWA C105/A21.5: Polyethylene encasement, 4-mil high-density cross laminated or 8-mil linear-low density, color as required by local/state regulations. <p>Exposed/Immersed Piping:</p> <ul style="list-style-type: none"> • Primer Coating: Where shop primer is applied to protect pipe during shipping, storage and handling, primer shall be compatible with pipe coating requirements of Section 09900, Painting.
Fittings	<p>Lined and coated same as pipe.</p> <p>Push-On (PO): AWWA C110/A21.10 and C111/A21.11, gray or ductile iron, 250 psi minimum working pressure. American Cast Iron Pipe Co., Fastite Joint; U.S. Pipe and Foundry, Tyton Joint.</p> <p>Mechanical (MJ): AWWA C110/A21.10, C111/A21.11, and C153/A21.53 gray or ductile iron, 250 psi minimum working pressure. Follower glands shall be ductile iron.</p> <p>Restrained Mechanical Joint (RMJ): Standard MJ Fittings with RMJ Gland conforming to requirements of Section 15120, PIPING SPECIALTIES.</p> <p>Proprietary Restrained (PRJ): AWWA C111/A21.11 and C153/A21.53, ductile iron, 250 psi minimum working pressure. Clow Corp., Super-Lock Joint; American Cast Iron Pipe Co., Flex-Ring or Lok-Ring Joint; U.S. Pipe, TR Flex.</p> <p>Grooved End (GRV): AWWA C606 and C110/A21.10, ductile iron, 250 psi minimum working pressure. Victaulic.</p> <p>Flange (FLG): AWWA C110/A21.10 ductile iron, faced and drilled, 125-pound flat face. Gray cast iron will not be allowed.</p>
Joints	<p>Push-On (PO): 250 psi minimum working pressure, AWWA C110/A21.10 and C111/A21.11. American Cast Iron Pipe Co., Fastite Joint; U.S. Pipe and Foundry, Tyton Joint.</p> <p>Mechanical (MJ): 250 psi minimum working pressure.</p> <p>Restrained Mechanical Joint (RMJ): Standard MJ Joint with RMJ gland conforming to requirements of Section 15120, PIPING SPECIALTIES.</p> <p>Proprietary Restrained (PRJ): 150 psi minimum working pressure. Clow Corp., Super-Lock; American Cast Iron Pipe Co., Flex-Ring or Lok-Ring; U.S. Pipe, TR Flex.</p> <p>Grooved End (GRV): Rigid type radius cut conforming to AWWA C606, 250 psi minimum working pressure. Victaulic.</p> <p>Flange (FLG): 125-pound flat face, ductile iron, threaded conforming to AWWA C115/A21.15. Gray cast iron will not be allowed.</p> <p>Branch connections 3 inches and smaller, shall be made with service saddles as specified in Section 15120, PIPING SPECIALTIES.</p>

15100 PSDS DIP-2

ITEM	DESCRIPTION
Couplings	<p>Grooved End: 250 psi minimum working pressure, malleable iron per ASTM A47 or ductile iron per ASTM A536. Victaulic.</p> <p>Grooved End Adapter Flanges: 250 psi minimum working pressure, malleable iron per ASTM A47 or ductile iron per ASTM A536. Victaulic.</p>
Bolting	<p>T-Bolts and other specialty bolts: Manufacturer's standard.</p> <p>Hex Bolts: ASTM A307, Grade B carbon steel hex head bolts</p> <p>Nuts: ASTM A563, Grade A carbon steel hex head nuts.</p>
Gaskets	<p>Push-On, Mechanical, and Proprietary Restrained Joints: Red Rubber (SBR) conforming to ANSI/AWWA C111/A21.11.</p> <p>Grooved End Joints: Halogenated butyl conforming to ASTM D2000 and AWWA C606.</p> <p>Flanged, Water and Sewage Service: 1/8 inch-thick, red rubber (SBR), hardness 80 (Shore A), rated to 200 degrees F, conforming to ANSI B16.21, AWWA C207, and ASTM D1330, Grades 1 and 2.</p> <p>Full face for 125-pound flat-faced flanges, flat-ring type for 250-pound raised-face flanges. Blind flanges shall be gasketed covering the entire inside face with the gasket cemented to the blind flange.</p> <p>Gasket pressure rating to equal or exceed the system hydrostatic test pressure.</p>
Joint Lubricant	Manufacturer's standard.

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS FPVC

FUSIBLE POLYVINYL CHLORIDE (FPVC) PIPE

PART 1 - GENERAL**1.1 DESCRIPTION****A. SCOPE**

1. This section specifies fusible polyvinyl chloride (FPVC) pipe, including standards for dimensionality, testing, quality, acceptable fusion practice, safe handling and storage.
2. Furnish all labor, materials, equipment and incidentals required and install and test FPVC force main sewer and fittings, complete as shown on the Drawings and as specified herein.
3. Carrier pipe shall conform to the following dimensionality and general characteristics in Table 1.

Table 1: FPVC Pressurized Carrier Pipe

PIPE DESCRIPTION	NOMINAL DIAMETER (IN.)	DR	COLOR	PRESSURE CLASS (PSI)	REQ'D INNER DIAMETER (IN.)	MAX WORKING HEAD* (absolute elev. ft)
FM1-SEWER (TO PS-B)	10	25	Green	165	10.16	86
FM1-SEWER	12	25	Green	165	12.08	313
FM2-SEWER (TO PS-B)	16	25	Green	165	15.92	60
FM2-SEWER	16	25	Green	165	15.92	276
BR-SEWER	16	25	Green	165	15.92	180
BR-SEWER	18	25	Green	165	17.85	180
BR-SEWER	20	25	Green	165	19.77	180
IPR-RECYCLED	8	25	Purple	165	8.28	162
IPR-RECYCLED	10	25	Purple	165	10.16	162
LS-2 SEWER	10	25	Green	165	10.16	70
RELOC-WATER	6	18	Blue	235	6.09	CITY ENGINEER**
RELOC-WATER	8	18	Blue	235	8.28	CITY ENGINEER**
RELOC-WATER	10	18	Blue	235	10.16	CITY ENGINEER**
RELOC-WATER	12	18	Blue	235	12.08	CITY ENGINEER**
RELOC-RAW WATER	4	25	Purple	165	4.00	100

* Reference hydraulic grade line drawings for maximum working head depictions. Maximum

15100 PSDS FPVC-1

working head is defined as the maximum hydraulic grade line to be used in CONTRACTOR calculations for test pressures as specified in Section 15990

**Consult OWNER City Engineer for max working head

4. All non-pressurized FPVC open-cut construction casing pipe shall be DR-25 (DIPS) per Table 2 and 3 and must be 2-inches larger in ID than the FPVC or HDPE Carrier pipe OD

TABLE 2: MINIMUM ALLOWABLE CASING FOR FPVC CARRIERS (DIPS)

USING FPVC CARRIER (DIPS)		MINIMUM ALLOWABLE DR-25 FPVC CASING (DIPS)		
Nom. Size	O.D. (in)	Nom. Size	Req'd I.D. (in)	I.D. - O.D. >2 (in)
4"	4.80	8"	8.28	3.48
6"	6.90	10"	10.16	3.26
8"	9.05	12"	12.08	3.03
10"	11.10	14"	14.00	2.90
12"	13.20	16"	15.92	2.72
16"	17.40	20"	19.77	2.37
18"	19.50	24"	24.12	4.62
20"	21.60	24"	24.12	2.52

TABLE 3: MINIMUM ALLOWABLE CASING FOR HDPE CARRIERS (IPS)

USING HDPE CARRIER (IPS)		MINIMUM ALLOWABLE DR-25 FPVC CASING (DIPS)		
Nom. Size	O.D. (in)	Nom. Size	Req'd I.D. (in)	I.D. - O.D. >2 (in)
4"	4.50	8"	8.28	3.78
6"	6.63	10"	10.16	3.53
10"	10.75	14"	14.00	3.25
12"	12.75	16"	15.92	3.17
14"	14.00	18"	17.85	3.85
18"	18.00	24"	24.12	6.12
20"	20.00	24"	24.12	4.12
22"	22.00	24"	24.12	2.12
24"	24.00	30"	29.29	5.29

5. FPVC Fiber Optic or Electrical conduit shall be 4" DR-25 (DIPS)

1.2 REFERENCES

- A. Work performed under this section shall conform to the Contract Drawings and Specifications and shall comply with all standards, rules and regulations, laws and ordinances of OWNER and all other authorities having jurisdiction, as amended. That

15100 PSDS FPVC-2

which is necessary to make the work comply with the above requirements shall be provided without additional cost to the OWNER.

- B. Unless otherwise specified, references to documents shall mean the documents in effect at the time of design, bid, or construction, whichever is earliest. If referenced documents have been discontinued by the issuing organization, references to those documents shall mean the replacement documents issued or otherwise identified by that organization or, if there are no replacement documents, the last version of the document before it was discontinued.
- C. Where document dates are given in the following listing, references to those documents shall mean the specific document version associated with that date, regardless of whether the document has been superseded by a version with a later date, discontinued or replaced.
- D. ASTM International, most recent version:
 - 1. ASTM C923 - Standard Specification for Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes and Laterals
 - 2. ASTM D1784 - Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds
 - 3. ASTM D1785 - Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120
 - 4. ASTM D2152 - Test Method for Degree of Fusion of Extruded Poly(Vinyl Chloride) (PVC) Pipe and Molded Fittings by Acetone Immersion
 - 5. ASTM D2241 - Poly (Vinyl Chloride) (PVC) Plastic Pipe (SDR-PR)
 - 6. ASTM D2665 - Poly (Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings
 - 7. ASTM D3034 - Standard Specification for Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings
 - 8. ASTM F477 - Elastomeric Seals (Gaskets) for Joining Plastic Pipe
 - 9. ASTM F679 - Standard Specification for Poly(Vinyl Chloride) (PVC) Large Diameter Plastic Gravity Sewer Pipe and Fittings
 - 10. ASTM F1057 - Standard Practice for Estimating the Quality of Extruded Poly (Vinyl Chloride) (PVC) Pipe by the Heat Reversion Technique
 - 11. ASTM F1417 - Standard Test Method for Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air
- E. American Water Works Association, most recent version:
 - 1. ANSI/AWWA C110/A21.10 - American National Standard for Ductile-Iron and Gray-Iron Fittings, 3-inch through 48-inch, for Water and Other Liquids
 - 2. ANSI/AWWA C111/A21.11 - American National Standard for Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings
 - 3. ANSI/AWWA C153/A21.53 - AWWA Standard for Ductile-Iron Compact Fittings for Water Service
 - 4. AWWA C605 - Standard for Underground Installation of Polyvinyl Chloride (PVC) Pressure Pipe and Fittings for Water
 - 5. AWWA C651 - Standard for Disinfecting Water Mains
 - 6. AWWA C900 - Standard for Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 in. through 12 in. (100mm Through 300mm), for Water Distribution
 - 7. AWWA C905 - Standard for Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 14 in. through 48 in. (350mm Through 1200mm), for Water Distribution and Transmission

15100 PSDS FPVC-3

8. AWWA M23 - AWWA Manual of Supply Practices PVC Pipe—Design and Installation, Second Edition
- F. National Sanitation Foundation, most recent version:
 1. NSF-14 - Plastics Piping System Components and Related Materials
 2. NSF-61 - Drinking Water System Components--Health Effects
- G. Plastics Pipe Institute, most recent version:
 1. PPI TR-2 - PVC Range Composition Listing of Qualified Ingredients
- H. UNI-BELL PVC Pipe Association, most recent version:
 1. UNI-B-6 - Recommended Practice for Low-Pressure Air Testing of Installed Sewer Pipe
 2. UNI-PUB-08 - Tapping Guide for PVC Pressure Pipe

1.3 SUBMITTALS

- A. Submit, in accordance with Section 01330, and within 30 days of the notice to proceed, the name of the pipe and fitting manufacturers and a list of materials to be furnished by each manufacturer. Also, include information on local representative for each manufacturer, if product is sold through a distributor.
- B. Shop Drawings including piping layouts and schedules shall include dimensioning, fittings, types and locations of valves and appurtenances, joint details, methods and location of supports, anchorage, gasket material, grade of material and all other pertinent technical information for all items to be furnished.
- C. Pipe manufacturer and Fusion services provider shall include the following:
 1. Minimum Bending Radius
 2. Maximum Safe Pull Force
 3. Fusion technician qualification indicating conformance with this specification
- D. After pipe installation, the following AS-RECORDED DATA is required from the CONTRACTOR and/or fusion provider to the OWNER upon request:
 1. Approved datalogger device reports
 2. Pipe Size and Thickness
 3. Machine Size
 4. Fusion Technician Identification
 5. Job Identification
 6. Fusion Joint Number
 7. Fusion, Heating, and Drag Pressure Settings
 8. Heat Plate Temperature
 9. Time Stamp
 10. Heating and Cool Down Time of Fusion
 11. Ambient Temperature

1.4 QUALITY ASSURANCE

- A. Fusion Technician Requirement:
 1. Fusion Technician shall be fully qualified by the pipe supplier to install FPVC pipe of the type(s) and size(s) being used.

15100 PSDS FPVC-4

2. Qualification shall be current as of the actual date of fusion performance on the project.
 3. Fusion technician shall have a minimum of one year and 3,000 lineal feet of FPVC fusion experience to qualify for this work.
- B. Specified Pipe Suppliers:
1. FPVC pipe shall be used as manufactured under the trade names Fusible C-900®, Fusible C-905®, and FPVC®, for Underground Solutions, Inc., Poway, CA, (858) 679-9551 or equal.
 2. Fusion process shall be as patented by Underground Solutions, Inc., Poway, CA, Patent No. 6,982,051. OWNER and ENGINEER are aware of no other supplier of FPVC pipe that is an equal to this specified pipe supplier and products.

1.5 HANDLING AND STORAGE

- A. Any length of pipe showing a crack or which has received a blow that may have caused an incident fracture, even though no such fracture can be seen, shall be marked as rejected and removed at once from the work. Damaged areas, or possible areas of damage may be removed by cutting out and removing the suspected incident fracture area. Limits of the acceptable length of pipe shall be determined by the OWNER or ENGINEER.
- B. Any scratch or gouge greater than 10% of the wall thickness will be considered significant and can be rejected unless determined acceptable by the OWNER or ENGINEER.
- C. Pipe lengths should be stored and placed on level ground. Pipe should be stored at the job site in the unit packaging provided by the manufacturer. Caution should be exercised to avoid compression, damage, or deformation to the ends of the pipe. The interior of the pipe, as well as all end surfaces, should be kept free from dirt and foreign matter.
- D. Pipe shall be handled and supported with the use of woven fiber pipe slings or approved equal. Care shall be exercised when handling the pipe to not cut, gouge, scratch or otherwise abrade the piping in any way.
- E. If pipe is to be stored for periods of 30 days or longer, the pipe should be shaded or otherwise shielded from direct sunlight. Covering of the pipe, which allows for temperature build-up is strictly prohibited. Pipe should be covered with an opaque material while permitting adequate air circulation above and around the pipe as required to prevent excess heat accumulation.
- F. Pipe shall be stored and stacked per the pipe supplier's guidelines.

1.6 DELIVERY AND OFF-LOADING

- A. All FPVC pipe shall be bundled or packaged in such a manner as to provide adequate protection of the ends during transportation to the site. Any pipe damaged in shipment shall be replaced as directed by the OWNER or ENGINEER.
- B. Each FPVC pipe shipment should be inspected prior to unloading to see if the load has shifted or otherwise been damaged. Notify OWNER or ENGINEER immediately if more

15100 PSDS FPVC-5

than immaterial damage is found. Each pipe shipment should be checked for proper quantity, pipe size, color and type.

- C. FPVC pipe should be loaded, off-loaded, and otherwise handled in accordance with AWWA M23, and all of the pipe supplier's guidelines shall be followed.
- D. Off-loading devices such as chains, wire rope, chokers, or other pipe handling implements that may scratch, nick, cut, or gouge the pipe are strictly prohibited.
- E. During removal and handling, be sure that the pipe does not strike anything. Significant impact could cause damage, particularly during cold weather.
- F. If appropriate unloading equipment is not available, pipe may be unloaded by removing individual pieces. Care should be taken to insure that pipe is not dropped or damaged. Pipe should be carefully lowered, not dropped, from trucks.

1.7 WARRANTY

- A. The pipe and pipe installation via fusion services shall be warranted for one year per the pipe supplier's standard terms.

PART 2 - PRODUCTS

2.1 GENERAL

- A. All FPVC sewer pipe shall be from a single manufacturer.
- B. FPVC piping shall be made from PVC compound conforming to cell classification 12454 per ASTM D1784.
- C. Testing shall be in accordance with the referenced AWWA standards. Unless otherwise specified. FPVC pipe lengths shall be assembled in the field with butt-fused joints. The CONTRACTOR shall follow the pipe supplier's written guidelines for this procedure. All fusion joints shall be completed as described in this specification.
- D. FPVC pipe shall be manufactured in a standard 20' or 40' nominal length, or custom lengths as specified.
- E. FPVC pipe shall be extruded with plain ends. The ends shall be square to the pipe and free of any bevel or chamfer. There shall be no bell or gasket of any kind incorporated into the pipe.
- F. FPVC pipe shall be homogeneous throughout and be free of visible cracks, holes, foreign material, blisters, or other visible deleterious faults.
- G. FPVC pipe shall be marked as follows:
 - 1. Nominal pipe size
 - 2. PVC
 - 3. Dimension Ratio, Standard Dimension Ratio, or Schedule
 - 4. AWWA pressure class, or standard pressure rating for non-AWWA pipe, as applicable

15100 PSDS FPVC-6

5. AWWA standard designation number, or pipe type for non-AWWA pipe, as applicable
6. Extrusion production-record code
7. Trademark or trade name
8. Cell Classification 12454 and/or PVC material code 1120 may also be included

2.2 FPVC PRESSURE PIPE FOR WASTEWATER

- A. FPVC for pressurized wastewater not conforming to AQQA C905 dimensionally shall conform to AWWA C900, ASTM D2241 or ASTM D1785 for standard dimensionality, as applicable.
- B. FPVC pipe shall be green in color for wastewater use.

2.3 CONNECTIONS AND FITTINGS FOR PRESSURE APPLICATIONS

- A. Connections shall be defined in conjunction with the coupling of project piping, as well as the tie-ins to other piping systems.
- B. All fittings and connections must be restrained.
- C. DUCTILE IRON MECHANICAL AND FLANGED FITTINGS
 1. Acceptable fittings for use with FPVC pipe shall include standard ductile iron fittings conforming to AWWA/ANSI C110/A21.10, or AWWA/ANSI C153/A21.53 and AWWA/ANSI C111/A21.11.
 2. Connections to FPVC pipe shall be made using a restrained retainer gland product for PVC pipe, as well as for MJ or flanged fittings.
 3. Bends, tees and other ductile iron fittings shall be restrained.
 4. Ductile iron fittings and glands must be installed per the manufacturer's guidelines.
 5. All pipe fittings outside of the Pump Station shall be long radius.
- D. CONNECTION HARDWARE
 1. Bolts and nuts for buried service shall be made of non-corrosive, high-strength, low-alloy steel having the characteristics specified in ANSI/AWWA C111/A21.11, regardless of any other protective coating.
- E. All ductile iron mechanical and flanged fittings shall be lined and coated with Tnemec 431 and as per manufacturer recommendation.

2.4 CONNECTIONS TO SANITARY SEWER MANHOLES AND STRUCTURES

- A. FPVC pipe shall be connected to manholes and other structures to provide a leak-free, properly graded flow into or out of the manhole or structure.
- B. Connections to existing manholes and structures shall be as indicated in the construction documents.
 1. For a cored or drilled opening provide a flexible, watertight connection that meets and/or exceeds ASTM C923.
 2. For a knock out opening, provide a watertight connection (waterstop or other method) meeting the material requirements of ASTM C923 that is securely attached to the pipe with stainless steel bands or other means.

15100 PSDS FPVC-7

3. Grout opening in manhole wall with non-shrink grout. Pour concrete collar around pipe and outside manhole opening. Provide flexible pipe joint or flexible connector within 2 feet of the collar.
- C. Connections to a new manhole or structure shall be as indicated in the construction documents.
 1. A flexible, watertight gasket per ASTM C923 shall be cast integrally with riser section(s) for all precast manhole and structures.
 2. Drop connections shall be required where shown on drawings.
 3. Grout internal joint space with non-shrink grout.

PART 3 - EXECUTION

3.1 FUSION PROCESS

A. GENERAL

1. FPVC pipe will be handled in a safe and non-destructive manner before, during, and after the fusion process and in accordance with this specification and pipe supplier's guidelines.
2. FPVC pipe will be fused by qualified fusion technicians, as documented by the pipe supplier.
3. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine.
4. Only appropriately sized and outfitted fusion machines that have been approved by the pipe supplier shall be used for the fusion process. Fusion machines must incorporate the following elements:
 - a. HEAT PLATE - Heat plates shall be in good condition with no deep gouges or scratches. Plates shall be clean and free of any debris or contamination. Heater controls shall function properly; cord and plug shall be in good condition. The appropriately sized heat plate shall be capable of maintaining a uniform and consistent heat profile and temperature for the size of pipe being fused, per the pipe supplier's guidelines.
 - b. CARRIAGE - Carriage shall travel smoothly with no binding at less than 50 psi. Jaws shall be in good condition with proper inserts for the pipe size being fused. Insert pins shall be installed with no interference to carriage travel.
 - c. GENERAL MACHINE - Overview of machine body shall yield no obvious defects, missing parts, or potential safety issues during fusion.
 - d. DATA LOGGING DEVICE - An approved datalogging device with the current version of the pipe supplier's recommended and compatible software shall be used. Datalogging device operations and maintenance manual shall be with the unit at all times. If fusing for extended periods of time, an independent 110V power source shall be available to extend battery life.
5. Other equipment specifically required for the fusion process shall include the following:
 - a. Pipe rollers shall be used for support of pipe to either side of the machine
 - b. A weather protection canopy that allows full machine motion of the heat plate, fusion assembly and carriage shall be provided for fusion in inclement, extreme temperatures, and /or windy weather, per the pipe supplier's recommendations.
 - c. An infrared (IR) pyrometer shall be required for checking pipe and heat plate temperatures.

15100 PSDS FPVC-8

- d. Fusion machine operations and maintenance manual shall be kept with the fusion machine at all times.
- e. Facing blades specifically designed for cutting FPVC pipe shall be used.

B. JOINT RECORDING

- 1. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine. The fusion data logging and joint report shall be generated by software developed specifically for the butt-fusion of FPVC pipe. The software shall register and/or record the parameters required by the pipe supplier and these specifications. Data not logged by the data logger shall be logged manually and be included in the Fusion Technician's joint report.

3.2 GENERAL INSTALLATION

- A. Installation guidelines from the pipe supplier shall be followed for all installations.
- B. The FPVC pipe will be installed in a manner so as not to exceed the recommended bending radius.
- C. Where FPVC pipe is installed by pulling in tension, the recommended Safe Pulling Force established by the pipe supplier shall not be exceeded.
- D. Fusible pipelines laid on a curve shall use a maximum of 75 percent of manufacturer's recommended allowable bend radius.

3.3 CONTRACTOR PIPE SYSTEM CONNECTIONS

- A. Pipe connections and connections to structures shall be installed per OWNER standards and local regulations, as well as per the connection manufacturer's guidelines and as indicated in the construction documents.

3.4 TESTING

- A. Testing shall comply with all applicable jurisdictional building codes, statutes, standards, regulations, and laws.
- B. No partial testing is allowed for FPVC pipe unless approved by the OWNER and ENGINEER.
- C. Testing for pressure piping to be per Section 15990.

3.5 QA/QC PROTOCOL TESTING

- A. CONTRACTOR shall coordinate with the QA/QC personnel to perform all testing prior to backfill.
 - 1. Vendor Qualification Testing – Pipe extruders shall submit pipe samples for testing of material properties as well as the strength of the butt-fusion joint.
 - 2. Vender Testing – Pipe manufacturer shall meet relevant AWWA and ASTM standards and tests.

15100 PSDS FPVC-9

SECTION 15100 PSDS HDPE

FUSIBLE HIGH DENSITY POLYETHYLENE PIPE (HDPE) PIPE

PART 1 - GENERAL**1.1 DESCRIPTION****A. SCOPE**

1. This section specifies high density polyethylene pressure (HDPE) pipe, including standards for dimensionality, testing, quality, acceptable fusion practice, safe handling and storage.
2. Furnish all labor, materials, equipment and incidentals required and install and test HDPE force main sewer pipe and fittings, complete as shown on the Drawings and as specified herein.
3. Each offsite pipeline system shall utilize a single continuous length of the same pipe material, size, and pressure class unless otherwise noted on the Contract Drawings.
4. CONTRACTOR shall note that HDPE is not the OWNER standard for new potable water pipeline materials and is only permitted for non-potable & recycled water applications.
5. CONTRACTOR shall provide CC-2 (Chlorine Class II Oxidative Resistance) for HDPE PE4710 Brine and IPR pipelines that carry fluids with disinfection residuals, recycled water, and/or treated effluent
6. Pipe shall conform to the following dimensionality and general characteristics table:

PRESSURIZED CARRIER PIPE (PE 4710 IPS)						
PIPE DESCRIPTION	NOMINAL DIAMETER (IN.)	DR (IPS)	COLOR	PRESSURE CLASS (PSI)	REQD INNER DIAMETER (IN.)	MAX WORKING HEAD* (absolute elev. ft)
FM1-SEWER (TO PS-B)	12	17	Grey/Black with green stripe	125	11.16	85
FM1-SEWER	16	11	Grey/Black with green stripe	200	12.92	310
FM2-SEWER (TO PS-B)	18	17	Grey/Black with green stripe	125	15.75	65
FM2-SEWER	20	11	Grey/Black with green stripe	200	16.15	275
BR-SEWER	18	17 (CC2)	Grey/Black with green	200	15.75	180

15100 PSDS HDPE-1

3. Independent Laboratory Testing Lot Acceptance – A lot of pipe must pass tests conducted by an independent laboratory (AWWA Flattening, Heat Reversion, Acetone Immersion).
4. Fusion QC & Traceability
 - a. Each fusion joint fused in the field shall have data logger and direct operator input to record critical fusion parameters such as temperature, pressure, ambient conditions, etc on each fusion joint.
 - b. Link fusion data with an identifier and pipe lot.
 - c. QA/QC personnel must provide a fusion data sheet with unique joint identifier listed per each joint to the OWNER.

++ END OF SECTION ++

15100 PSDS FPVC-10

			stripe			
BR-SEWER	20	17 (CC2)	Grey/Black with green stripe	200	17.51	180
BR-SEWER	24	11 (CC2)	Grey/Black with green stripe	200	19.37	180
IPR-RECYCLED	10	17 (CC2)	Grey/Black with purple stripe	125	9.41	165
IPR-RECYCLED	12	11 (CC2)	Grey/Black with purple stripe	200	10.29	165
LS-2 SEWER	12	17	Grey/Black with green stripe	25	11.16	70
4"VENT – TO CARV/ARV	4	11	Grey/Black with green stripe	200	3.63	MATCH CONNECTED MAIN ALIGNMENT
4"VENT – TO CARV/ARV	4	17	Grey/Black with green stripe	125	3.94	MATCH CONNECTED MAIN ALIGNMENT

*Reference hydraulic grade line drawings for maximum working head depictions. Maximum working head is defined as the maximum hydraulic grade line to be used in CONTRACTOR calculations for test pressures as specified in Section 15990

7. All non-pressurized HDPE open-cut construction casing pipe shall be PE 4710 DR-21 (IPS) per Table 2 and 3 and must be 2-inches larger in ID than the FPVC or HDPE Carrier pipe OD

TABLE 2: MINIMUM ALLOWABLE CASING FOR FPVC CARRIERS (DIPS)

USING FPVC CARRIER (DIPS)		MINIMUM ALLOWABLE DR-21 HDPE CASING (IPS)		
Nom. Size	O.D. (in)	Nom. Size	I.D. (in)	I.D. - O.D. >2 (in)
4"	4.80	8"	7.75	2.95
6"	6.90	10"	9.66	2.76
8"	9.05	12.00	11.46	2.41
10"	11.10	16.00	14.38	3.28
12"	13.20	18.00	16.18	2.98
16"	17.40	22.00	19.78	2.38
18"	19.50	24.00	21.58	2.08

15100 PSDS HDPE-2

20"	21.60	28.00	25.17	3.57
-----	-------	-------	-------	------

TABLE 3: MINIMUM ALLOWABLE CASING FOR HDPE CARRIERS (IPS)

USING HDPE CARRIER (IPS)		MINIMUM ALLOWABLE DR-21 HDPE CASING (IPS)		
Nom. Size	O.D. (in)	Nom. Size	I.D. (in)	I.D. - O.D. >2 (in)
4"	4.50	8"	7.75	3.25
6"	6.63	10"	9.66	3.03
10"	10.75	16.00	14.38	3.63
12"	12.75	18.00	16.18	3.43
14"	14.00	20.00	17.98	3.98
18"	18.00	24.00	21.58	3.58
20"	20.00	26.00	23.38	3.38
22"	22.00	28.00	25.17	3.17
24"	24.00	30.00	26.97	2.97

8. HDPE Fiber Optic or Electrical conduit shall be 4" DR-21 HDPE 4710 (IPS)

1.2 REFERENCES

- A. Work performed under this section shall conform to the Contract Drawings and Specifications and shall comply with all standards, rules and regulations, laws and ordinances of the OWNER and all other authorities having jurisdiction, as amended. That which is necessary to make the work comply with the above requirements shall be provided without additional cost to the OWNER.
- B. Unless otherwise specified, references to documents shall mean the documents in effect at the time of design, bid, or construction, whichever is earliest. If referenced documents have been discontinued by the issuing organization, references to those documents shall mean the replacement documents issued or otherwise identified by that organization or, if there are no replacement documents, the last version of the document before it was discontinued.
- C. Where document dates are given in the following listing, references to those documents shall mean the specific document version associated with that date, regardless of whether the document has been superseded by a version with a later date, discontinued or replaced.
- D. American Society for Testing and Materials (ASTM) International, most recent version:
 1. ASTM A307 - Standard Specification for Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength
 2. ASTM D2321 - Standard Practice for Underground Installation of Thermoplastic Pipe for Sewer and Other Gravity-Flow Applications

15100 PSDS HDPE-3

3. ASTM D2774 – Standard Practice for Underground Installation of Thermoplastic Pressure Piping
 4. ASTM D2657 - Standard Practice for Heat Fusion Joining of Polyolefin Pipe and Fittings
 5. ASTM D2837 - Standard Test Method for Obtaining Hydrostatic Design Basis for Thermoplastic Pipe Materials
 6. ASTM D3350 - Standard Specification for Polyethylene Plastics Pipe and Fittings Materials
 7. ASTM F714 - Standard Specification for Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
- E. American Water Works Association (AWWA), most recent version:
1. AWWA C600 - Installation of Ductile Iron Water Mains and Their Appurtenances
 2. AWWA C901 - Polyethylene (PE) Pressure Pipe and Fittings, 1/2-in Through 3-in, for Water Distribution and Transmission
 3. AWWA C906 - Polyethylene (PE) Pressure Pipe and Fittings, 4-in Through 63-in, for Water Distribution and Transmission
 4. AWWA M55 – PE Pipe – Design and Installation
- F. American National Standards Institute (ANSI), most recent version:
1. ANSI B16.1 - Cast Iron Flanges and Flanged Fittings.
 2. ANSI B16.21 - Nonmetallic Flat Gaskets for Pipe Flanges.
 3. ANSI/NSF 61- Drinking Water System Components-Health Effects

1.3 SUBMITTALS

- A. Submit, in accordance with Section 01330, and within 30 days of the notice to proceed, the name of the pipe and fitting manufacturers and a list of materials to be furnished by each manufacturer. Also, include information on local representative for each manufacturer, if product is sold through a distributor.
- B. Submit the name and qualifications of the technician proposed to perform the heat fusion of the pipe joints.
- C. Shop Drawings including piping layouts and schedules shall include dimensioning, fittings, types and locations of valves and appurtenances, joint details, methods and location of supports, anchorage, gasket material, grade of material and all other pertinent technical information for all items to be furnished.
- D. Pipe manufacturer and Fusion services provider shall include the following:
 1. Minimum Bending Radius
 2. Maximum Safe Pull Force
- E. Submit description of the method of testing the pipe and fittings including a complete drawing of mandrel with dimensions for each pipe size.
- F. Submit certification that the stress regression testing has been performed on the specific polyethylene resin being utilized in the manufacturing of the pipe for this contract in accordance with ASTM D2837.

15100 PSDS HDPE-4

- G. Prior to each shipment, submit certified test reports that the pipe and fittings for this contract were manufactured and tested in accordance with the ASTM [and AWWA] Standards specified herein.
- H. After pipe installation, the following AS-RECORDED DATA is required from the contractor and/or fusion provider to the OWNER upon request:
 - 1. Approved datalogger device reports
 - 2. Pipe Size and Thickness
 - 3. Machine Size
 - 4. Fusion Technician Identification
 - 5. Job Identification
 - 6. Fusion Joint Number
 - 7. Fusion, Heating, and Drag Pressure Settings
 - 8. Heat Plate Temperature
 - 9. Time Stamp
 - 10. Heating and Cool Down Time of Fusion
 - 11. Ambient Temperature

1.4 QUALITY ASSURANCE

- A. Fusion Technician Requirement:
 - 1. Fusion Technician shall be fully qualified by the pipe supplier to install HDPE pipe of the type(s) and size(s) being used.
 - 2. Qualification shall be current as of the actual date of fusion performance on the project.
 - 3. Fusion technician shall have a minimum of one year and 5,000 lineal feet of HDPE fusion experience to qualify for this work.
- B. All HDPE pipe and fittings shall be manufactured in strict accordance with ASTM F714, and shall be from a single manufacturer who is fully experienced, reputable and qualified in the manufacture of the polyethylene pipe and fittings to be furnished. All HDPE pipe and fittings shall be supplied by a single distributor who is fully experienced, reputable, and qualified with the distribution of the pipe and fittings to be furnished. The pipe shall be designed, constructed, and installed in accordance with the best practices and methods and shall comply with these specifications.
- C. All pipes under this contract shall be manufactured from a polyethylene resin that has been specifically stress regression tested to provide a product supplying a minimum Hydrostatic Design Basis (HDB) of 1600 psi, as determined in accordance with ASTM D2837.
- D. All HDPE pipe to be installed under this Contract may be inspected at the factory for compliance with this Section by an independent testing laboratory provided by the OWNER. The manufacturer's cooperation shall be required in these inspections. The cost of these plant inspections of all pipe approved for this Contract will be borne by the OWNER.
- E. Inspection of the pipe may also be made by the ENGINEER or other representatives of the OWNER after delivery. The pipe shall be subject to rejection at any time on

15100 PSDS HDPE-5

account of failure to meet any of the specified requirements, even though pipes may have been accepted as satisfactory at the place of manufacture. Pipe rejected after delivery shall be marked for identification and shall immediately be removed from the job.

- F. A representative of the pipe supplier shall witness and inspect the fusion of 30% of the pipe joints. This shall include the witnessing and inspection of the fusion of the test joint, the first 20 joints installed, and all joints for piping in the Bore and Jack portions of the project.

1.5 HANDLING AND STORAGE

- A. Any length of pipe showing a crack or which has received a blow that may have caused an incident fracture, even though no such fracture can be seen, shall be marked as rejected and removed at once from the work. Damaged areas, or possible areas of damage may be removed by cutting out and removing the suspected incident fracture area. Limits of the acceptable length of pipe shall be determined by the OWNER or ENGINEER.
- B. Any scratch or gouge greater than 10% of the wall thickness will be considered significant and can be rejected unless determined acceptable by the OWNER or ENGINEER.
- C. Pipe lengths should be stored and placed on level ground. Pipe should be stored at the job site in the unit packaging provided by the manufacturer. Caution should be exercised to avoid compression, damage, or deformation to the ends of the pipe. The interior of the pipe, as well as all end surfaces, should be kept free from dirt and foreign matter.
- D. Pipe shall be handled and supported with the use of woven fiber pipe slings or approved equal. Care shall be exercised when handling the pipe to not cut, gouge, scratch or otherwise abrade the piping in any way.
- E. If pipe is to be stored for periods of 30 days or longer, the pipe should be shaded or otherwise shielded from direct sunlight. Covering of the pipe, which allows for temperature build-up is strictly prohibited. Pipe should be covered with an opaque material while permitting adequate air circulation above and around the pipe as required to prevent excess heat accumulation.
- F. Pipe shall be stored and stacked per the pipe supplier's guidelines

1.6 DELIVERY AND OFF-LOADING

- A. All HDPE pipe shall be bundled or packaged in such a manner as to provide adequate protection of the ends during transportation to the site. Any pipe damaged in shipment shall be replaced as directed by the OWNER or ENGINEER.
- B. Each HDPE pipe shipment should be inspected prior to unloading to see if the load has shifted or otherwise been damaged. Notify OWNER or ENGINEER immediately if more

15100 PSDS HDPE-6

than immaterial damage is found. Each pipe shipment should be checked for proper quantity, pipe size, color and type.

- C. HDPE pipe should be loaded, off-loaded, and otherwise handled in accordance with AWWA M55, and all of the pipe supplier's guidelines shall be followed.
- D. Off-loading devices such as chains, wire rope, chokers, or other pipe handling implements that may scratch, nick, cut, or gouge the pipe are strictly prohibited.
- E. During removal and handling, be sure that the pipe does not strike anything. Significant impact could cause damage, particularly during cold weather.
- F. If appropriate unloading equipment is not available, pipe may be unloaded by removing individual pieces. Care should be taken to insure that pipe is not dropped or damaged. Pipe should be carefully lowered, not dropped, from trucks

1.7 WARRANTY

- A. The pipe and pipe installation via fusion services shall be warranted for one year per the pipe supplier's standard terms.

PART 2 - PRODUCTS

2.1 GENERAL

A. PIPE

- 1. HDPE pipe is a flexible conduit and shall be designed to transfer imposed loads to the surrounding embedment medium. The pipe and fittings shall be free from all defects including indentations, delaminations, cracks, bubbles and pinholes, which due to their nature, degree, or extent, detrimentally affect the strength and serviceability of the pipe. Any pipe or fittings with such defects which, in the judgement of the ENGINEER, will affect the strength and serviceability shall be repaired or rejected.
- 2. HDPE pipe resins shall be high molecular weight, high density polyethylene with a cell classification number of 345464C or higher in accordance with ASTM D3350.
- 3. The pipes shall have the nominal dimensions shown on the Drawings, and shall conform to the dimension requirements of the DIPS Sizing System (ANSI B36.10). Pipe shall meet the requirements of Dimension Ratio (DR) 13.5.
- 4. All polyethylene pipes shall meet the requirements of ASTM F714.
- 5. Pipe shall be furnished in standard laying lengths not exceeding 50-ft.

B. FITTINGS

- 1. All polyethylene pipe fittings shall meet the requirements of ASTM F714.
- 2. DIP fittings shall not be permitted for intermediate joints connecting two HDPE pipe segments
- 3. HDPE fittings shall be fully pressure rated to match the pipe DR pressure rating. All fittings shall be molded or fabricated by the same manufacturer as the pipe. HDPE fittings shall be joined using butt, heat fusion and/or electrofusion.

15100 PSDS HDPE-7

Adhesives and solvent cements shall not be permitted. All joints shall be made in strict compliance with the manufacturer's recommendations and ASTM 2657.

4. Joining system
 - a. Where required, flange connections, mechanical joint connections and butt connections using bolted mechanical couplers shall be provided from ~~a pipe stub with a polyethylene and steel stiffener~~ an HDPE flange or MJ adapter containing a ductile iron or steel back-up ring and an internal 316 SST pipe stiffener ring.^{AD5}
 - b. Flanged connections shall not be permitted for intermediate joints connecting two HDPE pipe segments
 - c. Flanged connections shall be provided from a pipe stub and a steel back-up flange. Back-up flanges shall be primed and painted in a corrosion protected paint recommended and supplied by the manufacturer.
 - d. All bolts, nuts and hardware shall be Type 304 stainless steel.
5. All pipe fittings outside of the Pump Station shall be long radius.

C. PIPE IDENTIFICATION

1. At 5-ft intervals along the pipe, the pipe shall be marked with the name of the manufacturer, size and class (pressure and DR), and manufacturing reference to ASTM F714.
2. A color coded strip(s) shall be marked along the entire length of the pipe per the color specified in this section.

2.2 CONNECTIONS AND FITTINGS FOR PRESSURE APPLICATIONS

- A. Connections shall be defined in conjunction with the coupling of project piping, as well as the tie-ins to other piping systems.
- B. All fittings and connections must be restrained.
- C. DUCTILE IRON MECHANICAL AND FLANGED FITTINGS
 1. Acceptable fittings for use with HDPE pipe shall include standard ductile iron fittings conforming to AWWA/ANSI C110/A21.10, or AWWA/ANSI C153/A21.53 and AWWA/ANSI C111/A21.11.
 2. Connections to HDPE pipe shall be made using Standard Detail 15850.~~an HDPE plain end to flange adapter and a Welded Steel Reducer for DIP or FPVC pipes and fittings. A ductile iron or steel back-up ring conforming to ANSI B16.1 fitted to the polyethylene flange adapter may be required.~~^{AD5}
 3. MJ fittings may be used at the connection.
 4. Bends, tees and other ductile iron fittings shall be restrained with the use of thrust blocking or other means as indicated in the construction documents.
 5. Ductile iron fittings and glands must be installed per the manufacturer's guidelines.
- D. CONNECTION HARDWARE
 1. Bolts and nuts for buried service shall be made of non-corrosive, high-strength, low-alloy steel having the characteristics specified in ANSI/AWWA C111/A21.11, regardless of any other protective coating.

15100 PSDS HDPE-8

- E. All ductile iron mechanical and flanged fittings shall be lined and coated with Tnemec 431 and as per manufacturer recommendation.

2.3 CONNECTIONS TO SANITARY SEWER MANHOLES AND STRUCTURES

- A. HDPE pipe shall be connected to manholes and other structures to provide a leakfree, properly graded flow into or out of the manhole or structure.
- B. Connections to existing manholes and structures shall be as indicated in the construction documents.
 - 1. For a cored or drilled opening provide a flexible, watertight connection that meets and/or exceeds ASTM C923.
 - 2. For a knock out opening, provide a watertight connection (waterstop or other method) meeting the material requirements of ASTM C923 that is securely attached to the pipe with stainless steel bands or other means.
 - 3. Grout opening in manhole wall with non-shrink grout. Pour concrete collar around pipe and outside manhole opening. Provide flexible pipe joint or flexible connector within 2 feet of the collar.
- C. Connections to a new manhole or structure shall be as indicated in the construction documents.
 - 1. A flexible, watertight gasket per ASTM C923 shall be cast integrally with riser section(s) for all precast manhole and structures.
 - 2. Drop connections shall be required where shown on drawings.
 - 3. Grout internal joint space with non-shrink grout.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All pipe and fittings shall be installed in accordance with the manufacturer's instructions and this specification.
- B. The contractor performing the joining shall be certified by a distributor of the pipe material supplied. All fusion joints shall be done by a factory qualified technician as designated by the manufacturer with a minimum of one year experience with the fusion equipment to be used.
- C. Joining of the pipe by heat fusion shall be done in accordance with ASTM D2657. Prior to the start of pipe installation, one test joint shall be made and tested. Test shall be done in accordance with CPChem Co. Bulletin No. 106. No joints shall be made until a successful test joint has been made.
- D. When cutting pipe is required, the cutting shall be done by machine specifically designed for the cutting of HDPE pipe. The cut shall leave a smooth cut at right angles to the axis of the pipe.

15100 PSDS HDPE-9

- E. Fittings shall be connected to HDPE pipe in accordance with manufacturer's recommendations.
- F. Flanged and mechanical connections shall consist of the following:
 - 1. A high density polyethylene flange adapter, made by the manufacturer from the same resin as the pipe, and fully pressure rated to match the pipe DR pressure rating, thermally butt-fused to the stub end of the pipe.
 - 2. A ductile iron or steel back-up ring conforming to ANSI B16.1 fitted to the polyethylene flange adapter and shaped as necessary to suit the outside dimension of the pipe.
 - 3. A full face neoprene gasket, conforming to ANSI B16.21.
 - 4. Corrosion resistant bolts and nuts of Type 316 stainless steel as specified in ASTM A276 and ASTM A307. Bolts shall be tightened alternatively and evenly to the manufacturer's specified torques. After installation a bitumastic coating shall be applied to bolts and nuts.
- G. Fusible pipelines laid on a curve shall use a maximum of 75 percent of manufacturer's recommended allowable bend radius.

3.2 JOINING METHODS

A. GENERAL

- 1. HDPE pipe will be handled in a safe and non-destructive manner before, during, and after the fusion process and in accordance with this specification and pipe supplier's guidelines.
- 2. HDPE pipe will be fused by qualified fusion technicians, as documented by the pipe supplier.
- 3. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine.
- 4. Only appropriately sized and outfitted fusion machines that have been approved by the pipe supplier shall be used for the fusion process. Fusion machines must incorporate the following elements:
 - a. HEAT PLATE - Heat plates shall be in good condition with no deep gouges or scratches. Plates shall be clean and free of any debris or contamination. Heater controls shall function properly; cord and plug shall be in good condition. The appropriately sized heat plate shall be capable of maintaining a uniform and consistent heat profile and temperature for the size of pipe being fused, per the pipe supplier's guidelines.
 - b. CARRIAGE - Carriage shall travel smoothly with no binding at less than 50 psi. Jaws shall be in good condition with proper inserts for the pipe size being fused. Insert pins shall be installed with no interference to carriage travel.
 - c. GENERAL MACHINE - Overview of machine body shall yield no obvious defects, missing parts, or potential safety issues during fusion.
 - d. DATA LOGGING DEVICE - An approved datalogging device with the current version of the pipe supplier's recommended and compatible software shall be used. Datalogging device operations and maintenance manual shall be with the unit at all times. If fusing for extended periods of time, an independent 110V power source shall be available to extend battery life.

15100 PSDS HDPE-10

5. Other equipment specifically required for the fusion process shall include the following:
 - a. Pipe rollers shall be used for support of pipe to either side of the machine.
 - b. A weather protection canopy that allows full machine motion of the heat plate, fusion assembly and carriage shall be provided for fusion in inclement, extreme temperatures, and /or windy weather, per the pipe supplier's recommendations.
 - c. An infrared (IR) pyrometer for checking pipe and heat plate temperatures shall be used.
 - d. Fusion machine operations and maintenance manual shall be kept with the fusion machine at all times.
 - e. Facing blades specifically designed for cutting HDPE pipe shall be used.
- B. BUTT FUSION CONNECTION
 1. The pipe shall be joined by the butt fusion procedure outlined in ASTM F 2620 or PPI TR-33.
 2. All fusion joints shall be made in compliance with the pipe or fitting manufacturer's recommendations.
 3. Fusion joints shall be made by qualified fusion technicians per PPI TN-42.
- C. SADDLE FUSION CONNECTION
 1. Saddle fusion shall be done in accordance with ASTM F 2620 or TR-41 or the fitting manufacturer's recommendations and PPI TR-41.
 2. Saddle fusion joints shall be made by qualified fusion technicians. Qualification of the fusion technician shall be demonstrated by evidence of fusion training within the past year on the equipment to be utilized on this project.
 3. Saddle fusion is used to fuse branch saddles, tapping tees, and other HDPE constructs onto the wall of the main pipe (ASTM F905).
- D. ELECTROFUSION CONNECTION
 1. Electrofusion joining shall be done in accordance with the manufacturers recommended procedure or ASTM F 1290 and PPI TN 34.
 2. The process of electrofusion requires an electric source , a transformer, commonly called an electrofusion box that has wire leads, a method to read electronically (by laser)or otherwise input the barcode of the fitting, and a fitting that is compatible with the type of electrofusion box used.
 3. The electrofusion box must be capable of reading and storing the input parameters and the fusion results for later download to a record file.
 4. Qualification of the fusion technician shall be demonstrated by evidence of electrofusion training within the past year on the equipment to be utilized for this project.
- E. JOINT RECORDING
 1. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine.
 2. The fusion data logging and joint report shall be generated by software developed specifically for the butt-fusion of HDPE pipe.
 3. The software shall register and/or record the parameters required by the pipe supplier and these specifications.

15100 PSDS HDPE-11

4. Data not logged by the data logger shall be logged manually and be included in the Fusion Technician's joint report.

3.3 TESTING

- A. Testing shall comply with all applicable jurisdictional building codes, statutes, standards, regulations, and laws.
- B. No partial testing is allowed for HDPE pipe unless approved by the OWNER and ENGINEER.
- C. Testing for pressure piping to be per Section 15990.

3.4 QA/QC PROTOCOL TESTING

- A. CONTRACTOR shall coordinate with the QA/QC personnel to perform all testing prior to backfill.
 1. Vendor Qualification Testing – Pipe extruders shall submit pipe samples for testing of material properties as well as the strength of the butt-fusion joint.
 2. Vender Testing – Pipe manufacturer shall meet relevant AWWA and ASTM standards and tests.
 3. Independent Laboratory Testing Lot Acceptance – A pipe lot must pass tests conducted by an independent laboratory (AWWA Flattening, Heat Reversion, Acetone Immersion).
 4. Fusion QC & Traceability
 - a. Each fusion joint fused in the field shall have data logger and direct operator input to record critical fusion parameters such as temperature, pressure, ambient conditions, etc on each fusion joint.
 - b. Link fusion data with an identifier and pipe lot.
 - c. QA/QC personnel must provide a fusion data sheet with unique joint identifier listed per each joint to the OWNER.

+ + END OF SECTION + +

15100 PSDS HDPE-12

SECTION 15100 PSDS HDPE

FUSIBLE HIGH DENSITY POLYETHYLENE PIPE (HDPE) PIPE

PART 1 - GENERAL**1.1 DESCRIPTION****A. SCOPE**

1. This section specifies high density polyethylene pressure (HDPE) pipe, including standards for dimensionality, testing, quality, acceptable fusion practice, safe handling and storage.
2. Furnish all labor, materials, equipment and incidentals required and install and test HDPE force main sewer pipe and fittings, complete as shown on the Drawings and as specified herein.
3. Each offsite pipeline system shall utilize a single continuous length of the same pipe material, size, and pressure class unless otherwise noted on the Contract Drawings.
4. CONTRACTOR shall note that HDPE is not the OWNER standard for new potable water pipeline materials and is only permitted for non-potable & recycled water applications.
5. CONTRACTOR shall provide CC-2 (Chlorine Class II Oxidative Resistance) for HDPE PE4710 Brine and IPR pipelines that carry fluids with disinfection residuals, recycled water, and/or treated effluent
6. Pipe shall conform to the following dimensionality and general characteristics table:

PRESSURIZED CARRIER PIPE (PE 4710 IPS)						
PIPE DESCRIPTION	NOMINAL DIAMETER (IN.)	DR (IPS)	COLOR	PRESSURE CLASS (PSI)	REQD INNER DIAMETER (IN.)	MAX WORKING HEAD* (absolute elev. ft)
FM1-SEWER (TO PS-B)	12	17	Grey/Black with green stripe	125	11.16	85
FM1-SEWER	16	11	Grey/Black with green stripe	200	12.92	310
FM2-SEWER (TO PS-B)	18	17	Grey/Black with green stripe	125	15.75	65
FM2-SEWER	20	11	Grey/Black with green stripe	200	16.15	275
BR-SEWER	18	17 (CC2)	Grey/Black with green	200	15.75	180

15100 PSDS HDPE-1

			stripe			
BR-SEWER	20	17 (CC2)	Grey/Black with green stripe	200	17.51	180
BR-SEWER	24	11 (CC2)	Grey/Black with green stripe	200	19.37	180
IPR-RECYCLED	10	17 (CC2)	Grey/Black with purple stripe	125	9.41	165
IPR-RECYCLED	12	11 (CC2)	Grey/Black with purple stripe	200	10.29	165
LS-2 SEWER	12	17	Grey/Black with green stripe	25	11.16	70
4" VENT – TO CARV/ARV	4	11	Grey/Black with green stripe	200	3.63	MATCH CONNECTED MAIN ALIGNMENT
4" VENT – TO CARV/ARV	4	17	Grey/Black with green stripe	125	3.94	MATCH CONNECTED MAIN ALIGNMENT

*Reference hydraulic grade line drawings for maximum working head depictions. Maximum working head is defined as the maximum hydraulic grade line to be used in CONTRACTOR calculations for test pressures as specified in Section 15990

7. All non-pressurized HDPE open-cut construction casing pipe shall be PE 4710 DR-21 (IPS) per Table 2 and 3 and must be 2-inches larger in ID than the FPVC or HDPE Carrier pipe OD

TABLE 2: MINIMUM ALLOWABLE CASING FOR FPVC CARRIERS (DIPS)

USING FPVC CARRIER (DIPS)		MINIMUM ALLOWABLE DR-21 HDPE CASING (IPS)		
Nom. Size	O.D. (in)	Nom. Size	I.D. (in)	I.D. - O.D. >2 (in)
4"	4.80	8"	7.75	2.95
6"	6.90	10"	9.66	2.76
8"	9.05	12.00	11.46	2.41
10"	11.10	16.00	14.38	3.28
12"	13.20	18.00	16.18	2.98
16"	17.40	22.00	19.78	2.38
18"	19.50	24.00	21.58	2.08

15100 PSDS HDPE-2

20"	21.60	28.00	25.17	3.57
-----	-------	-------	-------	------

TABLE 3: MINIMUM ALLOWABLE CASING FOR HDPE CARRIERS (IPS)

USING HDPE CARRIER (IPS)		MINIMUM ALLOWABLE DR-21 HDPE CASING (IPS)		
Nom. Size	O.D. (in)	Nom. Size	I.D. (in)	I.D. - O.D. >2 (in)
4"	4.50	8"	7.75	3.25
6"	6.63	10"	9.66	3.03
10"	10.75	16.00	14.38	3.63
12"	12.75	18.00	16.18	3.43
14"	14.00	20.00	17.98	3.98
18"	18.00	24.00	21.58	3.58
20"	20.00	26.00	23.38	3.38
22"	22.00	28.00	25.17	3.17
24"	24.00	30.00	26.97	2.97

8. HDPE Fiber Optic or Electrical conduit shall be 4" DR-21 HDPE 4710 (IPS)

1.2 REFERENCES

- A. Work performed under this section shall conform to the Contract Drawings and Specifications and shall comply with all standards, rules and regulations, laws and ordinances of the OWNER and all other authorities having jurisdiction, as amended. That which is necessary to make the work comply with the above requirements shall be provided without additional cost to the OWNER.
- B. Unless otherwise specified, references to documents shall mean the documents in effect at the time of design, bid, or construction, whichever is earliest. If referenced documents have been discontinued by the issuing organization, references to those documents shall mean the replacement documents issued or otherwise identified by that organization or, if there are no replacement documents, the last version of the document before it was discontinued.
- C. Where document dates are given in the following listing, references to those documents shall mean the specific document version associated with that date, regardless of whether the document has been superseded by a version with a later date, discontinued or replaced.
- D. American Society for Testing and Materials (ASTM) International, most recent version:
 1. ASTM A307 - Standard Specification for Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength
 2. ASTM D2321 - Standard Practice for Underground Installation of Thermoplastic Pipe for Sewer and Other Gravity-Flow Applications

15100 PSDS HDPE-3

3. ASTM D2774 – Standard Practice for Underground Installation of Thermoplastic Pressure Piping
 4. ASTM D2657 - Standard Practice for Heat Fusion Joining of Polyolefin Pipe and Fittings
 5. ASTM D2837 - Standard Test Method for Obtaining Hydrostatic Design Basis for Thermoplastic Pipe Materials
 6. ASTM D3350 - Standard Specification for Polyethylene Plastics Pipe and Fittings Materials
 7. ASTM F714 - Standard Specification for Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
- E. American Water Works Association (AWWA), most recent version:
1. AWWA C600 - Installation of Ductile Iron Water Mains and Their Appurtenances
 2. AWWA C901 - Polyethylene (PE) Pressure Pipe and Fittings, 1/2-in Through 3-in, for Water Distribution and Transmission
 3. AWWA C906 - Polyethylene (PE) Pressure Pipe and Fittings, 4-in Through 63-in, for Water Distribution and Transmission
 4. AWWA M55 – PE Pipe – Design and Installation
- F. American National Standards Institute (ANSI), most recent version:
1. ANSI B16.1 - Cast Iron Flanges and Flanged Fittings.
 2. ANSI B16.21 - Nonmetallic Flat Gaskets for Pipe Flanges.
 3. ANSI/NSF 61- Drinking Water System Components-Health Effects

1.3 SUBMITTALS

- A. Submit, in accordance with Section 01330, and within 30 days of the notice to proceed, the name of the pipe and fitting manufacturers and a list of materials to be furnished by each manufacturer. Also, include information on local representative for each manufacturer, if product is sold through a distributor.
- B. Submit the name and qualifications of the technician proposed to perform the heat fusion of the pipe joints.
- C. Shop Drawings including piping layouts and schedules shall include dimensioning, fittings, types and locations of valves and appurtenances, joint details, methods and location of supports, anchorage, gasket material, grade of material and all other pertinent technical information for all items to be furnished.
- D. Pipe manufacturer and Fusion services provider shall include the following:
 1. Minimum Bending Radius
 2. Maximum Safe Pull Force
- E. Submit description of the method of testing the pipe and fittings including a complete drawing of mandrel with dimensions for each pipe size.
- F. Submit certification that the stress regression testing has been performed on the specific polyethylene resin being utilized in the manufacturing of the pipe for this contract in accordance with ASTM D2837.

15100 PSDS HDPE-4

- G. Prior to each shipment, submit certified test reports that the pipe and fittings for this contract were manufactured and tested in accordance with the ASTM [and AWWA] Standards specified herein.
- H. After pipe installation, the following AS-RECORDED DATA is required from the contractor and/or fusion provider to the OWNER upon request:
 - 1. Approved datalogger device reports
 - 2. Pipe Size and Thickness
 - 3. Machine Size
 - 4. Fusion Technician Identification
 - 5. Job Identification
 - 6. Fusion Joint Number
 - 7. Fusion, Heating, and Drag Pressure Settings
 - 8. Heat Plate Temperature
 - 9. Time Stamp
 - 10. Heating and Cool Down Time of Fusion
 - 11. Ambient Temperature

1.4 QUALITY ASSURANCE

- A. Fusion Technician Requirement:
 - 1. Fusion Technician shall be fully qualified by the pipe supplier to install HDPE pipe of the type(s) and size(s) being used.
 - 2. Qualification shall be current as of the actual date of fusion performance on the project.
 - 3. Fusion technician shall have a minimum of one year and 5,000 lineal feet of HDPE fusion experience to qualify for this work.
- B. All HDPE pipe and fittings shall be manufactured in strict accordance with ASTM F714, and shall be from a single manufacturer who is fully experienced, reputable and qualified in the manufacture of the polyethylene pipe and fittings to be furnished. All HDPE pipe and fittings shall be supplied by a single distributor who is fully experienced, reputable, and qualified with the distribution of the pipe and fittings to be furnished. The pipe shall be designed, constructed, and installed in accordance with the best practices and methods and shall comply with these specifications.
- C. All pipes under this contract shall be manufactured from a polyethylene resin that has been specifically stress regression tested to provide a product supplying a minimum Hydrostatic Design Basis (HDB) of 1600 psi, as determined in accordance with ASTM D2837.
- D. All HDPE pipe to be installed under this Contract may be inspected at the factory for compliance with this Section by an independent testing laboratory provided by the OWNER. The manufacturer's cooperation shall be required in these inspections. The cost of these plant inspections of all pipe approved for this Contract will be borne by the OWNER.
- E. Inspection of the pipe may also be made by the ENGINEER or other representatives of the OWNER after delivery. The pipe shall be subject to rejection at any time on

15100 PSDS HDPE-5

account of failure to meet any of the specified requirements, even though pipes may have been accepted as satisfactory at the place of manufacture. Pipe rejected after delivery shall be marked for identification and shall immediately be removed from the job.

- F. A representative of the pipe supplier shall witness and inspect the fusion of 30% of the pipe joints. This shall include the witnessing and inspection of the fusion of the test joint, the first 20 joints installed, and all joints for piping in the Bore and Jack portions of the project.

1.5 HANDLING AND STORAGE

- A. Any length of pipe showing a crack or which has received a blow that may have caused an incident fracture, even though no such fracture can be seen, shall be marked as rejected and removed at once from the work. Damaged areas, or possible areas of damage may be removed by cutting out and removing the suspected incident fracture area. Limits of the acceptable length of pipe shall be determined by the OWNER or ENGINEER.
- B. Any scratch or gouge greater than 10% of the wall thickness will be considered significant and can be rejected unless determined acceptable by the OWNER or ENGINEER.
- C. Pipe lengths should be stored and placed on level ground. Pipe should be stored at the job site in the unit packaging provided by the manufacturer. Caution should be exercised to avoid compression, damage, or deformation to the ends of the pipe. The interior of the pipe, as well as all end surfaces, should be kept free from dirt and foreign matter.
- D. Pipe shall be handled and supported with the use of woven fiber pipe slings or approved equal. Care shall be exercised when handling the pipe to not cut, gouge, scratch or otherwise abrade the piping in any way.
- E. If pipe is to be stored for periods of 30 days or longer, the pipe should be shaded or otherwise shielded from direct sunlight. Covering of the pipe, which allows for temperature build-up is strictly prohibited. Pipe should be covered with an opaque material while permitting adequate air circulation above and around the pipe as required to prevent excess heat accumulation.
- F. Pipe shall be stored and stacked per the pipe supplier's guidelines

1.6 DELIVERY AND OFF-LOADING

- A. All HDPE pipe shall be bundled or packaged in such a manner as to provide adequate protection of the ends during transportation to the site. Any pipe damaged in shipment shall be replaced as directed by the OWNER or ENGINEER.
- B. Each HDPE pipe shipment should be inspected prior to unloading to see if the load has shifted or otherwise been damaged. Notify OWNER or ENGINEER immediately if more

15100 PSDS HDPE-6

than immaterial damage is found. Each pipe shipment should be checked for proper quantity, pipe size, color and type.

- C. HDPE pipe should be loaded, off-loaded, and otherwise handled in accordance with AWWA M55, and all of the pipe supplier's guidelines shall be followed.
- D. Off-loading devices such as chains, wire rope, chokers, or other pipe handling implements that may scratch, nick, cut, or gouge the pipe are strictly prohibited.
- E. During removal and handling, be sure that the pipe does not strike anything. Significant impact could cause damage, particularly during cold weather.
- F. If appropriate unloading equipment is not available, pipe may be unloaded by removing individual pieces. Care should be taken to insure that pipe is not dropped or damaged. Pipe should be carefully lowered, not dropped, from trucks

1.7 WARRANTY

- A. The pipe and pipe installation via fusion services shall be warranted for one year per the pipe supplier's standard terms.

PART 2 - PRODUCTS

2.1 GENERAL

A. PIPE

- 1. HDPE pipe is a flexible conduit and shall be designed to transfer imposed loads to the surrounding embedment medium. The pipe and fittings shall be free from all defects including indentations, delaminations, cracks, bubbles and pinholes, which due to their nature, degree, or extent, detrimentally affect the strength and serviceability of the pipe. Any pipe or fittings with such defects which, in the judgement of the ENGINEER, will affect the strength and serviceability shall be repaired or rejected.
- 2. HDPE pipe resins shall be high molecular weight, high density polyethylene with a cell classification number of 345464C or higher in accordance with ASTM D3350.
- 3. The pipes shall have the nominal dimensions shown on the Drawings, and shall conform to the dimension requirements of the DIPS Sizing System (ANSI B36.10). Pipe shall meet the requirements of Dimension Ratio (DR) 13.5.
- 4. All polyethylene pipes shall meet the requirements of ASTM F714.
- 5. Pipe shall be furnished in standard laying lengths not exceeding 50-ft.

B. FITTINGS

- 1. All polyethylene pipe fittings shall meet the requirements of ASTM F714.
- 2. DIP fittings shall not be permitted for intermediate joints connecting two HDPE pipe segments
- 3. HDPE fittings shall be fully pressure rated to match the pipe DR pressure rating. All fittings shall be molded or fabricated by the same manufacturer as the pipe. HDPE fittings shall be joined using butt, heat fusion and/or electrofusion.

15100 PSDS HDPE-7

Adhesives and solvent cements shall not be permitted. All joints shall be made in strict compliance with the manufacturer's recommendations and ASTM 2657.

4. Joining system
 - a. Where required, flange connections, mechanical joint connections and butt connections using bolted mechanical couplers shall be provided from a pipe stub with a polyethylene and steel stiffener.
 - b. Flanged connections shall not be permitted for intermediate joints connecting two HDPE pipe segments
 - c. Flanged connections shall be provided from a pipe stub and a steel back-up flange. Back-up flanges shall be primed and painted in a corrosion protected paint recommended and supplied by the manufacturer.
 - d. All bolts, nuts and hardware shall be Type 304 stainless steel.
5. All pipe fittings outside of the Pump Station shall be long radius.

C. PIPE IDENTIFICATION

1. At 5-ft intervals along the pipe, the pipe shall be marked with the name of the manufacturer, size and class (pressure and DR), and manufacturing reference to ASTM F714.
2. A color coded strip(s) shall be marked along the entire length of the pipe per the color specified in this section.

2.2 CONNECTIONS AND FITTINGS FOR PRESSURE APPLICATIONS

- A. Connections shall be defined in conjunction with the coupling of project piping, as well as the tie-ins to other piping systems.
- B. All fittings and connections must be restrained.
- C. DUCTILE IRON MECHANICAL AND FLANGED FITTINGS
 1. Acceptable fittings for use with HDPE pipe shall include standard ductile iron fittings conforming to AWWA/ANSI C110/A21.10, or AWWA/ANSI C153/A21.53 and AWWA/ANSI C111/A21.11.
 2. Connections to HDPE pipe shall be made using an HDPE plain end to flange adapter and a Welded Steel Reducer for DIP or FPVC pipes and fittings. A ductile iron or steel back-up ring conforming to ANSI B16.1 fitted to the polyethylene flange adapter may be required.
 3. MJ fittings may be used at the connection.
 4. Bends, tees and other ductile iron fittings shall be restrained with the use of thrust blocking or other means as indicated in the construction documents.
 5. Ductile iron fittings and glands must be installed per the manufacturer's guidelines.
- D. CONNECTION HARDWARE
 1. Bolts and nuts for buried service shall be made of non-corrosive, high-strength, low-alloy steel having the characteristics specified in ANSI/AWWA C111/A21.11, regardless of any other protective coating.
- E. All ductile iron mechanical and flanged fittings shall be lined and coated with Tnemec 431 and as per manufacturer recommendation.

15100 PSDS HDPE-8

2.3 CONNECTIONS TO SANITARY SEWER MANHOLES AND STRUCTURES

- A. HDPE pipe shall be connected to manholes and other structures to provide a leakfree, properly graded flow into or out of the manhole or structure.
- B. Connections to existing manholes and structures shall be as indicated in the construction documents.
 - 1. For a cored or drilled opening provide a flexible, watertight connection that meets and/or exceeds ASTM C923.
 - 2. For a knock out opening, provide a watertight connection (waterstop or other method) meeting the material requirements of ASTM C923 that is securely attached to the pipe with stainless steel bands or other means.
 - 3. Grout opening in manhole wall with non-shrink grout. Pour concrete collar around pipe and outside manhole opening. Provide flexible pipe joint or flexible connector within 2 feet of the collar.
- C. Connections to a new manhole or structure shall be as indicated in the construction documents.
 - 1. A flexible, watertight gasket per ASTM C923 shall be cast integrally with riser section(s) for all precast manhole and structures.
 - 2. Drop connections shall be required where shown on drawings.
 - 3. Grout internal joint space with non-shrink grout.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. All pipe and fittings shall be installed in accordance with the manufacturer's instructions and this specification.
- B. The contractor performing the joining shall be certified by a distributor of the pipe material supplied. All fusion joints shall be done by a factory qualified technician as designated by the manufacturer with a minimum of one year experience with the fusion equipment to be used.
- C. Joining of the pipe by heat fusion shall be done in accordance with ASTM D2657. Prior to the start of pipe installation, one test joint shall be made and tested. Test shall be done in accordance with CPChem Co. Bulletin No. 106. No joints shall be made until a successful test joint has been made.
- D. When cutting pipe is required, the cutting shall be done by machine specifically designed for the cutting of HDPE pipe. The cut shall leave a smooth cut at right angles to the axis of the pipe.
- E. Fittings shall be connected to HDPE pipe in accordance with manufacturer's recommendations.

15100 PSDS HDPE-9

- F. Flanged and mechanical connections shall consist of the following:
1. A high density polyethylene flange adapter, made by the manufacturer from the same resin as the pipe, and fully pressure rated to match the pipe DR pressure rating, thermally butt-fused to the stub end of the pipe.
 2. A ductile iron or steel back-up ring conforming to ANSI B16.1 fitted to the polyethylene flange adapter and shaped as necessary to suit the outside dimension of the pipe.
 3. A full face neoprene gasket, conforming to ANSI B16.21.
 4. Corrosion resistant bolts and nuts of Type 316 stainless steel as specified in ASTM A276 and ASTM A307. Bolts shall be tightened alternatively and evenly to the manufacturer's specified torques. After installation a bitumastic coating shall be applied to bolts and nuts.
- G. Fusible pipelines laid on a curve shall use a maximum of 75 percent of manufacturer's recommended allowable bend radius.

3.2 JOINING METHODS

A. GENERAL

1. HDPE pipe will be handled in a safe and non-destructive manner before, during, and after the fusion process and in accordance with this specification and pipe supplier's guidelines.
2. HDPE pipe will be fused by qualified fusion technicians, as documented by the pipe supplier.
3. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine.
4. Only appropriately sized and outfitted fusion machines that have been approved by the pipe supplier shall be used for the fusion process. Fusion machines must incorporate the following elements:
 - a. HEAT PLATE - Heat plates shall be in good condition with no deep gouges or scratches. Plates shall be clean and free of any debris or contamination. Heater controls shall function properly; cord and plug shall be in good condition. The appropriately sized heat plate shall be capable of maintaining a uniform and consistent heat profile and temperature for the size of pipe being fused, per the pipe supplier's guidelines.
 - b. CARRIAGE - Carriage shall travel smoothly with no binding at less than 50 psi. Jaws shall be in good condition with proper inserts for the pipe size being fused. Insert pins shall be installed with no interference to carriage travel.
 - c. GENERAL MACHINE - Overview of machine body shall yield no obvious defects, missing parts, or potential safety issues during fusion.
 - d. DATA LOGGING DEVICE - An approved datalogging device with the current version of the pipe supplier's recommended and compatible software shall be used. Datalogging device operations and maintenance manual shall be with the unit at all times. If fusing for extended periods of time, an independent 110V power source shall be available to extend battery life.
5. Other equipment specifically required for the fusion process shall include the following:
 - a. Pipe rollers shall be used for support of pipe to either side of the machine.

15100 PSDS HDPE-10

- b. A weather protection canopy that allows full machine motion of the heat plate, fusion assembly and carriage shall be provided for fusion in inclement, extreme temperatures, and /or windy weather, per the pipe supplier's recommendations.
- c. An infrared (IR) pyrometer for checking pipe and heat plate temperatures shall be used.
- d. Fusion machine operations and maintenance manual shall be kept with the fusion machine at all times.
- e. Facing blades specifically designed for cutting HDPE pipe shall be used.

B. BUTT FUSION CONNECTION

- 1. The pipe shall be joined by the butt fusion procedure outlined in ASTM F 2620 or PPI TR-33.
- 2. All fusion joints shall be made in compliance with the pipe or fitting manufacturer's recommendations.
- 3. Fusion joints shall be made by qualified fusion technicians per PPI TN-42.

C. SADDLE FUSION CONNECTION

- 1. Saddle fusion shall be done in accordance with ASTM F 2620 or TR-41 or the fitting manufacturer's recommendations and PPI TR-41.
- 2. Saddle fusion joints shall be made by qualified fusion technicians. Qualification of the fusion technician shall be demonstrated by evidence of fusion training within the past year on the equipment to be utilized on this project.
- 3. Saddle fusion is used to fuse branch saddles, tapping tees, and other HDPE constructs onto the wall of the main pipe (ASTM F905).

D. ELECTROFUSION CONNECTION

- 1. Electrofusion joining shall be done in accordance with the manufacturers recommended procedure or ASTM F 1290 and PPI TN 34.
- 2. The process of electrofusion requires an electric source , a transformer, commonly called an electrofusion box that has wire leads, a method to read electronically (by laser)or otherwise input the barcode of the fitting, and a fitting that is compatible with the type of electrofusion box used.
- 3. The electrofusion box must be capable of reading and storing the input parameters and the fusion results for later download to a record file.
- 4. Qualification of the fusion technician shall be demonstrated by evidence of electrofusion training within the past year on the equipment to be utilized for this project.

E. JOINT RECORDING

- 1. Each fusion joint shall be recorded and logged by an electronic monitoring device (data logger) connected to the fusion machine.
- 2. The fusion data logging and joint report shall be generated by software developed specifically for the butt-fusion of HDPE pipe.
- 3. The software shall register and/or record the parameters required by the pipe supplier and these specifications.
- 4. Data not logged by the data logger shall be logged manually and be included in the Fusion Technician's joint report.

15100 PSDS HDPE-11

3.3 TESTING

- A. Testing shall comply with all applicable jurisdictional building codes, statutes, standards, regulations, and laws.
- B. No partial testing is allowed for HDPE pipe unless approved by the OWNER and ENGINEER.
- C. Testing for pressure piping to be per Section 15990.

3.4 QA/QC PROTOCOL TESTING

- A. CONTRACTOR shall coordinate with the QA/QC personnel to perform all testing prior to backfill.
 - 1. Vendor Qualification Testing – Pipe extruders shall submit pipe samples for testing of material properties as well as the strength of the butt-fusion joint.
 - 2. Vendor Testing – Pipe manufacturer shall meet relevant AWWA and ASTM standards and tests.
 - 3. Independent Laboratory Testing Lot Acceptance – A pipe lot must pass tests conducted by an independent laboratory (AWWA Flattening, Heat Reversion, Acetone Immersion).
 - 4. Fusion QC & Traceability
 - a. Each fusion joint fused in the field shall have data logger and direct operator input to record critical fusion parameters such as temperature, pressure, ambient conditions, etc on each fusion joint.
 - b. Link fusion data with an identifier and pipe lot.
 - c. QA/QC personnel must provide a fusion data sheet with unique joint identifier listed per each joint to the OWNER.

+ + END OF SECTION + +

15100 PSDS HDPE-12

SECTION 15100 PSDS HDPE1

PIPING SYSTEM DATA SHEET – HIGH DENSITY POLYETHYLENE DRAINAGE PIPE

ITEM	DESCRIPTION
Pipe	High Density Polyethylene Pipe, smooth inside, corrugated outside intended for storm drainage application. Meeting the requirements of AASHTO M-252/M-294, Type S. Meets H-20 loading requirements with 1-foot of soil cover. Provide solid pipe unless specifically called out "slotted" on the Drawings. ADS N-12 WT IB or equal.
Fittings	Use PVC thermo-molded sanitary fittings which are constructed to specifically work with the HDPE pipe system. Lab test certified to 10.8 psi, minimum, meeting the requirements of ASTM D3212. Elbows shall be radiused, not segmented/beveled. Do not use fabricated HDPE fittings. ADS Series 35 or equal.
Joints	Water-tight joints, integral bell/spigot ends with an integral reinforcing collar on the bell. Provide gasket on the spigot end. Lab test certified to 10.8 psi, minimum, meeting the requirements of ASTM D3212. Provide transition couplings and adapters as required to couple with other piping systems.
Couplings	HDPE wrap-around sleeve with self-contained tightening straps. Lab test certified to 5 psi, minimum. Same manufacturer as pipe.
Gaskets	Rubber gasket meeting the requirements of ASTM F-477

15100 PSDS HDPE1-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS PVC1

PIPING SYSTEM DATA SHEET – SOLVENT WELDED POLYVINYL CHLORIDE PIPE

ITEM	DESCRIPTION
Pipe	Schedule 80 Polyvinyl Chloride (PVC), unless indicated otherwise. Type I, Grade I or Class 12454-B conforming to ASTM D1784 and ASTM D1785. Pipe shall be manufactured with 1% titanium dioxide for ultraviolet protection.
Fittings	Schedule to match pipe above, ASTM D2466 and ASTM D2467 for socket weld type and Schedule 80 ASTM D2464 for threaded type. Fittings shall be manufactured with 1% titanium dioxide for ultraviolet protection.
Joints	Solvent socket weld except where connection to threaded valves and equipment may require future disassembly.
Flanges	One piece, molded hub type PVC flat face flange in accordance with Fittings above, 125-pound ANSI B16.1 drilling
Bolting	Hex Bolts: ASTM A193 B8, Type 304 stainless steel Nuts: ASTM A194 Grade 8, Type 304 stainless steel
Gaskets	Flat-Face Mating Flange: Full-faced 1/8-inch thick EPDM rubber.
Solvent Cement	As recommended by the pipe and fitting manufacturer conforming to ASTM D2564, except solvent weld cement for PVC pipe joints in sodium hypochlorite service shall be free of silica filler and shall be certified by the manufacturer to be suitable for that service. Certification shall be submitted.
Thread Sealant	Teflon Tape.

15100 PSDS PVC1-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS PVC2

PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE PRESSURE PIPE

ITEM	DESCRIPTION
Pipe	Conform to the requirements of AWWA C900-16 (4-inch to 60-inch) for PVC water transmission pipe, pressure class as shown in pipe schedule. If no pressure class is shown in pipe schedule, provide pressure class adequate to accommodate test pressure shown in pipe schedule. All pipes designed to carry recycled water shall be colored purple.
Fittings	Ductile Iron per 15100 PSDS DIP – Ductile Iron Pipe. Transition fittings necessary for the proper connection shall be the standard of, and provided by, the manufacturer of the fittings.
Joints	Rubber-gasketed bell and spigot or rubber-gasketed couplings. No restrained joint PVC piping shall be allowed. In sections where joint restraint is required, transition piping to Ductile Iron Pipe with restrained joint fittings or as shown on the drawings.
Gaskets	Conforming to the requirements of ASTM F477.
Joint Lubricant	Manufacturer's standard.

15100 PSDS PVC2-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS PVC3**PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE DRAIN, WASTE AND VENT
PIPE**

ITEM	DESCRIPTION
Pipe	PVC Drain Waste and Vent type, ASTM D1785, Type 2110, Schedule 40.
Fittings	Schedule to match pipe above, ASTM D2665 Drain, Waste and Vent Type
Joints	Solvent socket weld except where connection to threaded valves and equipment may require future disassembly.
Solvent Cement	As recommended by the pipe and fitting manufacturer conforming to ASTM D2564.
Thread Sealant	Teflon Tape.
Special Installation Instructions for DWV Piping	<ol style="list-style-type: none">1. Approximate routing as shown on drawings. Provide drain waste and vent piping to produce a complete, code-compliant drain, waste and vent system.2. Provide and install all required fittings, adapters, etc. to produce a complete system.3. Set piping above floor slab true and plumb.4. Set risers in CMU walls where possible, set exposed risers as close to walls as possible.5. Where vent stacks pass through roof, fit with flashing sleeve secured to roof.6. Extend vents minimum 1 foot above roof.

15100 PSDS PVC3-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS PVC4**PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE GRAVITY SEWER PIPE**

ITEM	DESCRIPTION
Pipe	Conform to the requirements of ASTM D3034 (4 to 15-inch) and ASTM F679 (18 to 24-inch). Provide minimum SDR-26 sewer pipe with a minimum pipe stiffness of 115 PSI. PWEagle, or Equal.
Fittings	Conform to the requirements of ASTM D3034 (4 to 15-inch) and ASTM F679 (18 to 24-inch). GPK, or Equal.
Joints	Rubber-gasketed bell and spigot or rubber-gasketed couplings conforming to ASTM D3212.
Gaskets	Conforming to the requirements of ASTM F477.
Joint Lubricant	Manufacturer's standard.

15100 PSDS PVC4-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS PVC6**PIPING SYSTEM DATA SHEET – POLYVINYL CHLORIDE STORM DRAIN PIPE**

ITEM	DESCRIPTION
Pipe	Conform to the requirements of ASTM D3034 (4 to 15-inch) and ASTM F679 (18 to 24-inch). Provide minimum SDR-26 storm drain pipe with a minimum pipe stiffness of 115 PSI. PWEagle, or Equal.
Fittings	Conform to the requirements of ASTM D3034 (4 to 15-inch) and ASTM F679 (18 to 24-inch). GPK, or Equal.
Joints	Rubber-gasketed bell and spigot or rubber-gasketed couplings conforming to ASTM D3212.
Gaskets	Conforming to the requirements of ASTM F477.
Joint Lubricant	Manufacturer's standard.

15100 PSDS PVC6-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS RCP

PIPING SYSTEM DATA SHEET – REINFORCED CONCRETE PRESSURE PIPE

ITEM	DESCRIPTION
Pipe	AWWA C302, Reinforced Concrete Pressure Pipe, Non-Cylinder Type.
Design Requirements	Internal Working Pressure: 8 feet of water Surge Pressure (add to Working Pressure): 15 feet of water Test Pressure: As specified in Pipe Schedule Depth of Burial: 14.0 feet Live Load at Surface: HS20 Truck Loading
Lining	Unless otherwise specified in the Pipe Schedule, piping shall be lined as specified in Section 06640.
Fittings	AWWA C302
Joints	Bell & Spigot (B&S)
Gaskets	Single rubber gasket conforming to AWWA C302.
Joint Lubricant	Manufacturer's standard.
Cement	Conform to ASTM C150, Type II
Aggregate	Fine and coarse aggregates shall conform to the requirements of ASTM C33
Reinforcing Steel	Conform to the requirements of AWWA C302

15100 PSDS RCP-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS SSTP

PIPING SYSTEM DATA SHEET – STAINLESS STEEL PIPE

ITEM	SIZE	DESCRIPTION
Pipe	2 inch & smaller 2-1/2 thru 6 inch	Austenitic stainless steel, ASTM A312, Grade TP 316 seamless, or welded Schedule 80 Schedule 40
Joints	3 inch & smaller 4 inch & larger	Threaded or flanged at valves and equipment. Flanged at valves and equipment.
Couplings		Threaded, Type 316 Stainless Steel, Class 3000: LF2 ASME B16.11, SA182
Flanges		Class 150, F316/316L, ASTM A102, ANSI B16.5 Class 150 or Class 300, threaded, 1/16-inch raised face.
Unions		Threaded Type 316 Stainless Steel, Class 3000: MSS SP83 ,SA182
Plugs		Threaded Type 316 Stainless Steel, Class 3000: Threads conform to ASME B1.20.1 NPT; Materials conform to ASTM A182, Dimension conform to ASME B16.11
Bolting		Hex Bolts: ASTM A320/A320M, Type 316 stainless steel, grade 5 Nuts: ASTM F594, Type 316 stainless steel, grade 5
Gaskets	All Flanges	Flanged, Water and Sewage Service: 1/8-inch thick, red rubber (SBR), hardness 80 (Shore A), rated to 200 degrees F., conforming to ANSI B16.21, AWWA C207, and ASTM D1330, Grades 1 and 2. Blind flanges shall be gasketed covering the entire inside face with the gasket cemented to the blind flange.
Thread Lubricant	2 inch & smaller	Heavy duty anti-seize joint lubricant for stainless steel threads that is insoluble in water.

15100 PSDS SSTP-1

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15100 PSDS WSP

PIPING SYSTEM DATA SHEET – WELDED STEEL PIPE CASING

ITEM	DESCRIPTION
Pipe	<p><u>Exposed Utility Bridge Crossing (Size Varies):</u> Carbon steel ASTM A283/A283M Rev A Grade C or ASTM A285/A285M Grade C, sheet or coil, fabricated in accordance with AWWA C200, straight or spiral seam, thickness designed for handling requirements, minimum thickness 1/8-inch, sizes are to be nominal outside diameters conforming to ASME B36.10M.</p> <p><u>12" Trenchless Casing:</u> Carbon steel ASTM A283/A283M Rev A Grade C or ASTM A285/A285M Grade C, sheet or coil, fabricated in accordance with AWWA C200, straight or spiral seam, thickness designed for handling, with a minimum thickness of 1/4-inch, sizes are to be nominal outside diameters conforming to ASME B36.10M.</p>
Linings/Coatings	<p><u>Exposed Utility Bridge Crossing (Size Varies):</u> Factory Applied Lining and Coating: Fusion Bonded Epoxy per AWWA C-213, 16 mil thickness. 3M Scotchkote 206N, or equal. CONTRACTOR to submit color selected by OWNER.</p> <p><u>12" Trenchless Casing:</u> Lining and Coating not required.</p>
Joints	Full penetration butt-welded
Fittings	<p>All fittings 6" and smaller shall be forged. Fittings 8" to 24 inches may be forged or fabricated, unless shown otherwise on the Drawings.</p> <p>Fabricated: Carbon steel fabricated from pipe in accordance with AWWA C208; elbows to have a 22.5-degree maximum miter section angle and a radius of 2.5 times the diameter, unless shown otherwise; wyes, tees, crosses, and outlets to be reinforced in accordance with AWWA M-11.</p> <p>Forged: Butt-welding fittings, ASTM A234/A234M, Grade WPB meeting the requirements of ANSI B16.9. Fitting wall thickness to match adjoining pipe. Elbows to be long radius unless shown otherwise.</p>

15100 PSDS WSP-1

ITEM	DESCRIPTION
Gaskets	<p><u>Potable Water and Sewage Service:</u> 1/8-inch thick, cloth-inserted rubber, corrosive acid and alkali free conforming to ANSI B16.21 and AWWA C207.</p> <p>Provide full-face gaskets for flat-face flanges; flat ring gaskets for raised-face flanges.</p> <p>Gaskets for rolled grooved ends shall be as recommended by manufacturer for sewage service.</p>

15100 PSDS WSP-2

SECTION 15120**PIPING SPECIALTIES****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings:
 - 1. Manufacturer's data on materials, construction, end connections, ratings, overall lengths, etc.

PART 2 - PRODUCTS**2.1 SERVICE SADDLES**

- A. Double-Strap Iron:
 - 1. Pressure Rating: Capable of withstanding 150 psi internal pressure without leakage or over stressing.
 - 2. Run Diameter: Compatible with outside diameter of pipe on which saddle is installed.
 - 3. Taps: Iron pipe threads.
 - 4. Materials:
 - a. Body: Malleable or ductile iron.
 - b. Straps: Galvanized steel.
 - c. Hex Nuts and Washers: Steel.
 - d. Seal: Rubber.
 - 5. Manufacturers and Products:
 - a. Smith-Blair; Series 313 or 366.
 - b. Dresser; Style 91.
 - c. Or Equal

2.2 FLEXIBLE COUPLINGS

- A. Flexible Couplings (FC)
 - 1. Features:
 - a. Description: Sleeve-type flexible couplings
 - b. Pressure and Service: Same as connected piping.
 - c. Sleeve material: Carbon steel for carbon steel and ductile iron piping systems, or stainless steel for stainless steel piping systems.
 - d. Coating and Lining: All cast and carbon steel components shall be epoxy lined and coated, minimum 16 mils thickness. For potable water service, lining shall be NSF-61 certified.
 - e. Gasket: EPDM
 - f. Bolts and Nuts: Alloy steel, corrosion-resistant, prime coated. Buried couplings shall have Type 316 stainless steel bolts and nuts.
 - 2. Manufacturers and Products:
 - a. Ductile Iron Pipe:
 - 1) Smith-Blair, Inc.; Style 411.
 - 2) Or Equal.

B. Flanged Coupling Adapters (FCA)

1. Features:
 - a. Description: One end of adapter shall be flanged and the other end shall have a sleeve type flexible coupling.
 - b. Pressure and Service: Same as connected piping.
 - c. Adapter body material: Cast iron or steel.
 - d. Gasket: EPDM
 - e. Bolts and Nuts: Alloy steel, corrosion-resistant, prime coated. Buried couplings shall have Type 316 stainless steel bolts and nuts.
2. Manufacturers and Products:
 - a. Ductile Iron Pipe:
 - 1) Dresser Piping Specialties; Style 227.
 - 2) Smith-Blair, Inc.; Style 127.
 - 3) Or Equal.

C. Restrained Flanged Coupling Adapters (RFCA)

1. Features:
 - a. Description: One end of adapter shall be flanged and the other end shall have a sleeve type flexible coupling.
 - b. Pressure and Service: Same as connected piping.
 - c. Adapter body material: Cast iron or steel.
 - d. Gasket: EPDM
 - e. Bolts and Nuts: Alloy steel, corrosion-resistant, prime coated. Buried couplings shall have Type 316 stainless steel bolts and nuts.
 - f. Restraining lug.
2. Manufacturers and Products:
 - a. Ductile Iron Pipe:
 - 1) Romac Industries; RFCA
 - 2) Or Equal.

D. Restraint Rods for Flexible Couplings: As shown on the Drawings

E. Unrestrained DIP Transition Coupling

1. Features:
 - a. Applicability: Couple new host pipe with existing ACP pipe. Must be used in conjunction with separate restrainer device.
 - b. Description: DIP coupling with interchangeable gaskets and color-coded end rings corresponding with host pipe.
 - c. Pressure and Service: Same as connected piping.
 - d. Castings: end rings and center rings ductile (nodular) iron, meeting or exceeding ASTM A 536
 - e. Gaskets: EPDM, NSF-61 approved
 - f. Bolts and Nuts: 304 SS
 - g. Coatings: Shop coat with corrosion protection.
 - h. Lining: NSF 61 approved
2. Manufacturers and Products:
 - a. Ductile Iron Pipe:
 - 1) Romac, 501
 - 2) Or Equal

2.3 RESTRAINED COUPLINGS

A. Restrained Mechanical Joint Glands (RMJ)

1. Pressure Rating:
 - a. Minimum Working Pressure Rating: Not less than 150 psi.
 - b. Safety Factor: Not less than two times working pressure and shall be supported by manufacturer's proof testing.
2. RMJ gland shall be designed for use with standard mechanical joint pipe. Pipe restraint products designed for use with push-on joints will not be acceptable.
3. Thrust Restraint:
 - a. Provide hardened steel wedges that bear against and engage outer pipe surface, and allow articulation of pipe joint after assembly while wedges remain in their original setting position on pipe surface.
 - b. Products employing set screws that bear directly on pipe will not be acceptable.
4. Manufacturer and Product:
 - a. Ductile Iron Pipe Only
 - 1) EBAA Iron Sales Co.; Megalug.
 - 2) Romac Industries Inc.: RomaGrip
 - 3) Or Equal.

B. Dismantling Joint

1. Pressure Rating
 - a. Minimum Working Pressure Rating: Not less than 150 psi
 - b. Pressure rating to be no less than test pressure for piping system in which the Restrained Dismantling Joint is used.
 - c. Safety Factor: Not less than two times working pressure and shall be supported by manufacturer's proof testing.
2. Thrust Restraint
 - a. Provide steel tie rods, ASTM A 193 GR B7
 - b. Number and arrangement of tie rods to provide dismantling joint assembly which meets pressure rating requirement.
3. Materials of Construction
 - a. Flanged Adapter Body: Steel
 - b. Follower Flange: Ductile Iron
 - c. Gasket: Buna-N, NSF-61 approved
 - d. Flange: Steel, per AWWA C207
 - e. Spigot: Steel
 - f. Studs: Type 304 stainless steel
 - g. Coating: NSF-61 approved epoxy
4. Manufacturer and Product
 - a. Smith-Blair, Model 975 or 972, as required for pressure rating
 - b. Romac Industries, Style DJ400
 - c. Or Equal.

C. Asbestos Cement Pipe (ACP) Restrainer

1. Features:
 - a. Description: Restrainer with thread rods to restrain ACP to host pipe or fittings placed over fittings, hydrants, flanged coupling adapters, meter and mechanical joints.
 - b. Coating: Standard shop coat with heavy corrosion inhibiting metal primer.
 - c. Restrainer Body: Pressure vessel quality steel ASTM A285 Grade C or equal.

- d. Bolts and Nuts: SS 18-8 Type 304
- 2. Manufacturers and Products:
 - 1) JCM 630 Fitting Restrainer 631 Pipe Restrainer
 - 2) Or Equal.

2.4 MODULAR MECHANICAL SEAL

- A. Type: Interconnecting synthetic rubber links shaped and sized to continuously fill annular space between pipe and sleeve, blockout, or core-drilled opening in concrete slabs or walls.
- B. Features:
 - 1. Links: EPDM
 - 2. Bolts and nuts: Type 316 stainless steel
 - 3. Pressure plates: composite
 - 4. Temperature range: -40 to 250 degrees Fahrenheit
 - 5. Pressure rating: guaranteed by the manufacturer to provide a water-tight seal with a differential hydrostatic head of 40-feet of water
- C. Manufacturers and Products:
 - 1. PSI-Thunderline; Link-seal, Type S-316
 - 2. Or equal

2.5 PIPE TO MANHOLE CONNECTORS

- A. Type: Resilient rubber male-to-female wedge-style flexible connector between a circular gravity pipe and a circular opening core-drilled into a precast or cast-in-place concrete structure.
- B. Performance Requirements:
 - 1. Able to hold 10 psi head pressure for 10 minutes with no leakage
 - 2. Load Rating: 150 lbs per inch pipe diameter
- C. Materials:
 - 1. Body: resilient rubber material conforming to ASTM C923
 - 2. Hardware: 300 Series Stainless Steel conforming to ASTM C923, ASTM A666 and ASTM A240
- D. Manufacturer and Products
 - 1. Trelleborg Pipe Seals Milford, Inc., Model Kor-N-Seal I – 106 Series for pipes up to 18" diameter and Kor-N-Seal II – 206 Series for pipes from 20" to 54" in diameter.
 - 2. Or Equal

2.6 FLEXIBLE HOSE CONNECTION

- A. Type: Lockable Male Cam-lock
 - 1. Materials:
 - a. Adapter and Cap: Glass-reinforced polypropylene
 - b. Gaskets and O-rings: Viton
 - c. Handles, Rings, and Pins: Stainless Steel
 - 2. Temperature Rating: 0 to 150 deg F

15120-4

3. Pressure Rating:
 - a. 0 deg F: 100 psi
 - b. 70 deg F: 125 psi
 - c. 150 deg F: 70 psi
 4. Adapter:
 - a. 2" FNPT x Male quick connect adapter
 5. Cap
 - a. 2" Lockable Type
- B. Manufacturers and Products:
1. Banjo
 - a. Adapter: 200A with Viton gasket
 - b. Cap: 200CAP with Viton gasket
 2. Or equal

2.7 PRESSURE GAGES

- A. Type: Direct mounted, dial type pressure gage.
1. Construction: Weatherproof,
 - a. Case:
 - 1) 4-inch diameter
 - 2) Material: cast aluminum with black finish or 304 stainless steel
 - 3) Flangeless
 - 4) Bottom 1/4-inch N.P.T. connection.
 - b. Ring: Chrome plated or stainless steel, close type.
 - c. Dial: White face, black numbers and graduations.
 - d. Window: Laminated safety glass or clear acrylic plastic.
 - e. Pointer: Micrometer type, black finish, red tip.
 - f. Movement: Stainless steel, rotary type, delrin sector and bushings.
 - g. Bourdon Tube: Seamless phosphor bronze, Grade A over-pressured and stress relieved.
 - h. Socket and Tip: Forged brass, alloy steel and Type 316 stainless steel.
 2. Accuracy: 1 percent minimum.
 3. Range: Unless noted otherwise, provide gages with a range from 0 to 100 psi.
 4. Gage Cocks: Provide brass tee handle cock before each gage.
 5. Diaphragm Seals:
 - a. Provide diaphragm seals on all installations where called for on the Drawings, Details or Specifications
 - b. Diaphragm seals shall be thread-attached type with removable cleanout AISI Type 316 stainless steel diaphragm, zinc or cadmium plated carbon steel upper housing and stainless-steel lower housing.
 - c. The diaphragm shall be of continuous design to safely contain the process fluid in the event of gauge breakage or removal with the system under pressure.
 - d. The lower housing shall be provided with a tapped 1/4-inch NPT flushing connection and an M x F stainless steel needle valve.
 6. Provide snubber or pulsation dampener to protect gage.
 7. Reference ANSI B40.1 for Grade 1A gages.
- B. Product and Manufacturer: Provide one of the following:
1. Weksler Instrument Company, Regal Gauges.
 2. H.O. Trerice Company, 700 Series.
 3. Or equal.

15120-5

2.8 WATER METERS - 4-INCH:

- A. General: For use in measurement of cold water in water or recycled water distribution systems.
- B. Construction:
 - 1. Housing: Cast Bronze, Low Lead Alloy.
 - 2. Turbo Head: Cast Bronze, Low Lead Alloy.
 - 3. Nose Cone and Straightening Vanes: Thermoplastic.
 - 4. Rotor: Thermoplastic.
 - 5. Rotor Radial Bearings: Lubricated Thermoplastic.
 - 6. Rotor Thrust Bearings: Sapphire Jewels.
 - 7. Rotor Bearing Pivots: Passivated 316 Stainless Steel.
 - 8. Calibration Mechanism: Stainless Steel and Thermoplastic.
 - 9. Magnet: Ceramic.
 - 10. Register Lid and Shroud: Thermoplastic, Bronze.
 - 11. Trim: Stainless Steel.
- C. Performance:
 - 1. Typical Operating Range: 10-1250 gpm.
 - 2. Maximum Continuous Operation: 1000 gpm.
 - 3. Maximum Intermittent Flow: 1250 gpm.
 - 4. Typical Low Flow: 6 gpm.
 - 5. Pressure Loss at Maximum Continuous Operation: 7.3 psi.
 - 6. Maximum Operating Pressure: 150 psi.
- D. Connections: 4-inch AWWA 125 pound round flanges.
- E. Register: Straight reading, permanently sealed magnetic drive.
- F. Registration: 10,000,000 cubic feet.
- G. Special Markings for Recycle Water Service:
 - 1. Lavender/purple color lid, shroud, register dial face, and cast iron bottom.
 - 2. The word "RECLAIMED" or "RECYCLED" shall be cast or engraved in the meter body, covers and bottom, and printed on the register dial face and lid.
- H. Manufacturers and Products:
 - 1. Badger Meter Co.; Recordall Turbo 1000 Meter (Standard or Reclaimed)
 - 2. Or equal.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. General
 - 1. Follow all manufacturer's directions
- B. Flexible Couplings (FC)
 - 1. Follow all manufacturer's directions
 - 2. No more than 1-inch gap between pipe ends

15120-6

3. Center flexible coupling in joint
 4. Tighten bolts in an alternating pattern to provide even tension around the coupling
 5. Tighten bolts to specified torque
 6. In buried installations, wrap coupling with plastic fastened to pipe to protect bolts and coupling from backfill material
- C. Flanged Coupling Adapters (FCA)
1. Follow all manufacturer's directions
 2. No more than 1-inch gap between pipe plain end and flange face
 3. Tighten flange bolts prior to tightening coupling bolts
 4. Tighten bolts in an alternating pattern to provide even tension around the coupling
 5. Tighten bolts to specified torque
 6. In buried installations, wrap coupling with plastic fastened to pipe to protect bolts and coupling from backfill material
- D. Restrained Mechanical Joint Glands (RMJ)
1. Follow all manufacturer's directions
 2. Tighten mechanical joint gland bolts before tightening restraint lugs
 3. Tighten restraint lugs until torque head breaks off
 4. In buried installations, wrap joint with plastic fastened to pipe to protect bolts and coupling from backfill material
- E. Pressure Gages
1. Follow all manufacturer's directions
 2. Install diaphragm seals where process liquid would be detrimental to gage life (wastewater, chemical service, etc.)
 3. Check gage accuracy

+ + END OF SECTION + +

15120-7

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15200**VALVES AND OPERATORS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Shop Drawings:
 - 1. Product data sheets for make and model.
 - 2. Complete catalog information, descriptive literature, specifications, and identification of materials of construction.
 - 3. Certificate of Compliance for: Butterfly valves; full compliance with AWWA C504.
- B. Tests and inspection data.
- C. Operation and Maintenance Data as specified in Section 01330, SUBMITTAL PROCEDURES.

1.2 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. In accordance with manufacturer's directions.

PART 2 - PRODUCTS**2.1 GENERAL**

- A. All valves shall be the same size as the pipe in which they are installed, unless specifically noted otherwise on the Drawings.
- B. All valves shall include all appurtenant parts (operators, chainwheels, handwheels, valve stems, floor stands, gear boxes, operating nut, etc.) for a complete operating valve.
 - 1. Valve shall be, as much as practical, fully factory assembled.
- C. All valves shall open by turning counter-clockwise. Maximum force required for operation shall be 40 lbs.
- D. Where Lead-Free Bronze or Brass is specified, materials shall be in compliance with California Health & Safety Code Section 116875. Not more than a weighted average of 0.25 percent of the wetted surface of the valve shall be lead. Valve shall be provided with a "hang tag" or other marking that easily identifies the valve as Lead-Free.
- E. Coatings and Linings:
 - 1. Provide factory-applied coatings as described herein.
 - 2. Where liquid epoxy coatings are specified, coatings shall conform to AWWA C550.
 - 3. Field coat the exterior of all valve bodies with the same coating as is required for the adjacent pipe in Section 09900, PAINTING and Section 15100, PIPE AND FITTINGS, unless otherwise specified.
- F. Nuts, Bolts and Washers

15200-1

1. Hex Bolts: ASTM A320/A320M, Type 304 stainless steel, Grade B8, Class 2
2. Nuts: ASTM F594, Type 304 stainless steel, Grade B8, Class 2
3. Washers: Type 304 stainless steel

2.2 BALL VALVES

- A. **BAV-03:** Stainless Steel Ball Valve, 3 Inches and Smaller
 1. Service: Water, air.
 2. Features:
 - a. Threaded ends
 - b. Rated minimum 800 psig WOG (Water-Oil-Gas)
 - c. Stainless steel body
 - d. Polished stainless steel ball
 - e. Teflon seat
 - f. Stainless steel lever-type handle
 3. Manufacturers and Products:
 - a. Apollo, Type 76
 - b. Watts Type S-FBV-1
 - c. Or Equal

- B. **BAV-05:** PVC Ball Valve 4 Inches and Smaller:
 1. Service: Water, Chemical Duty.
 2. Features:
 - a. Rated 150 psi at 73 degrees F
 - b. ASTM D1784, Type I, Grade 1 polyvinyl chloride body, ball, and stem, end entry
 - c. Double union design,
 - d. Flanged-end if noted in Valve Schedule, otherwise solvent-weld socket ends
 - e. EPDM or Teflon seat
 - f. EPDM O-rings and stem seals
 3. Manufacturers and Products:
 - a. Nibco; Chemtrol Tru-Bloc.
 - b. ASAHI/America; Type 21/21A.
 - c. Or Equal.

- C. **CRP-01:** Ball Corporation Valve 3/4 Inch to 2 Inch:
 1. Features:
 - a. Rated 300 psi at 73 degrees F
 - b. Brass alloys C89520 or C89833 with a maximum lead content of 0.25% by weight. Brass alloys shall meet AWWA C800, paragraph 4.1.2.
 - c. Full round-port ball valve, no reduced port permitted
 - d. Ends as required
 - e. Double O-ring stem seals
 - f. Key operator
 2. Manufacturers and Products:
 - a. Mueller Company; 300N Series Ball Corporation Valves
 - b. Ford Meter Box Company; FB-NL Series Ballcorp Ball Corporation Valves
 - c. Or Equal.

2.3 CHECK VALVES

- A. **CKV-11:** Flap Gate, 4 Inches to 60 Inches
 1. Service: Water.

2. Features:
 - a. Cast iron construction
 - b. Automatic operation
 - c. Fully adjustable linkage
 - d. Stainless steel studs, bolts and pins
 - e. Bronze bushings
 - f. Minimum 5-degree seating angle
 - g. 125 lb ANSI flange drilling
 - h. Cast iron seat
 3. Coatings and Linings:
 - a. Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - b. For potable water applications, epoxy lining shall be NSF 61 approved.
 4. Manufacturer:
 - a. Waterman; F-25 Drainage Gate
 - b. HydroGate; Model 10C
 - c. Or equal.
- B. **CKV-12:** Swing Check Valve (2" to 48")
1. Service: Water, Sewage, and General Service.
 2. Style: Swing Check, full flow body with only two moving parts, the flexible disc and Disc Accelerator, Flanged-End Connections
 3. General: Valves shall comply with AWWA C508. The valves used in potable water service shall be certified to NSF/ANSI 61 Drinking Water System Components – Health Effects, and certified to be Lead-Free in accordance with NSF/ANSI 372.
 4. Body: The valve body and cover shall be constructed of ASTM A536 Grade 65-45-12 ductile iron or ASTM A126 class B gray iron for 30 in. (800mm) and larger. Optional body materials include ASTM A-351 Grade CF8M, stainless steel for sizes 3" (80 mm) through 12" (300 mm). The valves shall have flanged ends conforming to ANSI B16.1, Class 125.
 5. Disc: The disc shall be precision molded Buna-N (NBR), ASTM D2000-BG and nylon reinforcement. Optional disc material includes Viton, EPDM, Hypalon - The disc shall be of one-piece construction, with an integral O-ring type sealing surface and reinforced with alloy steel. Non-Slam closing characteristics shall be provided through a short 35 degree disc stroke and a disc accelerator to provide a cracking pressure of 0.3 psig.
 6. Disc Accelerator: Stainless Steel, Type 302 - The disc accelerator shall be of one piece construction and provide rapid closure of the valve in high head applications. The disc accelerator shall be enclosed within the valve and shall be field adjustable and replaceable without removal of the valve from the line. The disc accelerator shall be held in place captured between the cover and disc.
 7. Cover Seal: Buna-N ASTM D2000
 8. Cover Bolt, Cover Bolt Nut, Washer: Stainless Steel, Type 316
 9. Cover Pipe Plug: Steel
 10. Body Pipe Plug: Steel, Nickel plated
 11. Coatings and Linings: The exterior and interior of the valve shall be coated with an NSF/ANSI 61 approved fusion bonded epoxy coating.
 12. Manufacturer:
 - a. Val-Matic; Surgebuster Swing Check Valve
 - b. Or equal.
- C. **CKV-36:** Inline Check Valve
1. Service: Water, Sewage.

15200-3

2. Features:
 - a. All-elastomer inline check valve
 - 1) Designed to allow flow in only one direction
 - 2) One-piece reinforced elastomeric construction
 - 3) Entire valve shaft shall fit within the pipe inside diameter and shall not protrude beyond the face of the end of the pipe
 - 4) The saddle must be flat and integral with the rubber body above the centerline in order to not produce any areas that can collect or trap debris
 - 5) The outside diameter of the upstream and downstream sections of the valve must be circumferentially in contact with the inside diameter of the pipe
 - 6) Valve shall be furnished with stainless steel expansion clamps which shall be installed in the upstream or downstream cuff of the valve
 - b. Elastomeric material: EPDM
3. Manufacturers and Products:
 - 1) Tideflex Technologies Series CMUF-SL slip-in Checkmate Ultraflex Valve
 - 2) Or Equal.

2.4 GATE VALVES

- A. **GAV-10:** Resilient-Seated Gate Valve, 2 Inches to 24 Inches:
 1. Service: Water.
 2. Features:
 - a. Conforms to AWWA C509 (2") or AWWA C515 (3" to 24")
 - b. Iron body
 - c. Resilient seat, bronze mounted
 - d. Full port
 - e. Valve Ends:
 - 1) Mechanical joint ends for buried service, unless shown otherwise on drawings or valve schedule
 - 2) Flanged ends for exposed service
 - f. Non-rising stem
 - g. Actuator for Buried Service:
 - 1) Stem extension, as required, to bring operating nut to within 12" of ground surface.
 - 2) 2-inch operating nut
 - h. Actuator for Exposed Service:
 - 1) Handwheel
 - i. Design working water pressure: 250 psig
 - j. Coatings and Linings:
 - 1) Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - 2) For potable water applications, epoxy lining shall be NSF 61 approved.
 3. Manufacturers and Products:
 - a. Mueller 2360 (2") or 2361 (3" to 24")
 - b. M&H Valve; AWWA C509 (2") or AWWA C515 (3" to 24").
 - c. Or Equal.

2.5 PLUG VALVES

- A. **PLV-10:** Eccentric Plug Valve, 3 Inches to 20 Inches:
 1. Service: Water, sewage.
 2. Features:

- a. Non-lubricated type.
- b. Drip-tight shutoff with pressure from either direction.
- c. Features:
 - 1) Body: Cast iron Type ASTM A126 Class B.
 - 2) Plug:
 - a) Cast iron or 316 stainless steel.
 - b) Round or rectangular port of no less than 80 percent of connecting pipe area.
 - c) Coated with Buna-N, Chloroprene, or Hycar.
 - 3) Seats: Type 316 stainless steel or nickel.
 - 4) Stem:
 - a) Bearing: Self-lubricating stainless steel or reinforced Teflon.
 - b) Seal:
 - 1. Multiple V-rings, U-cups, or O-rings of nitrile rubber.
 - 2. Externally adjustable and re-packable without removing the bonnet or actuator from the valve under pressure.
 - c) Provide upper and lower grit seals on stem.
 - 5) Ends:
 - a) Exposed service: Flanged per ANSI B16.1 or grooved, as shown on Drawings or indicated on Valve Schedule.
 - b) Buried service: Mechanical joint per ANSI A21.11.
 - 6) Actuators:
 - a) Exposed:
 - 1. Valves 3 Inches through 6 Inches: Wrench lever manual actuator.
 - 2. Valves 8 Inches through 20 Inches: Totally enclosed, geared, manual actuator with handwheel
 - b) Buried: 2-inch nut per Valve Schedule.
 - 7) Coatings and Linings:
 - a) Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - b) For potable water applications, epoxy lining shall be NSF 61 approved.
- d. Pressure Rating:
 - 1) Valves 3 Inches through 12 Inches: 175 psi.
 - 2) Valves 14 Inches through 20 Inches: 150 psi.
- 3. Manufacturers and Products:
 - a. DeZurik; Style PEC.
 - b. Pratt; Ballcentric.
 - c. Milliken; Millcentric.
 - d. Or Equal.

2.6 HOSE VALVES

- A. **HSV-01:** ¾" Angle-Pattern Hose Valve, non frost-proof
 - 1. Service: Water.
 - 2. Features:
 - a. 3/4-inch NPT female inlet,
 - b. 3/4-inch male hose thread outlet,
 - c. Heavy rough brass body rated 125 psi,
 - d. Removable handle,
 - e. Atmospheric vacuum breaker conforming to ASSE Standard 1011 and IAPMO code
 - 3. Manufacturers and Products:
 - a. Acorn; 8131

15200-5

- b. Or Equal.

2.7 CONTROL VALVES

- A. **PRV-30:** Pressure Relief Valve, Sewage Service (4 Inches through 8 Inches)
 - 1. Service: Sewage.
 - 2. Function:
 - a. Pushing against compression springs, valve shall quickly open at a designated pressure setting
 - b. Valve shall remain in the open position as long as system pressure remains above the setting
 - c. Following pressure reduction below the setting, valve shall use hydraulic system to slowly return valve to the closed position
 - d. The valve shall be capable of full functionality in any orientation
 - 3. Features:
 - a. Flanged ends, ANSI B16.1, Class 125
 - b. Valve body shall be inherently self-cleaning
 - 1) Net flow area no less than the area of its nominal pipe size when fully opened
 - c. Removable seat
 - d. Springs:
 - 1) Valve shall have dual compression springs, tension springs are not acceptable
 - 2) Springs shall be fully enclosed in steel cylinders, exposed springs are not acceptable
 - e. Hydraulic system shall be integral to valve, no external hydraulic systems shall be required for valve functionality
 - f. Pressure relief factory set (see valve schedule). Field adjustable from zero to ten percent above factory setting.
 - g. Where required on the drawings, provide NEMA 4 limit switch mounted to valve to indicate when the valve is open.
 - h. Orientation of valve (right angle or in-line) shall be per drawings
 - i. Valve and spring dimensions shall allow for installation in the location shown on the drawings without conflict
 - 4. Materials:
 - a. Body: cast iron, ASTM A126, Class B
 - b. Disc: cast iron or steel
 - c. Springs: steel
 - d. Seat: stainless steel
 - e. All other wetted parts: stainless steel
 - 5. Coatings and Linings:
 - a. Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - 6. Manufacturers and Products:
 - a. GA Industries, Inc., 6" Figure 626-D (in-line);
 - b. Or Equal.

2.8 AIR RELIEF AND VACUUM VALVES

- A. **ARV-01:** 2-inch Air Release Valve, Water Service up to 150 psi
 - 1. Service: Water.
 - 2. Features:
 - a. Automatically exhausts small amounts of entrained air that accumulates in a system

15200-6

- b. Once air has been exhausted, uses water pressure to close valve. In CLOSED position, seat against resilient seat to prevent water leakage.
 - c. Rated 150 psi working pressure, orifice size by manufacturer (minimum orifice size 3/16-inch).
 - d. Cast iron, ductile iron, or semi-steel body, cover with stainless steel float and trim.
 - e. 2-inch inlet, 1/2-inch outlet .
 - f. Provide No. 16 Mesh 316SS screen on inlets and outlets.
 - g. Coatings and Linings:
 - 1) Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - 2) For potable water applications, epoxy lining shall be NSF 61 approved.
 - 3. Manufacturers and Products:
 - a. APCO Valve and Primer Corp.; Model 200a.
 - b. Val-Matic Valve; Model VM-38.2.
 - c. Or equal.
- B. **ARV-02:** 2-inch Air Release Valve, Sewage Service up to 150 psi
 - 1. Service: Sewage.
 - 2. Features:
 - a. Automatically exhausts small amounts of entrained air that accumulates in a system
 - b. Once air has been exhausted, uses sewage pressure to close valve. In CLOSED position, seat against resilient seat to prevent water leakage.
 - c. Rated 150 psi working pressure, orifice sized by manufacturer (minimum orifice size 3/16")
 - d. Cast iron, ductile iron, or semi-steel body, cover with stainless steel float and trim.
 - e. 2-inch inlet, 1/2-inch outlet.
 - f. Suitable for use with sewage.
 - g. Provide flushing connections for maintenance.
 - h. Provide vent hose or piping and route discharge line to nearest drain/structure.
 - i. Maximum Valve Height: 18-inches
 - j. Coatings and Linings:
 - 1) Liquid epoxy, 12 mil minimum, for valve interior and exterior.
 - 3. Manufacturers and Products:
 - a. APCO Valve and Primer Corp.; Model 400
 - b. Val-Matic Valve; Model VM-48A.
 - c. Or equal.
- C. **CARV-03:** Combination Air Release and Vacuum Anti-Surge Valve, Sewer Service:
 - 1. Service: Sewage.
 - 2. Features:
 - a. Combines functions of uninterrupted discharge of air during filling, continuous discharge of dis-entrained pressurized air, unrestricted vacuum break, and pipeline surge protection in a single chamber. Valves shall be anti-surge and anti-shock air release and vacuum break valves.
 - b. Once air has been exhausted, uses sewer pressure to close valve. In CLOSED position, seat against resilient seat to prevent water leakage.
 - c. Single-body type
 - d. Rated 145 psi max operating pressure.
 - e. Stainless Steel body, flanges, cover and fasteners.
 - f. HPDE floats with EPDM O-ring seals.

- g. Sizes:
 - 1) PS-A, FM1, FM2 and Brine: 3-inch inlet, 3-inch outlet.
 - 2) IPR: 2-inch inlet, 2-inch outlet
- h. Suitable for use with sewage.
- i. Maximum Valve Height: 22-inches
- 3. Manufacturers:
 - a. Vent-O-Mat; Model: RGX-II
 - b. Vent-Tech; Model: 2" SDG, 3" SXG
 - c. Or equal.
 - d.

2.9 OPERATORS:

A. General:

- 1. Operator force not to exceed 40 pounds under any operating condition, including initial breakaway. Gear reduction operator when force exceeds 40 pounds.
- 2. Operator self-locking type or equipped with self-locking device.
- 3. Provide position indicator on all valves.
- 4. Worm and gear operators one-piece design worm-gears of gear bronze material. Worm hardened alloy steel with thread ground and polished. Traveling nut type operators threaded steel reach rods with internally threaded bronze or ductile iron nut.
- 5. Valve handles, wheels, etc. to be designed to accommodate a padlock.

B. Manual Operator:

- 1. Galvanized and painted handwheels.
- 2. Lever operators allowed on quarter-turn valves 8 inches and smaller.
- 3. Cranks on gear type operators.
- 4. For all valves above 5'-0" above adjacent working surface (finished floor or finished grade), provide chain wheel operator with tiebacks
- 5. For all exposed valves below adjacent working surface (finished floor or walkway), provide extension stem, floor stands, and other accessories to permit operation from 2'-6" above adjacent working surface.
- 6. For all buried valves 3" and larger, provide stem extension, valve bonnet, valve box and 2" AWWA operating nut such that operating nut is within 12" of adjacent finished grade.
 - a. For small-diameter buried valves, provide cross-shaped handle for operating with forked key.

C. Automatic Operators:

- 1. General:
 - a. Where indicated on the drawings and/or in the valve schedule, provide automatic operators.
 - b. Size operators to 1-1/2 times required operating torque. Motor stall torque not to exceed torque capacity of valve.
 - c. Provide stem protection for rising stem valves.
 - d. All automatic operated valves shall have manual override option. Manual override option shall not require any more than 40 lbs of force for valve operation.
 - e. Coordination of all automatic operators with the valves being operated shall be the responsibility of the valve manufacturer. Automatic operators shall be completely compatible with the valves being controlled.
 - f. Automatic Operators shall be of the following types:

2. Type 100 – Motor, Heavy-Duty – Open/Close:
 - 1) Shall operate valve from fully closed to fully open or the reverse in 30 seconds.
 - 2) Power Supply: 480V, 3 PH, 60 HZ AC
- b. Motor:
 - 1) Sized for 15-minute, intermittent duty.
 - 2) 480 VAC, 3 PH, 60 HZ
 - 3) 1800 RPM
 - 4) Class F insulation
 - 5) TENV
- c. Controls: Each actuator shall be equipped with the following:
 - 1) Transformer: Provide 480-120 VAC control transformer for 120 VAC controls.
 - 2) Magnetic reversing starter.
 - 3) Provide a lost motion device to enable the motor to attain full speed before encountering the stem load.
 - 4) Control Relays: Actuator shall accept maintained OPEN and CLOSE contact inputs. Upon loss of signal actuator shall stop and hold last position.
 - 5) Two position limit switches: Provide two-train gear limit switches. LSC and LSO 2NO, 2NC contacts each. Provide switches rated 10A at 120 VAC.
 - 6) Torque limiting switches: Provide torque limiting switches responsive to the mechanical torque developed in seating, backseating, or by obstruction. Torque control accuracy shall be within plus or minus five percent. Permit calibration of the switches without requiring the use of torque wrenches. Provide dry contacts for an external torque alarm.
 - 7) Local Controls: Provide LOCAL/OFF/REMOTE selector switch and OPEN/STOP/CLOSE push button controls.
 - 8) Local Position indication: provide open and closed indicator lights. Lights shall be at least 2 watt LED, green lens for open and red lens for closed. Activate both lights when between open and closed.
 - 9) Dry contact for remote indication of the actuator mode of operation. Contact shall be closed when the LOCAL/OFF/REMOTE switch is in the remote position and internal control power exists.
 - 10) Terminal connections for remote controls fed from an internal 120VAC supply.
- d. Enclosure:
 - 1) NEMA 4
 - 2) Provide space heater and thermostat. Space heater shall maintain internal enclosure temperature 5 degrees F greater than ambient temperature at all times.
- e. Spare Parts: Furnish a set of the following spare parts with each actuator:
 - 1) Electric Motor (only one motor for each different size and type of motor is required).
 - 2) Declutch Level O-ring.
 - 3) Drive Sleeve Assembly O-ring.
 - 4) Drive Sleeve Assembly seal ring.
 - 5) Worm gear shaft O-ring.
 - 6) Torque transmission stem O-rings.
- f. Manufacturers and Products:
 - 1) EIM Series 2000
 - 2) Or Equal

15200-9

2.10 ACCESSORIES

- A. T-Handled Operating Wrench:
 - 1. One each galvanized operating wrench, 4 feet long.
 - 2. Manufacturers and Products:
 - a. Mueller; No. A-24610.
 - b. Clow No.; F-2520.
 - c. Or Equal.
- B. Cast Iron Valve Box: Designed for traffic loads, sliding type, with minimum of 6-inch ID shaft.
 - 1. Box: Cast iron with minimum depth of 9 inches.
 - 2. Lid: Cast iron, minimum depth 3 inches, marked WATER.
 - 3. Extensions: Cast iron.

PART 3 - EXECUTION**3.1 VALVE SCHEDULE**

- A. A Valve Schedule has been attached to this Specification and is incorporated herein by reference. Provide valves in accordance with Valve Schedule.
- B. For valves that are not referenced in Valve Schedule, provide the valve type called for on the Drawings.

3.2 PREPARATION

- A. Cleaning:
 - 1. Clean all mating faces of valve (threads, flange faces, etc.) prior to assembly.
 - 2. Remove all debris from valve body prior to assembly.
 - 3. Take extra care to clean mating faces of existing pipe and fittings which may have corrosion, dirt, debris and mineral build-up which should be removed for a proper fit.
- B. Apply joint compound, lubricant, etc. as recommended by valve manufacturer for proper installation prior to installation.
- C. Install valves in accordance with the following schedule and as noted on the Drawings:

3.3 INSTALLATION

- A. Install valves per manufacturer's recommendations.
- B. Install valves so handles operate from fully open to fully closed without encountering obstructions.
- C. Install valves in location and orientation for easy access for routine operation and maintenance. Access should be such that an operator can operate the valve by reaching a handle, chain, etc. at a height between 2'-6" and 5'-0" above adjacent work surface (for buried valves, this is accomplished with a t-handle wrench and the operating nut being within 12" of finished grade).

- D. Install plug valves with the seat side as indicated on the drawings. If manufacturer's recommendations differ from indicated seat direction on the drawings, or if no seat side is indicated, install plug valves with seat side as recommended by the manufacturer after obtaining approval from the ENGINEER.

3.4 TESTS AND INSPECTION

- A. Valve may be either tested while testing pipelines, or as a separate step.
- B. Test that valves open and close smoothly under operating pressure conditions. Test that two-way valves open and close smoothly under operating pressure conditions from both directions.
- C. Inspect air release and vacuum valves as pipe is being filled to verify venting and seating is fully functional.
- D. Count and record number of turns to open and close valve; account for any discrepancies with manufacturer's data.
- E. Set, verify, and record set pressures for all relief and regulating valves.
- F. Automatic valves to be tested in conjunction with control system testing. Set all opening and closing speeds, limit switches, as required or recommended by the ENGINEER.

3.5 SUPPLEMENTS

- A. The following supplements are attached to this Specification section and incorporated herein by reference:
 - 1. 15200 VS – Valve Schedule

+ + END OF SECTION + +

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15200 VS

VALVE SCHEDULE

1.1 DESCRIPTION

- A. General:
1. This schedule is provided for the convenience of the CONTRACTOR. Some valves may be shown on the drawings, but not listed here.
 2. Valve specifications are given in Section 15200, Valves and Operators.
- B. Valve Tag Number:
1. Tag numbers are as noted in the Drawings.
- C. Valve Type:
1. Valve types are as described in 15200, Valves and Operators
- D. Valve Ends:
1. FLG – Flanged
 2. GRV – Grooved End
 3. LUG – Lugged
 4. MJ – Mechanical Joint
 - a. Where the surrounding piping system is installed with restrained joints, MJ valves shall be installed using RMJ (restrained mechanical joint) glands per 15120, Piping Specialties.
 5. SLV – Solvent Welded Socket
 6. SLD – Soldered Socket
 7. THR – Threaded
 8. W – Wafer
- E. Installation Codes
1. Ex – Exposed
 2. Un – Underground
 3. SU – Submerged
- F. Valve Actuators, as described in 15200, Valves and Operators
1. HW – Handwheel
 2. L – Lever
 3. N – 2" Nut
 4. N/A – Not Applicable
 5. Type 100 – Motor, Heavy-Duty – Open/Close
 6. Type 601 – Hydraulic - Modulating

1.2 VALVE SCHEDULE

VALVE TAG NUMBER	VALVE TYPE	ENDS	DIAMETER	INSTALLATION	ACTUATOR	LOCATION
V-5-100	GAV-10	MJ	8"	UN	N	35+00 IPR
V-5-101	GAV-10	MJ	6"	UN	N	122+04 RELOC W HYD

15200 VS-1

CONFORMED SET**DECEMBER 2020**

VALVE TAG NUMBER	VALVE TYPE	ENDS	DIAMETER	INSTALLATION	ACTUATOR	LOCATION
V-5-102	GAV-10	MJ	6"	UN	N	137+76 RELOC W HYD
V-5-103	GAV-10	MJ	10"	UN	N	143+23 RELOC W
V-5-104	GAV-10	MJ	6"	UN	N	144+80 RELOC W HYD
V-5-105	GAV-10	MJ	6"	UN	N	147+39 RELOC W
V-5-106	GAV-10	MJ	12"	UN	N	11+05 BR
V-5-107	GAV-10	MJ	12"	UN	N	11+05 RO DISCHARGE
V-6-101	BAV-5	THR	2"	EX	L	94+30 ARV (FM1)
V-6-102	BAV-5	THR	3"	EX	L	94+30 ARV (FM2)
V-6-103	BAV-5	THR	3"	EX	L	94+30 ARV (BR)
V-6-104	ARV-02	THR	2"	EX	N/A	94+30 ARV (FM1)
V-6-105	ARV-02	THR	3"	EX	N/A	94+30 ARV (FM2)
V-6-106	ARV-02	THR	3"	EX	N/A	94+30 ARV (BR)
V-6-107	ARV-01	THR	2"	EX	N/A	94+66 ARV (IPR)
V-6-108	CARV-03	FLG	2"	EX	N/A	114+30 CARV (FM1)
V-6-109	CARV-03	FLG	3"	EX	N/A	114+30 CARV (FM2)
V-6-110	CARV-03	FLG	3"	EX	N/A	114+30 CARV (BR)
V-6-111	CARV-03	FLG	2"	EX	N/A	114+45 CARV (IPR)
V-6-112	GAV-10	MJ	4"	UN	N	126+80 CARV (BR)
V-6-113	GAV-10	MJ	4"	UN	N	126+80 CARV (IPR)
V-6-114	CARV-03	FLG	3"	EX	N/A	126+80 CARV (BR)
V-6-115	CARV-03	FLG	2"	EX	N/A	126+80 CARV (IPR)
V-6-116	PLV-10	FLG	8"	UN	N	149+50 LS-3 (FM1)
V-6-117	PLV-10	FLG	8"	UN	N	149+50 LS-3 (FM2)
V-6-118	GAV-10	MJ	8"	UN	N	150+32 RELOC W
V-6-119	GAV-10	MJ	8"	UN	N	150+35 RELOC W
V-7-101	CARV-03	FLG	2"	EX	N/A	33+30 CARV (FM1)
V-7-102	CARV-03	FLG	3"	EX	N/A	33+30 CARV (FM2)
V-7-103	CARV-03	FLG	3"	EX	N/A	33+30 CARV (BR)
V-10-101	CKV-12	FLG	8"	EX	N/A	PS-A
V-10-102	PLV-10	FLG	8"	EX	HW	PS-A
V-10-103	PLV-10	FLG	16"	EX	HW	PS-A
V-10-104	PLV-10	FLG	16"	EX	HW	PS-A
V-10-105	CARV-03	FLG	3"	EX	N/A	PS-A
V-10-106	PLV-10	FLG	10"	EX	TYPE 100	PS-A
V-10-107	PLV-10	FLG	16"	EX	TYPE 100	PS-A
V-10-110	CKV-36	N/A	18"	SU	N/A	PS-A
V-10-201	CKV-12	FLG	8"	EX	N/A	PS-A
V-10-202	PLV-10	FLG	8"	EX	HW	PS-A
V-10-301	CKV-12	FLG	8"	EX	N/A	PS-A
V-10-302	PLV-10	FLG	8"	EX	HW	PS-A
V-20-101	CKV-12	FLG	8"	EX	N/A	PS-B
V-20-102	PLV-10	FLG	8"	EX	HW	PS-B
V-20-103	PLV-10	FLG	12"	EX	HW	PS-B

15200 VS-2

VALVE TAG NUMBER	VALVE TYPE	ENDS	DIAMETER	INSTALLATION	ACTUATOR	LOCATION
V-20-104	PLV-10	FLG	16"	EX	HW	PS-B
V-20-105	ARV-02	THR	2"	EX	N/A	PS-B
V-20-106	PLV-10	FLG	12"	UN	TYPE 100	PS-B
V-20-108	PLV-10	FLG	16"	UN	TYPE 100	PS-B
V-20-109	PLV-10	FLG	12"	UN	N	PS-B
V-20-110	PLV-10	FLG	16"	UN	N	PS-B
V-20-120	GAV-10	MJ	6"	UN	N	PS-B
V-20-201	CKV-12	FLG	8"	EX	N/A	PS-B
V-20-202	PLV-10	FLG	8"	EX	HW	PS-B
V-20-301	CKV-12	FLG	8"	EX	N/A	PS-B
V-20-302	PLV-10	FLG	8"	EX	HW	PS-B
V-20-401	PLV-10	FLG	6"	EX	HW	PS-B
V-20-402	PRV-30	FLG	6"	EX	N/A	PS-B
V-20-403	PLV-10	FLG	6"	UN	N	PS-B

+ + END OF SECTION + +

15200 VS-3

THIS PAGE IS INTENTIONALLY BLANK

SECTION 15400

PLUMBING FIXTURES

PART 1 - GENERAL**1.1 SUBMITTALS**

- A. Shop Drawings:
1. Catalog information and rough-in dimensions for plumbing fixtures, products, and specialties.

PART 2 - PRODUCTS**2.1 PLUMBING FIXTURES**

- A. Utility Sink (**US-01**):
1. Fixture: Enameled cast iron with stainless steel rim guard and blank back. Kohler; Model K-6718 Bannon.
 2. Faucet: Chicago Faucet Co.; Model 897-CP, with hose threads, integral supply stops, vacuum breaker, pail hook, and wall brace.
 3. Accessories: Kohler; Model K-6673, 3-inch trap standard with grid strainer.
- B. Instant Water Heater (**IWH-01**):
1. Tankless, instantaneous electric water heater.
 2. Copper heat exchanger.
 3. Copper-sheathed heating elements.
 4. Plastic housing.
 5. Minimum flow capacity for 50-degree Fahrenheit temperature rise: 1.5 gpm.
 6. 240V/single phase/50A max.
 7. Manufacturer and Model:
 - a. Bosch; Model AE9.5 PowerStar
 - b. Or Equal.
- C. Water Closet (Floor Mounted, Tank Flush) (**WC-01**):
1. Fixture:
 - a. Floor mounted
 - b. Vitreous china
 - c. Elongated bowl
 - d. Siphon Jet action
 - e. Bolt-mounted tank with spud nut
 - f. 1.6-gallons per flush
 2. Seat:
 - a. Olsonite corp.; 10-CC-SS, or equal, with open front.
- D. Fixture Trim
1. Supply Stop:
 - a. Flexible supply with heavy cast brass, loose key 1/2-inch IPS by 3/8-inch outside diameter tubing angle stop to wall with canopy flange; chrome-plated finish.
 - b. Provide stop with stuffing box.

15400-1

- c. Manufacturers and Products:
 - 1) McGuire Manufacturing Company
 - 2) Or Equal.
- 2. Trap:
 - a. Chrome-plated, 17-gauge, semicast P-trap with compression ring cast brass waste and vent connection and cleanout.
 - b. 1-1/2 inches for lavatories and drinking fountains.
 - c. 1-1/2 inches for sinks.
 - d. Manufacturers and Products:
 - 1) McGuire Manufacturing Company
 - 2) Or Equal.

2.2 DRAINAGE PRODUCTS

- A. Roof and Overflow Drains:
 - 1. Features:
 - a. Dura-coated cast iron body and dome.
 - b. 8-1/2" diameter, less than 5" high dome.
 - c. Female NPT outlet (size per Drawings).
 - d. Provide combined flashing clamp for use with membrane roofing and gravel stop.
 - e. Provide underdeck mount and accessories for mounting to metal deck.
 - f. For overflow drains, provide extensions as shown on the Drawings.
 - g. Free area of 41.5 square inches.
 - 2. Manufacturer and Product:
 - a. Jay R. Smith Manufacturing Co., Figure 1330.
 - b. Zurn, Figure Z125.
 - c. Or Equal.
- B. Roof Drain Leaders:
 - 1. Schedule 40 galvanized steel threaded pipe, size as shown on Drawings.
- C. Floor Drain (**FD-01**):
 - 1. Features:
 - a. Cast Iron body and grate
 - b. Heavy duty top grate, Designed for use on finished concrete floors with heavy industrial traffic loads.
 - c. Trap primer connection.
 - d. Threaded outlet designed for use with PVC drain waste and vent pipe
 - 2. Manufacturers:
 - a. Jay R. Smith Manufacturing Co.; Model 2120 with Speedi-Set outlet
 - b. Or equal.
- D. Floor Cleanout (**FCO-01**):
 - 1. Material: Tapered thread, bronze plug with round adjustable scoriated secured cast iron top. Designed for use on finished concrete floors with heavy industrial traffic loads.
 - 2. Outlet designed for use with PVC drain waste and vent pipe
 - 3. Manufacturers and Products:
 - a. Jay R. Smith Mfg. Co.; Model 4111 with Speedi-Set outlet.
 - b. Zurn; Model Z1400-HD with Neo-Loc outlet
 - c. Or equal.

15400-2

E. Trap Priming Valves:

1. Automatic Trap Primer
 - a. Materials: Brass, no springs or diaphragms, ½" NPT inlet and outlet
 - b. Manufacturer and Product:
 - 1) Precision Plumbing Products, Inc. Model Prime-Rite
 - 2) Jay R. Smith Mfg. Co.
 - 3) Or Equal.
2. Electrical Actuated Trap Primer
 - a. Features:
 - 1) Surface mounted metal cabinet with cover plate
 - 2) ½" NPT inlet
 - 3) ½" NPT outlet
 - 4) Electrical Components
 - a) Circuit breaker
 - b) Switch
 - c) Timer solenoid valve (UL listed)
 - b. Accessories:
 - 1) Trap primer distribution Unit (Required for trap primer serving 2-4 drains)
 - c. Manufacturer and Product:
 - 1) Precision Plumbing Products, Inc. Model Mini-Prime Electronic (Serves 1 drain) with surface mounted cabinet, Model MPB-500-115V
 - 2) Precision Plumbing Products, Inc. Model Mini-Prime Electronic (Serves 1-4 drains) with surface mounted cabinet, Model MPB-500-115V with Distribution Unit (DU-U).

PART 3 - EXECUTION**3.1 DETAILING**

- A. Contract Drawings and specifications do not detail all requirements for installation of plumbing fixtures. CONTRACTOR shall provide all required materials to provide a complete installation of all plumbing fixtures which is fully functional and compliant with all applicable codes and regulations.

3.2 PLUMBING FIXTURE INSTALLATION

- A. General:
 1. Install all plumbing fixtures plumb, level and per the manufacturer's instructions.
- B. Plumbing Fixtures, Mounting Heights:
 1. Standard rough-in catalogued heights, unless shown otherwise on Drawings.
 2. Caulk fixtures in contact with finished walls with waterproof, white, non-hardening sealant which will not crack, shrink, or change color with age.
- C. Fixture Trim: Install fixture trim where applicable on fixtures.
- D. Water Heater:
 1. Install water heater and all appurtenances in accordance with the local plumbing code.
 2. Route the drains from the relief valve, drip pan, and how water tank drain to the nearest floor drain. Provide an air gap.

E. Drains and Cleanouts:

1. Install top flush with finished floor elevation.
2. Install PVC p-traps at each floor drain.
3. Provide cleanouts where shown and where required by code.

F. Trap Priming Valves:

1. Provide one trap priming valve for each floor drain. Trap priming valves and associated piping are not shown on the Drawings, but are required.
2. Connect each trap priming valve to W1 system.
3. Connect trap priming valve to floor drain using ½" Type K soft copper tubing. Install copper tubing at the time of floor drain installation (before concrete for floor is placed). Route tubing to final location of trap priming valve.
4. Locate trap priming valves as required, however, group trap priming valves for floor drains in the same area.
5. Provide shut-off valve (1/2" ball valve) between trap priming valve and W1 line feeding trap priming valve directly adjacent to trap priming valve.
6. Label trap priming valve indicating which floor drain is served.

G. Roof Drain Leaders:

1. Slope horizontal leaders ¼-inch per foot in the downstream direction.

+ + END OF SECTION + +

SECTION 15500

HEATING, VENTILATION AND AIR CONDITIONING EQUIPMENT

PART 1 - GENERAL**1.1 SERVICE CONDITIONS:**

- A. All units will be designed using the following outdoor design conditions:

Summer	
Outdoor Dry-Bulb Temperature	84 °F
Outdoor Wet-Bulb Temperature	63 °F
Winter	
Outdoor Dry-Bulb Temperature	36 °F

- B. All units will be designed using the following indoor design conditions:

Summer	
Electrical/Control Room Dry-Bulb Temperature	71 °F
Winter	
Electrical/Control Room Dry-Bulb Temperature	71 °F

1.2 SUBMITTALS:

- A. Complete specifications, descriptive drawings, catalog cuts, and descriptive literature that include make, model, dimensions, weight of equipment, horsepower, and electrical schematics for products and control system components specified.
- B. Complete performance data that indicates full compliance with the Specifications.
- C. Recommended procedures for protection and handling of equipment and materials prior to installation.
- D. Manufacturer's standard finish color selection for cabinet finishes.
- E. Operation and maintenance manuals.
1. List of recommended spare parts for equipment and materials specified.
 2. Manufacturer's Certificate of Conformance for the heat pumps.

1.3 QUALITY CONTROL

- A. Furnish 2-year warranty for all equipment.
- B. Furnish special warranty of 5 years for refrigeration section compressor(s).

PART 2 - PRODUCTS

2.1 VARIABLE REFRIGERANT FLOW (VFR) SYSTEM

- A. See Drawings M1.0 and M2.0

2.2 EXHAUST FAN

- A. See Drawings M1.0 and M2.0

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install equipment and systems in accordance with manufacturers' instructions.
- B. Evaporative Coolers:
 - 1. Pipe drain pan connection as recommended by manufacturer.
 - 2. Locate units to provide access spaces required for filter changing; motor, drive, and bearing servicing; and fan shaft removal.
 - 3. Lubricate nonsealed bearings prior to startup.
- 4. Seismic Restraints:
 - a. Use lateral and vertical motion limiters described in the latest edition of SMACNA "Guidelines For Seismic Restraints of Mechanical Systems."
 - b. Restraint Snubbers: Rubber-faced, securely anchored to the structure, and installed with sufficient clearance so that unit isolators are not restricted for proper free isolation, but do limit movement in all directions.
 - c. Restrain as described in the latest edition of ASHRAE "HVAC Applications," chapter on Seismic Restrain Design.

+ + END OF SECTION + +

SECTION 15990

HYDROSTATIC PRESSURE TESTING OF PRESSURE PIPING SYSTEMS

PART 1 - GENERAL**1.1 DESCRIPTION**

- A. Scope: Provide all labor, materials, equipment, and incidentals as shown on the Drawings required to perform the hydrostatic pressure testing of pressure piping systems.

1.2 SUBMITTALS

A. General:

1. The Contractor shall submit a pressure pipeline testing plan/manual to OWNER for approval. The CONTRACTOR shall maintain a testing schedule and update it accordingly per the overall project progress schedule requirements. The OWNER will review the CONTRACTOR's testing plan and assess it based on the Hydrostatic Pressure Testing Check List at minimum. The following check list items are not intended to direct the CONTRACTOR's means and methods, and the ENGINEER assumes no responsibility for the completeness of the list. It is the CONTRACTOR's sole responsibility to safely administer required testing of pressure piping systems in accordance with Contract Drawings, Specifications, listed standards, OWNER requirements, manufacturer's recommendations, and project permits. The CONTRACTOR shall demonstrate to the satisfaction of the OWNER that proper planning, equipment, test procedures, safety measures, and post-testing procedures are in place
2. Testing Plan: Submit prior to testing and include at least the information that follows.
 - a. Testing dates
 - b. Piping systems and section(s) to be tested
 - c. Test type
 - d. Method of isolation
 - e. Calculation of maximum allowable leakage for piping section(s) to be tested
 - f. Certifications of Calibration: Testing equipment
 - g. Hydrostatic testing data and post-testing report samples.
3. Reference Section 15100 PS – Pipe Schedule for test pressure.

B. Hydrostatic Pressure Testing Check List

1. PRE-TEST PLANNING

- a. Individual pipeline test sections shall be approved for testing by OWNER.
- b. Pipeline test section shall be cleaned of all construction debris and foreign matter prior to testing.
- c. CONTRACTOR shall obtain proper environmental and regulatory permits for access to sufficient volumes of fill water, post-test water analysis and treatment, and disposal of the test water.
- d. CONTRACTOR shall analyze elevation profile and filling procedure for fill velocity potential against dynamic surge pressure during filling, which might over-pressure local components, especially in low elevations.
- e. CONTRACTOR shall finalize volumetric rate of fill, fill method, and fill procedure for each pipeline system.
- f. CONTRACTOR shall determine rate of initial pressurization.
- g. All operators and testing participants shall read the approved testing plan and attend a pre-test safety and quality meeting and denote name and responsibility on sign-in sheet. The CONTRACTOR shall denote personnel in direct supervision of pressure testing authority, including their qualifications, tasks, and responsibilities.
- h. CONTRACTOR shall coordinate with OWNER if joints, fittings, service connections, or valves are required to be exposed during test.
- i. CONTRACTOR shall ensure dead ends on main line pipe, turnouts, and/or laterals employ air vents of adequate size and pressure rating and installed in "open" position.
- j. CONTRACTOR shall develop emergency response and mitigation procedures for equipment and pipe failures during testing.
- k. CONTRACTOR shall remove air from the pipeline test section in accordance with the approved testing methodology. It is the responsibility of the CONTRACTOR to demonstrate to OWNER why traditional fill-and-vent air removal techniques would not fulfill the CONTRACTOR's selected means and methods prior to submitting alternatives for approval that utilize direct mechanical assistance, such as but not limited to pigging with a temporary foam pig.

2. EQUIPMENT

- a. CONTRACTOR shall ensure all all blind-flanged ends and valves are restrained and supported.
- b. CONTRACTOR shall verify capacity of all equipment to perform its function without fault during testing.
- c. CONTRACTOR shall verify all gages, dead-weight testers, data recorders, temperature recorders, and water volume meters are calibrated (within last year), certified, and traceable to records.

- d. CONTRACTOR shall utilize at least two calibrated pressure gages or instruments placed into the test system to be used as a cross-check for gage accuracy. Typically, one calibrated pressure gage is placed at each end and then monitored, to assure the entire test section was pressurized. When an additional dead-weight tester is used, the pressure readings shall be recorded at a minimum of ½-hour increments. When a calibrated pressure recorder is used, it shall record continuously during the test. Any pressure gage used shall have sufficient pressure range to 150% of the maximum allowable test pressure.
 - e. All temporary tools such as hoses, connection fittings, flanges, blinds, isolation valves, etc., shall be rated higher than the maximum hydrostatic pressure.
 - f. Hydrostatic pressurizing pumps shall utilize calibrated safety pressure relief valves.
3. SAFETY:
- a. Pipeline operators shall protect employees and the public during hydrostatic pipe testing pursuant to 49 CFR 192.515(a).
 - b. CONTRACTOR shall provide radio or cellular communication capabilities to personnel where uninterrupted line of site is not available. It is the responsibility of the CONTRACTOR to monitor the entire length of the test section for leaks and maintain reliable and constant communication between personnel.
 - c. CONTRACTOR shall delineate via high-visibility devices and secure test section perimeter in accordance with applicable encroachment permits and safety requirements. Only authorized personnel instructed in test plan and issued with PPE shall be allowed in test section perimeter.
 - d. CONTRACTOR shall validate operator qualifications, experience and training (contractor licenses, professional degrees, professional certifications, work history) to participate and perform hydrostatic testing activities, plot pressure-time curves, make calculations, and otherwise work in assigned roles during testing in a safe and knowledgeable manner.
4. POST-TESTING
- a. CONTRACTOR shall secure temporary de-watering lines against movement or de-coupling and exercise extreme caution during dewatering. Provide safe-guards against lack of anchoring, worn coupling, and excessive and variable system pressures; and for installed anchoring, restraint, and control of de-watering piping, written procedures, and adequate employee training.
 - b. Provide hydrostatic testing data and post-testing report to OWNER.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 PRESSURE TESTING****A. General:**

1. Notify ENGINEER in writing 5 days in advance of testing. Perform testing in presence of ENGINEER.
2. Complete installation of piping system, including all thrust restraint, prior to pressure testing.
 - a. If thrust blocking is specified, wait 5 days minimum after concrete thrust blocking is installed to perform pressure tests. If high-early strength cement is used for thrust blocking, wait may be reduced to 2 days.
3. Prior to test, remove and replace with pipe spools or suitably isolate appurtenant instruments or devices that could be damaged by pressure testing.
4. New Piping Connected to Existing Piping: Isolate new piping with grooved-end pipe caps, spectacle blinds, blind flanges, or as acceptable to ENGINEER.
5. Piping to be Pressure Tested and Test Pressure: as indicated on Piping Schedule.
6. All free air must be removed or vented from the pipeline prior to testing.

B. Testing with Water (non-HDPE or non-FPVC pressure pipe):

1. Fluid: Clean, potable water.
2. Pipeline Protection:
 - a. Maximum Filling Velocity: 0.25 foot per second, applied over full area of pipe.
 - b. Vent piping during filling. Open vents at high points of piping system or loosen flanges, using at least four bolts, or use equipment vents to purge air pockets.
3. Exposed Piping:
 - a. Perform testing on insulated piping prior to application of insulation
 - b. Maintain hydrostatic test pressure continuously for 60 minutes, minimum, and for such additional time as necessary to conduct examinations for leakage.
 - c. Examine joints and connections for leakage.
 - 1) Correct visible leakage and retest as specified.
 - 2) Empty pipe of water prior to final cleaning or disinfection.
4. Buried Piping:

- a. Test after backfilling has been completed.
- b. Expel air from piping system during filling.
- c. Apply and maintain specified test pressure with hydraulic force pump. Valve off piping system when test pressure is reached.
- d. Maintain hydrostatic test pressure continuously for 2 hours minimum, reopening isolation valve only as necessary to restore test pressure.
- e. Determine actual leakage by measuring quantity of water necessary to maintain specified test pressure for duration of test.
- f. Maximum Allowable Leakage:

$$L = \frac{SD(P)^{1/2}}{133,200}$$

where:

- L = Allowable leakage, in gallons per hour.
S = Length of pipe tested, in feet.
D = Nominal diameter of pipe, in inches.
P = Test pressure during leakage test, in pounds per square inch.
- g. Correct leakage greater than allowable, and retest as specified.

C. Field Testing of Fusible PVC Pressure Pipe Systems Using Water per AWWA C605 and AWWA M23

1. The CONTRACTOR shall comply with the manufacturer's testing requirements based on AWWA C605 and AWWA M23
2. Reference hydrostatic test pressure listed in Section 15100 PS - Pipe Schedule. The hydrostatic pressure test shall not be less than 1.25 times the stated anticipated maximum sustained working pressure of the pipeline measured at the highest elevation along the test section and not less than 1.5 times the stated sustained working pressure at the lowest elevation of the test section. However, in no case shall the test pressure exceed the rated working pressure for any joint, thrust restraint, valve, fitting or other connected appurtenance of the test section
3. The duration of the hydrostatic test shall be 2 hours.
4. Maximum allowable leakage shall be determined per the make-up water allowance per gasket for PVC pressure pipe based on allowance included in AWWA C605.
5. Max filling and flushing rates shall be unique to size and DR of pipe pursuant and shall comply with the manufacturers' requirements.

D. Field Testing Polyethylene Pressure Pipe Systems Using Water per ASTM F2164:

15990-5

1. General: The testing procedural methodology listed herein is adapted from the Plastics Pipe Institute Guidance for Field Hydrostatic Testing of High Density Polyethylene Pressure Pipelines: Owner's Considerations, Planning, Procedures, and Checklists TN-46/2013a to meet ASTM F2164 requirements. It is the CONTRACTOR's responsibility to confirm this testing approach with the manufacturer and submit to ENGINEER for approval a modified testing methodology that meets ASTM F2164.
2. Fluid: Clean, potable water.
3. Pipeline Protection:
 - a. Maximum Slow Fill Rate: $Q_{gpm} = 0.402D^2_{inches}$, applied over full area of pipe.
 - b. Vent piping during filling. Open vents at high points of piping system or loosen flanges, using at least four bolts, or use equipment vents to purge air pockets.
4. Test Section Lengths:
 - a. The CONTRACTOR shall determine the test section length such that the hydrostatic test pressure at any point in the test section is (i) not less than the design pressure, and, (ii) not more than 25% to 50% above the design pressure rating of any pipeline component; and that fluid is available for the test together with facilities for its disposal, in accordance with regulatory requirements, after test.
5. A firm urethane foam pig or swab, pushed by the fill water, may be used to assist in air removal, especially in flatter portions of the pipeline or where there are pipe slope changes where air pockets may become trapped. The CONTRACTOR shall keep record of all pig/swab(s), and ensure removal after testing.
6. **Phase 1 Testing Per ASTM F2164**
 - a. Fill and vent and purge the pipe system of trapped air to less than 4% trapped air by volume. (This can be validated, as will be described later.) The pipeline shall be full of water, but not positively pressurized (other than the natural hydrostatic head) for 60-minutes prior to the start of the re-bound hydrostatic pressure test.
 - b. Start the test timer at T= "zero" minutes. Rapidly pressurize the test section to the specified test pressure (STP) in less than 10 minutes, if possible. Hold the STP for 30 minutes by repetitively injecting small volumes of make-up water into the test section to sustain, but not exceed, the STP, as the HDPE molecules creep-strain and "stretch", as the pipe slightly expands. Inspect exposed joints and connections for visible leaks during this time period.
 - c. At T= 30 minutes, valve-off and isolate and record the confined specified test pressure (STP) as P30. Allow the test pressure to decay for an additional 60 minutes, until the timer is T= 90 minutes.
 - d. Measure and record the residual test pressure as P90 at T= 90 minutes.
 - e. If P90 > 70% of STP, this phase has passed and proceed to Phase II. If P90 is < 70% of STP, then the test has failed, either because of a leak or because of excessive trapped air dissolving into the water

7. Phase 2 Testing Per ASTM F2164

- a. If any trapped air or dissolved air content is "low" compared to the water volume filling the pipe system, then the pressure drop should be fairly linear upon a quick release of a partial volume of water from the pipeline. If the dissolved air or trapped air content is "high", then, even though a small volume of test water is quickly released, the test pressure will not drop much because the air will expand to fill the space. In this phase, the P90 test pressure is reduced, per the instructions below, by bleeding out a small volume of pressurized test water, and, the volume of water that is bled out is measured by a calibrated meter or by measuring receptacles (gallons, buckets, barrels).
- b. The Air Volume Assessment is performed as follows:
 - 1) Quickly (< 5minutes) and safely bleed out water from the pipeline so as to reduce the pressure by 10% to 15%. Accurately measure and record the pressure drop as ΔP .
 - 2) Accurately and safely measure and record the water volume bled out as ΔV .
 - 3) Calculate: $\Delta V_{\text{max allowable}} = 1.2 V \Delta P \{ (1/ E_w) + (D / t E_R) \} = \text{___ gallons.}$

Where:

1.2 = air allowance factor.

V = test pipe section volume of water, in gallons.

ΔP = measured pressure drop, in "psi".

t = nominal pipe wall thickness, in inches.

D = pipe inside diameter, in inches.

E_w = Bulk modulus of water, in psi (from chart below)

<u>Temperature</u>	<u>Bulk Modulus</u>
5°C – 41°F	301,600-psi
10°C – 50°F	306,000-psi
15°C – 60°F	310,400-psi
20°C – 68°F	314,750-psi
25°C – 77°F	320,500-psi
30°C – 86°F	323,450-psi

E_R = HDPE pipe modulus, in psi (from chart below).

<u>Temperature</u>	<u>1-hour test</u>	<u>2-hour test</u>	<u>3-hour test</u>
5°C – 41°F	143,600-psi	134,900-psi	130,500-psi
10°C – 50°F	130,500-psi	123,300-psi	118,900-psi
15°C – 60°F	118,900-psi	113,150-psi	108,800-psi
20°C – 68°F	108,800-psi	103,000-psi	98,630-psi
25°C – 77°F	100,080-psi	94,275-psi	91,375-psi
30°C – 86°F	92,825-psi	88,475-psi	87,024-psi

- 4) When $\Delta V < \Delta V_{\text{max allowable}}$, Phase II passes; proceed to the main test, Phase III.

- 5) If $\Delta V > \Delta V_{\text{max allowable}}$, the test has failed, and the cause must be corrected. Upon correction, the preliminary and secondary phases are to be repeated until passing.
- 6) When excessive air is entrained or trapped in the pipeline, the pressure response is increasingly non-linear. The above air assessment test validates that minimal air is trapped and the test result will be indicative of the leak integrity of the pipeline, as illustrated in in an example figure from AS/NSZ Standard 2566-2 Appendix M and WRC's IGN 4-01-03:

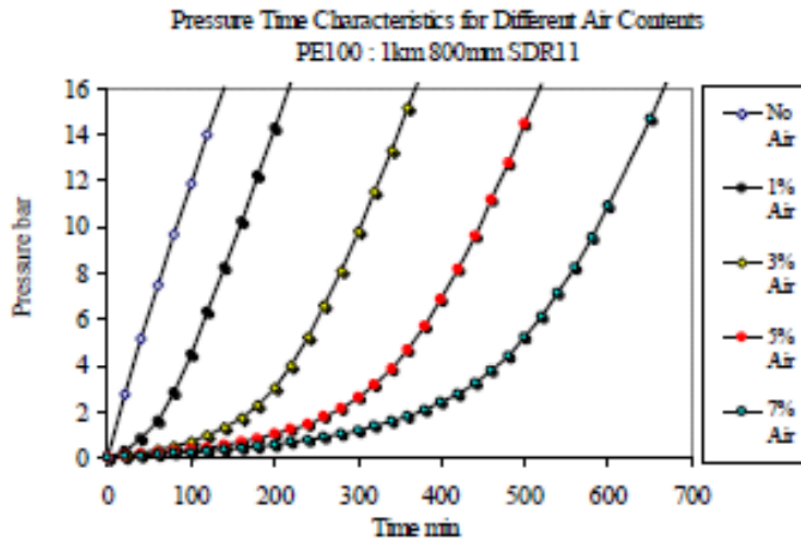


Figure A2.1: Pressure Rise Characteristics for 1 km of 800mm SDR 11 PE 100 Pipe

8. **Phase 3 Testing Per ASTM F2164:**

- a. After the pressure is dropped 10% to 15%, and while the above air assessment calculations are being made, the pressure internal to the HDPE pipe should stabilize and remain constant within $\pm 5\%$ of the Phase III reduced test pressure. If the plot of re-bound pressure versus time shows a continuous falling of pressure, the pipeline is leaking and the test fails. Ordinarily, the Phase III rebound test time is 30-minutes. In some cases this test duration may be extended to one-hour. If the Phase III observation test duration is extended to 90-minutes, the initial pressure-rise may be followed by a flat stable pressure followed by a slight drop as visco-elastic creep resumes later in this extended period. The standard Phase III observation and approval period is 30-minutes per European Hydrostatic pressure test Standards, with a possible extension to one hour per ASTM F2164, if required for all observations along the pipeline length. The test shall not be acceptable when there is a failure of any pipeline component, or any measurable or visible leakage. The test shall be acceptable when the Phase III reduced pressure rebounds or remains static for 30-minutes. If the hydrostatic pressure test fails, the cause should be corrected and a full procedure re-test conducted after a suitable "rest and relaxation" period, prior to

the re-test. The typical chart below, from AS/NZS 2566-2 Appendix M, illustrates a typical successful hydrostatic pressure test

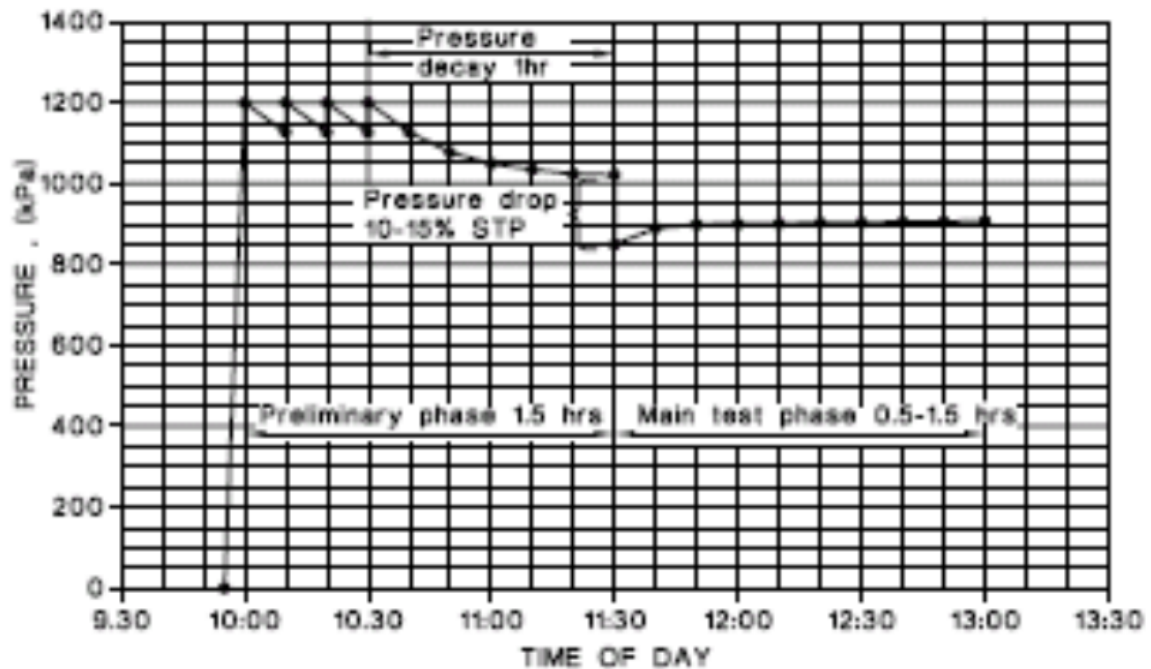


FIGURE M5 TYPICAL SUCCESSFUL MODIFIED REBOUND TEST FOR A PE PIPELINE

9. De-Pressurizing, and Draining the Test Section

- a. After the hydrostatic pressure test has been successfully completed, the elevated pressure within the test section shall be safely reduced in accordance with the test plan. When the test section is ready to be drained, the air vents shall be opened and the water drained from low points, at a flow-rate in accordance with the test plan. The hydrostatic pressure test water shall be re-used, treated, or drained to an approved water-way, after-which all connections shall be closed or otherwise re-instated. Remove all temporary blinds, supports, test connections

10. Pressure Test Report

- a. The pressure test report should include full details of all work associated with the hydrostatic pressure test, including the planning documentation, safety training, pre-test meeting minutes, the hydrostatic pressure test-plan, the hydrostatic pressure test documentation, any leak corrective actions, the certified test results, and the sign-offs for acceptance. Items also to be included are:
 - 1) Pipe properties, flow identification/name, and stationing

- 2) Pipeline test section length versus elevation chart showing heights of air vent valves, gage locations, filling and drain points, pressure rating of the pipe and pressure rating of all fittings and appurtenances included in the test.
- 3) Notations of leakage, failure, or rupture of any thrust blocking, pipe, fitting, joint, connection, etc.
- 4) Location and nature of any leaks that were repaired.
- 5) Test Water temperature and ambient temperature.
- 6) Plot of test pressure variation by test time duration for each phase.
- 7) The plot of the pressure decay graph & its interpretation; explanation of variances.
- 8) All calculations for Phase I, Phase II, and Phase III.
- 9) Verification of visible inspection of any exposed pipeline components.
- 10) Date and times of the hydrostatic pressure testing; gage and instrument calibration records.
- 11) Reference Standards used as guidelines for the hydrostatic pressure testing.
- 12) Signature acceptance of hydrostatic pressure test results by: CONTRACTOR operator, CONTRACTOR supervisor, and OWNER.

+ + END OF SECTION + +

SECTION 15995**DISINFECTION OF POTABLE WATER & RECYCLED WATER SYSTEMS****PART 1 - GENERAL****1.1 SUBMITTALS**

- A. Informational Submittals:
 - 1. Plan describing and illustrating conformance to appropriate AWWA standards and this Specification.
 - 2. Procedure and plan for cleaning system.
 - 3. Procedures and plans for disinfection and testing.
 - 4. Proposed locations within system where Samples will be taken.
 - 5. Type of disinfecting solution and method of preparation.
 - 6. Certification that employees working with concentrated chlorine solutions or gas have received appropriate safety training.
 - 7. Method of disposal for highly chlorinated disinfecting water.
 - 8. Independent Testing Agency: Certification that testing agency is qualified to perform bacteriological testing in accordance with AWWA standards, agency requirements, and this Specification.
 - 9. Certified Bacteriological Test Results:
 - a. Facility tested is free from coliform bacteria contamination.
 - b. Forward results directly to ENGINEER.

1.2 QUALIFICATIONS

- A. Independent Testing Agency: Certified in the State of California with 10 years' experience in field of water sampling and testing. Agency shall use calibrated testing instruments and equipment, and documented standard procedures for performing specified testing.

PART 2 - PRODUCTS**2.1 WATER FOR DISINFECTION**

- A. Clean, uncontaminated, and potable.
- B. CONTRACTOR shall make arrangements for water supply and convey water in disinfected pipelines or containers.

2.2 CONTRACTOR'S EQUIPMENT

- A. Furnish chemicals and equipment, such as pumps and hoses, to accomplish disinfection.
- B. Water used to fill pipeline may be supplied using a temporary connection to existing distribution system. Provide protection against cross-connections as required by AWWA C651.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Conform to AWWA C651 for pipes and pipelines, C652 for tanks and reservoirs, C653 for water treatment plants and filters, and C654 for wells, except as modified in these Specifications.
- B. Disinfect the following items installed or modified under this Project, intended to hold, transport, or otherwise contact potable or recycled water:
 - 1. Relocated Water Pipelines
 - 2. Indirect Potable Reuse Pipelines
 - 3. Existing Water Pipeline connections
- C. Disinfect surfaces of materials that will contact finished water, both during and following construction, using one of the methods described in AWWA C652 and C653. Disinfect prior to contact with finished water. Take care to avoid recontamination following disinfection.
- D. Prior to application of disinfectants, clean pump, tank, filters, and pipelines of loose and suspended material.
- E. Allow freshwater and disinfectant solution to flow into pipe or vessel at a measured rate so chlorine-water solution is at specified strength. Do not place concentrated liquid commercial disinfectant in pipeline or other facilities to be disinfected before it is filled with water.

3.2 PIPING

- A. Cleaning:
 - 1. Before disinfecting, clean all foreign matter from pipe in accordance with AWWA C651.
- B. If the continuous feed method or the slug method of disinfection, as described in AWWA C651 are used, flush pipelines with potable water until clear of suspended solids and color. Provide hoses, temporary pipes, ditches, and other conduits as needed to dispose of flushing water without damage to adjacent properties.
- C. Flush service connections and hydrants. Flush distribution lines prior to flushing hydrants and service connections. Operate valves during flushing process at least twice during each flush.
- D. Flush pipe through flushing branches and remove branches after flushing is completed.
- E. Disinfecting Procedure: In accordance with AWWA C651, unless herein modified.

3.3 PUMPS

- A. Disinfecting Solutions: Minimum free chlorine concentration of 100 ppm.
- B. Application:

1. Inject disinfecting solution into pump and associated piping and circulate for a minimum 3-hour period of time. At end of 3-hour period, solution shall have a strength of at least 50 ppm free chlorine.
2. Operate valves and pump appurtenances during disinfection to ensure that disinfecting solution is dispersed into all parts of pump and lines.
3. If disinfecting solution contained in pump has a residual free chlorine concentration less than 50 ppm after the 3-hour retention period, reclean pump, reapply disinfecting solution, and retest until a satisfactory test result is obtained.
4. After chlorination, flush water from pump until water through the unit is chemically and bacteriologically equal to permanent source of supply.

3.4 DISPOSAL OF HEAVILY CHLORINATED WATER

- A. Do not allow flow into a waterway without neutralizing disinfectant residual.
- B. See the appendix of AWWA C651, C652, C653, and C654 for acceptable neutralization methods.

+ + END OF SECTION + +

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16010**ELECTRICAL GENERAL****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. The following list of components and areas of work is a summary of the work required in the drawings and specifications. The list is not comprehensive of the total work required nor is it in any specific order. It is merely being provided as an aid to the bidder. Work not listed herein, but described in the plans or specifications, is also part of the overall scope of work.
- B. Two pump stations, each including the following features:
 - 1. Utility Metering with Main Disconnect, Distribution Section, Generator Breaker, and Transfer Switch.
 - 2. Generator with sound attenuating enclosure.
 - 3. Motor Controls with VFDs.
 - 4. Sump Termination Panels and Instrument Junction Boxes.
 - 5. Bridge crossing control panel with solar power
 - 6. Control panel(s).
 - a. Contractor shall remove PLCs from Control Panels and provide to Owner Representative upon completion of factory testing. Purpose is for Owner Representative to complete program testing.
 - 7. PLC, OI, and SCADA.
 - a. Configuration and Programming of the SCADA System is by Application Programmer, an Owner furnished function. Application programmer is defined in Qualifications.
 - b. Setup, configuration, programming, and software testing of the Programmable Logic Controllers and Operator Interfaces used in this project will be by Application Programmer.
 - c. Control Descriptions may be adjusted during construction as needed and project circumstances dictate. Application Programmer will make modifications to control descriptions (and associated PLC and SCADA configurations) as needed during construction and start-up.
 - d. PLC system will be programmed in the latest version of

16010-1

- software at time of project conception. PLC programming software to be furnished by Application Programmer.
- e. Existing PLC control system will be replaced under the Construction project. The new system will control the existing systems, new systems, and modified existing systems.
 - f. Application Programmer will be available to startup systems as they become available. The Contractor shall notify the Application programmer of start-up and testing dates via the 3 week look-ahead construction schedule.
8. Communications system. Contractor to coordinate, configure, test, and place communications system(s) into operation.
- a. Fiber optic network system to connect pump stations together and to treatment plant.
 - 1) This includes PS-A, PS-B, LS-1, LS-2, Community Center, Sampling Well, Pipeline Bridge Crossing, and Treatment plant.
 - 2) Control and Administration networks.
 - 3) Loop network topology.
 - 4) 4" Conduit to include 3 innerducts with fiber optic cable as specified and fill as defined per conduit schedule.
 - b. Temporary Cellular based communications system. Cellular unlimited data service to be provided by Contractor for 1 year.
9. Instrumentation
- a. Furnish NSF/ANSI 61 certified products that have undergone testing for any device, valve, instrument, or assembly that will come into contact with drinking water.
 - b. Mounting supports or other accessories as detailed and as recommended by the instrument manufacturer for the application.
 - c. Contractor shall calibrate, configure and test all instrumentation and document results.
10. Coordination and timely installation of critical path equipment and services such that construction may be facilitated. The Electrical Contractor and System Integrator should not assume that submittals, manufacturing, installation, start-up will be based on their own schedule. The Electrical Contractor and System Integrator scope of work is part of a much larger project and will need to be coordinated. Expect that additional cost in time and labor will be required beyond

normal optimistic projections.

11. Conduit – support systems, wire, and grounding system, for equipment interconnection, and operation.
 12. All necessary process piping, shut off, sample and calibration valves, drains, pressure reducers and calibration equipment for connection of instrumentation.
 13. Trenching, backfilling, compaction and resurfacing for all new underground conduit routes, concrete pads, and pull boxes.
 14. Coordination and equipment for connection of power utility and telephone services per utility drawings and standards.
 15. Site electrical devices, lights and receptacles.
 16. Seismic Anchorage Design Calculations and conforming installation.
 17. System startup, calibration, testing and documentation.
 - a. The Application Programmer (defined in Electrical Specifications [Electrical General].) and/or Construction Manager will be actively engaged in Operational Testing and Commissioning. These efforts shall be combined efforts of the Application-Programmer/Construction-Manager/Engineer and Contractor.
 - b. The Contractor shall facilitate test as outlined herein such that hardware, software and application programming are tested completely and all applicable test documentation is completed.
 - c. The Contractor shall assume that a minimum of 80 hours will be required to assist in this task.
 - d. Sufficient time shall be allocated in the construction schedule for troubleshooting, testing, startup, and verification of application programming in front of associated construction milestones. For instance, if a pump station is required to be operational prior to a date certain, then the schedule shall allocate time for these activities. The time necessary depends on the system to be started and shall be coordinated with the Owner Representative or Application Programmer during construction scheduling early in the project.
- C. Electro-mechanical equipment to be installed in this project may be specified in other divisions but will interface to equipment provided under Electrical Specifications. Obtain submittals for those devices, review, coordinate and provide all interfacing equipment, software, communications, I/O, and testing to integrate the equipment to the extent possible and as intended.
- D. Install electrical and control portion of electro-mechanical equipment specified in other sections. Reference those specifications, pertinent details, and follow

all manufacturer instructions to erect, install and commission equipment. Furnish all electrical equipment, interconnecting wire, and make connections to place equipment in operation.

- E. All electrical equipment and materials, and methods - including installation, calibration, and testing - shall conform to the applicable codes and standards listed in this and other Sections. All electrical materials and work shall conform to published standards of the National Electric Code (NEC) current issue, Institute of Electrical and Electronic Engineers (IEEE), and Underwriters Laboratories Inc (UL).

1.02 RELATED SPECIFICATIONS

- A. The following specification sections are part of the [Electrical Specifications].

Section	Description
16110	Conduit and Boxes
16120	Low Voltage Wire and Data Cable
16121	Fiber Optic Communication System
16180	Solar Power Generation System
16210	Engine Generator
16250	Automatic Transfer Switch
16430	Low Voltage Switchboard
16450	Grounding
16470	Panelboard and Power Transformer
16481	Variable Frequency Drive
16600	Factory and Field Testing
16905	Control Panels
16910	PLC & OI Hardware
16915	PLC & OI Applications Programming
16940	Instrumentation

- B. Owner, Engineer, Construction Manager, Application Programmer, and City are used within Electrical Specifications and are interchangeable. They are all representatives of the Owner, in this case, the City of Morro Bay.

1.03 QUALIFICATIONS AND REQUIRED WORK SCOPE

- A. Electrical Contractor

1. Management and installation of the entire electrical and control system (including stand-by generator) required for this project shall be by an Electrical Contractor meeting qualifications as defined herein.
 - a. Contractor shall be capable of looking at electrical equipment submittals, prior to installation, comparing hookup requirements to the drawings, and noting any deficiencies.

16010-4

2. Electrical Contractor shall select, furnish, and install all commodity electrical materials (conduit, wire, supports, fittings, ductbanks, etc) that are generally not "custom" or uniquely manufactured for this project. Custom electrical panels, controls, and instrumentation shall be furnished by Systems Integrator.
3. Shall be competent in and familiar with management and subcontracting of specialty electrical and instrumentation supply and engineering work as requires of a Systems Integrator as described herein.
4. Electrical Contractor must be competent in performance, supervision and coordination of work required and performed by equipment suppliers and Systems Integrator (Subcontractors).
5. The Electrical Contractor (EC) shall meet the following minimum qualifications:
 - a. Has a current C10 Electrical Contractor's License issued by the State of California Department of Consumer Affairs.
 - b. EC shall be regularly engaged in similar industrial power and controls electrical contracting for the Water and Wastewater Industry.
 - c. EC shall have successfully performed work of similar or greater complexity (as measured in contract value on industrial power and controls projects) on at least three (3) previous projects.
 - d. EC shall carry all insurances as defined and required by the special provisions and as required by law.
 - e. EC shall be competent in methods and materials execution and selection associated in the type of electrical and instrumentation work specified in this Division.
 - 1) EC shall be familiar with and understand codes and requirements from NFPA70, NFPA110, and all other governing national or local codes as required for work scope as described in the drawings and specifications.
 - 2) EC shall know and understand common terms and abbreviations used in this Industry. Not all terms and abbreviations will be defined in the drawings and specifications.
 - f. EC shall comply with State law which requires that all personnel installing electrical components are certified by the State of California as "Electrician" or "Electrician Trainee." Apprentices may install electrical components only under direct supervision of a certified Electrician.
 - g. EC shall have sufficient qualified personnel to staff the project and meet the construction schedule as defined by the Contract requirements or as approved during the submittal process.

B. System Integrator

1. Systems Integrator shall be a supplier to the Electrical Contractor and must be competent in performance, supervision and coordination of

work required in this contract.

2. This includes, but is not limited to, all work necessary to select, furnish, construct, supervise installation, configure, calibrate, test, and place into operation all transmitters, instruments, programmable controllers, control panels, motor controls, alarm equipment, communications, monitoring equipment, and accessories.
3. The System Integrator shall have on staff a Project Engineer with three years prior experience on similar sized projects. This Project Engineer shall coordinate the technical aspects of this project and prepare the submittals and drawings. The Project Engineer shall attend all coordination meetings when specifically requested by the Engineer.
4. The System Integrator (SI) shall meet the following minimum qualifications:
 - a. SI shall be regularly engaged providing electrical and control systems for the Municipal Water and Wastewater Industry.
 - b. SI shall have an Electrical Engineer on staff registered in the State of California as a Professional Engineer.
 - c. SI shall be capable of labeling all electrical panels as manufactured or customized by the System Integrator with appropriate Underwriters Laboratories (UL) label prior to factory testing or shipment to project site.
 - d. SI shall have successfully completed work of similar or greater complexity and on similar facilities on at least ten previous projects under the present company name.
 - e. SI shall be actively engaged in the following disciplines for the last 5 consecutive years.
 - 1) Design and manufacturing of custom Control Panels, Motor Controls Centers, and associated devices and equipment as specified in this division.
 - 2) Programming and commissioning of SCADA, PLC and Operator Interface hardware.
 - 3) Instrumentation - selection, purchase, calibration, start-up and commissioning.
 - 4) Testing, calibration, start-up, and commissioning of control systems as applied to the Water and Wastewater industry.
 - f. SI shall employ personnel on this project who have successfully completed ISA or equal training courses on general purpose instrumentation.
 - g. SI shall have a permanent, fully staffed and equipped service facility within 200 miles of the project site for a minimum of 1 year prior to bid date with personnel and equipment required to maintain, repair and calibrate the instrumentation system.
5. The companies listed below have been determined to meet the minimum qualifications specified in this Section and are pre-qualified for performing work as System Integrators on the project. Other System Integrators may submit a statement of qualifications, proving

16010-6

requirements above, and listing relevant project experience on similar completed projects. Include project references with phone numbers including the Owner, Engineer and Electrical Contractor. See submittals section of this specification section.

- | | | |
|----|------------------------------|----------------|
| a. | Tesco Controls, Inc. | (916) 395-8800 |
| b. | Glenmount Global | (707) 258-8400 |
| c. | Primex Control Systems | (707) 449-0341 |
| d. | Wunderlich-Malec | (925) 460-9921 |
| e. | Telstar, Inc. | (925) 671-2888 |
| f. | Technical Systems, Inc (TSI) | (707) 678-4444 |

6. A System Integrator who is not on the list but meets the qualifications may be listed by the Contractor during bid, but must submit qualifications for consideration during construction. That listing Contractor runs the risk of the System Integrator that they choose being rejected and having to identify another System Integrator who is approved by the Engineer as meeting the qualifications listed and provide that second integrator at no additional cost to the Owner. Contractor's bids will not be rejected on the basis of their listed System Integrator, however, only those System Integrators who are in the specifications are pre-qualified for the project.

C. Application Programmer

1. The Applications Programmer will be a part of the construction management team and their work is not in contract.
2. The Application Programmer work is limited to programming and configuration, and associated startup and testing services of the PLC, Operator Interface, and SCADA. All other work is by Contractor.
3. The application programmer will further define the specific portion of the control description during the construction of the project.
4. The Application Programmer will assist to coordinate the project program installation and testing work and further define the control descriptions.
5. The Application Programmer will attend coordination meetings when specifically requested by the Construction Manager.

1.04 CONTRACT DOCUMENTS

- A. The resolution of conflicting information within the contract electrical documents shall put precedence on electrical drawings over that of electrical specifications.
- B. The Drawings and specifications are intended to be descriptive of the type of electrical system to be provided with sufficient detail to construct. Minor omission of detail shall not relieve a qualified contractor from the obligation to provide a complete operational system if it can be determined that the

particular detail is usual and customary for similar systems.

- C. The following specifications may incorporate specific equipment or materials that do not have equal equipment listed. These items are standards because of their familiarity, serviceability, and/or spare parts inventory. However, equal alternate equipment or materials (noted in the submittal cover letter) will be considered for use on this project if submitted. The Engineer may reject said equipment for the purpose of adherence to standards.
- D. Contract drawings are diagrammatic and indicate general arrangement of systems and equipment.
 - 1. Exact locations and layouts of electrical products shall be defined during submittal, assembly, or field fit during construction. Field measurements take precedence over dimensioned drawings. Drawing intent is to show initial size, capacity, approximate location, orientation, and general relationship of equipment in area shown but may not show exact detail or arrangement.
 - 2. However, when materials, locations, sizes, or methods are specifically dimensioned, detailed or noted, the drawings shall take precedence over electrical specifications in the event of conflict. In no case, is NEC, UL, or other applicable governing standards to be overridden.
- E. The Contractor shall examine the architectural, mechanical, structural, and electrical and instrumentation submittals and equipment furnished under other specifications divisions in order to determine conduit routing, stub-up locations, and final terminations for all conduits and cables. Conduits shall be stubbed up as near as possible to equipment electrical terminals. The exact locations and routing of cables and conduits shall be governed by structural conditions, physical interferences, and the physical location of wire terminations on equipment. If the Contractor installs equipment conflicting with the architectural, mechanical, structural, instrumentation or electrical equipment provided under this and other specifications sections, the Contractor shall replace without additional cost.
- F. All equipment shall be installed and located so that it can be readily accessed for operation and maintenance. If accessibility appears to be compromised, the location of equipment or stub ups shall be modified to the extent possible.
- G. Where conduits are shown on the Drawings, or stated to be furnished but not explicitly shown, as part of the scope of work; the Contractor shall provide all fittings, boxes, wiring, etc. as required for completion of the raceway system in compliance with the NEC and the applicable specifications in this Section.
- H. No changes from the Drawings or specifications shall be made without written approval of the Engineer. Should there be a need to deviate from the Contract documents, submit written details and reasons for all changes to the Engineer for review.
- I. The Contractor shall maintain a neatly and accurately marked full size set of Contract Drawings recording the as built locations and layout of all electrical

and instrumentation equipment, routing of raceways, junction and pull boxes, and other diagram or drawing changes. Drawings shall be kept current weekly, with all "change orders", submittal modifications, and construction changes shown. Drawings shall be subject to the inspection by the Engineer at all times, progress payments or portions thereof may be withheld if drawings are not accurate or current.

- J. When documents are changed, they shall be marked with erasable colored pencils using the following coloring scheme:

Additions - red
Deletions - green
Comments - blue
Dimensions - black

- K. Prior to acceptance of the work, the Contractor shall deliver to the Engineer one set of record full size drawings neatly marked accurately showing the information required above.

1.05 UTILITY COORDINATION AND FEES

- A. All fees and charges of the Power Utility for design and final connection will be paid by others.
- B. Coordinate all work with the Utility for the work shown on Contract Drawings.
1. Unless already completed, apply for electric service within 10 working days from Notice to Proceed.
 2. Coordinate and meet with the Utility's Representative at the project site(s) within 30 days after award of contract.
 3. Discuss specific installation and comply with Utility requirements. Contact Engineer in the event that Utility requirements far exceed allowances in the plans and specifications. Provide an itemized list of deviations and potential costs or credits.
 4. Coordinate and obtain required inspections prior to backfill. Make corrections to installation as required.
 5. Coordinate connection and date of service with Utility. Utility back-charges due to mis-coordination or installation problems will be Contractor responsibility to pay and correct.
- C. Furnish and install electric service in accordance with the serving Utility's requirements.
1. The contract plans show the preliminary design for the Utility installation. Slight changes required by the Utility do not constitute extra work unless cost impacts in material and labor exceed \$5000. In that event, the agreed excess amount will be allowed as a contract change.

2. The Contractor shall provide and install service entrance equipment, all material, conduits, wiring, pull ropes, pole risers, transformer pads, bollards, etc. as shown on Utility design drawings and standards for new power service. Utility standards are available upon request from the Utility or for download from the Utility's website.
 3. The Utility will provide and install primary wire, transformer, meter, and connections.
- D. Following award of Contract, schedule all service installations and connections with utilities. Construction or start-up delays as a consequence to lack of documented effort by the Contractor which delay the project completion due to lack of Utility services will not be considered valid and Contract liquidated damages may be assessed.

1.06 PROJECT COORDINATION

- A. Prior to submittal, the Electrical Contractor shall coordinate with equipment suppliers to verify sizes, mounting, connections, storage, and delivery of equipment. If there are any issues whereby the solution will be in conflict with plans and specifications, or that are undefined and need direction, they shall be brought to the attention of the Engineer or Construction Manager via the RFI process.
- B. Where connections must be made to existing or new operational facilities, the Contractor shall schedule all the required work with Engineer, including the power shutdown period. Carry out each shutdown so as to cause the least disruption to the operation of the installation.
1. The Contractor shall limit all unscheduled shutdown periods to less than 15 minutes and only with prior approval of the Station operator.
 2. Carry out shut downs of durations greater than 15 minutes only after the time and date schedule and sequence of work proposed to be accomplished during shutdown has been favorably reviewed by the Engineer. Submit shutdown plans at least 2 days in advance of when the scheduled shutdown is to occur.
 3. Provide temporary power to all existing facilities utilizing a portable generator. The generator shall be utilized for all shutdowns that exceed 15 minutes and run continuously for the duration of the primary power shutdown. All cost for operating the generator including equipment, fuel and labor shall be provided.
 4. The Engineer reserves the right to delay, change, or modify any scheduled shutdown at any time, at no additional cost to the Owner, when the risk of such a shutdown would jeopardize the operation of the water distribution system and/or water plant operation.

1.07 SUPERVISION

- A. The Contractor shall schedule all activities, manage all technical aspects of

the project, coordinate submittals and drawings, and attend all project meetings associated with this Section. The Contractor shall coordinate and confirm that the project schedule is being adhered to and all work is being completed within the scheduled time frames.

- B. The Contractor shall supervise all work in this Section, including the electrical system general construction work, from the beginning to completion and final acceptance.
- C. The Contractor shall coordinate, obtain, prepare, and/or complete the documentation required within this division. All documentation shall be complete and delivered prior to final acceptance.

1.08 INSPECTIONS

A. General

- 1. Contract work or materials shall be subject to inspection at any time by the Engineer. If equipment, material, or installation method does not conform to the Contract documents, or does not have a favorably reviewed submittal status and has been determined to be unsatisfactory by the Engineer, then the Contractor shall remove said material from the premises; and if said material has been installed, the entire expense of removing and replacing same, including any cutting and patching that may be necessary, shall be borne by the Contractor.
- 2. The Engineer may inspect and test the fabricated equipment at the factory before shipment to job site. See Electrical Specifications [Factory and Field Testing] for requirements.
- 3. Work shall not be closed in or covered over before inspection and approval by the Engineer. All costs associated with uncovering and making repairs where non-inspected work has been performed shall be borne by the Contractor.
- 4. The Contractor shall cooperate with the Engineer and provide assistance at all times for the inspection of the electrical system under this Contract. The Contractor shall remove covers, provide access, operate equipment, and perform other reasonable work which, in the opinion of the Engineer, will be necessary to determine the quality of the work.

B. Milestones requiring inspection and signoff.

- 1. Underground conduit and grounding system complete. Do not cover any portion of conduit prior to inspection. Conduits must be labeled with temporary tags per Electrical Specifications [Conduit and Boxes] and [Grounding].
- 2. Factory testing. Coordinate test date with Engineer 2 weeks prior to test scheduled date.

3. Installation of electrical equipment. Equipment is anchored in place, conduit connections are complete, no wire is yet pulled into conduit. Permanent conduit tags must be in place per Electrical Specifications [Conduit and Boxes] and [Grounding].
4. Wire termination complete. Do not energize equipment. All wire tags must be installed and wires terminated per Electrical Specifications [Low Voltage Wire and Data Cable]. Pre-energization testing to commence after inspection.
5. Testing per Electrical Specifications [Factory and Field Testing]. All testing per Electrical Specifications [Factory and Field Testing] shall be witnessed unless specifically declined by the Engineer. Schedule tests with Engineer 2 weeks prior to test date.
6. Start-up per Electrical Specifications [Factory and Field Testing]. Schedule tests with Engineer 2 weeks prior to test date.
7. Punch list – final inspection. Schedule final walkthrough with Engineer one week prior to intended project completion date. All items on punchlist must be complete prior to scheduling walk-through.

1.09 JOB CONDITIONS

A. Construction Power and Telephone Service

1. The Contractor shall coordinate, furnish and install, temporary utility services required during construction of the project, such as temporary electrical power and telephone service. Temporary services shall be installed in accordance with the applicable codes and regulations of the serving utilities.
2. Upon completion of the project, remove temporary services. All equipment and material shall be the property of the Contractor.

B. Equipment Storage

1. The Contractor shall provide adequate protection for all equipment and materials during shipment, storage and construction.
2. Equipment and materials shall be completely and sufficiently sealed and covered and set on a pallet above grade so that they are protected from weather, wind, dust, water, or construction operations.
3. Equipment shall not be stored outdoors. Where equipment is stored or installed in an area with susceptibility to moisture, such as unheated buildings, untested piping, etc., provide an acceptable means to prevent moisture damage, such as plastic cover and a uniformly distributed heat source to prevent condensation.

- C. The project site is located where outside temperatures vary between 10 deg F. to 110 deg F. Humidity in this area will range from 10% to 100%.

16010-12

1.10 AREA CLASSIFICATIONS

- A. Area classifications are shown on the site electrical plans. The area enclosed by walls or the entire drawing area shall be classified as shown unless otherwise described in notes.
- B. All electrical equipment, enclosures, conduit, and supports shall be formally rated for or, at minimum, meet the intent of the rating as interpreted by Engineer.
- C. If no area classification rating is shown on the drawings, classification shall default to a NEMA 12 rating for indoors, and NEMA 4 rating for outdoors (non corrosive) and NEMA 4X for corrosive areas both indoors and outdoors.

1.11 SUBMITTAL REQUIREMENTS

- A. General
 - 1. Requirements described herein are specific to electrical submittals and are secondary to those described in other general specifications sections. Any additional requirements described here that are beyond those described in those sections shall be provided as described. Conflicts shall be resolved by giving priority to general specifications.
 - 2. The Contractor shall ensure that the System Integrator and/or equipment suppliers provide the submittal documentation required in this section. Submittals shall be neat, orderly, complete (without unneeded parsing), and indexed.
 - a. Like equipment shall be submitted complete in a single submittal. For instance, all general electrical materials shall be in a single submittal. All instrumentation, all control panels, or all MCCs and so on shall be submitted complete where possible.
 - b. Submittals that are broken down without sufficient cause will be rejected for future inclusion into a combined submittal.
 - c. Do not separate submittals by area.
 - d. Do not separate submittals by specification division unless agreed to in advance.
 - e. Submittals for work scope covered in this contract are expected to be as follows. This list is intended to be a guideline and not to be specific of all submittals required. Project circumstances or leadtimes or availability will each impact the order and division of submittals.
 - 1) General electrical materials – conduit, wire, labels, etc.
 - 2) Power Distribution and Motor Controls
 - 3) PLC and Control Panels
 - 4) Engine Generator
 - 5) Seismic Calculations
 - 6) Instrumentation

- 7) Fiber Optic Communication System
 - 8) Factory and Field Testing forms and procedures
 - 9) Installation details or procedures
 - 10) O&M Manuals
3. The Contractor shall coordinate submittals with the work so that project will not be delayed. This coordination shall include scheduling the different categories of submittals, so that one will not be delayed for lack of coordination with another. Time extensions will not be allowed due to failure to properly schedule submittals.
 4. No material or equipment shall be delivered to the job site until the submittal for such items has been reviewed by the Engineer and marked "no exceptions noted" or "make corrections noted".
 5. The equipment specifications have been prepared on the basis of the equipment first named in the Specifications. The Contractor shall note that the second named equipment, if given, is considered acceptable and equal equipment, but in some cases additional design, options, or modifications may be required to meet Specifications or functional installation.
 6. Exceptions to the Specifications or Drawings or equipment or procedures submitted as "equal" to specified equipment shall be clearly identified in a letter at the front of the submittal. Submittal data for "equal" equipment or procedures shall contain sufficient details so a proper evaluation may be made by the Engineer. The Contractor is responsible for verifying proper application/operation of substituted equipment.
 7. The opinion of the Engineer will be the final determination whether a substitution request meets the design intent.
 8. Deviations from the Contract documents shall **not** be incorporated into the work without prior written approval of the Engineer. A "Change Order" directive from the Engineer is required prior to incorporating any deviation from the Contract documents that has costs associated. The cost differential associated with this change order must be negotiated with the Owner to amend the Contract to reflect the costs or savings.
- B. Electrical Equipment -- Submittal data shall be grouped by equipment type. Each submittal shall be as complete as possible covering the entire project and scope of supply. Drawings or equipment submitted individually that are not on the critical path will not be accepted for individual review. The electrical submittals shall include (as a minimum):
1. Table of Contents
 2. Comment Letter: The Project Engineer of the System Integrator shall note all deviations from Contract Documents and the reason(s) for the deviation. They may use this forum to inform the Engineer or

installing Contractor of important information related to the project. RFIs must be submitted separately. Re-submittals shall include written responses to every comment provided by the Engineer during the previous review.

3. Bill of Materials: The Contractor and System Integrator each shall provide Bill of Material for electrical components formatted as shown below. Generic names or part numbers as defined by a distributor or Integrator are not acceptable. Only the originating manufacturer's name and part number shall be listed. Provide separate bill of materials for each panel, MCC, instrument list, etc.

Bill of Material

Item #	Qty	Tag#	Description	Manufacturer	Part #

4. Shop Drawings:
 - a. Equipment elevations with enclosure details drawn to scale or dimensioned with relative scale.
 - b. Electrical One-line, Elementary, and wiring diagrams
 - c. PLC I/O wiring diagrams
5. Catalog Data shall include the following: (features and options shall be highlighted, circled, or "arrowed.")
 - a. Instrumentation data summary sheets (by Contractor)
 - b. Manufacturer's technical information brochure
 - c. Physical size and mounting details and illustrations
 - d. Calibration Range
 - e. Input/output signals
 - f. Electric power, air, and/or water supply requirements.
 - g. Options selected and available (Cross out items not included)
 - h. Materials of construction of components

- C. Shop Drawings - Shop drawings shall be furnished for each electrical panel even if one was not shown explicitly on the Drawings. Shop drawings shall be numbered in sequence. Blank drawings or drawings that contain no specific project data will not be accepted for review.

All drawings shall be generated with a computer utilizing AutoCAD or similar drafting program. Drawings shall be no smaller than 11" x 17". The lettering shall be legible and no smaller than 0.75 inch in height.

Drawings shall be custom prepared for this project and shall have borders and a title block identifying the project, manufacturer, system or location, drawing number, drawing title, AutoCAD file name, project engineer, date, revisions, and type of drawing. Diagrams shall carry a uniform and coordinated set of wire colors, wire numbers, and terminal block numbers. The shop drawings shall include the following as a minimum:

16010-15

1. Electrical one-line diagrams detailing all devices associated with the power distribution system. The following applicable information or data shall be shown on the one- or three- line diagram: location, size and amperage rating of bus; size and amperage rating of wire or cable; breaker ratings, number of poles, and frame sizes; power fail and other protective devices; fuse size and type.
2. Detailed analog and digital I/O diagrams showing the wiring requirements for each instrument or device connection. Reference the Drawings for an example of each I/O card drawing requirements. If one is not included in the Drawings, then one may be obtained from the Engineer upon request.
3. Elementary (wiring) diagrams shall be provided for all relay logic, programmable logic controls, motor controls, power supplies, and other wiring. All elementary (wiring) diagrams shall be drawn in JIC EMP/EGP format and standards showing ladder rung numbers and coil and contact cross referencing numbers.
4. Equipment exterior and interior scaled drawings of front, side, elevation, deadfront, front panel devices, and backpan components. Show fabrication methods and details; including material of construction, paint color, door latch and lock, and ventilation system. Show shipping split locations and offloading information. Submit base plan showing allowed conduit entrance areas and bolt hole locations.
5. Drawings shall show UL required information as needed to UL label the equipment in accordance with UL procedures for label applied.
6. Submit full size drawing of all nameplates and tags, as specified herein, to be used on project. Submittal to include the following:
 - a. Dimensions of nameplate.
 - b. Exact lettering and font for each nameplate.
 - c. Color of nameplate.
 - d. Color of lettering.
 - e. Materials of construction.
 - f. Method and materials for attachment.
 - g. Drawing showing location of nameplates on each, panel and enclosure.

D. Seismic Anchor Design Calculations

1. All switchgear, motor controls centers, transformers, cabinets, raceways, supports, and electrical materials shall be so installed as to remain in a secure and captive position when subjected to a horizontal force in accordance with the current, applicable, and more stringent of California Building Code (CBC) or International Building Code (IBC) requirements. Method of securing shall constrain equipment against both vertical and horizontal forces and overturning forces.
2. Calculations as prepared by a structural engineer registered in the State of California shall be submitted in accordance with code

requirements for earthquakes forces on all specified equipment. Calculations shall include wind loading forces for equipment installed outdoors.

1.12 OPERATING AND MAINTENANCE INFORMATION

A. Operational Training

1. At time of completion, the Contractor shall provide a period of not less than 6 hours training for instruction of operation and maintenance personnel in the use of systems. Instruct all personnel at one time in one session. Make necessary arrangements with manufacturer's representative. Provide product literature and application guides for user's reference during instruction.

B. Operations and Maintenance Manuals

1. Provide Operation and Maintenance manuals per specifications as described in "Submittal Requirements" in this section with the following additional requirements:
 - a. A comprehensive index.
 - b. A complete "Record" set of favorably reviewed electrical submittals as provided under subsection "Submittal Requirements" illustrating all components, piping, and electrical connections.
 - c. A complete list of the equipment supplied, including serial numbers, ranges, catalog cuts, and pertinent data.
 - d. Full specifications on each item.
 - e. Detailed service, maintenance and operation instructions for each item supplied. Schematic diagrams of all electronic devices shall be included. A complete parts list with stock numbers shall be provided for the components that make up the assembly. All of these shall be originals, no copies.
 - f. Special maintenance requirements particular to this system shall be clearly defined, along with special calibration and test procedures.
2. Submit electronic readable PDF file format (CD disk copies (2) or email with attachments or download links) of the proposed O&M manuals for review by the Engineer. Submittals shall be delivered timely to the Engineer to allow for review period, corrections, and re-submissions as necessary.
 - a. General Contractor supervision must not be circumvented by sending submittals direct to Engineer.
 - b. O&M Submittals shall be published 1st electronically and 2nd on hard copy paper stock.

- c. Electronic Submittals shall be transmitted with the hard copy submittals and be viewable using a PDF reader.
 - d. Electronic submittals shall be assembled in accordance with the specifications for hard copy submittals with table of contents, bookmarks, tabs, subtabs, etc. utilizing the electronic bookmarks feature available in the PDF assembler.
 - e. Electronic (PDF) submittals must follow all applicable requirements for hard copy submittals including indexing, item selection indication, bookmarks, etc.
3. Provide four (4) hard copy O&M manuals per specifications as described in SUBMITTALS REQUIREMENTS in this section.
- a. Deliver approved hard-copy O&M manuals to the project site and Owner prior to pre-operational testing or equipment start-up.
- C. At the end of the project hard copy and soft copy electronic PDF files, shall be updated to "as-built" conditions.
- D. Provide two (2) sets of compact disk (CD) containing all shop drawings, application programs, configurations, calculations, documents or other computer electronic files prepared for this project in native file format and updated to reflect as-built conditions.

PART 2: PRODUCTS

2.01 QUALITY

- A. All equipment and materials shall be new, in current production, and the products of reputable suppliers having adequate experience in the manufacture of these particular items. For uniformity, only one manufacturer will be accepted for each type of product.
- B. Products specified that have become obsolete (out of current manufacturing, or have been superseded by another product) shall be cross-referenced to a replacement product(s) and provided in lieu of the specified product(s) for no additional cost. Under no conditions, shall products be submitted or furnished that are known (on manufacturer's list of obsolescence) and expected to be removed from current production within 12 months after project submittal. Products found to have been furnished this way will be removed and replaced at Contractor's expense.
- C. All equipment shall be designed for the service intended and shall be of rugged construction, of ample strength for all stresses which may occur during fabrication, transportation, erection, and continuous or intermittent operation. All equipment shall be adequately braced and anchored and shall be installed in a neat and workmanlike manner. Appearance and safety, as well as utility, shall be given consideration in the design of details. All components and devices installed shall be standard items of industrial grade,

unless otherwise noted, and shall be of sturdy and durable construction suitable for long, trouble free service. Light duty, fragile and competitive grade devices of questionable durability shall not be used.

- D. The Contractor should expect that there will be occasional freezing conditions at the project site in outdoor locations. Instrument valves, tubing, instrumentation, and other components, etc. which are outdoors and susceptible to damage if frozen, must be provided with internal or external protection. Freeze protection can consist of internal or external active heaters with thermostats and/or passive insulation systems. Active systems can be powered from a nearby receptacle or via the conduit intended for the device.
- E. Products that are specified and include a manufacturer, trade name or catalog number are intended to establish a standard of quality, performance, warranty and service. Products that are specified "or equal," do not prohibit the use of equal products of other manufacturers provided they are submitted, identified and promoted as equal, and favorably reviewed by the Engineer prior to procurement and installation.
- F. Products submitted as "equal" to the named products will be reviewed for conformance with the specifications and in comparison with the first named product. If the equal product meets specifications, but does not have a feature or performance characteristic that is available with the first named product, and that feature or performance is required for this project, then the submitted equal product may be rejected on those grounds.
- G. In the event that some claims of the manufacturer of submitted "equal" product are called into question by the Engineer, the Contractor, may be required to prove those claims either prior to installation or during startup of product. If the product does not meet the claims made or specifications, the product may be rejected by the Engineer and a replacement product must be submitted by the Contractor in its place. All cost for the rejected product, installation, testing, and removal will be the responsibility of the Contractor.
- H. Underwriters Laboratories (UL) listing is required for all substituted equipment when such a listing is available for the first named equipment. Extra parts, labor, panel space, power supplies, circuit breakers, and/or GFIC devices shall be provided as necessary for incorporation of specified non-UL components.
- I. When required herein or requested by the Engineer, the Contractor shall submit equipment or material samples for test or evaluation. The samples shall be furnished with information as to their source and prepared in such quantities and sizes as may be required for proper examination and tests, with all freight and charges prepaid. All samples shall be submitted before shipment of the equipment or material to the job site and in ample time to permit the making of proper tests, analyses, examinations, rejections, and resubmissions before incorporated into the work.

2.02 NAMEPLATES & TAGS

- A. Equipment exterior nameplates - Nameplate material shall be rigid laminated

black plastic with beveled edges and white lettering; except for caution, warning, and danger nameplates the color shall be red with white lettering. The size of the nameplate shall be as shown on the drawings. No letters are allowed smaller than 3/16". All nameplates located outdoors shall be UV resistant. Securely fasten nameplates in place using two stainless steel screws, type 316L, if the nameplate is not an integral part of the device. Epoxy cement or glued on nameplates will not be acceptable. Engrave the nameplates with the inscriptions as approved by the Engineer in the submittal.

1. For each major piece of electrical equipment provide a manufacturer's nameplate showing the Contract specified name and number designation, and pertinent ratings such as voltage, # of phases, ratings, etc.
 2. For each device with a specific identity (pushbutton, indicator, instrument, etc.) mounted on the exterior or deadfront of a piece of equipment provide a nameplate with the inscription as shown on the Drawings and described herein.
 3. Where no inscription is indicated on the Drawings or described herein, furnish nameplates with an appropriate inscription providing the name and number of device.
 4. Install Safety Signs in accordance with the latest OSHA requirements.
 - a. Entrances to electrical rooms and stations: Danger Sign requirements, ELECTRICAL ROOM, HIGH VOLTAGE (define voltage, example 480 VAC) KEEP OUT, AUTHORIZED PERSONNEL ONLY.
 - b. Equipment enclosures, cable tray and wireway where 120 VAC or higher and 50 V DC and higher exist: Danger Sign requirements, HIGH VOLTAGE (define voltage, example 480 VAC) AUTHORIZED PERSONNEL ONLY.
 - c. Equipment such as motor control centers, control panels, etc., where more than one source may be present in an enclosure or cubicle: Danger Sign requirements, VOLTAGE (define voltage, example 120 VAC control voltage or 480 VAC power) FROM MULTIPLE SOURCES IN THIS ENCLOSURE.
 - d. Equipment such as switchboards, switchgear, panelboards and motor control centers: Warning Sign requirements, WARNING, SERVICE ENTRANCE DISCONNECT FOR 1 OF ____ (define quantity) SERVICES TO THIS BUILDING. OTHER SERVICE ENTRANCE DISCONNECTS ARE LOCATED AT (define locations).
 5. Caution, warning and danger nameplates shall be red with white lettering
- B. Equipment Interior Nameplates - Nameplate material shall be clear plastic

16010-20

with black machine printed lettering as produced by a KROY or similar machine; except caution, warning, and danger nameplates shall have red lettering. The size of the nameplate tape shall be no smaller than 1/2" in height with 3/8" lettering unless otherwise approved by the Engineer. Securely fasten nameplates in place on a clean surface using the adhesion of the tape. For each device with a specific identity (relay, module, power supply, fuse, terminal block, etc.) mounted in the interior of a piece of equipment provide a nameplate with the inscription as shown on the Drawings and described herein. Where no inscription is indicated on the Drawings or described herein, furnish nameplates with an appropriate inscription providing the name and number of device used on the submittal drawings. Stamp the nameplates with the inscriptions as approved by the Engineer in the submittal.

- C. Equipment Tags - When there is no space or it is impractical to attach an engraved plastic nameplate with screws, as is the case with most field devices and instruments, the Contractor shall attach a tag to the equipment with the same inscriptions as specified above in paragraph A. The tag shall be made from stainless steel material and the size of the nameplate shall be no smaller than 3/8"h x 2"w with 3/16" machine printed or engraved lettering unless otherwise approved by the Engineer. The tag shall be attached to the equipment with stainless steel wire of the type normally used for this purpose.

2.03 FASTENERS

- A. Fasteners for securing equipment to walls, floors, or ceilings, shall be stainless steel. The minimum size fastener shall be 3/8 inch diameter.

2.04 COMPONENTS

- A. Switches and Pushbuttons
 - 1. Switches (HS) and pushbuttons (HC) for general purpose applications shall be water and oil tight as defined by NEMA 4X, corrosion resistant as defined by NEMA ICS 6-110.58, U.L. listed, standard 30 mm diameter, with plastic holding nut.
 - 2. Switches and pushbuttons shall have contacts rated NEMA A600 or 10 amperes continuous and 600 VAC. Provide NO and NC contacts as required.
 - 3. Engraved black legend plates shall be provided to define each switch and pushbutton function.
 - 4. Selector switch handles and pushbutton caps shall be black unless otherwise noted on drawing. Lock-out stop caps shall be red.
 - 5. Selector switches for hand-off-auto (HOA) applications shall have the hand position to the left, off in center, and auto in the right position.
 - 6. Pushbuttons and selector switches in hazardous locations shall have

hermetically sealed contacts or explosion proof enclosures.

7. Lockout stop pushbuttons shall include padlocking attachment. Pushbutton type shall be coordinated with padlock attachment type.
8. Switches and pushbuttons shall be Allen-Bradley 800H, or equal.

B. Indicating Lights

1. Indicating Lights for general purpose applications shall be NEMA 4X, corrosion resistant as defined by NEMA ICS 6-110.58, U.L. listed, 30 mm diameter, with plastic lens, plastic holding nut, and miniature bayonet lamp base.
2. Lamp shall be full voltage 120 VAC with 28 chip (min) High Intensity LED.
3. Indicating lights shall have contacts rated NEMA A600 or 10 amperes continuous and 600 VAC. Provide NO and NC contacts as required.
4. Engraved black legend plates shall be provided to define each lights function.
5. Indicating light type and color of lens shall as follows or as otherwise shown on the Drawings:

a.	Open/On	Green
b.	Closed/Off	Red
c.	Alarm	Amber or Blue
d.	Power On	White
6. Indicating lights designated "PTT" on wiring diagram or shown with push-to-test wiring shall be provided with a push-to-test switch and wiring.
7. Indication lights shall be Allen-Bradley 800H, or equal.

C. Relays and Timers

1. General: Relays and timers shall be provided with N.O. or N.C. contacts as shown on the Drawings. All spare contacts shown shall be provided. Contacts shall be rated 10 amps minimum at 120 VAC, 60 Hz unless otherwise shown on the Drawings. Coil voltage shall be 120 VAC unless otherwise described or shown on the Drawings. Relays and timers shall be designed for continuous duty. All relays shall be U.L. listed. All relays and sockets shall be the product of a single manufacturer. The following is a summary of abbreviations associated with relays and timers:

CR	– Control relay
TR	– Timing relay

16010-22

TDOE – Time delay on energization
 TDOD – Time delay on de-energization
 PR – Power Relay

2. Sockets for plug-in relays and timers shall be standard industrial type DIN rail mount with barrier type pressure plate screw terminals. Sockets shall be rated 300 VAC, 10 amps minimum.
 - a. Blade 8 or 11 pin for coil voltage above 90 volts AC or DC.
 - b. Octal 8 or 11 pin for coil voltage below 90 volts AC or DC.
3. Control relays (CR) shall be plug-in type with neon indicating lights and clear see-through sealed housing to exclude dust. Provide IDEC Type RR, or equal. Two form-C contacts (minimum) shall be provided on each relay.
4. Time delay relays on energization (TR-TDOE) shall be solid state plug-in relays with adjustable timer ranges from 1 second to 10 hours selectable unless other ranges are shown. Provide LED timer energized indicator lamp. Time delay relays shall be IDEC RTE, or equal.
5. Time delay relays on energization (TR-TDOE) shall be solid state plug-in relays with adjustable timer ranges from 1 second to 10 hours selectable unless other ranges are shown. Provide LED timer numeric display with countdown function. Time delay relays shall be IDEC GT3D-3EAF20, or equal.
6. Time Delay Relays (TR-TDOD)
 - a. Time delay relays on de-energization (TR-TDOD) (continuous power control input) shall be solid state plug-in relays with a timer adjustable range from 1 second to 10 hours selectable unless other ranges are shown. Provide LED timer energized indicator lamp. Time delay relays shall be IDEC RTE, or equal.
 - b. Time delay relays on de-energization (TR-TDOD) (true off) shall be solid state plug-in relays with a timer adjustable range from 1 second to 10 minutes unless other ranges are shown. True off time delay relays shall be IDEC GT3F-2, or equal.
7. Power relays (PR) shall be plug-in type and clear see-through sealed housing to exclude dust. Provide Magnecraft Type 389FXCXC-120A, or equal. 3PDT contacts rated 20A or 1 HP at 240 VAC (minimum) shall be provided on each relay. Furnish compatible blade type relay socket model 70-788EL11-1 or equal.

2.05 RADIO TRUSSED TOWER

A. Design Criteria

16010-23

1. Submit all criteria used in the calculations for the tower and footing design. Design shall be in accordance with the 2016 California Building Code.
2. Wind design shall be based on the following criteria:
 - a. Basic Wind Speed: 115 mph, Exposure C per ASCE 7-10.
3. Seismic design shall be based on the following criteria:
 - a. SS (maximum short-term spectral response acceleration) = 2.826
 - b. S1 (maximum 1-second spectral response acceleration) = 1.005
 - c. SDS (design short-term spectral response acceleration) = 1.884
 - d. SD1 (design 1-second spectral response acceleration) = 1.005
 - e. Ie (Seismic Importance Factor) = 1.50
 - f. Risk Category = IV
 - g. Structure Class = III
4. Other criteria may be added at the discretion of the Tower Engineer.

B. TOWER FOUNDATION DESIGN

1. The tower foundation is a part of this contract and shall be installed by the Contractor. The tower foundation shall be designed by the manufacturer to safely sustain the structure and its live loads. Tower footing design shall be based on the soil bearing capacity given in the Geotechnical Report furnished as part of the specifications.
2. The Contractor shall conform to all requirements contained in the geotechnical report in a manner that minimizes the risk for future settlement. This includes, but is not limited to, excavation and over-excavation of on-site soil; placement and compaction of imported - soil and on-site soil; moisture conditioning, and all related testing specified by the Geotechnical Report.
3. The tower and foundation are part of this contract and shall be installed by the Contractor. Assumptions for foundation in project plans are there for bidding purposes to aid in defining quantities. Some changes to those assumptions are expected and are required to be incorporated into final design and installed foundation.
4. The tower and foundation shall be designed by the manufacturer to safely sustain the structure and its live loads. Tower footing design shall be based on the soil bearing capacity calculated in Geotechnical Report.

C. TOWER:

1. General:

16010-24

- a. Tower shall be provided in accordance with approved national standard ANSI/TIA 222-G. structure class III, Exposure Category C, Topographic Category 1.
 - b. Self-supporting (guyless).
 - c. Support antenna at elevation and orientation necessary to achieve functional requirements.
 - d. Suitable for outdoor environmental conditions at location of installation.
 - e. Adequate support and protection for communication lines.
 - f. Complete with necessary mounting accessories.
 - g. Include all required safety equipment.
2. Performance
 - a. 2 degree maximum deflection with live load as specified.
3. Antenna and other live design loads:
 - a. 10 square feet of effective projected area located at top of tower.
 - b. Cables and mounting hardware.
 - c. These design loads may exceed planned live loads to be installed under this contract.
4. Height above foundation:
 - a. 35 feet.
5. Protective Equipment:
 - a. Grounding kit.
 - b. Do not use mast, poles, or structures for ground path.
6. Unit Manufacturers and Products: Rohn 45G or equal.

2.06 MOTOR CONTROL ACCESSORIES

A. Control Power Transformer:

1. Control power transformer shall be epoxy encapsulated for dust and moisture protection. The internal wiring shall be copper and have 105 deg. C insulation rating. The unit shall feature barriered screw terminals for connection to electrical circuits. Provide with time-delay, slow-blow secondary fuse rated to protect the transformer and interrupt 10,000 amperes at 120VAC. Two primary fuses rated for 480 VAC and AIC as shown in the Drawings shall be provided. Transformer minimum size and voltage ratings shall be as shown on Contract drawings. Control power transformer shall be Micron Impervitran, Cutler Hammer MTE or equal.

B. Simplex Starter:

1. The simplex starter shall be self contained motor starter and include a three pole magnetic circuit protector, NEMA rated motor starter with adjustable overloads, HOA, lights and other buttons as defined on the motor elementary or as required for an operable system. The

16010-25

enclosure shall be non-metallic 316 stainless steel and rated NEMA 4X. The motor starter shall be rated for 480 Volt, and 10 HP (minimum) unless otherwise shown on the drawings. Provide fuses, auxiliary contacts, or indicators as required by the motor control or one-line diagram. A side or front mounted operator shall interlock the door and open/close the MCP breaker and have provisions for up to 3 padlocks. Simplex Starter shall be Cutler Hammer, ABB, Square D, or equal.

C. Voltage Monitor Relay (VMR)

1. The voltage monitor relay (VMR) shall continuously monitor the three phases for power loss, low voltage, phase loss, and phase reversal. The VMR shall interface to the control circuit with DPDT contacts rated for 4 Amps at 120 VAC. The VMR shall have a drop-out voltage adjustment, time delay adjustment, and status indicating LEDs. Voltage monitor relay shall be Time Mark 2652, or equal.

2.07 DEVICES

A. Switches

1. General purpose commercial grade switches shall be manufactured in accordance with UL 20. Switches shall be one pole, brown, 20 amps at 277 VAC, 1HP at 120 VAC, 2 HP at 240 VAC. Switches shall have copper alloy contact arm with silver cadmium oxide contacts. Switches shall have slotted terminal screws and a separate green grounding screw. Provide Leviton 1221, or equal.
2. Wall mount commercial grade motion detector switches (denoted with M next to switch symbol in drawings) shall utilize passive infrared detection with 180 deg field of view to determine if the space is occupied by personnel. The device shall be capable of switching incandescent (800W at 120V) and fluorescent (1200VA at 120V) lamps with electronic ballasts. The device shall feature a manual-off-auto switch. A delay off time adjustment shall be settable from 30 seconds to 30 minutes. The device shall incorporate a photocell with light intensity adjustment to keep the switch from activating when light levels are above setting. Provide Leviton ODS10, or equal.

B. Receptacles

1. General purpose receptacles shall be commercial grade, duplex and rated 20 amps, 120 VAC, 2 pole, 3 wire grounding, NEMA 5-20R configuration, specification grade, and side wired to screw terminals. Face color shall be brown when paired with stainless steel covers. General purpose receptacles shall be specification grade Leviton 5362-B or equal.
2. Ground fault circuit interrupter receptacles shall be used where noted as GFI on plan or where in outdoor NEMA 3R locations. GFI receptacles shall be commercial grade, duplex, brown, 20A, 120V, back and side wired, with "test" and "reset" buttons. "Daisy Chain"

connecting multiple receptacles from one GFI unit is not acceptable. GFI receptacles shall be Leviton 8898, Leviton MGNF2-B, Leviton 7899, or equal.

3. Boxes shown in NEMA 3R environments and outdoor locations shall be weatherproof while in-use. Furnish in-use weatherproof covers and weatherproof boxes for these areas.
4. Definite purpose receptacles and plugs in NEMA 4 or 4X environments where a receptacle is shown and a device is to be connected continuously, shall be listed as UL type 4, 4X, (Plug) and NEMA 3R (flip cover). Receptacles, plugs, and housings shall be fabricated of impact resistant plastic with o-rings and gaskets to prevent the entrance or water, vapors, and chemicals when unplugged or plugged. Circular plugs shall be retrofitted onto equipment so as to be compatible with the receptacles to maintain in-use ratings. Furnish Hubbel Watertight Wiring Devices and Accessories, or equal.

2.08 POWER MONITORING

A. Power Monitor

1. General:

- a. Microprocessor based multifunction power and energy meter
- b. Designed for multifunction electrical power, voltage, and current measurement on 3 phase power systems.
- c. Measured parameters: voltage, current, frequency, unbalance, kW, KVAR, KVA, power factor, kWh.
- d. Support for 3-Element Wye, 2.5 Element Wye, 2 Element Delta, 4 wire Delta systems.
- e. 200 ms update for power measurement, 100ms update for voltage, current, Hz.
- f. Din rail mounting
- g. 85 to 264 VAC control power, 5W.

2. Voltage Inputs

- a. Configurable to potential transformer ratio.
- b. Input impedance of 1 Mega Ohm, 0.014W at 120 Volts.
- c. Direct voltage input range
 - 1) 347 Volts Line to Neutral
 - 2) 600 Volts Line to Line.
- d. 2500V withstand.

3. Current Inputs:

- a. Configurable to current transformer (CT) ratio 1A or 5A input.
- b. Burden 0.05VA, Impedance 0.002 ohms

16010-27

- c. Meter shall have a maximum burden of 0.005VA per phase, at the maximum of 15 Amperes continuous input.
 - d. Fault current withstand shall be 200 Amps for 1/2 second.
 - 4. Digital I/O:
 - a. Two status inputs 24VDC dry contact.
 - b. Two assignable digital relay outputs
 - 5. Accuracy
 - a. Revenue meter accuracy
 - b. +/- 1% or better for volts and amps
 - c. +/- 1% for power and energy functions.
 - d. True RMS measurements
 - 6. Communications
 - a. Ethernet - 100BaseT Ethernet IP Allen Bradley protocol
 - b. Modbus TCP
 - 7. Display:
 - a. 4 Line backlit LCD display to display real time measured parameters including voltage, current, power, and power factor.
 - 8. Acceptable Products
 - a. Allen Bradley PM1000 1408-EM3A-ENT with Ethernet
 - b. Allen Bradley PM500 1420-V2P-ENT with Ethernet
 - c. Or Equal
- B. Current Transformers
 - 1. Furnish mounted (preferable) or unmounted current transformers based on space allocated and installation requirements. The current transformer shall have wire leads or binding posts and ratio as shown on the drawings. The accuracy shall be metering accuracy class 0.6 at a minimum burden at 60 hz shall be 2.5 VA and as required to meet specified accuracy of device(s) fed.

PART 3: EXECUTION**3.01 CONSTRUCTION METHODS**

- A. Equipment shall be assembled and wired by the manufacturer prior to shipment. Field modifications or changes are not allowed without a written "change order" to the Contract. Field changes, however large or small, shall be executed using the components, materials, wiring, labeling, and assembly methods identical to that of the original supplied equipment.
- B. Electrical plugs, receptacles, cords, and connectors required to power or interface the equipment and panels shall be furnished and installed by the

16010-28

Contractor.

- C. Factory as-built drawings for each custom manufactured control panel or MCC shall be shipped with the equipment and placed inside in waterproof envelopes.

3.02 EQUIPMENT FABRICATION

- A. All electrical equipment, including custom manufactured equipment, shall meet the requirements of Underwriters Laboratories (UL) and bear the appropriate label. Panels shall be affixed with UL label prior to shipment and be built in accordance with the UL guidelines and procedure that corresponds to the UL label. Custom control panels shall bear a UL-508 label, minimum, with additional UL labels as required per intended service.
 - 1. Design and furnish a Low Voltage Limited Energy Circuit for any device(s) not bearing a UL listing or registration that are required to be installed into a UL labeled panel.
 - 2. Revise voltages for any electrical parts and equipment that are specified that do not bear the UL listing or registration.
- B. Panel cutouts for devices (i.e. indicating lights, switches) shall be cut, punched, or drilled and smoothly finished with rounded edges. Exposed metal from cutouts that are made after the final paint finish has been applied shall be touched up with a matching paint prior to installing device.
- C. Equipment doors shall swing freely and close and latch with proper alignment.
- D. Component within the electrical equipment shall be securely mounted on an interior subpanel or backpan and arranged for easy servicing. Mounting bolts and screws shall be front mounted for device removal without special tools or removal of entire mounting panel.
- E. A ground bus shall be provided in each enclosure or cabinet. It shall have provisions for connecting a minimum of ten grounding conductors. Screw type lugs shall be provided for connection of grounding conductors. All grounding conductors shall be sized as shown on plans or in accordance with NEC Table 250-95, whichever is larger.
- F. Bolts and screws for mounting devices on doors shall have a flush head which blends into the device or door surface. No fastening devices shall project through the outer surfaces of equipment.

3.03 RADIO TOWER ERECTION

- A. General
 - 1. Unless otherwise specified, erection shall be in strict accordance with the tower manufacturer's recommendations. Particular care shall be exercised in handling and bolting of the tower sections and supports to avoid abrasion or scratching of the coating. Touch-up coating shall be done in accordance with tower manufacturer's recommendations where and as directed. The Contractor shall also be responsible for

16010-29

providing and installing all seismic tie-downs for the tower.

B. Foundation

1. The foundation shall be installed in accordance with manufacturer's structural design calculations and details. The foundation shall be level, with differential not exceeding $\pm 1/4$ -inch and not vary more than $\pm 1/2$ -inch from an established plane.

3.04 WORKMANSHIP

- A. All work in this division shall conform to the codes and standards outlined herein.
- B. Installation shall be performed by qualified personnel providing first class workmanship per Electrical Specifications [Electrical General, Qualifications].
- C. Maintain equipment installed (or to be installed) in new condition. Protect equipment from damage while in Contractor care from dust, water, or mishaps that are typical to construction sites
- D. Confirm that equipment and materials are correct for their intended duty and will be installed per manufacturer guidelines. Equipment and components found to be installed inconsistent with manufacturer guidelines and/or these specifications will not be acceptable and subject to removal and replacement.
- E. Upon completion of daily work, remove excess materials, scraps, and debris from the work area and from the inside of equipment.
- F. Upon notification, stop work on any portion of the installation that is determined to be non-compliant with contract or being installed by unqualified personnel.
- G. Perform all work to correct improper installations at no additional cost to the owner.
- H. Equipment furnished under this contract or provided to Contractor for installation shall be installed in accordance with manufacturer's instructions, installation calculations, and contract documents.

3.05 EQUIPMENT SHIPMENT AND STORAGE

- A. Shipment -- Any equipment whose destination (jobsite) is more than 25 miles from the factory shall be carefully protected for shipping. All openings shall be protected by plywood securely fastened to the framework of the equipment. Equipment shall be adequately covered during local delivery.
- B. Storage -- From the time of receipt until the equipment is installed and energized, the equipment shall be considered in storage. While in storage, a 120V, 1 phase source of power shall be made available and connected to space heaters in all items of equipment so equipped. Equipment not provided with space heaters shall be provided with a light bulb or electric heater while in storage to prevent moisture condensation. Unless stored indoors, it shall

16010-30

be a least 1 foot above grade covered with at least 2 layers of heavy polyethylene plastic sheets and anchored to prevent damage by high winds. All equipment shall be protected from dust and moisture prior to and during construction.

3.06 DAMAGED PRODUCTS

- A. Damaged products that cannot be repaired to new condition shall be replaced with new products. All equipment and materials shall be in like-new condition at start-up and commissioning.
- B. Any equipment furnished outside of contract to the Contractor shall be repaired or replaced if damaged while in the Contractor's care. The Contractor shall pay for the parts and/or services of the original equipment manufacturer (OEM) to troubleshoot, asses, and repair damaged equipment.
- C. Minor cosmetic damage shall be repaired by spray painting, after properly preparing the surface, all scratches or defects in the finish of the equipment. Only identical paint furnished by the equipment manufacturer shall be used for such purposes.

3.07 INSTALLATION

- A. General
 - 1. Install all products per manufacturer's recommendations and the Drawings.
 - 2. Provide all necessary hardware, conduit, wiring, fittings, and devices to connect the electrical equipment provided under other Sections.
 - 3. Protect wiring insulation from wear by installing rubber cushions, bushings, or strip insulation, or by fastening the wiring to a rigid surface with zip ties and anchors.
 - 4. Provide additional devices, wiring, conduits, relays, signal converters, isolators to complete interfaces of the electrical and instrumentation system.
 - 5. Changing normally open contacts to normally closed contacts or vice versa
 - 6. Adding additional relays to provide more contacts as necessary.
 - 7. All programmable devices (not specifically excluded herein) shall be programmed, set-up and tested by the Contractor prior to startup. Programming and set-up parameters shall be adjusted or changed as directed by the Engineer during start-up and throughout the warranty period.
 - 8. Coordinate with the Engineer and setup all alarm, process, and operation setpoints.

9. Keep a copy of the manufacturer's installation instructions on the jobsite available for review at all times prior to and during the installation of the associated equipment.
- B. Panels and enclosures:
1. Install panels and enclosures at the location shown on the Plans or approved by the Engineer.
 2. Install level and plumb.
 3. Seal all enclosure openings to prevent entrance of insects and rodents.
 4. Clearance about electrical equipment shall meet the minimum requirements of NEC 110.26
- C. Conduits and Ducts:
1. Install all conduits and ducts per Electrical Specifications [Conduit and Boxes] and [Grounding].
 2. Minimum wire bending space at terminals and minimum width of wiring gutters shall comply with NEC tables 312-6 (a) & (b).
- D. Wiring, Grounding, and Shielding:
1. Observe proper grounding and shielding practices as this application environment is generally noisy. The shield of shielded cables shall be terminated to ground at one end only, the origination end. The shield at the other end shall be encased in an insulated material to isolate it from ground.
- E. Cutting and Patching:
1. The Contractor shall do all cutting and patching required for installing his work. Any cutting which may impair the structure shall require prior approval by the Engineer. Cutting and patching shall be done only by skilled labor of the respective trades. All surfaces shall be restored to their original condition after cutting and patching.
- F. Cleaning and Touch up:
1. At the completion of the work, all parts of the installation, including all equipment, exposed conduit, and fittings, shall be thoroughly cleaned of grease and metal cuttings. Any discoloration or other damage to parts of the building, the finish, or the furnishings, due to the Contractor's failure to properly clean the system, shall be repaired by the Contractor.
 2. The Contractor shall thoroughly clean any of his exposed work requiring same.

3. Vacuum and clean the inside of all electrical and instrumentation enclosures prior to applying power.
4. The Contractor shall paint scratched or blemished surfaces with the necessary coats of quick drying paint to match existing color, texture and thickness. This shall include all prime painted electrical equipment including but not limited to enclosures, poles, boxes, devices etc.

3.08 APPLICATION OF POWER

- A. The Engineer will direct the energization and de-energization of all existing and new equipment. The Contractor is not authorized to energize or de-energize any equipment unless they have been given written permission to do so or while in the presence of the Engineer.
 1. Any equipment that is under repair, demolition or installation shall be locked off and tagged out of service with Contractor supplied padlocks and tags.
 2. The Contractor is required to comply with NFPA 70E and specifically in regards to safety when working on live equipment. Obtain work permits when needed to do live work.
- B. The Contractor is responsible for grounding of high and medium voltage cabling and/or bus during installation and removal of equipment. The contractor is responsible for complying with all California Electrical Safety Orders (ESO) and Occupational Safety and Health Act (OSHA) safety requirements and procedures while working in or near medium voltage equipment.

3.09 WARRANTY

- A. The Contractor shall warrant all electrical and instrumentation equipment & software for a period of 1 year from date of final acceptance. Standard published warranties of equipment which exceed the preceding specified length of time shall be honored by the manufacturer or supplier.
- B. The Contractor shall have a staff of experienced personnel available to provide on-site warranty service on 2 working days notice during the warranty period. Such personnel shall be capable of fully testing and diagnosing hardware & software and implementing corrective measures.

3.10 FINAL ACCEPTANCE

- A. Final acceptance will be given by the Engineer after the equipment testing is complete, each deficiency has been corrected, final documentation has been provided, and all the requirements of Contract documents have been fulfilled.
- B. At the end of the project, following the completion of the field tests, and prior to final acceptance, the Contractor shall provide the following:
 1. Each "operation and maintenance" manual shall be modified or

supplemented to reflect all field changes and as-built conditions.

2. Two (2) disk copies of all final documentation to reflect as-built conditions.
- C. Keys: Submit two sets of all keys for locks supplied on this project. Wire all keys for each lock securely together. Tag and plainly mark with lock number or equipment identification, and indicate physical location, such as panel or switch number.

END OF SECTION

SECTION 16110**CONDUIT AND BOXES****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Labor, materials, equipment, tools, safety gear, test equipment, incidentals, services, and transportation for a complete electro-mechanical installation as shown on the Drawings, included in these Specifications, or as can be reasonably implied from project descriptions.
- B. The scope of work includes:
 - 1. Furnish and install conduits, wireways, raceways, cable trays, junction boxes, pull boxes, and associated hardware. Provide conduit, fittings, hardware, hangars, mounting channel, and other parts for a complete raceway installation.
 - 2. Furnish and install grounding system required by drawings, or if not shown or defined, as required by Article 250 of the NEC.
 - 3. Installations shall be designed and installed with components meeting the NEMA area designation.
- C. Work includes that specified in Electrical Specifications [Electrical General].

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire & Data Cable]
- C. Electrical Specifications [Grounding]
- D. Project Drawings

1.03 QUALIFICATIONS

- A. Material furnished under this specification shall be installed by qualified installers meeting requirements specified in Electrical Specifications [Electrical General, Qualifications].

1.04 SUBMITTAL REQUIREMENTS

- A. Provide submittals and drawings as specified in Electrical Specifications [Electrical General, Submittal Requirements].

PART 2: PRODUCTS**2.01 CONDUIT, RACEWAYS AND WIREWAYS**

- A. GENERAL - Conduit, raceways, and wireways, wiring methods, materials,

16110-1

installation shall meet all requirements of the NEC, be UL labeled for the application, and meet the minimum following specifications.

1. All wiring shall be installed in conduits, raceways, or wireways when interconnecting equipment and devices.
 - a. The minimum size conduit shall be 3/4-inch unless indicated otherwise on the Drawings or for special connections to equipment.
 - b. Provide cords and cord seals for devices or instrumentation requiring waterproof seal to maintain NEMA 4 or 4X ratings. Example devices include lighting and pipe mounted instruments that are located below grade.
2. Conduits may connect into junction boxes or wireways as shown in the drawings or as requested by Contractor and approved by Engineer. Junction boxes (circle with J in drawings) can be as simple as a conduit or JIC box, or larger box as determined by contractor and needed for the installation. Drawing may or may not depict junction box requirements that may be required by code. Wireways or junction boxes shall be rated for area (as noted in the Drawings), or furnish minimum NEMA 4 if not noted.
3. The Contractor shall use conduit material types (SPEC per conduit schedule) as defined below or as otherwise shown in the contract drawings or as specifically called out in the conduit schedule.
 - a. Non-exposed underground portions of conduit run shall be PVC-40 for all signals and voltages unless otherwise shown in the conduit schedule.
 - b. Exposed conduit material (not underground and beyond transition) shall be per the following table unless specifically noted otherwise in the plan drawings. The conduit schedule denotes the conduit type for non-exposed (under-ground, in-concrete, etc.) and does not apply or coordinate with this table. Exposed condulets, elbows, fittings, device boxes, and hardware shall be of the same material and finish as the adjacent conduit.

<u>Location</u>	<u>Material</u>
NEMA 1 or 12	Galvanized rigid steel (GRS)
NEMA 3R	Galvanized rigid steel (GRS)
NEMA 4	PVC-Coated Steel (GRS-PVC)
NEMA4X	PVC-Coated Steel (GRS-PVC).
Class 1 Div 1 or 2 hazardous	PVC-Coated Steel (GRS-PVC)

4. Conduit stubs and transitions:

16110-2

- a. Conduit transitions shall be GRS-PVC for 6" on either side of the transition point (minimum) or as shown in drawing details. Conduit transition is defined as conduit sections emerging from or through concrete or earth or from below to above grade or through walls or vaults, non-exposed to exposed.
- b. Beneath pad mounted electrical equipment, where not exposed, shall be installed or trimmed to 2" or less above slab and have bushing or end bell installed. Overall height of conduit entering into the base of equipment shall be enough for bushings/bells to be installed but be high enough for conduit tags to be installed.
- c. Uniform in height for each panel or section. Conduits end bushings/bells shall not vary in height above slab more than ½" from lowest to highest.
- d. Conduits shall be spaced apart such that bushings and end bells may be installed without interfering with the adjacent conduits.
- e. Transitions to PVC shall include PVC coated locknuts to shield exposed steel pipe threads.
- f. Through walls – shall protrude approximately 2" and include end bell or bushing. Pack space around conduit with non-shrink grout if the thru-hole was core drilled.
- g. Conduits for future use shall be capped with coupling and plug. Identify each end with conduit labels.
- h. Existing conduits that are no longer able to be used due to removal of a section or shown demolished and that protrude above graded shall be cut flush and filled with grout.

5. Conduit Tags

- a. All conduits listed in the "Conduit and Wire Routing Schedule" shall have conduit tags at both ends of each conduit run with tag number from schedule identified. This shall include ends within underground pull boxes.
- b. All conduits shall have temporary tags during construction. Temporary tags may be made from duct tape with hand written ink marking or suitable equivalent. Temporary tags shall be removed by Contractor at time of installation of permanent tags.
- c. Tag material shall be rigid laminated red plastic with white lettering. The size of the tag shall be ¼" thick by ¾" round or ¾" x 1" rectangle minimum.
- d. Letter height shall be ¼" minimum. Engrave the tags with the

conduit number or acronym. Labeling shall be neatly installed for visibility and shall be clearly legible. Securely fasten tags in place using 20ga stainless steel tie wire through a pilot hole on the tag.

- e. Conduit tags shall be Custom manufactured per specification.

6. Supports

- a. Cross section of a single channel shall be 1-5/8" x 1-5/8" and cross-section of a double channel shall be 1-5/8" x 3-1/4". The channel wall thickness shall be 12 gauge as applicable.
- b. One-Hole clamps shall be intended for pipe mounting on support channels and equipped with clamp-backs. The clamps shall be Efcor, Thomas and Betts, Appleton or equal
- c. Spacers, provided to support underground conduits in concrete encasements, shall be plastic. The spacers shall be Carlon, Johns-Manville, Underground Products or equal
- d. Anchors shall be expansion type for securing equipment to concrete foundations, floors and walls. Anchors shall have length identification mark on the exposed end of the bolt. Provide Hilti Kwik Bolt 3, or equal.
- e. Stanchions shall be provided as needed to mount equipment and electrical components. Stanchions shall be shop fabricated from welded 4" c-channel, 12" x 12" x 1/4" steel base plate, coated with a rust inhibiting primer and top coat of gray polyurethane gloss paint. Attach equipment to the stanchion direct or on a 1/4" aluminum sheet sized for the equipment supported.
- f. Conduit Hangers shall be trapeze construction, with double channel, 3/8-inch rods and nuts. Suspend from suitable structural support.
- g. Support material and finish shall be per the following table unless otherwise noted in the drawings. Brackets, fittings and hardware shall be of the same material and finish.

<u>Location</u>	<u>Material</u>
Indoors NEMA 12	Galvanized steel
Outdoors NEMA 3R	Galvanized steel
Outdoors NEMA 4	Stainless Steel type 316
Corrosive areas NEMA4X	PVC bonded, 40 mil, factory applied

- h. Equipment mounting racks shall be designed by installer for rigid equipment and conduit mounting. Racks shall be bolted or welded construction and sized for equipment or as shown on

16110-4

the drawings.

- i. Strut channels shall be used for mounting equipment to walls and for supporting conduit runs. Double strut channel type shall be used for fabricating equipment mounting racks as required and/or as detailed on the drawings. Add additional supports to rigid mounting locations as needed to prevent wobbling and to meet seismic requirements. All field cut surfaces of the strut channels shall be deburred and coated to prevent rust.

B. Galvanized Rigid Steel Conduit - (GRS)

1. Manufactured from high-strength steel and hot dipped zinc galvanized inside and out. Conduit and fittings shall meet UL 514B, UL 6, and conform to NEMA RN 2. Conduit shall be capable of being used as an equipment grounding conductor per NEC 250.
2. Provide galvanized rigid steel factory sweeps and elbows for 90 degree transitions.
3. Cast fittings and device boxes shall be malleable iron or aluminum. Appleton type FS/FD or equal.
4. In hazardous locations, fittings shall meet and be listed UL 886.
5. All fittings, hubs, couplings, pulling elbows and connectors shall be threaded-type. Set-screw type and compression-type are not acceptable. All thread conduit is not allowed over 1/2" exposed length. Cover plates shall be cast iron with sealing gasket in NEMA 3R locations.
6. Conduits entering enclosures shall be fitted with insulated grounding bushing; O-Z "HBLG", Appleton "GIB", or approved equal. All grounding bushings shall be tied to the grounding system with properly sized bonding conductors per the NEC code.
7. Combination expansion-deflection fittings installed exposed shall be Type XD as manufactured by Crouse-Hinds Co.; Type DX as manufactured by O.Z. Gedney Co.; Type DF as manufactured by Appleton Electric Co., or equal

C. Galvanized Rigid and Coated Steel Conduit (GRS-PVC)

1. Galvanized Rigid Steel conduit with a 40-mil thick polyvinylchloride exterior coating and a 2-mil urethane interior coating meeting NEMA RN-1, UL-6 and ETL PVC-001. The bond of the PVC to the zinc coated pipe must be stronger than the tensile strength of the PVC.
2. Provide PVC coated galvanized rigid steel factory sweeps and elbows for 90 degree transitions.

16110-5

3. Cast fittings and device boxes shall be malleable iron or aluminum with a 40-mil thick PVC coating meeting the same
 4. In hazardous locations, fittings shall meet and be listed UL 886.
 5. Provide PVC coated threaded-type fittings, hubs, pulling elbows, couplings, and connectors; set-screw type and compression-type are not acceptable. Form 8 conduit fittings, ½" through 4", must have a tongue-in-groove gasket to effectively seal out the corrosive elements. Covers shall be supplied with plastic encapsulated stainless steel cover screws. Form 8 fittings shall be UL and type 4X and IP69 listed.
 6. A "PVC Coated Sealing Locknut" shall be used on all exposed male threads transitioning into female NPT threads which do not have sealing sleeves, including transitions from PVC couplings/female adapters to PVC Coated GRC elbows in direct burial applications. "PVC Coated Sealing Locknuts" are not to be used in place of a myers hub
 7. A PVC sleeve extending one pipe diameter or two inches, whichever is less, shall be formed at every female fitting opening except unions. The inside sleeve diameter shall be matched to the outside diameter of the conduit.
 8. All junction and metal pull boxes shall be galvanized with exterior surfaces PVC coated to 40 mils thickness.
 9. Unistrut, strut clamps, pipe straps, and clamp back spacers, shall have 40 mil thick PVC coating. All mounting anchors shall be stainless steel.
 10. Conduits entering enclosures shall be fitted with insulated grounding bushing. All grounding bushings shall be tied to the grounding system with properly sized bonding conductors per the NEC code.
 11. Installers of PVC Coated Conduit must be certified by the manufacturer and be able to present a valid, unexpired certified installer card.
 12. GRS-PVC conduit to be Robroy Plasti-bond, Perma-Cote, KorKap, T&B OCAL or equal.
- D. PVC Conduit, Schedule 40 or 80 (PVC-40, PVC-80)
1. Shall be high impact schedule 40 or 80 polyvinylchloride suitable for use underground, direct burial and for use with 90 C wires, and shall conform to UL 651. Shall be UL listed and labeled for "direct" burial.
 2. A copper bonding conductor shall be pulled in each raceway and bonded to equipment at each end with approved lugs.
 3. Each underground run shall be placed in a trench with a five (5) inch sand bed evenly compacted on all sides, top and bottom unless otherwise noted.

4. Elbows, and risers shall be per exposed conduit transition detail. PVC conduit is not allowed above ground except where specifically called out on the Drawings.
 5. PVC fittings shall have solvent-weld-type conduit connections. Fittings and device boxes shall be PVC with factory fabricated conduit connections. Provide Carlon or equal.
 6. Conduits entering enclosures shall be fitted with a glued male adapter, lock ring and bushing to prevent wire chafing. Conduits entering panels through concrete to an open bottom or entering a pull box shall have a glued end bell fitting.
 7. PVC conduit shall be stored on a flat surface and shielded from the sun.
- E. Communications Conduit, for use in fiber optic applications, (PVC-ID)
1. PVC Conduit with Splined Bell and Spicket, Schedule 40, Splinelock joining system. No solvent-cements required. Engineered joint immediately achieves full strength.
 2. HDPE Conduit made from Polyethylene SDR-13.5, heat fusion bonded,
 3. Each option for use in trench or trenchless locations.
 4. Each option suitable for innerduct installation.
- F. HDPE Innerduct, for use in fiber optic applications, (PVC-ID)
1. 1-1/4" size, quantity 3, for each 4" conduit length.
 2. Internal oscillating longitudinal ribs lower friction allowing longer cable installations.
 3. Internal oscillating longitudinal rib design reduces cable twisting during placement.
 4. Externally smooth wall
 5. Strength to match installation and service requirements.
 6. Six color coding options for identification without tags.
 7. Internal lubrication with pull tape installed as needed.
 8. Continuous lengths to each pullbox without splices.
- G. Liquid Tight Flexible Non-metallic Conduit (up to 2") - (FLEX)
1. Liquid tight flexible Nonmetallic Conduit shall be constructed of flexible PVC and have a smooth inner surface with integral crush resistant

reinforcement within the conduit and be designated as a Type LFNC-B (for FNMC-B).

2. Liquid tight Flexible Nonmetallic Conduit shall be sunlight, oil, and flame resistant and approved for the installation of electrical conductors in indoor and outdoor applications.
3. Liquid tight Flexible Nonmetallic Conduit shall be listed to UL standard UL1660.
4. Liquid tight flexible non-metallic conduit shall be installed in accordance with Article 351, Part B of the National Electrical Code (NEC) and other applicable sections of the NEC and/or local electrical codes.
5. Liquid tight Fittings shall be listed for the use with Liquid tight Flexible Nonmetallic Conduit and shall be marked LFNC-B (FNMC-B).
6. Flexible Non-Metallic Conduit shall be Carlon Carflex or equal.

H. Liquid Tight Flexible Metal Conduit (above 2-1/2") - (FLEX)

1. Liquid Tight Flexible Metal conduit shall be moisture and oil-proof with PVC jacket extruded over a galvanized flexible steel conduit.
2. Liquid Tight Flexible Metallic Conduit shall be sunlight, oil, and flame resistant and approved for the installation of electrical conductors in indoor and outdoor applications.
3. Liquid Tight Flexible Nonmetallic Conduit shall be listed to UL standard UL 360.
4. Liquid Tight flexible metallic conduit shall be installed in accordance with Article 351, Part B of the National Electrical Code (NEC) and other applicable sections of the NEC and/or local electrical codes.
5. Liquid Tight Fittings shall be listed for the use with Liquid tight Flexible Metallic Conduit and conform to UL514B.
 - a. Outdoors when extension of GRS-PVC: PVC coated galvanized steel with insulated bushings.
 - b. Outdoors when extension of GRS: Galvanized steel with insulated bushings.
 - c. Indoors or outdoors when extension of stainless steel: 316 stainless steel with sealing ring and insulated bushing.
 - d. Indoors: Galvanized steel with insulated bushings.
6. Flexible Metallic Conduit shall be Amer-Tite type GP or equal.

I. EMT Conduit, Electrical Metallic Tubing

1. Thinwall electroplated galvanized steel suitable for indoor and outdoor use with 90 C wires, and conform to UL 797.
2. All fittings, hubs, couplings, pulling elbows and connectors shall be compression-type, set screw type are not acceptable.

2.02 DEVICE BOXES**A. BOXES**

1. Device boxes shall be of zinc-galvanized malleable iron or cast aluminum with shape and size best suited for the particular application, rated for the location installed, and shall be supported directly to structure by means of screws, anchors, or bolts.
2. Box dimensions shall be in accordance with size, quantity of conductors, and conduit clearances per NEC articles 314 requirements.
3. Boxes exposed to the weather or in moist locations shall be weatherproof (WP) by means of gasketing under a weatherproof cover.
4. Boxes connected to GRS-PVC conduit runs shall be PVC coated with 40 mil coating.

B. DEVICE PLATES and COVERS

1. Indoor general purpose device plates and covers shall be stainless steel. Plates or covers shall be attached with stainless steel screws. An engraved plastic label denoting circuit breaker number and panelboard name shall be affixed to each cover with #4 stainless steel screws.
2. Weatherproof switch, outlet, and receptacle boxes shall be fitted with gasketed covers rated for wet locations. Each access cover shall have a padlockable cover to maintain security and weatherproof integrity even when a plug is connected to the receptacle. Screws and hinge springs shall be stainless steel. Weatherproof access covers shall be Leviton 5977-CL, Cooper 4966, or equal.

2.03 PULL BOXES**A. JUNCTION BOXES**

1. Where required for best installation or where specifically called out in the Drawings, junction boxes shall have JIC type construction with hinged door, NEMA 4X rating, manufactured of type 304 stainless steel or as otherwise shown. Door shall be fastened with clamps and stainless steel screws. No devices, screws, rivets, or bolts shall protrude through the exterior surface unless specifically shown on the Drawings. Boxes shall be Hoffman, Circle AW, or equal.

B. UNDERGROUND BOXES

1. Underground pull boxes shall be prefabricated "Christy Box" size and type as noted in the Drawings or equal. Size shall be as shown or dimensioned on the Drawings. Provide larger boxes as needed to meet code or as determined in field to allow for adequate pull area at Contractor discretion. Extension sections shall be provided as necessary to reach the depth of underground conduits with maximum depth of 48". All boxes shall have galvanized steel hold down bolts and hardware. Boxes shall be H/20 loading rated and have traffic rated covers. Steel covers or lids shall be galvanized and grounded with bonding jumper to the local grounding circuit per NEC. Pull box covers shall be labeled electrical, signal, utility, and telephone, whichever applies. Pull boxes shall be Christy Concrete Products, Brooks or equal.

C. UNDERGROUND VAULTS:

1. BOX: Underground vaults shall be prefabricated 6" thick reinforced concrete (4000PSI), H/20 load rating, with the interior size (minimum) as shown on the Drawings.
 - a. Provide larger pull boxes when necessary to allow for adequate pull area or to accommodate the number of conduits entering box.
 - b. Vaults shall include 2" thinwall section knock out area for conduit entry on 4 sides. Provide hole in bottom corner for ground rod.
 - c. Extension sections shall be provided as necessary to reach the depth of underground conduits.
 - d. Provide sloped bottom with 4" drain hole knockout in bottom center of vault.
2. LID: Provide hinged, torsion spring assist, traffic rated H/20, lid cover assemblies. Provide single leaf for 3 by 3 feet pull boxes. Provide double leaf for vaults with openings larger than 3 by 3 feet.
3. GROUND BUS: Provide a 1/4" x 12" copper ground bus in each vault. Provide 8 - 3/8" diameter holes for multiple #4/0 terminal compression or crimp connectors. Connect ground conductors from duct banks to the ground bus. Connect ground terminals to ground bus using bronze or stainless steel hardware.
4. CABLE SUPPORTS: Provide heavy-duty, nonmetallic cable racks for support of wire and cable in vaults. Racks shall be UL listed glass-reinforced nylon consisting of slotted wall brackets supporting cable support arms. Arms shall be designed to support a 400-pound load, minimum. Arms shall be adjustable by moving up and down the bracket. Each support bracket shall extend all the way from the bottom of the handhole to the top of the handhole. Provide 1/2-inch

stainless steel bolts, washers, and anchors to secure racks to handhole wall. Cable racks shall be Underground Devices Incorporated type RA arms with CR36 support brackets; Uni-strut Power-Rack F20N-STA33 Stanchions with F20N-ARM14 Arms; or equal. Provide racks to support conductors on 18-inch centers.

5. Underground vaults shall be Oldcastle Precast, Brooks, or equal.

D. PULL BOX AND VAULT IDENTIFICATION

1. Engrave or bead weld box covers with minimum thickness of ¼" x 1" lettering with pullbox name (i.e. PBX-XXX) and purpose (electrical, signal, fiber, telephone, etc.). Provide an additional identifier "high voltage" for boxes with 600 volts or higher.
2. Utility pull boxes shall be labeled per Utility Company standards.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 INSTALLATION

A. System:

1. Install all products per Electrical Specifications [Electrical General, Installation].

B. Rigid Conduits and Ducts:

1. Exposed conduits shall be neatly arranged with runs perpendicular or level and parallel to walls. Bends shall be concentric.
2. Except as expressly indicated or approved, all conduits shall be surface mount on block walls, concealed behind gypsum walls, and buried to required depth below floor slabs.
3. Pipe threads shall be treated with conductive thread compound.
4. Installation of the GRS-PVC conduits must be in accordance with the manufacturer's installation procedures using recommended tools.
 - a. Apply touch up compound at each fitting sealing sleeve edge to improve watertight seal.
 - b. To ensure compliance, the installer(s) must be "manufacturer certified" before installation can proceed.

- c. Certification available by contacting manufacturer's representative and attending a brief instructional course. Valid and unexpired certification card shall be available for review per installer.
- 5. Repair GRS-PVC coating utilizing a touch-up compound as provided by the manufacturer of the conduit of the same material as the coating. Overlap beyond the damaged area to cover the PVC coating. Contact from touchup compound to PVC is required to maintain integrity. The entire conduit shall be replaced if the repair exceeds 1" combined length.
- 6. A maximum of three equivalent 90 degree elbows are allowed in any continuous run. Install pull boxes where required to limit bends in conduit runs to not more than 270 degrees or where pulling tension would exceed the maximum allowable for the cable.
- 7. Route all above grade conduits parallel or perpendicular to structure lines and/or piping. Conduits installed above grade shall be braced in place with stanchions. Expansion joints shall be installed every 100 feet. Bends shall be concentric.
 - a. Combination expansion-deflection fittings installed exposed shall be Type XD as manufactured by Crouse-Hinds Co.; Type DX as manufactured by O.Z. Gedney Co.; Type DF as manufactured by Appleton Electric Co., or equal
- 8. Care shall be exercised to avoid interference with the work of other trades. This work shall be planned and coordinated with the other trades to prevent such interference. Process Pipe, mechanical and HVAC shall have precedence over conduits for routing and space requirements.
- 9. Seal each bottom entrance conduit into the MCC and other electrical enclosures with plugging compound sealant to prevent the entrance of gasses, insects and rodents. Plugging compound sealant shall be Gardner Bender Duct Seal or equal.
- 10. Exposed conduit stubs for future use shall be capped with coupling and plugged. Drill hole in plug for pull rope as necessary.
- 11. Explosion proof seal-off fittings shall be provided on all conduits that enter or leave hazardous areas per requirements of the National Electrical Code, Chapter 5 and UL 886. The seal-off fitting shall prevent hazardous gases and/or flames from passing from one type area to another through the conduit system. Ceramic or other non-asbestos fiber material and sealing compound shall be placed in the fitting to complete the seal.
- 12. Hazardous location conduit outlet boxes shall be used in hazardous locations for change in direction, access to conductors and as pull and splice boxes.

13. All spare conduits shall have 1/8" nylon pull ropes installed.

C. Flexible Conduit and Cords

1. Final connections to vibrating equipment such as motors, heaters and fans shall be made with liquid tight flexible conduit.
2. Flexible conduit lengths shall not be greater than 36 inches for sizes up to 2 1/2" and 48 inches for 3" and larger conduit.
3. Flexible conduit shall include a ground conductor for equipment bonding in circuits over 30 VDC or as shown in the conduit schedule.
4. Flexible conduit shall only be installed in exposed or accessible locations.
5. Where equipment is cord connected, submersible rated, and conduit connections are not possible without modification, devices and equipment may be free-air cord connected in lieu of flexible conduit. Connection to adjacent rigid conduit shall be through liquid-tight cord connector fitting specifically designed for the purpose and sized appropriately for the cord. Cord connectors shall be rated similar to the adjacent conduit they are connected to: Stainless steel, galvanized or plastic.

D. Excavation and Back Filling:

1. Trenches for conduit below floor slabs and other underground electrical conduit shall be excavated to the required depths per utility requirements or specific detail. Conduits under floor slabs shall have minimum trench depth to contain bends without any portion of the radius visible at finished grade.
2. Underground conduits outside of structures, excluding utility conduits, shall have a minimum cover of 24 inches except under roadways where minimum cover shall be 30 inches or as otherwise shown in the Contract Drawings. Back filling shall be done only after conduits have been inspected. Excavation and back fill of conduits shall conform to the requirements of other applicable Specifications sections unless modified on plans, and to other entities (Utilities, etc.) as required.
3. Install spacers to support underground conduits. Horizontal and vertical separation shall be maintained by plastic spacers set every four feet. Spacers shall be Carlon Snap-Loc or equal.
4. At all times during the installation of the electrical system, the Contractor shall provide barricades, fences, guard rails, etc., to safeguard all personnel, including small children, from excavated trenches.

E. Underground pullboxes:

16110-13

1. Pullboxes shall be located in areas that will experience the least traffic loading and in the general vicinity as shown in the Drawings. Boxes in pavement shall be set at final grade and boxes in planter areas shall be set 1" above final grade. Boxes shall not be buried by landscape material.
2. Steel pull box lids shall be grounded per NEC 250.4(A)(5) and 314.4.
3. Boxes shall be set on compacted base and base rock to minimize settling of the box over time. If the box is located in a paved traffic area, a 6" x 6" concrete ring shall be poured around the box below the pavement.

F. Device Mounting Heights:

1. Mounting heights of fixtures and devices shall be as follows unless otherwise indicated or when height has to be adjusted to be over or under counter tops.

Wall switches	=>	48 inches
Convenience outlets	=>	18 inches
Telephone outlets	=>	18 inches
Bracket fixtures	=>	7 feet 6 inches

G. Cutting, Coring, Patching and Repairing:

1. The Contractor shall do all cutting and patching required to install his work. Any cutting which may impair the structure will require prior approval. Cutting and patching shall be done only by skilled labor of the respective trades. Where it becomes necessary to cut into existing work for the purpose of making electrical installations, locate existing post tension cables, rebar and electrical services prior to core drilling using ground penetrating radar or similar technologies. All surfaces shall be restored to their original condition after cutting and patching.

3.03 FIELD ASSISTANCE

- A. General: Provide all equipment and supplies necessary to perform all testing. The Owner Representative shall have the option to witness and participate in the on-site tests performed by the installer.
- B. Per Electrical Specifications [Factory and Field Testing].

3.04 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

END OF SECTION

SECTION 16120**LOW VOLTAGE WIRE & DATA CABLE****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Labor, materials, equipment, tools, safety gear, test equipment, incidentals, services, and transportation for a complete electro-mechanical installation as shown on the Drawings, included in these Specifications, or as can be reasonably implied from project descriptions.
- B. The scope of work includes:
 - 1. Furnish and install wire, splices, lugs, or other miscellaneous devices as defined in this specification.
 - 2. End to end wiring and terminations for each system, device, instrument, and piece of equipment shown in the Drawings as new, or rehabilitated, or reconnected.
 - 3. Testing of conductors and completed wired systems.
 - 4. Installations shall be designed and installed with components meeting the NEMA area designation.
- C. Work includes that specified in Electrical Specifications [Electrical General].

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Conduit and Boxes]
- C. Electrical Specifications [Grounding]
- D. Project Drawings

1.03 QUALIFICATIONS

- A. Material furnished under this specification shall be installed by qualified installers meeting requirements specified in Electrical Specifications [Electrical General, Qualifications].

1.04 SUBMITTALS AND DRAWINGS

- A. Provide submittals and drawings as specified in Electrical Specifications [Electrical General, Submittal Requirements].

PART 2: PRODUCTS**2.01 WIRING AND ELECTRICAL DEVICES****A. GENERAL****1. General**

- a. Provide wiring and electrical devices specified herein and install field and internal panel wiring as shown on the Contract Drawings.
- b. This section applies to all wires or conductors used internal (non-field) to electrical equipment or external for field wiring.
- c. Field wire quantity and size shall be per "Conduit and Wire Routing Schedule."

2. Analog Signals

- a. Analog signal transmission between electric or electronic instruments shall be 4-20 milliamperes and shall operate at 24 volts DC unless otherwise specified. Milliampere signals shall be current regulated and shall not be affected by changes in load resistance within the unit's rating.
- b. Provide powered current isolators wherever the loops' load resistance exceeds the originating current signal transmitter's rating. Associated shunt resistors shall be located on rail-mounted terminal blocks. Exposed resistor leads shall be insulated with heat-shrink tubing.

B. LOW VOLTAGE WIRE AND CABLE (through 600V except instrument signals)

1. General: Low voltage conductors shall be used for power, control, lighting and miscellaneous circuits. This Section applies to all wires or conductors used internal for all electrical equipment or external for field wiring. Wire shall be new, plainly marked with UL label, gauge, voltage, type of insulation, and manufacturer's name.
 - a. Conductors shall be copper with a minimum of 98% conductivity.
 - b. Class C stranding. Solid conductors may be used for lighting and receptacle circuits.
 - c. Wire shall be rated 600 volt (min).
 - d. Size all conductors per NEC minimum or as shown on the drawings.

- 1) Minimum #12 AWG for wires used in power transmission circuits or as defined on the drawings.
- 2) Minimum #14 AWG for wires used in signal transmission circuits or as defined on the drawings.
2. Wire colors and sizes shall not change within the circuit.
3. Wire shall be properly fused or breaker protected at or below the maximum amperage rating allowed by the NEC.
4. Control and Power Wiring:
 - a. Field wire in conduit:
 - 1) Type XHHW-2, XLPE insulation, rated 90 °C in wet or dry locations, oil resistant.
 - i Use for power circuits carrying voltages higher than 200 volts phase to ground.
 - 2) Type THHN / THWN, PVC with nylon jacket insulation, rated 90 °C in dry locations and 75 °C in wet locations, oil resistant, UL83.
 - i Use for power circuits with voltages below 200 volts phase to ground, or control circuits.
 - 3) Minimum #12 AWG for wires used in power transmission circuits or as defined on the drawings.
 - 4) Minimum #14 AWG for wires used in signal transmission circuits or as defined on the drawings.
 - b. Field wire in tray (Tray Cable type TC):
 - 1) Individual cables - Insulation type THHN/THWN, rated 90 °C in dry locations and 75 °C in wet locations, oil resistant, UL83.
 - 2) Multi-conductor cables - Insulation type THHN/THWN (PVC/Nylon) conductors with an overall polyvinyl chloride (PVC) jacket, conforming to Article 318 "Cable Trays" and Article 340 "Power and Control Cable Type TC" of the National Electrical Code, and Standard 1277 of Underwriters Laboratories, Inc. Rated 600 volts, 90°C dry and 75°C wet, oil resistant, UL83.
 - 3) 3 or more conductor plus ground wire in a single cable.
 - 4) UL Listed as sunlight resistant, direct burial, and open wiring.

16120-3

- 5) Conductor sizing per ICEA Publication P-54-440 for cable tray and ICEA P-46-426 for conduit
 - 6) Minimum #12 AWG for wires used in power transmission circuits or as defined on the drawings.
 - 7) Minimum #14 AWG for wires used in signal or control transmission circuits or as defined on the drawings.
- c. Power cord
- 1) Flexible wire cord shall be type SOW, SOOW, or G and be provided in 2, 3, or 4 conductor plus ground as required for connected load.
 - 2) EPR insulation, 90 deg C rating, oil and abrasion resistant., overall jacket plus individual conductor jackets. 600V rated
 - 3) Conductors shall be stranded copper.
 - 4) Cord shall be installed with cord grips on each end where it enters termination enclosures.
- d. VFD Motor Supply Cable
- 1) VFD motor supply cable shall be shielded and designed for use with AC variable frequency drives. The cable shall be used to interconnect a variable frequency drive to the controlled motor.
 - 2) The VFD cable insulation shall disperse voltage spikes, harmonics, and power distortions associated with variable frequency drives. Cable shall be plainly marked with UL label, gauge, voltage, type of insulation, and manufacturer's name.
 - 3) Conduits requiring VFD supply cable shall be specifically listed in the conduit schedule in "NOTES" column designation defined as VFD CABLE.
 - 4) Power conductor size shall be as listed in the conduit schedule. Length shall be as required to extend from VFD to motor connection terminals. Conductor stranding shall be fine wire, three black conductors with white numbers and one green/yellow ground. Conductor stranding shall be class C or finer.
 - 5) Insulation for conductors shall be rated for 1000 volts (min). Insulation shall be oil and UV resistant rated - 25°C to 90°C.

- 6) For Cable sizes 12 AWG to 2 AWG the cable construction shall be tinned copper with XLPE insulation under dual shielding of foil tape and copper braid construction, and outer PVC jacket. The VFD motor supply cable shall be Olflex/Lapp USA Wire and Cable Inc. OLFLEX Slim series, Belden 295xx or equal.
- 7) For cable sizes above 2AWG to 500MCM the cable construction shall utilize 3 symmetrical grounds next to 3 power conductors with XLPE insulation and foil and braid shield. The VFD motor supply cable shall be Olflex/Lapp USA Wire and Cable Inc. OLFLEX VFD Symmetrical series or equal.
- e. Nonfield control panel or factory installed equipment internal wiring:
 - 1) Insulation - Type MTW, NFPA standard 79, UL 1063 with tinned copper.
 - 2) Minimum #16 AWG for wires used for individual conductor circuits 100 volts and above.
 - 3) Minimum #18 AWG for wires used for individual conductor circuits below 100 volts.
5. Instrument wiring:
 - a. Field: Instrument cables shall have 600V tray cable rated insulation and 100% individual shielded twisted pair #16 conductors with drain wire. Single twisted shielded pair (TSPR) cables shall be Belden 9342, or approved equal. Three wire twisted shielded cables (#18 TS3W) shall be Belden 1119A or equal.
 - b. Non-Field: Instrument cables shall have 300V rated insulation and 100% individual shielded twisted pair #18 conductors with drain wire. Single twisted shielded pair (TSPR.) cables shall be Belden 8760, or approved equal. Three wire shielded cable shall be Belden 8770 or equal.
 - c. Field multi-pair instrument cable as required per conduit schedule shall have 300V rated insulation and 100% individual shielded twisted pair #18 conductors with drain wire. Multiple twisted shielded pair (T.S.PR.) cables shall be Belden 9773 thru 9777, or equal.
 - d. Multi-pair cable is not allowed (unless specifically called out in conduit schedule or on plans) for use in field or non-field applications. One T.S.PR cable is required for each signal.
6. Manufacturer Supplied Cables

16120-5

- a. Cables and wiring for special systems provided by the manufacturer with the equipment shall be installed per the manufacturer's recommendations.

7. Data Cable

- a. Data network category 6 cable (indoor) shall consist of 4 pair unshielded twisted pair #24 awg solid copper conductors. The cable shall be rated by IEEE for service intended – plenum and dry.
 - 1) Cable: IEEE Category 6, various manufacturers.
 - 2) Connectors: Standard RJ-45 with boot.
- b. Data network cable (outdoor) shall consist of 4 pair foil and braid shielded twisted pair #24 awg solid copper conductors with anti-crosstalk divider, and drain wire. Rated Level 2 Category 5e Outdoor Carrier by IEEE for use in plenum, conduit, wet or dry.
 - 1) Cable: IEEE Category 5e, Ubiquiti Tough Carrier, Belden, or equal
 - 2) Connectors: Grounded RJ-45 with drain wire crimp.

8. Temporary motor or panel hook-up

- a. Temporary cable may be cord without conduit or PVC conduit with wiring. In either case, the cabling must be protected from damage during construction. Sections may be located out of harms way, buried, or sleeved in steel conduit as needed.
- b. Power Circuits: Provide 2, 3, or 4 conductor plus ground power supply cable(s) for temporary pump connections or electrical power circuits. Cables shall be sized for breaker rating amperage, (minimum).
- c. Provide multi-conductor (TC) cables for digital control circuits. Provide quantity of conductors as needed.
- d. Provide instrument wiring for 4-20 ma instrumentation.
- e. Voltage drop in power circuits shall not exceed 15% during motor start and 5% during operation.

C. COLOR CODE

- 1. All wires #8 and below shall have wire insulation the color specified. Wires #6 and larger may be black with color electrical tape at termination points.

2. No other colors shall be used without prior approval.
3. Color code - color code of all wire shall conform with the following table:

WIRE COLOR CODE TABLE

Description	Phase/Cod e Letter	Field wire or tape color	Non-Field Wire Color
480V, 3 Ph	A	Brown	Brown
	B	Orange	Orange
	C	Yellow	Yellow
240V or 208V, 3 Ph	A	Black	-
	B	Red (Orange if high leg)	-
	C	Blue	-
	Neutral	White	White
240 / 120 V, 1 Ph	L1	Black	Black
	L2	Red	-
24V Positive	24+	Blue	Pink
24V Negative	24-	Gray	Gray
12V Positive	12+	Blue	Red
12V Negative	12-	Black	Black
AC Control		Red	Red (Yellow for foreign circuits)
DC Control		Blue	Blue
Ground	G	Green	Green
Shielded Pair	+	Red, Clear, or White	Clear or White
	-	Black	Black

2.02 WIRE MARKING

- A. All panel, enclosure and field wiring shall have wire labels on both ends of each wire. Labeling shall be neatly installed for visibility and shall be clearly legible. Each conductor of instrument shielded signal wiring shall be labeled. Wire labels shall be machine printed with on white heat shrinkable tubing. Each label shall fit a minimum 23 characters, 3/16" in height before shrink. Tubing shall be oversized for the wire and shrunk into place using an electric heat gun. The "shrunk" label shall have just enough give to allow the label to

16120-7

be rotated. Hand lettered wire labels are not acceptable and shall be replaced at the Contractor's expense. Provide Brady "PermaSleeve" or equal.

1. **Node Style Wire Identification** - All wires that are electrically the same (connected to common termination points) and do not pass through a contact or other switching device shall have the same wire identification. The wire labeling code for each end of the same wire shall be identical.
 - a. The wire identification code for **internal panel** wiring shall be the number/letter as designated on the Contract elementary and/or approved shop drawings.
 - b. Wire labeling for **field** wiring shall contain the panel/equipment name as a prefix and the termination point name. (I.E. PLC50-A103 or P10-124). The hierarchy of label names is 1) PLC panel name, 2) MCC equipment name, and 3) Equipment name. Therefore, wires from PLC50 to the MCC50 P10 cubicle will be labeled PLC50-XXX. Wires from MCC50 P10 to field pressure switch PSH10 will be labeled P10-XXX.
 - c. Wire labels shall be exactly per interconnection submittal and/or control panel drawings -- abbreviations determined in the field are not allowed. Abbreviations may be used in the wire label as submitted and approved in the interconnection drawings submittal.
 - d. Wire labels for lighting and receptacle circuits shall consist of the panel board and circuit number and a unique node number. (I.E. LP#3-A, LP#3-B, LP#3-N)
 - e. Wire labels may be omitted on "neutral jumpers" less than 8" in length.

2.03 ELECTRICAL TAPE / SHRINKABLE INSULATORS

- A. Vinyl tape shall be 7 mil, 600 volt rated, flame retardant, hot and cold weather resistant conforming to UL510. Provide 3M Scotch Super 33+ vinyl tape or equal
 1. Vinyl tape for color coding shall be 7 mil, 3/4" width, vinyl tape conforming to UL 510. Provide 3M Scotch 35 vinyl tape or equal.
- B. Rubber Tape: EPR rubber, 90 deg C continuous rated. Provide 3M 130C rubber tape or equal.
- C. Varnished Cambric Tape: Adhesive backed, 7 mil, bias cut cotton tape, coated with yellow insulating varnish. Provide 3M Scotch 2510 or equal.
- D. Shrinkable insulators shall be heat shrinkable, polyolefin thick wall sleeves, end caps and cable repair sleeves are designed for use in splicing, sealing and re-jacketing of direct bury secondary cables. The insulators shall comply with

UL 486D and be rated up to 1000 Volts. They shall provide long-term reliable performance overhead, underground or submerged with mechanical and environmental protection. Shrinkable insulators shall be 3M ITCSN or 3M IMCSN per manufacturer instructions for the application or equal.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].
- B. Perform work to remedy non-compliant installations after inspection.
- C. Upon notification, stop work on any portion of the installation that is determined to be substandard or being installed by unqualified personnel.

3.02 FABRICATION AND INSTALLATION

- A. System:
 - 1. Install all products specified in Electrical Specifications [Electrical General, Installation].
 - 2. Panels shall be completely factory wired and tested before shipment.
 - 3. All spare PLC input / output points shall be wired to terminal blocks.
 - 4. A minimum of 20% spare unwired terminals shall be provided in each panel.
- B. Wiring Methods:
 - 1. Wiring Separation: Wires carrying 100 volts and above shall be physically separated from lower voltage wiring by using separate bundles or wire ways with sufficient distance to minimize the introduction of noise, crossing only at 90 degree angles.
 - 2. Harness: All wiring shall be neatly bundled and laced with plastic tie-wraps, anchored in place by screw attached retainer. Where space is available, wiring shall be run in slotted plastic wireways with dust covers. Wireways shall be sized such that the wire fill does not exceed 60%. Tie-wraps shall be T&B TY-RAP or equal.
 - 3. Retainers: Wireways, retainers, and other devices shall be screw mounted with round-head 316 stainless steel screws or mechanically mounted by push-in or snap-in attachments. Glue or sticky back attachment of any type or style shall not be used. Retainers shall be T&B TC series or equal.
 - 4. Hinge Loops: Where wiring crosses hinged surfaces, provide a "U" shaped hinge loop protected by clear nylon spiral wrap. The hinge loop shall be of sufficient length to permit opening and closing the door without stressing any of the terminations or connections. Spiral wrap

shall be Graybar T25N or equal.

5. Routing: Wires and cable shall be routed such as to maintain separation between 100 Volt or higher from 100 volt or lower wiring being run in the same duct or bundle. Wires and cables shall have sufficient length to allow slack and to avoid any strain or tension in the wire or cable.
 - a. Wires shall be routed in slotted plastic wireways with snap covers. Wires carrying 120 VAC shall be separated as much as possible from other wires and signal cables, and shall be routed only in ducts for 120 VAC. If the power wiring has to cross the signal wiring, the crossing shall be as close to a right angle as possible. Wireways for 24 VDC wiring shall be used for all other wires and cables. Routing of 120 VAC in combined wireways shall be minimized. Wires and cables shall be placed in the wireways in a straight, neat and organized fashion and shall not be kinked, tangled or twisted together. Additional wire ducting shall be provided for use by the electrical subcontractor for routing field wires to their landing points in the each electrical and instrumentation panel.
 - b. Provide 2" minimum separation between wireway and terminal blocks.
 - c. Wiring not routed in wireways shall be neatly bundled, treed, and laced with plastic ties.

C. Wire Terminations

1. Single wire and cable conductors shall be terminated according to the requirements of the terminal device as follows:
 - a. Crimp-on terminals: shall be UL listed, self-insulating sleeve type, with ring or rectangular type tongue, suitable for the size and material of the wire to be terminated, and for use with either solid or stranded conductors.
 - b. Terminal Blocks: Remove the last +/- 0.25 inches insulation from of the conductor and insert it under the pressure plate to full length of the bare portion of the conductor. Tighten the screw to close the pressure plate onto the conductor. No more than two conductors shall be installed in a single terminal. All strands of the conductor shall be captured under the pressure plate.
 - c. Screw-less terminals: wire shall be stripped back and inserted per the terminal manufacturer's instructions.
 - d. Motors with pigtail leads: Install terminal connectors on the motor pigtails and the cable to be connected. Terminals shall be non-insulated crimp-on type applied with a ratchet-type

16120-10

crimping tool. The terminals shall be bolted together with a nut, bolt and lock washer combination. The connection shall be booted with 3/16" thick rubber boot. Boot kit shall include rubber boot for each motor connection, plastic locking pins, silicone grease, and mastic sealing strips. Boot kits shall be 3M Motor Lead Pigtail Splice #5302, #5303, or #5404 as applicable for wire size applied.

2. When stripping insulation from conductors, do not score or damage conductor.
3. The drain wire and stripped end of outer jacket of shielded cables shall be covered with heat shrink insulating tubing. The drain wire shall be covered along its full bare length between the cable jacket cover and the terminal lug and placed on end outer jacket to cover foil.
4. Condulets with wire nut connections shall be supplied for wire termination to devices with leads instead of terminals (i.e. solenoid valves, level probe, etc.).

D. Wire Splicing

1. No wires shall be spliced without prior approval.
2. Where splices are allowed or approved they shall conform to the following:
 - a. Wire splicing devices shall be sized according to manufacturer's recommendations.
 - b. Splices of #10 and smaller, including fixture taps, shall be made with nylon self-insulated twist on wire nuts; T & B "Piggys", Ideal "Wing-Nut" or equal.
 - c. Splices of #8 and larger shall be hex key screw, two way connectors, insulated with molded high-dielectric strength plastic; NSI Polaris IPL or IPLD Series terminal blocks or equal.
 - d. Non-Motor Splices #10 and smaller in underground pullboxes shall have wire-nut connections inside and insulator tube which are sealed with non-hardening silicone based sealant that protects the connection from moisture and corrosion. The wire nut shall be pushed to the bottom of the tube and a locking cap closed to prevent moisture and dirt from entering the tube. The tube is factory filled with sealant and UL listed for waterproof connections. Provide 3M DBY-6 or DBR-6 or equal.
 - e. Non-Motor Splices #6 and smaller in underground pullboxes shall have wire-nut connections which are sealed with non-hardening silicone based sealant that protects the connection from moisture and corrosion. The wire nuts shall be factory filled with sealant and UL listed for waterproof connections.

Provide Ideal Model 60 or equal.

- f. Non-Motor Splices #4 and larger in underground pullboxes shall have double hex crimp barrel connections applied with adhesive/sealant filled heat shrinkable rubber insulation applied over the exposed connection. The cross-linked polyolefin shrink tube shall extend 4" on each side of the exposed connection minimum. Heat shrink tubing shall be 3M ITCSN or equal.

E. Wire Installation

1. Exercise care in pulling wires and cables into conduit or wireways so as to avoid kinking, stressing the cables, or damaging the insulation. Use a UL listed pulling compound for lubrication within conduits as necessary. The raceway construction shall be complete and protected from weather before cable is pulled in. Swab conduits before installing cables and exercise care in pulling, to avoid damage to the insulation or conductors.
2. All wire and cables (with the exception of coaxial antenna cable) shall be installed within UL listed raceways or enclosures. Install all wires and cables in one continuous length unless splices are per Contract Drawings, required to connect equipment or submitted and favorably reviewed.
3. Bundle incoming wire and cables in panels. Zip-tie at intervals of 2" and neatly spread into trees and connect to their respective terminals. Allow sufficient slack in cables for alterations in terminal connections. Do not bundle, tape or tie wires within conduits.

3.03 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

END OF SECTION

SECTION 16121**FIBER OPTIC COMMUNICATION SYSTEM****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Fiber Optic Ethernet network(s) shall be provided for interfacing and connecting the Pump Station PLCs, SCADA workstations, and Administration Network Devices. 10Mb, 100Mb and 1000Mb Ethernet traffic shall be supported by network.
- B. Section Includes:
 - 1. Fiber Optic (FO) cables for data networks.
 - 2. Network Fiber Optic Switches.
 - 3. Termination Equipment.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Project Drawings

1.03 QUALIFICATIONS

- A. Provide FO cables by a reputable manufacturer in this field for at least 3 years and has supplied FO cables to minimum of 5 major installations.
- B. FO installer shall be specialized in this field and has minimum of 2 years prior experience.

1.04 SUBMITTAL REQUIREMENTS

- A. Shop Drawings and Product Data: Submit in accordance with Electrical Specifications [Electrical General, Submittal Requirements]. Include description of components, methods of connecting components, and the following:
 - 1. Fittings and termination equipment.
- B. Show coordination for fiber optic cable, connectors, terminations, fiber optic switches, and other communication equipment whether specified herein or elsewhere in the specifications. Review the project drawings for all fiber optic communication devices and coordinate with those specifications.
- C. Statement of Installer's Training and Experience: Submit in accordance with requirements for and with Product Data.

1.05 ENVIRONMENTAL REQUIREMENTS

- A. Humidity: Maximum 95 percent, non-condensing.
- B. Ambient Temperature:
 - 1. Operational: Zero to 60 degrees Celsius.
 - 2. Storage: Minus 40 to 80 degree Celsius.

1.06 OPERATION AND MAINTENANCE INFORMATION

16121-1

- A. Provide operation and maintenance instructions as specified in Electrical Specifications [Electrical General].

PART 2: PRODUCTS

2.01 FIBER OPTIC CABLE

A. General

1. Acceptable Manufacturer: Corning Altos or equal.
2. 24 strand (12 pairs) single mode.

B. Construction

1. Cable shall be loose tube construction with up to 6 tubes with dielectric central strength member, gel waterblock material, overall strength covering, and PE jacket with ripcord
2. Optical fibers shall be coated with a suitable material to preserve the intrinsic strength of the glass.
3. Nylon yarn central strength member.
4. Up to 12 color coded fibers within each protective tube. Colors meeting EIA/TIA-598B, Optical Fiber Color Coding. Colors shall be stable across storage and operating temperature, will not cause fibers to stick together, dissolve into gel material, and will not fade.

1. Blue	5. Slate	9. Yellow
2. Orange	6. White	10. Violet
3. Green	7. Red	11. Rose
4. Brown	8. Black	12. Aqua
5. Buffer tubes shall be filled with a non-hygroscopic, non-nutritive to fungus, electrically non-conductive, homogenous gel. The gel shall be free from dirt and foreign matter. The gel shall be readily removable with conventional nontoxic solvents.
6. The cable shall contain at least one ripcord under the inner sheath for easy sheath removal.
7. Exterior 0.9mm polyethylene jacket with sequential footage markings.
8. The cable jacket shall be marked with the manufacturer's name, month and year of manufacture, sequential length markings, fiber count, and fiber type. The markings shall be in contrasting color to the cable sheath.
9. The shipping, storage, and operating temperature range of the cable shall be negative 30 °C to 70°C.
10. Physical Characteristics:

a. Tensile Strength:	> 600 lbs short duration
b. Min. Bending Radius:	10 inches
c. Diameter:	0.5 inches (maximum)
11. Mechanical stress applied to the cable shall not be transmitted to the optical fibers.
12. Cable shall be suitable for underground conduit installation and shall be waterproof and non-hydroscopic.

C. Fibers/Conductors

1. Each fiber continuous with no factory splices.
2. Single-mode, graded index, solid glass wave guides with the following characteristics:
 - a. Nominal core diameter 8/125 microns.
 - b. Minimum ellipticity 2.0 percent.
 - c. Outside clad diameter 125 microns
 - d. Minimum numerical aperture (NA) 0.275.
 - e. Maximum attenuation (850 nm) 3.75 db/Km.
 - f. Maximum attenuation (1,300 nm) 1.5 db/Km.

D. FDDI compatible and meets requirements of ANSI X3T9.5 for FDDI cable.

E. Attenuation tested, all fibers, with results provided on reel.

2.02 FIBER OPTIC TERMINATIONS

A. Connectors:

1. General:
 - a. type: SC
 - b. Factory Polished Face
2. Provide the following:
 - a. Attenuation (typical/maximum): 0.3 db/0.4 db.
 - b. Fiber nominal outside diameter: 125 micron.
3. Acceptable Manufacturer: Corning Unicam or equal.

2.03 FIBER OPTIC PATCH CORDS

A. Provide fiber patch cords with coordinated end connectors to make the interfaces required. Provide one spare fiber patch cord of each type for each location.

2.04 FIBER OPTIC PATCH PANEL (RACK MOUNT)

- A. Fiber optic patch panels shall meet the following (minimum) requirements:
1. Provide patch panel compete with rack, bulkhead, bulkhead adapter, furcation unit, strain relief and terminators.
 2. Mounting: 19-inch rack mount, two rack units (maximum).
 3. Capacity: 48 ports (minimum) via 6 or 8 port modules.
 4. SC Connectors.
 5. Include built-in cable management features for patch cords and cable distribution. Slide out tray for access to user side and installer side connectors.
 6. Lockable, protective front cover.
 7. Provide: Corning, LANscape, Hubbell FCR., Siemon RIC., or equal.

2.05 FIBER OPTIC PATCH PANEL (WALL or PANEL MOUNT)

16121-3

- A. Fiber optic patch panels shall meet the following (minimum) requirements:
 - 1. Low profile indoor enclosure with hinged door, bulkhead adapter(s), furcation unit, strain relief, and terminators.
 - 2. Dimensions approximate 24 strands maximum 10" x 10" x 6" with 4- 6 strand bulkhead connector panels
 - 3. Type SC bulkhead terminals
 - 4. Acceptable Manufacturer: Corning Wall Mountable Interconnect center WIC-012, WIC-024, or equal.

PART 3: EXECUTION**3.01 WORKMANSHIP**

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 INSTALLATION

- A. Install all cable in accordance to manufacturer's recommended procedures.
- B. Pulling force and other stress limits shall not be exceeded.
- C. Install cables using woven cable grips, air blown, or other methods to remove stress on the fibers during installation. Cables shall be installed using a constant pulling force.
- D. Cable pulling assembly shall be equipped with a shear pin sized to prevent excess tension from being transmitted to the cable.
- E. Cable shall be handled to maintain slack on the feed side of the pull and to avoid any sharp bending of the cable.

3.03 FIBER OPTIC SPLICING

- A. Provide a fiber optic cable plant installation diagram and include in the submittal to ensure a minimum number of splices.
- B. Where splices are necessary, fusion splice or mechanical splice the optical fibers with a splice loss not to exceed 0.2-db.
- C. Test all splices with an Optical Time Domain Reflectometer (OTDR) bidirectionally to verify splice loss at the time of splicing. Re-splice any splices not conforming to these specifications.
- D. Boot each splice location with a waterproof boot specially made for this purpose.
- E. During splicing operations, protect the unspliced portions of the cable from the intrusion of moisture and other foreign matter.
- F. Do not splice cable without prior approval.

3.04 FIBER OPTIC TERMINATION

- A. Fan out all fiber optic cable to allow direct connectorization of the fiber optic cable. Sleeve over each individual fiber with a Kevlar reinforced furcation tube. At the convergence point of all furcation tubes, provide strain relief with a high density plastic fan-out collar. Additionally, provide a minimum of 6.0-feet coil of spare fiber at each wiring closet.

- B. Install all patch cables and terminations to be protected from physical damage.
- 3.05 FIBER OPTIC ON-SITE TESTING
- A. General: Provide all equipment, instrumentation, and supplies necessary to perform all testing. The Owner Representative shall have the option to witness and participate actively in the on-site tests performed by the installer.
 - B. Per Electrical Specifications [Factory and Field Testing].

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16180**SOLAR POWER GENERATION SYSTEM****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Providing and installing a complete and operational solar power system that produces DC voltage and power to the specified load.
- B. Applies to Bridge Crossing Sump Control System.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire and Data Cable]
- C. Electrical Specifications [Control Panel]
- D. Project Drawings

1.03 SUBMITTAL REQUIREMENTS

- A. Provide submittals per Electrical Specifications [Electrical General, Submittal Requirements].
- B. Solar Panels, solar controller, batteries, enclosure, brackets and specialized components.
- C. Calculations, drawings, wiring diagrams, layouts, and installation requirements.
- D. Calculate solar wattage required given load to be powered, sun equivalence for area of installation, battery power storage and 30% safety factor. Submit calculations.

1.04 OPERATION AND MAINTENANCE INFORMATION

- A. Submit hardware Operations and Maintenance Manual per Electrical Specifications [Electrical General].

PART 2: PRODUCTS**2.01 SOLAR PANELS**

- A. Panels shall utilize high power silicon solar cells with minimum 19% module conversion efficiency.
- B. Tempered glass surface laminate with aluminum frame.
- C. Weatherproof electrical connection with 3 foot pigtail leads.
- D. Nominal output voltage per drawings (12 or 24 VDC). Capable of series or parallel connection.
- E. Maximum power (minimum) in watts as required per drawings. Provide

additional total watts output if power demands of equipment to be powered exceeds capabilities of solar system.

- F. Temperature effects shall not cause more than 0.5% reduction in power output per degree C increase above 25 degree C.
- G. 25 year expected life. 20 year minimum warranty on power output.
- H. Provide LG NeON® 2 Series or equal.

2.02 CHARGE CONTROLLER

- A. Incorporating pulse width modulation circuitry to control raw voltage and charge batteries within tolerances for specified battery types.
- B. Unit shall autoconfigure for 12 or 24 VDC battery systems. Built in protection for short circuit, low voltage, and reverse polarity. Disconnect switch shall provide capability to manually disconnect load from solar system.
- C. Selection for battery type – Gel Cell, Sealed, Flooded
- D. Temperature compensation for charge current rate. Charger shall reduce charging automatically in high temperature conditions.
- E. LED and LCD display for voltage, load amps and status conditions.
- F. Provide Morningstar Prostar or equal

2.03 BATTERIES

- A. The batteries shall be 12VDC, AGM valve regulated, lead-acid, and maintenance free of minimum amp-hour (AH) rating as shown in the drawings.
- B. Designed for solar applications where daily charge/discharge cycles are expected.
- C. The Batteries shall be DEKA AGM or equal.

2.04 BATTERY PANEL

- A. The batteries shall be housed in a dedicated battery panel. The panel shall be NEMA 3R, Aluminum, and shall include shelves for batteries, acid neutralizing mat, venting, battery straps and locking door handles.
- B. The Battery Panel shall hold two group 31 batteries in an upper-lower configuration and be manufactured by Two Seas 1624BE-02AV or equal.
- C. The battery panel shall have sufficient room above the batteries to mount the charge controller on an aluminum backplane.

2.05 SOLAR PANEL MOUNTING RACK

16180-2

- A. Rack shall be manufactured of galvanized steel and capable of tilting the solar panels to 30 to 45 degrees of tilt angle. Rack shall be manufactured specifically for the purposes of mounting solar panels. Provide one or more racks as required to mount the required number of solar panels.
- B. Provide UniRac or equal.

2.06 SOLAR PANEL MOUNTING POLE

- A. 20ft round tapered steel main section, hot dip galvanized, 11 ga steel thickness, min. Base plate diameter as required to meet performance criteria.
- B. Screwed in place top cap.
- C. Hand hole near base, 5" x 7" minimum. Ground lug accessible within.
- D. Anchor Bolts: Galvanized "L" anchors with 2 hex nuts and 2 washers per bolt for leveling. Provide 2-piece base anchor cover and fasteners.
- E. Design information
 - 1. IBC 2012 (MOD W/AASHTO), Exposure category C, Risk Category II.
 - 2. Wind Velocity: 100 MPH sustained with 130 MPH gust assuming effective panel area (EPA) and weight as required based on radios.
 - 3. Pole Top Load: Assume 20 sq ft EPA, minimum.
 - 4. One (1) degree of movement maximum at top of pole under wind gust conditions.
 - 5. Designed and manufactured by Valmont Industries DS210 series or equal.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 INSTALLATION

- A. Install batteries and charge controller into battery enclosure. Wire connect all components together in factory
- B. Install solar panels and control panels per details.
- C. Remove batteries for shipment.
- D. Install equipment per Electrical Specifications [Electrical General,

Installation].

3.03 FIELD ASSISTANCE

- A. Provide testing as specified in Electrical Specifications [Factory and Field Testing].
- B. Test solar system at project site for voltage, charge and discharge capacities. Document results on manufacturer supplied certification form.

3.04 WARRANTY

- A. Provide warranty per Electrical Specifications [Electrical General, Warranty].
- B. Perform the following services during the warranty period:
 - 1. Repair or replace defective components returned for service within 48 hours.
 - 2. Determine and report the cause of failure of modules returned for service.
 - 3. Resolve design or implementation problems discovered.

3.05 FINAL ACCEPTANCE

- A. Final acceptance will be given after the equipment has been "field" tested satisfactorily, each deficiency has been corrected, documentation has been provided, and all the requirements of design documents have been fulfilled.
- B. At the end of the project, following the completion of the field tests, and prior to final acceptance, the Contractor shall provide the following:
 - 1. Each "operation and maintenance" manual shall be modified or supplemented by the Supplier to reflect all field changes and as-built conditions.

END OF SECTION

SECTION 16210**ENGINE GENERATOR****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Because of potentially long permit applications processes and manufacturing lead times for the generator equipment, the Contractor is required to submit the complete generator submittal within 14 days of notice-to-proceed and/or contract award.
- B. These specifications describe the minimum requirements for a STANDBY duty three phase engine driven generator. The "Generator Data Sheet" at the end of this specification lists the minimum sizing for the generator and accessories. A larger generator shall be supplied when necessary to meet the requirements of this section. The Contractor shall complete this form with proposed generator values and include it with the generator submittal.
- C. The generator shall be provided as described in the following specification and as shown on the Contract drawings, herein designated as the design documents. The generator shall comply with all applicable sections of NFPA 30, 37, 70, 72 and 110, California Fire Code Articles 79 and 80 as well as State Statues.
- D. The equipment furnished under these specifications shall meet the requirements of NEC Article 702, "Optional Standby Systems" and any other applicable articles of the NEC.
- E. The system shall meet the requirements of NFPA 704 Hazard Identification System Diamond indicating the hazards associated with the fuel being stored.
- F. The generator shall be delivered as a skid mounted unit, completely assembled to the extent possible and factory tested.
- G. Only new models in current production by a U.S. firm that meet the requirements of these specifications and which are cataloged by the manufacturer and for which manufacturer's published literature and printed specifications are currently available, will be considered. Special options may be included only when recommended by the manufacturer of the unit approved.
- H. All equipment/options are to be factory installed. If the equipment/options are not available factory installed, dealer installed equipment/accessories may be acceptable. The bidder is to specify those items which will be dealer installed in the submitted bid document.
- I. The manufacturer's local representative shall be an authorized distributor who maintains a stock of spare parts for the supplied generator and has a service facility with factory-trained service personnel. The manufacturer's local

16210-1

representative shall be located within a radius of 200 miles of the project.

- J. The Contractor shall perform complete startup, training and testing services for the generator per Electrical Specifications [Factory and Field Testing] and as detailed herein.
- K. Generator system shall be EPA Certified and meet all current Local, State and Federal air emissions requirements at time and location of installation.
- L. Generator system shall be coordinated and compliant with all current Local and State building and Fire Protection codes and requirements at time and location of installation. Furnish alarms, signage, fuel containment, shutdowns, and other devices and systems as required.
- M. The Contractor shall supply the generator, labor, testing and associated documentation as specified herein. This document describes the materials and intended operation, but does not necessarily describe all devices necessary for a functional system. All components and devices shall be furnished and installed as required to provide a complete, operable and reliable system for accomplishing the functions and meeting the performance set forth hereinafter.
- N. The generator scope of work includes:
 - 1. Engine driven electric generator
 - 2. Sub-base fuel tank with fuel pump and associated piping.
 - 3. Battery charger (120 VAC operated) mounted to generator frame.
 - 4. Sound attenuating housing.
 - 5. All auxiliary apparatus and accessories shall be provided as required for a fully functional generator and to meet local code requirements.
 - 6. Install a steel reinforced concrete pad, adequately sized to support the specified generator and fuel tank.
 - 7. All piping associated with exhaust system.
 - 8. Trenching, back filling, compaction and paving of each underground conduit route
 - 9. Field installation, startup, testing and training for the generator and associated equipment as part of this scope of work.
 - 10. Fuel for use during testing and full tank top off upon testing acceptance.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Project Drawings
- C. The following manufacturing and installation standards apply to this section:
 - 1. ASTM International (ASTM): A335/A335M, Specification for Seamless Ferritic Alloy-Steel Pipe for High-Temperature Service.
 - 2. Best Available Control Technology Standards (BACT)

3. Code of Federal Regulations (CRF): Title 40 Volume 18, Control of Emissions from New and In-Use Non-road Compression-Ignition Engines.
4. National Fire Protection Association (NFPA):
 - a. 37, Installation and Use of Stationary Combustion Engines and Gas Turbines.
 - b. 70, National Electric Code.
 - c. 110, Emergency and Standby Power Systems.
5. SAE International (SAE): J1074, Engine Sound Level Measurement.
6. Underwriters Laboratories, Inc. (UL):
 - a. 142, Steel Aboveground Tanks for Flammable and Combustible Liquids.
 - b. 2085, Protected Aboveground Tanks for Flammable and Combustible Liquids.
 - c. 508, Industrial Control Equipment.
 - d. 1236, Battery Chargers for Charging Engine-Starter Batteries.
 - e. 2200, Stationary Engine Generator.
- D. The bidder shall carefully examine the plans and specifications, and be familiar with the conditions of the location of installation.

1.03 QUALIFICATIONS

- A. Equipment manufacturers shall be represented by a company capable of servicing and testing the generator unit from a mobile service vehicle dispatched from within a 200 mile radius.

1.04 SUBMITTAL REQUIREMENTS

- A. Submit shop documents and drawings for approval in accordance with this subsection and as specified in Electrical Specifications [Electrical General, Submittal Requirements]. All non-relevant items not provided on this project shall be crossed-off or deleted from all submitted documents and drawings.
- B. Submit a specification compliance statement, describing differences between specified and proposed equipment. Note equipment provided specifically to meet local agency or authority having jurisdiction requirements.
- C. Complete "Generator Data Sheet" at the end of this section and submit this form with the generator submittal.
- D. Submit data sheets and catalog information detailing:
 1. Engine:

16210-3

- a. Make and model.
 - b. Fuel type.
 - c. Number of cylinders and cylinder arrangement.
 - d. Bore and stroke.
 - e. Compression ratio.
 - f. Piston speed, Feet per Minute, at rated RPM.
 - g. Cylinder head, piston, valve, and block material.
 - h. Crankshaft material.
 - i. Main bearings, quantity and type.
 - j. Rated RPM and HP at rated RPM.
 - k. Governor type.
2. Generator:
 - a. Make and model.
 - b. Generator full load electrical rating, KVA, KW, Voltage, Amperage, Frequency (Hz), # of Phases, # of Wires, Power Factor.
 - c. Generator and Exciter type.
 - d. Insulation material, class, and temperature rise.
 - e. Bearings, quantity and type.
 - f. Peak motor starting, KVA.
 - g. Voltage regulator type and regulation % from no load to full load.
 - h. Frequency regulator type and regulation %, from no-load to full load.
 - i. One step load acceptance.
 - j. Unbalanced load capability.
 - k. Number of leads.
 - l. Generator transient ($x'd$) and subtransient ($x''d$) reactance in per unit.
 - m. Ambient temperature range.
3. Electrical
 - a. Control and instrument panel.
 - b. Generator main breaker.
 - c. Batteries and battery charger.
4. Cooling System
 - a. Maximum ambient temperature.
 - b. Capacity (gallons).
 - c. Coolant flow (gpm).
 - d. Fan diameter (in).
 - e. Fan HP requirement at rated RPM.
5. Accessories:
 - a. Exhaust silencer, stack, and piping system.
 - b. Fuel tank and piping system.
 - c. Vibration isolation system.

- d. Block Heater system.
 - e. Weatherproof/Soundproof Housing as specified herein.
 - f. Paint Finish.
- E. Submit electrical schematics and wiring diagrams for:
 - 1. Generator control panel.
 - 2. Battery charging system.
 - 3. Main generator.
 - 4. Voltage regulator.
 - 5. Governing system.
 - 6. Generator main breaker.
- F. Submit dimension drawings for:
 - 1. Engine generator side, front, and top.
 - 2. Pad construction (minimum) size, anchor details.
 - 3. Enclosure (if required).
 - 4. Fuel tank and containment basin.
 - 5. Exhaust muffler and air intake baffle.
 - 6. Conduit stub-up areas under generator frame and/or sub-base fuel tank.
- G. Submit reports, calculations, and curves for:
 - 1. Generator sizing calculation (computer generated report acceptable) showing that the unit is sized adequately to start all loads as shown on Contract Drawings "Load Calculation" without exceeding the maximum voltage dip specified.
 - 2. Generator air emissions data, prototype or actual, suitable for submission to governing air quality management agency where generator is to be installed. Emissions data shall be for fuel type as required by local air quality agency.
 - 3. Sound level data showing that the complete generator package meets the sound level requirements stated herein.
 - 4. Engine generator fuel consumption data at 25%, 50%, 75% and 100% electrical loading.
 - 5. Proposed concrete pad dimensions, reinforcement method and isolation material (as necessary) for submitted generator.
 - 6. Seismic calculations for bolt down anchorage for seismic site class D. Calculation shall be signed by a California Registered Professional Structural Engineer. Generator installation shall meet applicable CBC or IBC requirements for stand-by power systems.
 - a. Calculations shall include calculations for wind loading on equipment to be mounted outdoors.

- b. The Contractor shall submit a copy of the current ICBO anchor evaluation report for each type of anchor submitted.
 - c. The Contractor shall submit a copy of the concrete mix design to include the concrete design strength.
 - d. The Contractor shall submit Near Fault Vicinity and Location maps.
- 7. Battery sizing calculations showing all anticipated DC "black start" loads, and performance requirements including battery charger sizing and maximum recharge time.
- H. Air Quality Management Applications and Permits
 - 1. The Contractor shall obtain the correct ATC application from the AQMD and preliminarily complete the application by inserting the project specific generator technical information. Submit preliminary partially completed application to the Engineer for use by the Owner in preparation of the final completed ATC application.
 - 2. The Contractor shall submit all generator specific information required to complete the ATC permit application. The Owner will not submit the application until all the information is received and the submittal receives a status of "make corrections noted" or "approved." Submit information in sufficient time for application processing and submittal review as to not delay project completion. The generator will not be considered approved until the ATC permit is obtained.
 - 3. The Owner shall complete and apply for the "Authority to Construct" (ATC) permit from the Air Quality Management District or Board with jurisdiction for this generator system. Fees for permit and application will be paid by the Owner. The Owner will submit the permit application within 14 days of submittal approval. Allocate 12 weeks for Owner to obtain ATC permit once application has been submitted.
 - 4. The Contractor shall confirm that the submitted generator meets all AQMD guidelines prior to submittal of the generator unit or preliminary application. Failure to do so will delay the ATC permitting and submittal approval.
- I. Descriptive literature shall be provided that describes the generator and all accessories. This literature shall provide sufficient detail to determine that the generator has all the accessories, options, features, and characteristics specified herein. Items that are not provided shall be neatly lined out.
- J. Deviations from the Contract documents shall not be incorporated into the work without prior written approval. A "Change Order" directive is required prior to incorporating any deviation from the Contract documents that has costs associated. The cost differential associated with this change order must be negotiated to amend the Contract to reflect the costs or savings.

- K. Exceptions to the Specifications or Drawings or equipment or procedures submitted as "equal" to specified equipment shall be clearly identified by the equipment supplier in a letter at the front of the submittal. Submittal data for "equal" equipment or procedures shall contain sufficient details so a proper evaluation may be made. The Contractor is responsible for verifying proper application/operation of substituted equipment.
- L. The decision of the Owner governs what is acceptable as an approved equal. If the Owner considers it necessary, tests to determine equality of the proposed substitution shall be made, at the Contractor's expense, by an unbiased laboratory satisfactory to the Owner. Equality will be judged on the basis of the following:
 - 1. Conformance with description or performance required.
 - 2. Equal in quality.
 - 3. Comparable in operation and maintenance.
 - 4. Equal in longevity and service under conditions of climate and usage for given application.
 - 5. Conformance with space allocations.
 - 6. Comparable in appearance and artistic effect.
 - 7. Compatible with mechanical and electrical construction of related work without necessitating changes in detail.
- M. The Owner will not accept any ownership for material or equipment until the corresponding submittals have been reviewed by the Owner and approved.
- N. Submit complete and specific information with regard to equipment representatives and service facilities.

1.05 OPERATION AND MAINTENANCE INFORMATION

- A. Provide six (6) sets of operating, maintenance & parts instructions in original manuals (no copies allowed).

PART 2: PRODUCTS

2.01 QUALITY

- A. The generator shall be as manufactured by Caterpillar, Cummins, Generac, Kohler or equal with accessories as defined herein.
- B. The equipment supplied and installed shall meet the requirements of the National Fire Protection Association (NFPA 70 and NFPA 110) and all applicable local codes and regulations.
- C. The generator system shall be designed as a "black start" unit capable of starting and operating without any external power.
- D. Provide all of the features, options, and accessories specified herein and shown on the design drawings. Finished equipment shall be complete and site tested as an installed unit with all accessories functioning.

- E. All rotating parts shall have guards to protect against accidental contact in accordance with Federal OSHA and Cal-OSHA requirements.

2.02 RATING

- A. The engine generator shall have a minimum continuous standby rating as listed in "Generator Data Sheet" at the end of this section. Standby rated shall mean that generator starts within 60 seconds upon being called and operates continuously for the total duration of the generator call or fuel supply. Rating of the generator shall be based on operation when equipped with all necessary operating accessories such as radiator, fan, air cleaners, lubricating oil pump, governor, exhaust silencer, etc.
- B. No derating from the ratings specified shall occur for ambient temperatures below 122°F or installation elevation below 1,000 feet.
- C. The generator will be installed at approximately 200 feet above sea level. The generator shall operate as specified at ambient temperatures between 0 degrees Fahrenheit and 122 degrees Fahrenheit.
- D. The engine/generator shall accept 100% of its nameplate rating at 0.8 PF in one step, in compliance with NFPA 110, Paragraph 5-13.2.6.
- E. The generator shall be capable of successfully providing three phase, four wire, 60 hertz power to start and continuously operate at the specified KW rating and below for loads shown in the drawing and/or with power factors between 0.5 lag to 0.9 lead. It shall be capable of operating in noisy electrical environments that are typical of variable frequency drive motor loads. The nominal voltage and maximum step voltage dip shall be per the "Generator Data Sheet," as measured line to line at the generator terminals, during start of any of the station loads.
- F. Generator set mean time between failures shall be a minimum of 5,000 hours.

2.03 ENGINE

- A. The engine shall be a turbocharged compression ignition engine type, water cooled, four cycle, with vertical inline or V-type cylinders and an overhead valve configuration.
- B. The engine shall utilize only NO. 2 diesel fuel. Generator shall operate per manufacturer's specifications using fuel approved by local air quality authorities.
- C. The engine shall be of direct injection design, i.e. pre-combustion chambers shall not be incorporated in the cylinder heads.
- D. The engine shall have sufficient power to produce the specified ratings when operating with all accessories including exhaust, fuel, cooling, and battery charging systems, etc.

- E. The engine shall be equipped with:
1. Engine driven or electric fuel transfer pump, fuel filters, and electric fuel shutoff valve. The fuel transfer pump shall be capable of lifting the fuel from the sub-base fuel tank. Primary and secondary fuel filters shall be provided. The fuel filters shall be replaceable and conveniently located for servicing.
 2. Electrical governor; consisting of a magnetic pickup speed sensor, adjustable electronic control, and an electrical actuator mounted integrally with the fuel pump. The governor shall provide automatic engine generator set frequency regulation adjustable from isochronous to 5% droop. Governors using external throttle linkages are not acceptable.
 3. An electric starting system complete with batteries, battery charger, battery rack, connector cables, and any other equipment required to start the standby generator. The starting system shall not require an auxiliary AC power supply to start, fully load, and operate the standby generator. The batteries shall be sized to provide five starts with 30 seconds cranking for each start attempt. The battery charger shall be sized to fully recharge the batteries within 12 hours. If required to maintain the above criteria, an electrical heat pad for the batteries shall be provided to keep the batteries in a ready state at the specified minimum ambient temperature. The charger shall be furnished with charger trouble alarm and an automatic equalize timer for fast recharge. The charger shall alarm on loss of power and cause a generator common alarm output.
 4. Positive engagement solenoid shift-starting electric starter with DC voltage as listed in "Generator Data Sheet."
 5. Battery charging alternator with a minimum ampere output as listed in "Generator Data Sheet."
 6. Positive displacement, full pressure lubrication oil pump, cartridge oil filters, dipstick, and oil drain. The oil pump shall be capable of supplying adequate lubricating oil under pressure to the main bearings, crankshaft bearings, pistons, piston pins, timing gears, camshaft bearings, and valve rocker mechanism. The cartridge oil filters shall be full flow type, conveniently located for servicing. Filters shall be equipped with a spring loaded bypass valve to ensure oil circulation if filters are clogged.
 7. An electric DC motor-driven pre-lube oil pump shall be provided if required by the engine manufacturer's design for "black start" of the standby generator.
 8. Dry type replaceable air cleaner elements. The dry-type air cleaner shall be equipped with a self-cleaning dust and water evacuator and a vacuum restriction gauge to indicate maximum allowable restriction of the air cleaner system according to the engine manufacturer's

recommendations. The air cleaner elements shall be conveniently located for servicing. The air filters shall be supplied with automatic swing open louvers to allow inlet air flow during engine operation.

9. Unit mounted radiator, blower fan, water pump, and thermostat. The radiator with blower type fan shall be sized to maintain safe operation at 122° F ambient temperature. The engine cooling system shall be filled with a solution of 50/50 ethylene glycol/water antifreeze or equivalent as recommended by the manufacturer.
10. Replaceable type cylinder liners.
11. Replaceable insert main bearings.

2.04 GENERATOR

- A. The generator shall be a synchronous wye-connected generator designed for direct connection to the engine. It shall be salient-pole, brushless, 12-lead reconnectable, self-ventilated, drip-proof construction, with amortisseur rotor or damper windings and skewed stator for smooth voltage waveform. The unit shall conform to the applicable standards for synchronous generators, salient pole type.
- B. The generator shall have the following features:
 1. Temperature rise of the rotor and stator shall be limited to 125° C for the specified KW and KVA ratings.
 2. Steady state voltage regulation from no load to full load within +/- 0.25% for electronic governors, +/- 0.8% for mechanical governors.
 3. Steady state regulation from no load to full load within +/- 0.25%.
 4. The insulation material shall meet the NEMA standard (MG1-22.40 and 16.40) for class H and be vacuum impregnated with epoxy varnish to be fungus resistant per MIL I-24092.
 5. The excitation system shall be of brushless construction controlled by a solid state voltage regulator with adjustable volts-per-hertz operation capable of maintaining voltage within +/- 2% at any constant load from 0 to 100% of rating. The regulator isolated from the load to prevent tracking when connected to SCR loads. The regulator shall be protected from the environment by conformal coating and provide individual adjustments for voltage range, stability and volts-per-hertz operations. Provide permanent magnet (PM) excitation for generators above 150KW or AREP excitation for generators smaller than 150KW.
 6. The generator shall have a single maintenance-free bearing and be connected to the flywheel housing with a semi-flexible coupling between the rotor and the flywheel.

7. Radio interference suppression to meet the BS.800 and VDE Class G and N standards.
 8. Telephone interference factor of less than 50 per NEMA MG1-22.43.
 9. AC voltage waveform total harmonic distortion of less than 5% total from no load to full load. Any individual harmonic shall have less than 3% THD.
- C. The generator shall be inherently capable of sustaining at least 300% of rated current for at least 10 seconds under a 3-phase symmetrical short circuit without the addition of separate current support devices.
- D. On starting each listed load, the instantaneous voltage dip shall not exceed that listed in "Generator Data Sheet" and shall recover to +/- 1% of rated voltage within one second.

2.05 CONTROLLER & INSTRUMENT PANEL

- A. Provide a generator-set mounted controller & instrument panel. The controller top shall be mounted no higher than 6 feet above finished grade. Controller mounting shall be vibration isolated from the rest of the engine / generator set.
- B. Emergency stop maintained pushbutton located at maximum 6 feet above grade.
- C. Remote mounted emergency stop glass covered pull switch located as shown in the drawings at maximum 54 inches above grade.
- D. Controller Features
1. All solid state construction, except for interface relays. The controller shall utilize a microcomputer based logic with a ROM based control algorithm. Circuit boards shall be coated to protect from environmental damage.
 2. Graphical display with preconfigured screens for parameter and alarm viewing and setpoint changes.
 3. Voltage, current and power metering, engine and generator parameter viewing.
 4. Real time clock for time stamping of diagnostic events and maintenance reminders.
 5. Non-volatile memory for setpoint storage through power failures.
 6. Security through password access.
 7. Control of generator output circuit breaker for generator protection and synchronizing functions.

- a. Paralleling functions to including automatic and manual synchronizing, dead bus arbitration, load sharing, and load sense/load demand.
 - b. Protective relaying functions – phase sequence, over/under voltage, over/under frequency, reverse power, overcurrent, current balance.
- E. Control circuitry shall be of plug-in design for quick replacement. The controller shall be equipped to accept a plug-in device capable of allowing maintenance personnel to test controller performance without operating the engine. The controller shall be capable of operation from -40°C to 85°C.
- F. Input circuitry from fuel tank devices such as fuel level switches and level transmitters, shall be designed to be suitable for the application and consist of current limiting circuitry and/or non-sparking devices.
- G. Control must meet NFPA-110 Level 1 requirements (2005 version) and meet NFPA-70.
- H. The panel display shall include as a minimum:
 - 1. AC voltmeter.
 - 2. AC ammeter.
 - 3. Frequency meter.
 - 4. Water temperature gauge.
 - 5. Oil pressure gauge.
 - 6. Battery voltmeter gauge.
 - 7. Engine running time meter (non-resettable)
 - 8. Voltage adjustment.
 - 9. Pre-alarms:
 - a. Auxiliary fault.
 - b. Battery Charger Fault.
 - c. Fuel low level/pressure.
 - d. Low oil pressure.
 - e. Low engine temperature
 - f. High engine temperature.
 - g. High battery voltage
 - h. Low battery voltage
 - i. Fuel leak alarm
 - 10. Engine shutdowns:
 - a. Auxiliary Shutdown.
 - b. Emergency Stop.
 - c. Low coolant level
 - d. Overcrank.
 - e. Overspeed.
 - f. Low oil pressure.
 - g. Low fuel level.
 - h. High engine temperature.

11. Audible Alarm:
 - a. Generator switch not-in-auto.
12. Functions:
 - a. Three position (RUN-OFF-AUTO) function: In the RUN position the engine shall start and run regardless of the position of the remote starting contact. In the AUTO position, the engine shall start when contacts in the remote control circuit close and stop five minutes after those contacts open following the engine cooldown sequence. In the OFF position the engine shall not start even though the remote start contact closes. This position shall also shutdown engine immediately.
- I. Wiring – The manufacturer shall furnish, install at the factory, and test all wiring required between devices mounted within or on the standby generator unit base. All wiring shall be neatly and carefully installed in wiring gutters, wire looms, or raceway. All power supply circuits shall be provided with suitable isolation/electrical protection means consisting of either fuses or circuit breakers. All internal wiring shall be marked at both ends of the conductor.
- J. Operation:
 1. Two-wire generator start/stop control from an automatic transfer switch (normal start and stop with cooldown) and from a remote emergency stop (immediate stop with fuel shutoff).
 2. Engine starter control for:
 - a. Cranking cyler with 15 second ON and OFF cranking periods or as recommended by the manufacturer. Cranking shall cease upon engine starting and running.
 - b. Two methods of cranking termination shall be provided:
 - 1) After three 15 second cranking cycles.
 - 2) After 75 seconds if the engine fails to start or as recommended by the manufacturer
 - 3) Each condition shall lockout the engine, and visually indicate an overcrank alarm.
 - c. Starting system shall be designed for restarting in event of a false engine start. It shall permit the engine to completely stop rotating before reengaging the starter.
 3. Provide wiring circuitry and sensing devices as required for emergency shutdown of the engine on any occurrence of the following conditions.
 - a. Low coolant level.
 - b. Over speed.

- c. Over-crank.
 - d. High engine temperature.
 - e. Low oil pressure.
 - f. Low fuel
 - g. Emergency stop
 - h. Auxiliary shutdown
4. Engine cool down timer factory set at five (5) minutes to permit unloaded running of the generator set after the call to operate is dropped.
5. Programmable I/O contacts to be provided and brought out to terminals for connection to remote monitoring equipment:
- a. A common alarm dry contact, normally open which closes on any alarm condition.
 - b. A generator running dry contact, normally open which closes when the engine is running.
 - c. A generator in cool-down dry contact, normally open which closes when the engine is running but opens when the engine enters cool-down.
 - d. Low fuel level dry contact, normally open which closes on low fuel alarm condition.
 - e. Fuel level (0-100% full) 4-20 mA output for PLC/SCADA monitoring.
 - f. Auto switch position dry contact that closes when the three position (RUN-OFF-AUTO) selector switch is in the "AUTO" switch position.
 - g. Remote emergency shutdown from normally closed switch.

2.06 ACCESSORIES

- A. Engine block heater. Thermostatically controlled and sized to maintain manufacturers recommended engine coolant temperature to meet the start-up requirements of NFPA-99 and NFPA-110, Level 1. Wattage and voltage shall be per "Generator Data Sheet."
- B. Exhaust System:
- 1. The complete exhaust system (silencer, stack, and exhaust piping) shall be sized to ensure that exhaust back pressure falls within the manufacturer's minimum and maximum limitations under all operating conditions.
 - 2. Exhaust Silencer: Provide exhaust silencer including flexible piping & fittings properly sized and installed according to the manufacturer's requirements. The silencer shall be critical type (30dB attenuation minimum) and coated to be temperature and rust resistant. The flexible connector section(s) shall be seamless, stainless steel and the ends shall be pipe thread (2" maximum) or SAE flanged. Support for exhaust silencer shall be from overhead or side supports or as shown and shall not be carried by the exhaust manifold.

16210-14

3. Exhaust Stack and Piping: Provide thin-gauge steel pipes with flange connections, high temperature gaskets, elbows and straight runs to complete the exhaust system. The exhaust system shall extend vertically above roof to direct exhaust and heat away from building or enclosure or as shown on the drawings. Provide wall thimble and roof penetrations designed for high heat applications and a gravity actuated steel rain cap at end of exhaust pipe. Exhaust system shall be supported from side or above utilizing galvanized steel channel trapeze hangers, gusseted wall brackets or custom welded brackets per manufacturer's recommendations to meet the specified seismic design conditions. Design system to accommodate engine vibration and not loosen or break exhaust system mounts.
 4. Insulation system: The non-outdoor portion of the exhaust pipe, stack and silencer shall be covered with fiberglass insulation and soft outer cover. The outer cover shall be constructed of heat and fire resistant canvas material with snap buttons.
- C. Sub-Base Fuel Tank:
1. Fuel tanks shall be sized to provide fuel for a minimum full load run time in hours at full load listed in "Generator Data Sheet."
 2. The sub-base fuel system shall be listed under UL 142, sub section entitled Special Purpose Tanks EFVT category, and will bear their mark of UL Approval according to their particular classification
 3. Comply with local code requirements depending on location of installation. For example, furnish or provide the following:
 - a. Tank pressure test
 - b. Tank venting
 - c. Spill containment.
 - d. Hazardous labeling
 - e. Fuel Filling Level alarm
 - f. Others as required per code.
 4. Perform a 2 hour site fuel tank pressure test. Local codes will govern the requirements and need for pressure testing. Comply with local codes.
 5. The fuel tank shall have the following features:
 - a. Constructed of sheet steel with steel framing suitable for mounting the generator on top.
 - b. 1-1/4" mechanical fuel level gauge. Readout shall be fraction of full tank with indicators at 25%, 50%, 75%, 95% and 100% full. Provide Krueger Sentry Gauge or equal.
 - c. Flexible fuel line(s) rated 300°F and 100 PSI ending with pipe thread connections. Provide normally closed solenoid shutoff valve at fuel tank outlet that will energize/de-energize with generator run command.

- d. 3/8" suction and return connections (minimum).
 - e. 3/8" diameter drain (minimum).
 - f. Primer and enamel exterior.
 - g. Venting per NFPA 30 and American Petroleum Institute Standard No. 2000.
 - h. Top mounted 1" threaded fitting for future fuel sensor.
 - i. Code required spill containment around 2" fill port with normally closed valve to release spilled fuel into the primary steel tank. Provide cover for spill containment area.
 - j. Secondary containment tank sized to contain 110% of the capacity of the fuel tank. A 3/8" minimum drain plug and 1" leak detection threaded hole and plug shall be provided.
 - k. Fuel level switches that are rated for use in fuel or fuel vapor atmosphere that are non-sparking. Switches shall actuate on a float mechanism which operates a sealed switch for connection to the generator control panel. Provide the following independent or combination switches:
 - 1) High High (90% full) level audible alarm.
 - 2) High (85% full) level audible alarm.
 - 3) Low (25% full) level for low fuel alarm indication.
 - 4) Low Low (5% full) for low fuel engine shutdown and indication.
 - 5) Secondary Containment Leak for fuel tank leak alarm.
- D. Batteries: Support tray with plastic battery enclosure, tie downs, battery cables, and 12-volt batteries all mounted to the engine/generator skid. The batteries shall be capable of delivering the cold-cranking amps required at zero degrees Fahrenheit per SAE Standard J-537.
- E. Signage:
- 1. Signage shall be posted on the sides of the generator enclosure facing the main approaches to the system.
 - 2. Provide an engraved placard with fuel filling procedure, tank capacity, fuel type, and maximum fill guidelines.
 - 3. Provide signage 0.08" thick white painted/silk-screened aluminum with 1-1/2" red lettering to read "No Smoking". Signs shall be posted on all sides of generator enclosure.
 - 4. Provide signage 4" x 6" x 0.08" white painted aluminum with red lettering to read "Generator Emergency Stop" for installation at a remote emergency stop switch as shown on the drawings.
- F. Automatic Battery Charger suitable for continuous operation to maintain the battery charge voltage with no manual intervention. Battery charger features shall be as follows:
- 1. Solid state circuitry with charging modes as described to automatically recharge the starting batteries. When battery voltage drops below the specified value the battery charger shall operate at the high rate

constant current mode until the battery voltage rises to the preset equalize level. The equalize mode will continue until the current required to maintain this voltage drops to 50% of the high rate level.

2. A current limiting circuitry to prevent charger overload under low battery voltage conditions. Provide minimum DC voltage and amp ratings (minimum) as listed in "Generator Data Sheet."
 3. The battery charger shall provide temperature compensation of -2 mv/°C per cell over the ambient temperature of -40°C up to 60°C. This shall automatically adjust the "float" and "equalize" voltage settings to prevent the batteries from overcharging at high temperature and under charging at low ambient temperatures.
 4. The complete charger unit shall be U.L. listed.
 5. The charger shall be mounted to the engine/ generator skid. The charger shall be operational through an ambient temperature range of -40°F to 140°F. It shall include the following features:
 - a. Fused AC input and DC output overload & short circuit protection.
 - b. DC ammeter and voltmeter, 5% full scale accuracy, to indicate battery charging amps and volts.
 - c. "Power on" lamp to indicate when the charger is operating.
 - d. DC voltage regulation +/- 1% from no load to full load and over AC input line variations of +/- 10%.
 - e. Reverse polarity protection to prevent the charger from energizing outputs if improperly connected.
 - f. Current limiting. Current limiting circuitry shall be provided to prevent damage to the charger from being overloaded at low battery voltage such as occurs during short circuit conditions or during engine starter cranking.
 - g. The battery charger shall be powered from 120 VAC.
- G. Sound Attenuating Weatherproof Housing for the generator shall be as follows:
1. Manufactured from heavy-gauge aluminum or galvanized sheet steel and painted with the manufacturer's standard finish. Paint color shall be submitted to Owner for approval. Color choices shall include but not be limited to autumn white and beige. All surfaces shall be painted inside and out.
 2. The interior of housing shall have a heat resistant thermo-acoustic insulation system designed to meet sound attenuation requirements for the life of the generator. The placement, type, thickness and weight of the attenuator panels shall provide sound dampening to the specified level of allowable noise outside the generator. The air intake

and exhaust shall have similar dampening and allow ample air flow for proper engine cooling, without having to remove side panels. The insulation shall be mechanically held against walls, ceiling and doors behind full sheets of perforated galvanized sheet steel. All insulation shall be covered with the exception of the exhaust piping.

3. The enclosure shall house the engine, generator, control & instrument panel, battery charger, generator breaker, and all accessories.
4. The radiator discharge shall be directed upwards through the use of a vertical duct mounted to the enclosure. The duct shall include drip holes to allow rain water to drain out the bottom.
5. All exterior panels shall have lockable latches to prevent unauthorized entry.
6. The specified exhaust silencer shall be mounted in or on the roof of the enclosure with vibration isolators.
7. Pressure drops through the enclosure openings shall not exceed limits set by the manufacturer of the generator.
8. The enclosure shall be free standing and anchored to the concrete pad (or trailer) supporting the engine generator. The enclosure may be mounted to the generator skid only if a skid mounted enclosure can meet the sound attenuation requirements specified.
9. The enclosure shall be designed so that sound levels measured at a 25 feet radius from any side of the enclosure (free field) and 5 feet above ground level, noise levels shall not exceed (Generator Data Sheet) dB with the engine generator running at full load and full speed inclusive of exhaust noise.

H. CIRCUIT BREAKER DISCONNECT

1. GENERAL

- a. Circuit breakers and motor circuit protectors shall be manufactured by Eaton Cutler-Hammer, Square D, G.E., Siemens, or equal.
- b. Sized by Generator manufacturer to meet UL standards, cabling requirements per plans, and "Generator Data Sheet."
- c. Multiple-pole circuit breakers shall be designed so that an overload on one pole automatically causes all poles to open. The use of tandem or dual circuit breakers in a normal single-pole space to provide the number of poles or spaces specified are not acceptable.
- d. Molded case circuit breakers shall be operated by a single toggle-type handle and shall have a quick-make, quick-break switching mechanism. An automatic trip of the breaker shall be

clearly indicated by the handle position. Contacts shall be non-welding silver alloy and have flash reduction arc chutes. A push-to-trip button on the front of the circuit breaker shall provide a local manual means to exercise the trip mechanism.

- e. Minimum interrupting capacity:
 - 1) 480 volt circuit breaker shall have a minimum interrupting capacity of 42,000 amperes.
 - 2) 120 or 208 or 240 volt breaker shall have a minimum interrupting capacity of 22,000 amperes
- f. Circuit Breakers less than 400 volt and below 100-ampere trip or less shall have thermal-magnetic (TM) trip units and inverse time-current characteristics unless protecting full voltage or solid state reduced voltage motor starters, 15kva or larger transformer secondary, or as specifically shown on drawings.
- g. Circuit Breakers protecting full voltage or solid state reduced voltage motor starters shall be motor circuit protector (MCP) breakers with adjustable magnetic trip unless otherwise noted on the drawings.
- h. Circuit breakers shall be UL listed for series application.
- i. Where indicated circuit breakers shall be current limiting.
- j. Where indicated on drawings, provide UL listed circuit breakers for continuous duty at 100% of their ampere rating in the intended enclosure.

2. TRIP UNIT – Molded Case Circuit Breakers

- a. The trip unit shall be Eaton type Digitrip 310+ or approved equal.
- b. Each molded case circuit breaker microprocessor-based tripping system shall consist of three (3) current sensors, a trip unit and a flux-transfer shunt trip. The trip unit shall use microprocessor-based technology to provide the adjustable time-current protection functions. True RMS sensing circuit protection shall be achieved by analyzing the secondary current signals received from the circuit breaker current sensors, and initiating trip signals to the circuit breaker trip actuators when predetermined trip levels and time-delay settings are reached.
- c. Interchangeable rating plugs shall establish the continuous trip ratings of each circuit breaker. Rating plugs shall be fixed-type. Rating plugs shall be interlocked so they are not interchangeable between frames, and interlocked such that a breaker cannot be closed and latched with the rating plug removed.
- d. System coordination shall be provided by the following

16210-19

microprocessor-based time-current curve shaping adjustments:

- 1) Adjustable long-time setting (set by adjusting the trip setting dial to an amount not to exceed rating plug)
 - 2) Adjustable short-time setting and delay with selective flat or I^2t curve shaping,
 - 3) Adjustable instantaneous setting
 - 4) Adjustable ground fault setting and delay with selective flat or I^2t curve shaping.
- e. The microprocessor-based trip unit shall have both powered and unpowered thermal memory to provide protection against cumulative overheating should a number of overload conditions occur in quick succession.
- f. Furnish internal ground fault protection with adjustable settings. Provide neutral ground fault sensor for four-wire loads.
- g. Breakers shall have built-in test points for testing the long-time delay, instantaneous, and ground fault functions of the breaker by means of a test set.

2.07 STAIR AND PLATFORM SYSTEM

A. General

1. Non-skid walking surface shall be used for safety: steel pre-galvanized grip strut planking, 12 gauge thickness.
2. Steel welding shall be in accordance with the ANSI/AWS D1.1-02 gas metal arc welding process and shall be performed by experienced operators.
3. All exposed surfaces shall be smooth and free of sharp or jagged edges.

B. Stairways

1. Stair treads, and stringers shall be designed for a uniform live load of 100 pounds per square foot and a concentrated vertical load of 300 pounds over an area of 4 square inches.
2. Stair treads, stringers and risers shall be constructed using steel alloys for structural components.
3. The walking surface of the stairs shall be steel pre galvanized grip strut planking slip resistant surface.

C. Landings

16210-20

1. Landings shall be designed for a uniform live load of 100 pounds per square foot and a concentrated vertical load of 300 pounds over an area of 4 square inches.
 2. Landings shall be level and have a dimension in the direction of travel not less than the width of the stairway. Landings shall be constructed using steel alloys for structural components.
 3. The walking surface of the landing shall be continuous, without gaps, shall be steel pre-galvanized grip strut planking slip resistant surface. Sizes shall be fabricated as required by local codes and/or for specific applications as indicated on drawings.
- D. Legs
1. The legs shall be designed to support the landing sections. The legs shall be designed so that they will be perpendicular to the ground and vertical loads are transmitted axially through them regardless of the slope. All legs shall have 6"x 6"x 1/4" anchor plate pads.
- E. The stair system shall be Amer-Fab, or equal.

PART 3: EXECUTION**3.01 WORKMANSHIP**

- A. The construction methods specified herein shall be followed by the manufacturer of the generator. If the manufacturer fails to comply, the Contractor shall pay all costs required to make the changes to the equipment to conform to these construction methods.
- B. Screw type solderless terminals or lugs shall be provided for all field connected power cables, control and instrument wiring. All connections shall be accessible from a designated connection panel without removal of internal components.
- C. A terminal strip shall be provided for control and instrument wiring. Number all terminals with machine printed lettering.
- D. All internal and external control and instrument wiring shall have permanent identification at each point of connection. Wire identification shall be by machine printed numbered "shrink-tube" wiring sleeves. Internal wire numbers shall be per generator manufacturer's wiring diagram. External wire numbers shall be determined by the connected control panel(s).
- E. Control and instrument wiring shall be neatly bundled and secured in place with screw down anchors and plastic cable ties. Wiring shall be protected with plastic spiral wrap where it is subject to mechanical damage or crosses over to a hinged door.
- F. The generator and any accessories shall be a product of excellent workmanship and shall be free from any defects or imperfections that will

affect their appearance or serviceability.

- G. The generator's neutral shall be grounded per generator manufacturer's installation instructions for 3 wire distribution systems.

3.02 INSTALLATION

- A. The generator shall not be delivered to the job site until the manufacturer's certified factory test report has been submitted, reviewed and accepted. A non-existent or non-reviewed certified factory test report shall be sufficient cause for the unit to be rejected.
- B. The Contractor shall remove rejected equipment immediately from the jobsite at his expense until the generator submittal and/or factory test report is approved.

3.03 FACTORY INSPECTION AND TESTS

- A. Factory or Factory Authorized Dealer shall be considered one in the same for the purposes of inspection, testing, service facility and herein after may be referred to as "factory" or "manufacturer."
- B. Factory Tests: Each generator to be supplied shall be tested by the manufacturer prior to shipment. All tests shall be made with all accessories installed. The factory tests shall be made under varying loads (30% to 100%) for a minimum of one hour total.

The factory testing shall include the following tests:

- 1. Single step load pickup.
 - 2. Transient and steady state governing.
 - 3. Safety shutdown device testing.
 - 4. Voltage regulation.
 - 5. Rated power.
 - 6. Maximum power.
 - 7. Test all generator control panel alarms, status lights & indicators.
 - 8. Test all remote connection status and alarm points (dry contacts).
 - 9. Simulate remote ATS start/stop of generator utilizing a wire jumper.
- C. A typewritten factory test report shall be provided which lists the factory tests performed. The results of the each test, name & phone number of person who performed the tests, date(s) when tests were performed, serial & part number of equipment tested, setting values, failures encountered, and repairs made during testing.

3.04 FIELD ASSISTANCE

- A. The Contractor shall take all precautions necessary to ensure the safety of all personnel during the tests. Absolutely no tests shall be run that could potentially cause injury or jeopardize personnel safety.
- B. The initial setup of each generator shall be performed by a factory-trained

16210-22

service person of the manufacturer's local representative. Fill the engine fuel, lubricants, and cooling system and make all preliminary tests and checks required before engine start-up the day prior to witness field testing.

- C. The Contractor shall be responsible for and pay the costs for the necessary fuel to fill each generator tank prior to the start of the field tests. The fuel shall include a fuel conditioner as recommended by the manufacturer.
- D. The Contractor shall pay for a factory-trained service representative to perform one (1) 8-hour day of field tests for each generator, beginning at 8:00 a.m. any weekday, except Friday.
 - 1. Each failure mode, alarm, and control function shall be demonstrated to Owner by the Contractor's factory-trained service representative prior to performing any other field tests.
 - 2. The generator manufacturer representative shall furnish a temporary 1.0 PF load bank and connection cabling rated for a load equal to no less than 100 percent of the generator nameplate KW. The load bank shall be connected to the generator output terminals for a four (4) hour, full-load test. The Owner Representative shall be allowed to change loads during the tests to simulate normal operating conditions. The factory-trained service person shall be responsible for running the generator during the load tests. Any defects or failures discovered during these tests shall be corrected or adjusted by the factory-trained service person. The engine generator load test shall be restarted after each repair or adjustment that requires shutdown of the generator. The test shall be restarted as many times as necessary until the generator runs for four (4) continuous hours without shutdown or failure.
 - 3. The temporary load bank shall be set-up the day before testing. Under no circumstances shall the testing be allowed to extend beyond 5:30 p.m.
 - 4. All field tests shall be witnessed by Owner. Written notice shall be provided to the Owner Representative seven (7) days prior to the date for the field test.
- E. The Generator Field Checklist (GCL per Electrical Specifications [Factory and Field Testing] shall be completed by the generator manufacturer representative prior to beginning of operational testing. The checklist shall be signed by the representative submitted prior to the start of operational load bank testing.
- F. The Generator Performance Test Report (GPT per Electrical Specifications [Factory and Field Testing].) shall be completed by the generator manufacturer representative during operational testing. The forms shall be signed by the representative and given to the Owner Representative prior to completion of operational load bank testing.
- G. The Generator Sound Level Data Form (GSLD Electrical Specifications

16210-23

[Factory and Field Testing] shall be completed by the generator manufacturer representative during operational testing. The forms shall be signed by the representative and given to the Owner Representative prior to completion of operational load bank testing.

H. Training

1. The local representative's factory-trained service person shall instruct in the proper operating and maintenance procedures for all components of the generator. This instruction shall be given for a minimum length of two (2) hours. The training shall cover "operation" and "maintenance". Training shall not begin until Operation and Maintenance manuals are approved and field tests have been completed.

3.05 WARRANTY

- A. The Generator System Supplier shall have a staff of experienced personnel available to provide service on two (2) working days notice during the warranty period. Such personnel shall be capable of fully testing and diagnosing the equipment delivered; and of implementing corrective measures.
- B. If the Generator System Supplier fails to respond in two (2) working days, the Owner at its option will proceed to have the warranty work completed by other resources; the total cost for these other resources shall be reimbursed in full by the Contractor. The use of other resources, as stated above, shall not change or relieve the Contractor from fulfilling the remainder of the warranty requirements.
- C. Prior to final acceptance, the Contractor shall furnish a listing of warranty information for all manufacturers of materials and equipment supplied under the scope of work covered in these design documents. The listing shall include the following:
 1. Manufacturer's name, service contact person, phone number, and address.
 2. Material and equipment description, equipment number, part number, serial number, and model number.
 3. Warranty expiration date.
- D. Hardware support:
 1. The Contractor shall provide warranty of all equipment for a period of one (1) year from date of final acceptance. Standard published warranties of equipment which exceed the preceding specified length of time shall be honored by the manufacturer.
 2. The Contractor shall provide all labor and material to replace or repair any hardware that fails during the warranty period, at no additional cost to the Owner.

3.06 FINAL ACCEPTANCE

- A. Final acceptance will be given by the Owner after the equipment has been field tested satisfactorily, each deficiency has been corrected, documentation has been provided, and all the requirements of design documents have been fulfilled.
- B. At the end of the project, following the completion of the field tests, and prior to final acceptance, the Contractor shall provide the following to the Owner:
 - 1. Fuel tank top off. The Contractor shall supply up to one entire tank of fuel at the end of the project.
 - 2. Each "operation, maintenance and parts" manual shall be modified or supplemented by the Contractor to reflect all field changes and as-built conditions.
 - 3. Two sets of keys for all locks.

GENERATOR DATA SHEET (Pump Station A)

The following data sheet is a summary of generator required specifications. Not all specification requirements are listed below. The Contractor/Supplier shall return this page with the Submitted Value column completed. If submitted values are less than those listed in the Specification Minimum column, then the supplier shall explain reasons for the exception in cover letter.

Description	Specification Minimum	Units	Submitted Value	Units
Generator Continuous Output Power	250	KW		KW
	312.5	KVA		KVA
Three phase voltage (Nominal)	480	Volts AC		Volts AC
Continuous amperage at 0.8 power factor	367	Amps AC		Amps AC
Power Frequency	60	Hz		Hz
Max voltage dip with specified motors	10	%		%
Reactance – Subtransient (X''d)	**	%		%
Reactance – Transient (X'd)	**	%		%
Reactance – Synchronous (Xd)	**	%		%
Engine horse power at rated KW	**	HP		HP
Engine RPM at rated power	1800	RPM		RPM
Engine Fuel Type	No. 2 Diesel	-		-
Engine aspiration (Normal/Turbo)	Turbo	-		-
System Voltage	**	Volts DC		Volts DC
Alternator output (at system voltage)	**	Amps DC		Amps DC
Battery charger output	10	Amps DC		Amps DC
Engine block heater power	**	W		W
Alternator condensation strip heater	**	W		W
Heater(s) voltage (1 phase)	240	Voltage		Voltage
Fuel tank capacity (hrs @ 100% load)	24	Hours		Hours
Type (Sub-base/Remote)	Sub-base	-		-
Main Breaker Maximum Rating	400	Amps		Amps
Trip Features Per Spec	LSIG	-		-
Interrupt Rating	42	KAIC		KAIC
Load Bank (Radiator Mounted, None)	None	FLA		
Load Bank Rating Percentage				
Enclosure type	75 dB Sound Attenuating			
(Sound Atten., Weatherproof, None)				

** Sized per manufacturer recommendations to meet intent of plans and specifications, codes, and environmental conditions at location of installation. Please highlight any deviations from drawings and specifications.

GENERATOR DATA SHEET (Pump Station B)

The following data sheet is a summary of generator required specifications. Not all specification requirements are listed below. The Contractor/Supplier shall return this page with the Submitted Value column completed. If submitted values are less than those listed in the Specification Minimum column, then the supplier shall explain reasons for the exception in cover letter.

Description	Specification Minimum	Units	Submitted Value	Units
Generator Continuous Output Power	1000	KW		KW
	1250	KVA		KVA
Three phase voltage (Nominal)	480	Volts AC		Volts AC
Continuous amperage at 0.8 power factor	1469	Amps AC		Amps AC
Power Frequency	60	Hz		Hz
Max voltage dip with specified motors	10	%		%
Reactance – Subtransient (X''d)	**	%		%
Reactance – Transient (X'd)	**	%		%
Reactance – Synchronous (Xd)	**	%		%
Engine horse power at rated KW	**	HP		HP
Engine RPM at rated power	1800	RPM		RPM
Engine Fuel Type	No. 2 Diesel	-		-
Engine aspiration (Normal/Turbo)	Turbo	-		-
System Voltage	**	Volts DC		Volts DC
Alternator output (at system voltage)	**	Amps DC		Amps DC
Battery charger output	10	Amps DC		Amps DC
Engine block heater power	**	W		W
Alternator condensation strip heater	**	W		W
Heater(s) voltage (1 phase)	240	Voltage		Voltage
Fuel tank capacity (hrs @ 100% load)	24	Hours		Hours
Type (Sub-base/Remote)	Sub-base	-		-
Main Breaker Maximum Rating	1600	Amps		Amps
Trip Features Per Spec	LSIG	-		-
Interrupt Rating	42	KAIC		KAIC
Load Bank (Radiator Mounted, None)	None	FLA		
Load Bank Rating Percentage				
Enclosure type	75 dB Sound Attenuating			
(Sound Atten., Weatherproof, None)				

** Sized per manufacturer recommendations to meet intent of plans and specifications, codes, and environmental conditions at location of installation. Please highlight any deviations from drawings and specifications.

END OF SECTION

16210-27

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16250**AUTOMATIC TRANSFER SWITCH****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. The Contractor shall supply the automatic transfer switch (ATS) as specified herein.
- B. The ATS scope of work includes:
 - 1. Providing and installing one automatic transfer switch of rating shown on Contract Drawings.
 - 2. Submittal data and drawings.
 - 3. Startup assistance.
 - 4. Factory and field testing.
 - 5. Operation and maintenance manuals.
 - 6. Warranty of all components.
- C. Startup and configuration of ATS with installed voltages and loads.
- D. As required under Electrical Specifications [Factory and Field Testing], furnish all required labor, materials, safety equipment, transportation, test equipment, incidentals and services to perform factory and/or field testing.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Factory and Field Testing]
- C. Project Drawings

1.03 SUBMITTALS REQUIREMENTS

- A. Provide Submittals as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Include a record of each parameter available to be changed by the user. The list shall include factory defaults and space for entered values.

1.04 OPERATION AND MAINTENANCE INFORMATION

- A. Provide operation and maintenance information as specified in Electrical Specifications [Electrical General, Operating and Maintenance Information].
- B. Include a record of each ATS parameter setup during startup and testing and place a copy of setting in each O & M manual.

PART 2: PRODUCTS**2.01 AUTOMATIC TRANSFER SWITCH****A. General:**

1. The ATS shall be UL listed in accordance with UL 1008 and be labeled in accordance with that standard's 1½ and 3 cycle, long-time ratings. ATSS which are not tested and labeled with 1½ and 3 cycle (any breaker) ratings and have series, or specific breaker ratings only, are not acceptable.
2. The ATS shall be rated to close on and withstand 42,000 RMS symmetrical short circuit amperes at the ATS terminals or otherwise shown. Provide overcurrent protection as shown on the Contract drawings.
3. The ATS manufacturer shall be certified to ISO 9001 International Quality Standard and the manufacturer shall have third party certification verifying quality assurance in design/development, production, installation and servicing in accordance with ISO 9001.
4. ATS types utilizing components of molded-case circuit breakers, contactors, or parts thereof, are not acceptable.
5. The switch assembly shall be installed in a NEMA enclosure located as shown on Contract drawings.
6. The automatic transfer switch shall be an ASCO Model 7000, Eaton, each with options to meet specified requirements, or equal.

B. Switch Unit:

1. The transfer switch unit shall be electrically operated and mechanically held. The electrical operator shall be solenoid operated and only momentarily energized to minimize power consumption and heat generation.
2. The transfer switch shall feature a delayed transition mode. The switch shall remain in the neutral position (neither emergency nor normal) until the associated time delays have expired and allow the switch to complete the transfer.
3. The switch shall be 3 pole double-throw with inherently interlocked construction. A solid neutral shall be provided for all systems.
4. Wide contact gaps shall be provided to insure positive isolation of the normal and emergency power sources.
5. The switch shall be fully rated for amperage shown on Contract Drawings, for switching all types of loads including induction motors.

16250-2

The ratings shall apply to the voltage and mounting arrangement as shown in the drawings.

6. The main power contacts shall have silver alloy contact construction featuring a wiping action each time the switch is operated. Arc chutes shall be utilized to contain the inherent spark created when switching under load.
7. The main contact design shall allow repeated making and breaking of rated full load current, with a combination of motor and other loads and without damage or undue wear to the contacts.
8. All main power contacts and auxiliary contacts shall be mechanically driven from a common actuator shaft.
9. The bus shall be constructed of silver plated copper.
10. Inspection of all contacts, linkages and moving parts shall be possible from the front of the switch without disassembly of operating linkages and without disconnection of power conductors.
11. All switch and relay contacts, coils, mechanical linkages, and control elements shall be serviceable or removable from the front of the mounted switch or accessory assembly without removal of the switch or assembly from the compartment and without disconnection of the power cables or control wiring.
12. The switch shall have a manual operating handle for maintenance purposes.
13. Compression screw type solder-less terminals or lugs shall be provided for connecting all external line & load power cables and control wiring. All connections shall be accessible from the front without removal of internal components.
14. A terminal strip shall be provided for terminating all control wiring. All terminals shall be numbered with machine printed lettering matching the wire number of the terminated wire.
15. All control wiring shall have permanent identification at each point of connection. Wire identification shall be by machine printed numbered wiring sleeves. Electrically common wires shall have the same wire number. Electrically different wiring shall have unique wire numbers.
16. Control wiring shall be neatly bundled and secured in place by plastic cable ties. Wiring shall be protected with plastic spiral wrap where it crosses over a hinge to the door.

C. ATS CONTROL PANEL

1. A control panel shall be provided to direct the operation of the transfer switch. The modules sensing and logic shall be controlled by a

16250-3

built-in microprocessor. Control panels that do not utilize microprocessor electronics to control the operation of the switch are not acceptable.

2. A four line, 20 character LCD display and keypad shall be an integral part of the controller for viewing all available data and setting desired operational parameters. Operational parameters shall also be available for viewing and limited control through the serial communications input port.
3. The controller shall be connected to the transfer switch by an interconnecting wiring harness. The harness shall include a keyed disconnect plug to enable the controller to be disconnected from the transfer switch for routine maintenance.
 - a. Sensing and control logic shall be provided on multi-layer printed circuit boards.
 - b. The panel shall be enclosed with a protective cover and be outer door or deadfront mounted such that it may be operated with the door closed for safety and ease of maintenance.
4. A single controller shall provide twelve selectable nominal voltages for maximum application flexibility and minimal spare part requirements. Voltage sensing shall be true RMS type and shall be accurate to $\pm 1\%$ of nominal voltage. Frequency sensing shall be accurate to $\pm 0.2\%$.
 - a. The under-voltage of each phase of the normal source shall be monitored, with pickup adjustable from 85% to 100% of nominal and the dropout adjustable from 75% to 98% of pickup setting, both in increments of 1%. These adjustments shall be factory set at 85% dropout, and 90% pickup.
 - b. The voltage of each phase of the emergency source shall be monitored, with pickup adjustable from 85% to 100% of nominal. This adjustment shall be factory set at 95% pickup.
 - c. Frequency sensing of the emergency source shall be provided, with pickup adjustable from 90% to 100% of nominal. This adjustment shall be factory set at 97% pickup.
 - d. The control panel shall meet or exceed the voltage surge withstand capability in accordance with IEEE Standard 472-1974 (ANSI C37.90a 1974) and the withstand voltage test in accordance with the proposed NEMA Standard ICS1-109.21.
5. The transfer switch control panel shall be capable of operating over a temperature range of -20 to +60 degrees C.
6. The control panel shall include the following field adjustable time delays:
 - a. Time delay to override momentary normal source outages, adjustable from 0 to 5 minutes. This adjustment shall be field set to place emergency generator on-line in 1 minute.
 - b. Transfer to emergency time delay for controlled timing of load

- transfer to emergency, adjustable from 0 to 5 minutes. This adjustment shall be field set switch position in 5 seconds after power has stabilized.
- c. Emergency source failure time delay to ignore momentary transients during initial generator set loading, adjustable from 0 to 6 seconds. Set at 2 seconds.
 - d. Retransfer to normal time delay, adjustable 0 to 60 minutes. This adjustment shall be factory set at 5 minutes. The time delay is automatically bypassed if the emergency source fails and normal source is acceptable.
 - e. Unloaded running time delay for emergency engine generator cooldown, adjustable from 0 to 60 minutes. This adjustment shall be factory set at 5 minutes.
 - f. Delayed transition time delay for setting the dead time when all power is removed from the load side of ATS, adjustable 0 to 5 minutes. Set at 1 minute.
 - g. Generator Exercise Timer: Timer provided for operator adjustment of day of week, time of day and run duration for exercising the generator under operating loads by activating the automatic transfer switch. . Timer shall be mounted on the ATS outer deadfront door.
 - h. The controller shall provide an integral engine exerciser. The timer shall be field set by the Contractor with date and time during training. The engine exerciser shall allow the user to program up to seven different exercise routines. For each routine, the user shall be able to:
 - 1) Enable or disable the routine.
 - 2) Enable or disable transfer of the load during routine.
 - 3) Set the start time of day, day of week, week of month, alternate or every time start, duration of run.
 - 4) At the end of the specified duration the switch shall transfer the load back to normal and run the generator for the specified cool down period. A 10-year life battery that supplies power to the real time clock in the event of a power loss will maintain all time and date information.
7. The controller shall commit-to-start engine which requires the engine to reach proper output and run at least the duration of the cooldown setting, regardless of whether the load is transferred.
8. Provide interface relays or main switch follower contacts to comply with I/O interface requirements as defined in the P&ID diagram. Interfacing relays shall be industrial grade plug-in type with dust covers. Interface connections shall be wired to backpan terminal blocks. At minimum, the switch shall have the following unused I/O contacts available:
- a. Switch in Normal – SPDT rated 10 amps, 120 VAC
 - b. Switch in Emergency – SPDT rated 10 amps, 120 VAC
 - c. Engine starting contact -- DPDT gold-flashed contacts rated 10

- amps, 32 VDC
 - d. Emergency Power available – SPDT rated 10 amps, 120 VAC
 - e. Normal Power available – SPDT rated 10 amps, 120 VAC
- 9. Terminals shall be provided for a remote contact which opens to signal the ATS to transfer to emergency and for remote contacts which open to inhibit transfer to emergency and/or retransfer to normal.
- 10. Provide separate LED signal lights with nameplates indicating the following:
 - a. Utility power is available (green)
 - b. Generator power is available (red)
 - c. ATS is connected to Utility source (green)
 - d. ATS is connected to the Generator source (red)
 - e. ATS in neutral position (wht)
- 11. A three position momentary-type test switch shall be provided for the test / automatic / reset modes:
 - a. Test: simulate normal source failure
 - b. Automatic: normal operation
 - c. Reset: bypass the time delays on either transfer to emergency or retransfer to normal.
- 12. All adjustments shall be field adjustable without the use of tools, meters, power supplies, or special test equipment and can be made safely without personal exposure to live parts
- 13. Each adjustment resolution shall be settable within minimum increments of 1%.
- 14. Repetitive accuracy of timer, voltage and frequency settings over a temperature range of -20° C to 70° C shall be within +/-2%.
- 15. The control panel programming shall be lockable via password protection.
- 16. The wire harness for connection of the control panel to the transfer switch shall have sufficient length to reach between the mounting locations shown on the Contract drawings.
- 17. Provide the following displays on the controller:
 - a. Event log to display 99 logged events with the time and date of the event, event type and event reason.
 - b. Total number of ATS transfers.
 - c. Number of ATS transfers caused by power source failures.
 - d. Total number of days ATS has been in operation.
 - e. Total number of hours that the normal and emergency sources have been available.

PART 3: EXECUTION**3.01 WORKMANSHIP**

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 FIELD ASSISTANCE

- A. Testing, checkout and start-up of the ATS equipment shall be performed under the technical direction of a factory trained authorized manufacturer representative.
 - 1. The setup and programming of the ATS shall be provided by a factory-trained representative who is authorized by the ATS manufacturer to perform the startup. This setup and programming shall be done prior to and during the first application of power.
 - 2. Provide testing as specified in Electrical Specifications [Factory and Field Testing].
- B. Provide 1 hour of "ATS Setup" Training on operating and maintenance procedures.

3.03 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16430**LOW VOLTAGE SWITCHBOARD****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. This section applies to specifies switchboards rated 600 volts and below.
- B. Provide Switchboard(s) (SWBD) as specified herein and shown on the Drawings.
 - 1. The System Integrator shall perform and be responsible for procurement, submittals, shop drawings, interconnection drawings, factory testing, and all control wiring for the SWBD. System Integrator is defined in Electrical Specifications [Electrical General].
- C. All wiring, wire color codes, wire labeling and terminal blocks within SWBD shall be as specified in Electrical Specifications [Low Voltage Wire & Data Cable].
- D. The SWBD scope of work includes:
 - 1. Providing SWBD structure and all internal components.
 - 2. Installation of the SWBD on concrete pad per details.
 - 3. Submittal data and drawings.
 - 4. Startup and configuration of SWBD internal components.
 - 5. Factory and field testing.
 - 6. Operation and maintenance manuals.
 - 7. Warranty of all components.
 - 8. Seismic Anchorage Design Calculations and conforming installation.
 - 9. Conduit – support systems, wire, and grounding system, for equipment interconnection, and operation.
 - 10. System calibration, testing and documentation.
- E. Electrical Specifications [Factory and Field Testing]. Furnish all required labor, materials, safety equipment, transportation, test equipment, incidentals and services to perform factory and/or field testing.
- F. All electrical equipment and materials, and methods - including installation, calibration, and testing - shall conform to the applicable codes and standards listed in this and other Sections. All electrical materials and work shall conform to published standards of the National Electric Code (NEC), Institute of Electrical and Electronic Engineers (IEEE), and Underwriters Laboratories Inc (UL).

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire & Data Cable]
- C. Electrical Specifications [Automatic Transfer Switch]

16430-1

- D. Electrical Specifications [Panelboard and Power Transformer]
- E. Electrical Specifications [Factory and Field Testing]

1.03 SUBMITTALS REQUIREMENTS

- A. Provide Submittals as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Include a record of each configurable parameter available to be changed by the user for internal components. The list shall include factory defaults and space for entered values for each configurable component.

1.04 OPERATION AND MAINTENANCE INFORMATION

- A. Provide operation and maintenance instructions as specified in Electrical Specifications [Electrical General].

PART 2: PRODUCTS**2.01 SWITCHBOARD**

- A. General:
 - 1. The Switchboard shall be Cutler Hammer, Square D or approved equal.
 - 2. The Switchboard (SWBD) shall be built and tested in accordance with:
 - a. NEMA Standards
 - b. ANSI
 - c. Underwriters Laboratories, Inc.
- B. Metering Panel:
 - 1. Provide metal enclosed, front accessible, self contained utility metering panel. Voltage, phase, AIC and continuous amperage rating shall be as shown on Contract Drawings. Panel will include meter socket, factory installed main breaker(s) and test by-pass facility.
 - 2. Design utility entrance and termination and other features per NEC, local codes, and serving Utility requirements.
 - 3. Enclosure shall be manufactured from galvanized 14 ga. (min) sheet steel. The enclosure shall be finished with ANSI 61 gray enamel paint. Provide pad mount, surface mount or flush mount cabinet per installation detail.
- C. Switchboard:
 - 1. Switchboard shall be front accessible with group mounted, buss connected circuit protective devices. Where provisions for future circuit protective devices are required, space for the device, corresponding vertical buss, device connectors and the necessary

mounting hardware shall be supplied.

2. Distribution section shall meet all requirements per NEC, local codes, and as defined in the drawings.
3. Buss shall be copper. Aluminum buss is not equal to copper buss. Furnish buss mounted cable lugs sized for cabling that is required to be directly buss connected.
4. Buss shall, 3 phase, 4 wire, 480 volt, 65,000 AIC minimum symmetrical (or as shown otherwise in the drawings).
5. Power buss:
 - a. Continuous amperage rating at least equal to the main circuit breaker or the power source and shall be braced to withstand stresses resulting from the maximum short-circuit current available.
 - b. Horizontal bus shall extend through all sections of the switchgear unless shown otherwise in the drawings with vertical connections to circuit breakers in each section.
 - c. Buss shall be mounted on heavy-duty insulated glass polyester supports, and main bus joints shall be bolted using a minimum of two bolts.
 - d. Shipping splits and provisions for future bus extensions shall have tin-plated bolted connections.
6. Neutral bus, when specified or required, shall have the same capacity as the main bus.
7. Ground buss shall be rated per NEC relative to the power buss amperage rating and shall extend the entire length of the switchboard.

2.02 Molded Case Circuit Breakers:

A. General

1. Circuit breakers and motor circuit protectors shall be manufactured by Eaton Cutler-Hammer, Square D, G.E., Siemens, or equal.
2. Circuit breakers shall be the bolt-on type.
3. Multiple-pole circuit breakers shall be designed so that an overload on one pole automatically causes all poles to open. The use of tandem or dual circuit breakers in a normal single-pole space to provide the number of poles or spaces specified are not acceptable.
4. Molded case circuit breakers shall be operated by a single toggle-type handle and shall have a quick-make, quick-break switching mechanism. An automatic trip of the breaker shall be clearly indicated

by the handle position. Contacts shall be non-welding silver alloy and have flash reduction arc chutes. A push-to-trip button on the front of the circuit breaker shall provide a local manual means to exercise the trip mechanism.

5. Minimum interrupting capacity:
 - a. 480 volt circuit breaker shall have a minimum interrupting capacity of 42,000 amperes.
 - b. 120 or 208 or 240 volt breaker shall have a minimum interrupting capacity of 22,000 amperes
6. Circuit breakers shall be UL listed for series application.
7. Where indicated circuit breakers shall be current limiting.
8. Where indicated on Drawings, provide UL listed circuit breakers for continuous duty at 100% of their ampere rating in the intended enclosure.
9. Furnish add-on features such as auxiliary position status contacts, trip indication contacts, zone interlocking, shunt trip coils, etc, as shown in the drawings.

B. Trip Unit – Molded Case Circuit Breakers

1. Circuit Breakers over 400 volt and over 90A trip units as defined herein. All other circuit breakers shall have shall have non-electronic thermal-magnetic (TM) trip units with inverse time-current characteristics.
2. The trip unit shall be Eaton type Power Expert Release (PXR) or equal.
 - a. Each circuit breaker trip unit shall have three (3) current sensors, voltage sensors, microprocessor, and flux transfer trip solenoid at minimum.
 - b. Trip units shall be continuously self-checking and provide a visual indication that the internal circuitry is being monitored and is fully operational.
 - c. Trip units shall be powered from the primary voltage connected to the circuit breaker. Current flow shall not be required for settings functions. Circuit breaker trip units shall be operable and adjustable with zero current flowing through the circuit breaker.
 - d. True RMS sensing circuit protection shall be achieved by analyzing the secondary current signals received from the circuit breaker current and voltage sensors, and initiating trip signals to the circuit breaker trip actuators when predetermined trip levels and time-delay settings are reached.
 - e. Trip units shall be provided with a display panel. Trip units

shall have an information system that provides LEDs to indicate mode of trip following an automatic trip operation. The indication of the mode of trip shall be retained after an automatic trip. A reset button shall be provided to turn off the LED indication after an automatic trip

- f. Programming may be done via a keypad at the faceplate of the unit. Programming via the communication network if or as shown in drawings.
 - g. The trip unit shall offer a three-event trip log that will store the trip data, and shall time and date stamp the event.
 - h. The trip unit shall have the following advanced protective features integral to the trip unit:
 - 1) Adjustable undervoltage release (defeatable)
 - 2) Adjustable overvoltage release (defeatable)
 - 3) Reverse power and fault current
 - 4) Reverse sequence voltage
 - 5) Under-frequency
 - 6) Over-frequency
 - 7) Voltage phase unbalance and phase loss during current detection.
 - i. Although not preferred but if needed, furnish 24VDC redundant power supply with terminal blocks and 0.5A miniature circuit breakers to distribute control power to each circuit breaker trip unit that requires it for settings. The power supply shall be connected below the main breaker and transfer switch but above any feeder circuit breakers. Provide option for external power supply input.
3. System coordination shall be provided by the following microprocessor-based time-current curve shaping adjustments:
- a. Adjustable long-time setting (set by adjusting the trip setting dial to an amount not to exceed rating plug)
 - b. Adjustable short-time setting and delay with selective flat or I^2t curve shaping,
 - c. Adjustable instantaneous setting
 - d. Adjustable ground fault setting and delay with selective flat or I^2t curve shaping.
4. The microprocessor-based trip unit shall have both powered and

unpowered thermal memory to provide protection against cumulative overheating should a number of overload conditions occur in quick succession.

5. Furnish internal ground fault protection with adjustable settings. Provide neutral ground fault sensor for four-wire loads. Bypass neutral sensor for 3 wire loads.
6. Include ARMS technology for all circuit breakers 400A and above or where shown on drawings.
 - a. Activation and deactivation of the ARMS technology and local indication shall be accessible from the face of the trip unit without opening the circuit breaker door or cover and exposing operators to energized parts.
 - b. Recalibration or adjustment of trip unit parameters shall not be required when enabling / disabling the ARMS technology.
7. Breakers shall have built-in test points for testing the long-time delay, instantaneous, and ground fault functions of the breaker by means of a test set.

C. Manual operators

1. Furnish door interlocked manual operators for mains and selected feeder circuit breakers as shown in the drawings.
2. Manually operated mechanisms designed to open, close and reset circuit breakers.
3. Operators shall be available in three basic configurations— flange mounted, through-the door rotating and direct handle through door to provide a variety of options for different applications and enclosure ratings.

2.03 ACCESSORIES

A. Space Heaters:

1. Outdoor rated switchgear shall be provided with 120 volts AC thermostatically controlled space heaters. Heater wiring shall be to terminal blocks for connection to external power source. One heater shall be provided in each vertical breaker section. Heaters shall have guards to prevent accidental contact with power or control wiring.

B. Key Interlocks:

1. Key interlocks shall be provided as shown on the drawings. The switchgear manufacturer shall be responsible for coordinating interlocks for switchgear main circuit breakers interlocked with generator circuit breakers. Key interlocks shall be as manufactured by Kirk Key Interlock Company, or equal.

16430-6

C. Surge Protective Device (SPD)

1. SPD shall be suitable Service entrance location per ANSI/IEEE C62.41, IEEE C62.45, and UL1449 3rd edition and tested according to IEEE C62.44 as Secondary Surge Arrestor.
2. Unit shall be sealed and not allow vapors from entering the switchboard enclosure after a voltage surge event.
3. Modes of protection – Line to Line, Line to Ground, Line to Neutral (as applicable). Voltage, phase and neutral connections per one-line diagram. Current surge capacity shall be 60,000 amps per mode minimum
4. The SPD shall be factory installed inside the switchboard during assembly by the original equipment manufacturer. The OEM design shall be integral to the design of the switchgear with special paneling and cutouts specifically designed for unit mounting.
5. The SPD connections shall be located as close as possible to the load side of main disconnect device and ground/neutral bar.
6. The SPD shall have integral 30-amp disconnect and fuses. Service of the SPD assembly, fuses or other serviceable components shall be from front access of the switchboard and shall not require disassembly of switchboard panels to repair or replace parts.
7. SPD shall be Cutler-Hammer Clipper, Current Technology TransGuard or equal.

D. Power Monitor:

1. General:
 - a. Microprocessor based multifunction power and energy meter
 - b. Designed for multifunction electrical power, voltage, and current measurement on 3 phase power systems.
 - c. Measured parameters: voltage, current, frequency, unbalance, kW, KVAR, KVA, power factor, kWh.
 - d. Support for 3-Element Wye, 2.5 Element Wye, 2 Element Delta, 4 wire Delta systems.
 - e. 200 ms update for power measurement, 100ms update for voltage, current, Hz.
 - f. Din rail mounting
 - g. 85 to 264 VAC control power, 5W.
 - h. Furnish compatible current transformers with ratio as shown in the drawings or as needed to measure full feeding circuit breaker rated current.
2. Voltage Inputs

16430-7

- a. Configurable to potential transformer ratio.
 - b. Input impedance of 1 Mega Ohm, 0.014W at 120 Volts.
 - c. Direct voltage input range
 - 1) 347 Volts Line to Neutral
 - 2) 600 Volts Line to Line.
 - d. 2500V withstand.
3. Current Inputs:
- a. Configurable to current transformer (CT) ratio 1A or 5A input.
 - b. Burden 0.05VA, Impedance 0.002 ohms
 - c. Meter shall have a maximum burden of 0.005VA per phase, at the maximum of 15 Amperes continuous input.
 - d. Fault current withstand shall be 200 Amps for 1/2 second.
4. Digital I/O:
- a. Two status inputs 24VDC, dry contact.
 - b. One KYZ output, 24VDC, 30mA
5. Accuracy
- a. Revenue meter accuracy
 - b. +/- 1% or better for volts and amps
 - c. +/- 1% for power and energy functions.
 - d. True RMS measurements
6. Communications
- a. Ethernet - 100BaseT Ethernet IP Allen Bradley protocol
 - b. Modbus TCP
7. Acceptable Products
- a. Allen Bradley PM1000 1408-EM3A-ENT Ethernet
 - b. Or Equal
- E. Current Transformers
1. Furnish mounted (preferable) or unmounted current transformers based on space allocated and installation requirements. The current transformer shall have wire leads or binding posts and ratio as shown on the drawings. The accuracy shall be metering accuracy class 0.6 at a minimum burden at 60 hz shall be 2.5 VA and as required to meet specified accuracy of device(s) fed.

PART 3: EXECUTION**3.01 WORKMANSHIP**

16430-8

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship] and as specified herein.

3.02 INSTALLATION

- A. Vertical sections shall be mounted on steel channel sills continuous on two sides. The steel channel sills shall be heavy duty to meet the specific seismic requirements of this project location. These sills shall be mounted on the concrete pad to be installed per the Contract Drawings.
- B. Conduit entering Switchboard shall be stubbed up 1" into the bottom horizontal wireway (typically) directly below the vertical section in which the conductors are to be terminated.
- C. Base of Switchboard shall be adequately grouted, caulked or sealed to prevent the entry of insects and rodents.

3.03 FIELD ASSISTANCE

- A. Provide field testing as specified in Electrical Specifications [Electrical General, Testing].

3.04 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16450**GROUNDING****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Labor, materials, equipment, tools, safety gear, test equipment, incidentals, services, and transportation for a complete electro-mechanical installation as shown on the Drawings, included in these Specifications, or as can be reasonably implied from project descriptions.
- B. The scope of work includes:
 - 1. Furnish and install grounding system required by Drawings, or if not shown or defined, as required by Article 250 of the NEC. Ground conductors shall be sized for the protective device, minimum.
 - 2. Furnish and install conduits, junction boxes, underground boxes, and associated hardware. Provide hardware, conduit, fittings, and other parts for a complete grounding installation.
 - 3. Installations shall be designed and installed with components meeting the NEMA area designation.
- C. Work includes that specified in Electrical Specifications [Electrical General].

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire & Data Cable]
- C. Project Drawings

1.03 QUALIFICATIONS

- A. Material furnished under this specification shall be installed by qualified installers meeting requirements specified in Electrical Specifications [Electrical General, Qualifications].

1.04 SUBMITTAL REQUIREMENTS

- A. Provide submittals and Drawings as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Submit manufacturer's product information for connections, clamps, rods, terminals, and grounding system components.

PART 2: PRODUCTS**2.01 GROUNDING SYSTEM**

16450-1

A. General

1. Grounding conductors shall be sized as shown on the Drawings or in accordance with NEC table 250, whichever is larger.
2. Components of the grounding electrode system shall be manufactured in accordance with UL 467 - Standard for Safety Grounding and Bonding Equipment.

B. Grounding System

1. The utility service ground shall be tied to a building ground grid consisting of a "UFER" and/or ground rod type grounding system.
2. Electrical Contractor shall design layout of ground system if one is not shown on drawings per requirements herein.
3. The UFER shall consist of minimum 25 feet minimum of code sized bare copper wire conductor laid at 3 foot minimum depth encased with ground enhancement material or as detailed on the Contract Drawings. UFER ground shall be located where soil moisture content will be maximized. Terminate UFER ground at ground rod in inspection box.
4. Ground enhancement material shall be permanent and be designed to lower earth resistance in all soil conditions. Once set, material shall have resistivity of not more than 20 ohm-cm resistance. Material shall be set by mixing it with water to form a slurry and shall not dissolve or decompose once cured. Ground enhancement material shall be Erico Ground Enhancement Material (GEM), Lyncole XIT, or equal.
5. Utility services 200A and below: Provide 1 ground rod connected to the service panel with #2 bare copper ground wire and as shown on the drawings.
6. Utility services- 400A: Provide 2 ground rods 8 feet apart, connected together, and to the UFER ground, and to the service panel with #2 bare copper ground wire. Connect ground system to switchboard ground bus in two places from ground rods.
7. Utility services - 600A to 800A: Provide 3 ground rods 8 feet apart, connected together, and to UFER ground, and to the service panel with #1/0 bare copper ground wire. Connect ground system to switchboard ground bus in two places from ground rods.
8. Utility services 1000A to 1600A: Provide 4 ground rods 12 feet apart minimum, connected together, and to UFER ground, and to the service panel with #4/0 bare copper ground wire. Connect ground system to switchboard ground bus in four places from ground rod inspection boxes.
9. Utility services 2000A: Provide 4 ground rods 12 feet apart minimum, rectangular pattern, connected together, and to the UFER ground, and

to the service panel with #250 bare copper ground wire. Connect ground system to switchboard ground bus in four places from ground rod inspection boxes.

10. Utility services 3000A to 4000A: Provide 6 ground rods 16 feet apart minimum, rectangular pattern, connected together, and to the UFER ground, and to the service panel with #500 bare copper ground wire. Connect ground system to switchboard ground bus in four places from ground rod inspection boxes.
11. The ground bonding wire(s) from the ground rod(s) shall extend through and appropriately sized conduit into the electrical panel. Connect the ground wire(s) to the ground bus with readily visible UL approved "ground clamp" attached to the ground bus.
12. Install bare copper ground bond wires from the UFER ground to the various locations shown on the Drawings.

C. Raceway Grounds

1. Metallic conduits shall be assembled to provide a continuous ground path. Metallic conduits shall be bonded using insulated grounding bushings.

D. Equipment and Enclosure Grounds

1. Electrical and distribution equipment shall be connected to the grounding system. Cables shall be sized as specified.

E. Components

1. Ground rod shall be $\frac{3}{4}$ " x 10 ft solid steel with 10-mil copper-cladding.
2. Provide ground well enclosures for all outdoor ground rods. Furnish Christy type F8 or equal unless otherwise shown on the Drawings.
3. Ground rod clamps shall be bolt-on type as manufactured by O-Z Gedney type GRC, or equal.
4. Grounding and bonding wires shall be installed in all PVC conduits and nonmetallic raceways and connected to the ground bus and all equipment.
5. Each electrical enclosure shall have a copper ground bus. Screw type fasteners shall be provided on all ground busses for connection of grounding conductors. Ground bus shall be a Challenger GB series, ILSCO CAN series or equal.

PART 3: EXECUTION

3.01 WORKMANSHIP

16450-3

- A. All work in this Section shall conform to the codes and standards specified in specified in Electrical Specifications [Electrical General, Workmanship].

3.02 INSTALLATION

A. Grounding System:

1. Install all products per Electrical Specifications [Electrical General, Installation].
2. Each nonmetallic conduit shall contain a code sized grounding conductor.
3. The system neutral conductor and all equipment and devices required to be grounded by the National Electrical Code shall be grounded in a manner that satisfies the requirements of the National Code.
4. The system neutral (grounded conductor) shall be connected to the system's grounding conductor at only a single point in the system. This connection shall be made by a removable bonding jumper sized in accordance with the applicable provisions of the National Electrical Code if the size is not shown on the Drawings. The grounding of the system neutral shall be in the enclosure that houses the service entrance main overcurrent protection.
5. Utilize mechanical connections in accessible locations and exothermic connections in non-accessible or buried locations.
6. The secondary on all transformers shall be grounded.
7. All raceway systems, supports, enclosures, panels, motor frames, and equipment housings shall be permanently and effectively grounded.
8. Install insulated grounding conductor with feeders and branch circuit conductors in conduits. Size grounding conductors in accordance with NEC. Install from grounding bus of serving panel to ground bus of served panel, grounding screw of receptacles, lighting fixture housing, light switch outlet boxes or metal enclosures of service equipment. Ground conduits by means of grounding bushings on terminations at panelboards and distribution panels with 12ga. conductor to grounding bus
9. All receptacles shall have their grounding contact connected to a grounding conductor.
10. Branch circuit grounding conductors for receptacles or other electrical loads shall be arranged such that the removal of a lighting fixture, receptacle, or other load does not interrupt the ground continuity to any other part of the circuit.
11. Attachment of the grounding conductor to equipment or enclosures shall be by connectors specifically provided for grounding. Mounting,

support, or bracing bolts shall not be used as an attachment point for ground conductors.

12. Install grounding electrode conductor and connect to reinforcing steel in foundation footing. Electrically bond building steel to ground system. Bond metal siding not attached to grounded structure.

B. Ductbanks

1. Provide #4/0 AWG bare, stranded ground conductor in approximately the center of the ductbank where shown on plans and for all ductbanks containing cables rated 2kV or greater
2. Ground wire, where required, shall be strapped to a conduit every 5 feet.

3.03 FIELD QUALITY CONTROL

A. Inspections:

1. Engineer shall inspect ground system prior to cover.

B. Testing:

1. Complete applicable test forms if provided in testing specifications [Factory and Field Testing]. If form is not provided, furnish results on a vendor standard form.
2. Test each grounding connection to determine the ground resistance. The grounding test shall be IEEE 81.2 and NETA 7.13. The current reference rod shall be driven at least 100 feet from the ground rod or grid under test. The measurements shall be made at 10-foot intervals beginning 20 feet from the test electrode and ending 80 feet from it, in direct line between the ground rod or center of grid and the current reference electrode.

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16470**PANELBOARD AND POWER TRANSFORMER****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. The Contractor shall supply panelboards and power transformers as specified herein and as shown in the Contract Drawings.
- B. The Contractor shall perform complete startup and testing services for the panelboard and power transformer per Electrical Specifications [Factory and Field Testing].
- C. Work includes that specified in Electrical Specifications [Electrical General].
- D. Reference drawings for panelboard and transformer location – electrical structures or stand-alone. If within electrical structures, the Contractor shall supply the electrical section with factory installed panelboard and transformer. If stand-alone, the Contractor shall install individual components with enclosures as specified herein.
 - 1. The quantity of breakers with size and number of poles as shown on panelboard schedules.
 - 2. Submittal data and drawings.
 - 3. Startup assistance.
 - 4. Panelboard testing.
 - 5. Operation and maintenance manuals.
 - 6. Warranty of all components of the panelboard and power transformer.

1.02 SUBMITTAL REQUIREMENTS

- A. Provide submittals and drawings as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Provide ratings and characteristics including voltage, temperature rise, KVA, efficiency, materials of construction, NEMA enclosure rating, voltage taps, and impedance.
- C. Provide catalog cuts for circuit breakers and devices.
- D. Submit panelboard schedule for approval.

1.03 OPERATION AND MAINTENANCE INFORMATION

- A. Provide operating instructions as specified in Electrical Specifications [Electrical General, Operating and Maintenance Instructions].

PART 2 – PRODUCTS**2.01 PANELBOARDS****A. General**

1. The Contractor shall furnish panelboards of a type indicated on the one-line Contract drawings and specified herein.
2. Furnish and install padlock lock-off attachment for each circuit breaker.
3. Panelboards shall comply with the applicable sections of UL, NEC, and NEMA and shall be Cutler Hammer Pow-R-Line, Square D, ITT or equal.
4. A machine-typed circuit directory with clear plastic cover shall be supplied mounted on the inside of door in a frame when equipment is shipped. Circuit directory shall be as approved in the Submittal.

B. Interiors

1. Interiors shall be completely factory assembled with bolt-on devices.
2. Main and feeder breakers shall include lockout padlock hasp suitable for frame size. Provide Cutler Hammer QLPB123PL, PLK1, or similar.
3. Full size insulated neutral bars shall be included. Neutral busing shall have a suitable lug for each outgoing feeder requiring a neutral connection.
4. Main bus bars shall be plated copper sized in accordance with UL standards to limit temperature rise on any current carrying part to a maximum of 50 degrees C above an ambient 40 degrees C maximum.
5. A copper ground and neutral bus shall be included in all panelboards with terminal screws.

C. Boxes

1. Provide minimum gutter space in accordance with the National Electric Code. Where feeder cables supplying the mains of a panel are carried through its box to supply other electrical equipment, the box shall be sized to include the additional required wiring space. At least four interior mounting studs with adjustable nuts shall be provided.

D. Trims

1. Provide a hinged door over all circuit breaker handles. Doors in panelboard trims shall not uncover any live parts. Doors shall have a catch, lock and trim.

2. Surfaces of the trim assembly shall be properly cleaned, primed and a finish coat of gray ANSI 61 or 49 or to Switchboards and MCCs.
3. Surface trims shall be same height and width as box for surface mount, and $\frac{3}{4}$ " (min) beyond box on all sides for flush mount.

E. Panelboard Ratings

1. Panelboards shall have voltage, phase and short circuit (AIC) ratings as shown on the drawings.
2. Breakers shall be a minimum of 100 ampere frame. Breakers 15 through 100 amperes trip size shall take up the same pole spacing.
3. Panelboards shall be labeled with a UL short circuit rating. When series ratings are applied with integral or remote upstream devices, a label shall be provided. Series ratings shall cover all trip ratings of installed frames. It shall state the conditions of the UL series ratings including:
 - a. Size and type of upstream device
 - b. Branch devices that can be used
 - c. UL series short circuit rating

2.02 POWER TRANSFORMER

- A. The power transformer shall be ventilated dry type. Voltage and KVA ratings shall be as shown on the Contract Drawings. The transformer shall be as manufactured by Cutler Hammer, Jefferson, ACME, Square D, G.E., or equal.
- B. Transformer shall meet latest DOE 2016 minimum efficiency standards.
- C. Coils shall be manufactured of electrical grade aluminum (if stand-alone) or copper (if within a MCC or Switchboard) and shall be adequately braced for short circuit ratings and defined in ANSI and NEMA standards.
- D. Transformers rated 31KVA and above shall have two $2\frac{1}{2}$ percent taps above and below normal full capacity (ANFC and BNFC).
- E. The transformer shall carry full load continuously at rated voltage and frequency without exceeding the average temperature rise of 115°C above an ambient temperature of 40°C . Insulation shall be rated for 220°C (UL class 220°C).
- F. Impedance (Z): 4.0% +/- 0.3% or above to keep downstream fault currents to a minimum.
- G. Low noise. For transformers installed within electrical equipment, vibration isolators shall be installed between the transformer and its mounting surface to reduce case vibration and associated noise.
- H. For stand alone transformers, the transformer housing shall be securely

16470-3

fastened to the mounting surface with bolted connections sized appropriately to withstand seismic zone 4 forces.

- I. The transformer shall be finished with two coats of enamel to resist rust and corrosion.
- J. Transformers located inside electrical structures or enclosures shall be provided with adequate ventilation for heat removal as required.
- K. Transformer neutral shall be grounded in accordance with Article 250-26 and 450-10 of NEC and any applicable local ordinances. Installation and protection of the transformer grounding conductors and attachments shall be per NEC 250-24.

PART 3 – EXECUTION**3.01 WORKMANSHIP**

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].
- B. Perform work to remedy non-compliant installations after inspection.

3.02 INSTALLATION

- A. Provide installation as recommended by the manufacturer and as specified in Electrical Specifications [Electrical General, Installation].

3.03 FIELD ASSISTANCE

- A. Provide testing as specified in Electrical Specifications [Factory and Field Testing].

3.04 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

END OF SECTION

SECTION 16481**VARIABLE FREQUENCY DRIVE****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Provide each variable frequency drive as shown on elementary and one-line Drawings. Variable frequency drive shall be provided with full speed bypass, harmonic conditioner, line and/or load reactor, RFI filter and/or other accessories where shown on The Drawings. All VFDs shall be of the same manufacturer.
 - 1. The System Integrator shall perform and be responsible for procurement, submittals, shop drawings, testing, and all control wiring for the VFD. System Integrator is defined in Electrical Specifications [Electrical General].
- B. Provide enclosure (and side mounted wire chase as required) for top or bottom feed conduit connection as shown in the Drawings. Enclosure size shall not exceed the space allocated in the Drawings for such use.
- C. Provide cooling/ventilation system, mounting hardware, associated components, devices, and field control stations. Some components may be specified in other Electrical Specifications such as terminal blocks, wire, buttons, etc.
- D. Installation of the VFD with components as specified in Electrical Specifications [Electrical General]. The VFD scope of work includes:
 - 1. Providing and installing VFD(s) of rating shown on The Drawings.
 - 2. Submittal data and drawings.
 - 3. Startup assistance.
 - 4. Factory and field testing.
 - 5. Operation and maintenance manuals.
 - 6. Warranty of all components.
- E. Startup and configuration of VFD with actual motor load.
- F. Electrical Specifications [Factory and Field Testing]. Furnish all required labor, materials, safety equipment, transportation, test equipment, incidentals and services to perform factory and/or field testing.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire & Data Cable]
- C. Electrical Specifications [Factory and Field Testing]

1.03 SUBMITTALS REQUIREMENTS

16481-1

- A. Provide Submittals as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Include a record of each VFD parameter available to be changed by the user. The list shall include factory defaults and space for entered values.

1.04 OPERATING AND MAINTENANCE INFORMATION

- A. Provide operation and maintenance instructions as specified in Electrical Specifications [Electrical General].
- B. Include a record of each VFD parameter setup during startup and testing and place a copy of setting in each O & M manual.

PART 2: PRODUCTS

2.01 GENERAL

- A. All equipment shall be designed for the service intended and shall be of rugged construction, of ample strength for all stresses which may occur during fabrication, transportation, erection, and continuous or intermittent operation. All equipment shall be adequately stayed and braced and anchored and shall be installed in a neat and workmanlike manner. Appearance and safety, as well as utility, shall be given consideration in the design of details. All components and devices installed shall be industrial grade and shall be of sturdy and durable construction suitable for long, trouble-free service. Light duty, fragile, and competitive grade devices of questionable durability shall not be used.
- B. The VFD is inclusive of the input stage, buss, output stage, input filters, output filters, and all other assemblies, boards, or conditioning equipment, that make up the entire VFD system. The VFD system is herein referred to simply as "VFD" and is not to be parsed in any way to meet a specification as a specific part or assembly where it cannot be met as a system.
- C. Products that are specified by manufacturer, trade name, or catalog number establish a standard of quality and do not prohibit the use of equal products of other manufacturers provided they are favorably reviewed by the Owner and/or Engineer prior to installation.
- D. Underwriter's Laboratories (UL) listing is required for all substituted equipment when such a listing is available for the first named equipment.

2.02 QUALITY

- A. All equipment and materials shall be new and the products of reputable suppliers having adequate experience in the manufacture of these particular items. For uniformity, only one manufacturer will be accepted for each type of product.
- B. All equipment shall be designed for the service intended and shall be of rugged construction, of ample strength for all stresses which may occur

during fabrication, transportation, erection, and continuous or intermittent operation. All equipment shall be adequately stayed and braced and anchored and shall be installed in a neat and workmanlike manner. Appearance and safety, as well as utility, shall be given consideration in the design of details. All components and devices installed shall be standard items of industrial grade, unless otherwise noted, and shall be of sturdy and durable construction suitable for long, trouble-free service. Light duty, fragile, and competitive grade devices of questionable durability shall not be used.

- C. Products that are specified by manufacturer, trade name, or catalog number establish a standard of quality and do not prohibit the use of equal products of other manufacturers provided they are favorably reviewed by the Owner and/or Engineer prior to installation.
- D. Underwriter's Laboratories (UL) listing is required for all substituted equipment when such a listing is available for the first named equipment.

2.03 VARIABLE FREQUENCY DRIVE

- A. This specification is based on Allen Bradey 755T, ABB ACS-880, or equal. Drive must fit in the locations provided in the plans.
- B. The VFD shall be of the latest technology used to control and maintain a process variable (level, flow, pressure, speed, etc.) by varying the motor speed. The VFD shall be available from a single manufacturer in the horsepower range of 1 to 500 HP.
- C. Performance Requirements
 - 1. Harmonic Attenuation (applies to Ultra Low Harmonic (ULH) as shown in Drawings)
 - a. The VFD shall have an active filter line supply unit which controls the low order harmonic current to reduce the harmonic current impressed on the incoming power feeder.
 - b. The input current to the VFD shall limit the total harmonic content to less than 5% of the VFD's rated input on any power system and under all operating conditions.
 - c. The VFD shall comply with IEEE 519 requirements.
 - 2. Open loop static speed regulation shall be 0.5 % to 1% of rated motor speed. When motor speed feedback is provided from a suitable encoder, closed loop speed regulation shall be 0.1% of motor nominal speed. Dynamic speed accuracy shall be less than 1%-sec with 100% torque step open loop and 0.5%-sec closed loop with 100% torque step. 2. Torque control response time shall be less than 10 ms with nominal torque. In the torque regulating mode, torque regulating accuracy open loop shall be +/- 5%; torque regulating accuracy closed loop shall be +/- 2%;

D. Ratings

1. The VFD shall employ a full wave rectifier to prevent input line notching and operate at a fundamental (displacement) input power factor of 0.98 at all speeds and nominal load.
2. The VFD efficiency shall be 97.5% or better at full speed and load. Efficiency is defined as the output power divided by the input power in terms of percentage. All internal system losses recognized.
3. Load - The VFD shall be designed to continuously operate the following motor/pump load:
 - a. Motor NEMA design B, squirrel-cage induction or specialty specific use motor per Mechanical Division Specification as shown in Drawings.
 - b. Horsepower at full speed R.P.M. of submitted/approved motor.
 - c. Voltage, 230/460 VAC, three phase, 60 Hz.
 - d. Service factor, 1.15 S.F.
4. Input Power - The VFD shall be rated to continuously operate under the following input power conditions:
 - a. The Drive shall be rated to operate from 3-phase power at nominal voltage (208VAC to 600VAC, +10% /-15% as shown in Drawings), 48Hz to 63Hz.
 - b. The overvoltage trip level shall be a minimum of 30% over nominal, and the undervoltage trip level shall be a minimum 35% under the nominal voltage.
 - c. Three phase, phase rotation insensitive.
 - d. Displacement power factor, 0.95 lagging at all loads and speeds above 10% rated load.
5. Output Power - The VFD shall be rated to continuously operate while providing the following output power conditions:
 - a. Voltage, 0 to 500 VAC.
 - b. Frequency, 3 to 60 Hz.
 - c. Continuous motor horsepower.
 - d. VFD amp output (minimum).
 - e. Continuous current - as shown in Drawings or 115% of rated motor nameplate amps, whichever is higher.
 - f. Short term normal current, 110% of continuous rated current for a minimum duration of 1 minute per every 10 minutes running.
 - g. Short term heavy duty overload current, 150% of continuous rated current for a minimum duration of 1 minute per every 10 minutes running.
 - h. Waveform - sine coded PWM.
 - i. The drive's switching pattern shall be continually adjusted to provide optimum motor flux and avoid the high-pitched audible noise.

- j. Diodes and transistors shall have a minimum withstand of 1,200 peak inverse voltage (PIV).
- 6. Environmental - The VFD shall be rated to continuously operate under the following environmental conditions:
 - a. Ambient temperature, 5°F to 122°F (-15°C to 50°C).
 - b. Altitude, no derating below 3,300 ft.
 - c. Relative humidity, 95% non-condensing.
 - d. The drive shall be protected from atmospheric contamination by chemical gasses and solid particles per IEC 60721-3-3, chemical gasses Class 3C2 and solid particles Class 3S2.
 - e. The drive shall be protected from vibration per IEC 60721-3-3 Class 3M4 (sinusoidal displacement 3.0 mm, 2Hz to 9Hz; acceleration 10m/s², 9Hz to 200Hz).
- E. Protection - The VFD shall be provided with the following protection:
 - 1. For each programmed warning and fault protection function, the Drive shall display a message in complete English words or Standard English abbreviations. The three (3) most recent fault messages along with time, current, speed, voltage, frequency and DI Status shall be stored in the Drive's fault history. The last ten (10) fault names shall be stored in Drive memory.
 - 2. The Drive shall include internal MOV's for phase to phase and phase to ground line voltage transient protection.
 - 3. Output short circuit withstand rating and ground fault protection rated for 100,000 AIC shall be provided per UL508C without relying on line fuses. Motor phase loss protection shall be provided.
 - 4. The Drive shall provide electronic motor overload protection qualified per UL508C.
 - 5. Protection shall be provided for AC line or DC bus overvoltage at 130% of max. rated or undervoltage at 65% of min. rated and input phase loss.
 - 6. A power loss ride through feature will allow the Drive to remain fully operational after losing power as long as kinetic energy can be recovered from the rotating mass of the motor and load.
 - 7. Stall protection shall be programmable to provide a warning or stop the Drive after the motor has operated above a programmed torque level for a programmed time limit.
 - 8. Underload protection shall be programmable to provide a warning or stop the Drive after the motor has operated below a selected underload curve for a programmed time limit.
 - 9. Over-temperature protection shall provide a warning if the power

module temperature is less than 5°C below the over-temperature trip level.

10. The VFD shall constantly monitor the load current with an electronic thermal overload relay and trip the drive on motor overload. The electronic overload relay shall be adjustable and compensate for the reduced cooling of the motor at reduced speeds. This protection provides an orderly shutdown should the motor's thermal capabilities be exceeded and eliminates the requirement for conventional motor overload relays.
- F. Digital programmer/controller –The VFD shall be equipped with a front mounted operator control panel (keypad) consisting of a backlit, alphanumeric, graphic display and a keypad with keys for Start/Stop, Local/Remote, Up/Down and Help. Two (2) Softkeys will be provided which change functionality depending upon the position within the parameter hierarchy or state of panel.
1. All parameter names, fault messages, warnings and other information shall be displayed in complete English words or standard English abbreviations to allow the user to understand what is being displayed without the use of a manual or cross-reference table.
 2. The Display shall have contrast adjustment provisions to optimize viewing at any angle.
 3. The control panel shall provide a real time clock for time stamping events and fault conditions.
 4. The control panel shall include a feature for uploading parameter settings to control panel memory and downloading from the control panel to the same Drive or to another Drive.
 5. All Drives throughout the entire power range shall have the same customer interface, including digital display, and keypad, regardless of horsepower rating.
 6. The keypad is to be used for local control, for setting all parameters, and for stepping through the displays and menus.
 7. The keypad shall be removable and insertable under Drive power, capable of remote mounting, and shall have its own non-volatile memory.
 8. Digital Programmer/Controller (HIM) shall be capable of remote door mounting. Cable for remote digital programmer/controller shall be supplied as shown in the Drawings. The HIM shall be mounted and housed to maintain the NEMA 12 door rating.
 9. The standard operator panel shall provide a start-up, maintenance and diagnostic assistants that guides a new user through initial start-up and commissioning of the Drive as well as provide indications for

maintenance and help to diagnose a fault. In addition, a PID assistant, Real-time Clock assistant, Serial Communications assistant, and Drive Optimizer assistant shall be included. A Drive Optimizer assistant permits the user to choose Drive set-up for low nose, drive & motor efficiency or motor control accuracy.

10. The door mounted human interface module (HIM) display shall be capable to view and adjust the following diagnostic and status indicators:
 - a. VFD Speed % or Frequency
 - b. Instantaneous overcurrent.
 - c. Ground fault.
 - d. Overtemperature.
 - e. Overvoltage.
 - f. Undervoltage.
 - g. Overload.
 - h. Overfrequency.
 - i. Amps.
 - j. Voltage.
 - k. Temperature.
 - l. Auxiliary Fault.
 - m. Phase loss.
 - n. Current limit.
 - o. Power and kilowatt hours
 - p. Power up delay.
 - q. Status of discrete inputs and outputs.
 - r. Values of analog input and output signals
 - s. Values of PID controller reference, feedback and error signals.
11. Adjustments - The following setting ranges shall be provided and made independently accessible for operator adjustment:
12. Speed/Torque control functions shall include:
 - a. Minimum speed/torque limits.
 - b. Maximum speed/torque limits.
 - c. Selection of up to seven (7) preset speed settings or external speed control
 - d. Two (2) independent built-in PID controllers to control a process variable such as pressure, flow or fluid level.
 - e. Two (2) analog inputs shall be programmable to form a reference by addition, subtraction, multiplication, minimum selection or maximum selection.
13. Output control functions shall include:
 - a. Current and torque limit adjustments to limit the maximum Drive output current and the maximum torque produced by the motor. These limits shall govern the inner loop torque regulator to provide tight conformance with the limits with minimum overshoot.
 - b. A torque regulated operating mode with adjustable torque ramp

up/down and speed/torque limits.

- G. Input and Output Terminations - The VFD shall have terminals for input and output cabling as defined in the Conduit and Wire Schedule as shown on the Contract Electrical Drawings.
1. Provide power terminal blocks for motor lead connections where drive terminals are hard to reach or require drive cabinet disassembly to connect.
 2. Five (5) digital inputs, all independently programmable with at least twenty-five (25) input function selections. Inputs shall be designed for 120 volts AC input or as otherwise shown in the Drawings. Input functions must include time delay start and hand and auto (Ethernet) control.
 3. Two (2) form C relay contact digital outputs, all independently programmable with at least thirty (30) output function selections. Relay contacts shall be rated to switch a maximum two (2) Amps rms continuous current at a maximum switching voltage of 30VDC or 250VAC. Function selections shall include indications that the drive is ready (no faults and in remote), running, and are addressable from Ethernet as users choice.
 4. Two (2) analog inputs, each selectable for 0VAC - 10VAC or 4mA - 20mA, and independently programmable with at least ten (10) input function selections. Analog input signal processing functions shall include scaling adjustments, adjustable filtering and signal inversion. If the input reference (4-20mA or 0-10V) is lost, the VFD shall give the user the option of the following: (1) stopping and displaying a fault, (2) running at a programmable preset speed, (3) hold the VFD speed based on the last good reference received, or (4) cause a warning to be issued, as selected by the user. The Drive shall be programmable to signal this condition via a keypad warning, relay output and/or over the serial communications bus.
 5. Two (2) analog outputs providing 0 (4) to 20mA signals. Outputs shall be independently programmable to provide signals proportional to at least twelve (12) output function selections including output speed, frequency, voltage, current and power.
 6. Provide I/O input and relay output expansion card(s) as needed to accommodate the I/O wiring as shown in the Drawings. The option card shall be integrally mounted to the drive.
- H. Communications – The VFD shall include communications module for interface to the PLC. All settable parameters and instantaneous operational registers shall be accessible from the communications port.
1. Type
 - a. Ethernet TCP/IP (Allen Bradley Ethernet/IP)

2. Add-On Instructions

- a. The VFD manufacturer must have an add-on instruction that is compatible with the PLC on this project. The add-on instruction provides a preconfigured message command to send and receive information from the drive. The add-on instruction must be a free download available from the manufacturer website at the time of bid and thereafter.

3. Command and Metering registers to include:

- a. Digital input reads (giving status of inputs)
- b. Digital output commands (to relay DOs)
- c. 3 phase voltage and current
- d. Power in KW, KWH and Power factor
- e. Elapsed motor run time
- f. Start/Stop
- g. Running
- h. Fault conditions
- i. Heat Sink Temperature
- j. Others as available.

I. Features - The VFD shall have the following features:

1. Connection of the three incoming line leads and three-motor leads shall be the only connections necessary for manual operation of the VFD unit. All other wiring shall be prewired at the factory and self-contained within the VFD unit. A 120 VAC control power transformer and other auxiliary power supplies shall be provided with the VFD for power to pilot lights, meters, relays, and miscellaneous devices specified to be supplied with the VFD. Lugs shall be provided for connection of all power leads; terminal blocks shall be provided for all other wiring. Relay logic, wiring and enclosure layout shall be equivalent to that shown on the Drawings.
2. The VFD shall be protected by a circuit breaker disconnect unless otherwise shown in the Drawings. The disconnect shall be externally operated and shall have an operator mechanism that is an integral part of the enclosure. An operator mechanism shall be provided to allow padlocking the disconnect in the "off" position with up to two padlocks.
3. AC input fuses shall be provided on the line and/or load side of the VFD (if required by the manufacturer) to isolate the VFD power circuitry upon a fault condition.
4. Three (3) programmable critical frequency lockout ranges to prevent the VFD from operating the load continuously at an unstable speed.
5. Transient and surge voltage power line input protection shall be provided for the VFD through use of metal oxide varistors (MOVs), surge protective module, or other approved equal methods. Transient protection integral to the VFD shall be provided to a minimum of

10,000 volts, 50 joules without failure. The transient protection shall meet or exceed ANSI C7, 90-1971 and IEEE 472-1974 Standards without failure. Failure is defined as loss of components in the VFD including power semiconductors and fuses. The VFD shall be protected from the following, as a minimum, power line transients and recover to automatically restart and resume normal operation without posting a fault:

- a. Switching the primary of a power transformer.
 - b. Switching power factor correction capacitors "ON" and "OFF" line.
 - c. De-energization or energization of contactors, relays, and other power equipment from the power line.
 - d. Starting and stopping of other motors when powered from Utility.
6. The VFD shall not be affected by or generate excessive electro-magnetic interference (EMI). The VFD shall be provided with a radio interference filter (RIF) to meet the following requirements:
- a. The use of a 4 Watt hand-held VHF/UHF transceiver within three feet of the VFD with its doors closed shall not cause erratic operation, loss of configuration, or any other deviation from normal operation.
 - b. The worst case conducted and radiated EMI generated by the VFD shall not be enough to prevent the use of hand held VHF-UHF transceivers within three feet of the VFD with its doors closed.
7. Opening of the VFDs input switches, circuit breakers, or output contactors while the VFD is operating under load shall not result in damage to the VFD power or control circuit components.
8. The VFD shall be capable of starting and operating without a motor load connected.
9. Phase loss protection shall be provided to prevent single phasing of the motor load.
10. The VFD shall have an instantaneous electronic trip circuit to protect the VFD from output line-to-line and line-to-ground short circuits. Output line-to-line and line-to-ground short circuits shall not damage the VFD.
11. The VFD shall be protected from excessive regeneration by a full function regeneration limit circuit which avoids nuisance tripping when overhauling loads occur. The full function regeneration limit circuit reduces the negative current limit of the drive during periods of excessive regeneration allowing the drive to remain fully operational without exceeding the level of regenerated energy which can be safely accepted and dissipated by the inverter. The following performance

characteristics shall be provided:

- a. The regeneration circuit automatically adjusts the negative current limit, allowing the load to decelerate at the fastest rate possible without excessive regenerated energy. Deceleration torque is automatically limited to its maximum safe level.
 - b. If the load tends to overhaul the drive motor, the negative current limit is automatically adjusted to prevent excessive regeneration. The inverter hold back torque decreases and allows the motor to follow the load while maintaining hold back torque at its maximum safe level.
12. Automatic fault reset to automatically restart the drive after any type of fault condition. This automatic restart shall repeat up to three attempts. This automatic reset shall be provided to prevent a drive fault from completely locking out on isolated nuisance fluctuations. When the drive is locked out after its automatic reset attempts the operator shall be able to reset the VFD by a local or remote manual reset pushbutton. Fault lockout shall be indicated on the door mounted drive fail pilot light.
 13. The VFD shall be capable of continued operation during an intermittent loss of incoming line power up to five cycles.
 14. The VFD shall automatically restart upon reapplication of power after a loss of line power. Momentary or sustained power failures shall not fault trip out the VFD or blow any fuses.
 15. Any configuration of adjustments or controls not set by a switch or potentiometer shall be stored in nonvolatile memory. No configuration information shall be lost due to power failures of any duration.
 16. The VFD shall be capable of starting into a rotating motor without tripping out on a fault.
 17. The drive shall have an adjustable voltage boost control capable of providing additional starting torque to the motor at start. This control shall provide the additional voltage only at the frequency range required to start the motor thus reducing the additional motor heating excess voltage would cause at normal operating speeds.
 18. The drive shall be equipped with critical frequency jump circuitry which allows the VFD to be setup to skip two bands of frequencies which cause excessive vibration or noise.
- J. Enclosure - The enclosure type shall be as shown in the Drawings - freestanding, wall mount, motor control center full section, or MCC cubicle mount construction. All components shall be accessible from the front of the enclosure. Rear or side access shall not be required in order to remove or service any component. The enclosure shall include the following in its construction:

16481-11

1. The VFD shall incorporate thermostat/run controlled fans for cooling. The air flow through the VFD compartment shall provide proper cooling of the operating VFD at an (external cabinet) ambient temperature of 104°F. Fan mounting shall include reusable air filters on suction. Provide fans for suction and discharge vents as required maintaining air flow and forcing circulation.
2. Provide specific use fans located within the enclosure to cool, directly, specific components such as line filters or DV/DT filters.
3. Thermostat shall have bi-metallic adjustable set point range of 30° to 140°F. Thermostat shall have a switching capacity of 10A at 120 VAC. Provide Hoffman A-TEMNO temperature switch or approved equal to operate fans. Thermostat shall operate fans in parallel with motor running output of VFD.
4. The VFD, including the enclosure and input protection, shall be UL listed for a minimum of 42,000 RMS symmetrical ampere fault withstand capability. VFDs consisting of the VFD, enclosure, and all accessories, that are not UL listed will not be approved.

2.04 SINGLE TURN POTENTIOMETER

- A. Provide manual single turn potentiometer. Potentiometer shall be compatible with the VFD input for manual speed control. Potentiometers shall be Allen-Bradley 800H, Cutler Hammer or equal.

2.05 HARMONIC LINE/LOAD REACTOR

- A. Provide three phase AC reactor intended for use as an input or output filter for AC-PWM variable frequency drives. Line reactor shall be current rated to maximum continuous VFD amp rating or as shown in the Drawings. The impedance of the reactor shall be 5% or as shown otherwise in the Drawings.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].
- B. Requirements of Related Electrical Sections apply to design, documentation construction and assembly of Variable Frequency Drives.
- C. Perform work to remedy non-compliant installations after inspection.

3.02 FIELD ASSISTANCE

- A. Testing, checkout and start-up of the variable frequency drive equipment shall be performed under the technical direction of a factory trained authorized manufacturer representative.

1. The setup and programming of the VFD shall be provided by a factory-trained representative who is authorized by the VFD manufacturer to perform the startup. This setup and programming shall be done prior to and during the first application of power to the motor. The VFD electronic motor overload protection shall be set to meet the motor nameplate and NEC Code requirements.
 2. Provide testing as specified in Electrical Specifications [Factory and Field Testing].
- B. Provide 1 hour of "VFD Setup" Training on operating and maintenance procedures.
- 3.03 WARRANTY
- A. Provide warranty as specified in Electrical Specifications [Electrical General; Warranty].

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16600**FACTORY AND FIELD TESTING****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. This Section defines factory and field testing requirements of electrical and instrumentation equipment and as specified in this section and in Electrical Specifications. All equipment provided under Electrical Specifications and electrical equipment provided under other sections shall be tested as specified herein.
- B. The Electrical Contractor shall coordinate at no additional cost to the Owner, the services of an approved qualified third party independent testing company for the purpose of performing specific tests as outlined in EXECUTION, Field Test of this section.
- C. The System Integrator, Testing Company and/or Electrical Contractor shall provide all labor, tools, material, power, and technical supervision to perform the specified tests and inspections.
- D. The Electrical Contractor shall be present during field testing and assist the System Integrator and/or Testing Company in testing all equipment. The Electrical Contractor shall be ready to correct any wiring problems found during testing.
- E. The Application Programmer (defined in Electrical Specifications [Electrical General].) and/or Construction Manager will be actively engaged in Operational Testing and Commissioning. These efforts shall be combined efforts of the Application-Programmer/Construction-Manager/Engineer and Contractor. The Contractor shall facilitate test as outlined herein such that hardware, software and application programming are tested completely and all applicable test documentation is completed.
 - 1. Expect that field testing of plant operational testing, SCADA and PLC checkout, is going to require 2 weeks per station after pre-operational tests are done. Contractor and System Integrator shall assist in this start-up. Coordinate with Owner Representative to schedule this start-up period.
- F. It is the intent of these tests to ensure that all equipment is operational within industry and manufacturer's tolerances and is assembled in accordance with design plans and Specifications.
- G. The Owner and/or Construction Manager may witness testing in effort to insure quality and verify results. The Contractor is required to provide notification 2 weeks prior to any test that are intended to be documented and submitted for approval or are final tests. The Owner and Construction Manager must specifically decline witness of each test to be performed, and

16600-1

the test must be successful, and it must be documented on the day of test, in order for it to not have to be repeated in the presence of an authorized witness. Only the Owner or Construction Manager may assign an authorized witness.

- H. All tests shall be documented in writing by the person performing the test on the test forms submitted (and similar to those shown at the end of this section) and signed by the Engineer as satisfactorily completed. The Testing Company, Electrical Contractor or System Integrator performing tests shall keep a detailed log of all tests that failed or did not meet Specifications, including date of occurrence and correction.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Project Drawings
- C. Additional testing may be specified in other Electrical Specifications.

1.03 FACTORY AND FIELD GENERAL REQUIREMENTS

A. Testing General

1. Prior to any field testing Operation & Maintenance Manuals shall have been submitted and approved.
2. The test forms shall be completed by the contractor during testing and calibration of all equipment. All tests shall be witnessed by the Owner's Representative. Completed test forms shall be given to the Owner's Representative the day of the test. Complete two sets of test forms if Contractor wants to keep a copy.
3. The Contractor shall give the Engineer 10 working days notice of the dates and time for inspections and testing.
4. Include test results in the Maintenance and Operational Manual.
5. As a minimum, all the tests indicated/specified on the test forms shall be performed and test forms filled out by the Contractor.
6. Prepare and submit formal test procedures and forms at least two weeks prior to the start of testing. Testing shall not commence until the test procedures have been reviewed and approved. Submit a combined test procedure submittal with separate sections for factory and field tests.
7. If the results of any of tests are unacceptable, the Contractor shall make corrections and perform the tests again until they are acceptable; these tests shall be done at no additional cost.

B. Failure to Meet Test

1. Any system, material or workmanship which is found defective on the basis of these tests shall be reported immediately following the test.

The Contractor shall replace the defective material or equipment and have tests repeated.

C. Safety

1. Testing shall conform to the respective manufacturer's recommendations. All manufacturers' safety precautions shall be followed.
2. Safety, as shown herein and in other divisions, shall be a combination of all methods and practices described. Safety practices may not be determined based on the least restrictive requirement, but instead, on the most restrictive requirement. Obtain clarification if there is any question prior to performing tests.
3. The procedures stated herein are guidelines for the intended tests, the Contractor shall be responsible to modify these tests to fit the particular application and ensure personnel safety. Absolutely no tests shall be performed in such a fashion that personnel safety is jeopardized.
4. The Contractor shall have two or more personnel present at all tests.
5. Two non-licensed portable radios shall be provided by the Contractor for use during testing.
6. Contractor shall comply with California Electrical Safety Orders (ESO) and Occupational Safety and Health Act (OSHA): All test and procedures shall comply with ESO and OSHA as to safety, protective clothing, clearances, padlocks and barriers around electrical equipment energized during testing.
7. The first set of tests to be performed (**pre-energization**) shall determine the suitability for energization and shall be completed with all power turned off.

1.04 QUALIFICATIONS

A. Testing Company

1. Testing company shall have been actively engaged in the type of electrical testing specified in this Division for the past three years (minimum). The Testing Company representative shall have two years experience in field testing of equipment working for the Testing Company or equivalent. The following Electrical Testing Companies are pre-approved.
 - a. EETS (916) 339-9691
 - b. Industrial Test (888)-809-8550
 - c. Emerson Electrical Reliability Services
 - d. Apparatus Testing and Engineering (916) 853-6280
 - e. Apparatus Testing and Engineering (925) 454-1363

16600-3

- f. Power Systems Testing (925) 583-2361
- 2. Testing Companies not listed are required to submit company and individual representative resumes for review and approval.
- B. System Integrator Representative
 - 1. The system integrator representative shall have 1 year experience in field testing of equipment working for the System Integrator or equivalent. If the representative does not demonstrate necessary experience or competence during testing or start-up, the System Integrator shall provide a representative meeting the required competence and experience.
- C. Electrical Contractor Representative
 - 1. The Electrician shall have 5 years minimum experience working with industrial control systems and have a Journeyman level experience rating.
- D. Application Programmer Representative
 - 1. Application programmer will assist in testing as defined herein.

1.05 SUBMITTAL REQUIREMENTS

- A. The Contractor shall ensure that the Testing Company, System Integrator, and all equipment suppliers provide the submittal documentation required in this section. Submittals shall be complete, neat, orderly, and indexed. The Contractor shall check all submittals required under this Division for the correct number of copies, adequate identification, correctness, and compliance with the Contract Specifications and Drawings, and initial all copies certifying compliance.
- B. The System Integrator shall assemble and submit for approval complete testing procedures and forms at least two weeks prior to the start of testing. Contractor is responsible for compiling testing procedures and forms from multiple sub-contractors as required.
- C. Test submittal shall include: (as applicable)
 - 1. Proposed procedure for operational testing whether it is performed in the factory or field. Procedure shall include method, simulated I/O requirements, bypass piping, telemetry, and necessary materials and equipment to conduct test.
 - 2. Test forms (for all tests, factory and field, and regardless of who performs tests). Test forms shall be electronically completed prior to submittal with entry spaces filled to the extent possible. The only remaining data that shall require completion during the test is the test data itself. Test forms shall be provided as illustrated at the end of this section or equal.

3. Approved shop one-line, elementary diagrams and PLC I/O drawings.
4. Control strategies photocopied at 75% reduction with room at the side of page for comments on each paragraph or control strategy.

PART 2: PRODUCTS**2.01 TEST EQUIPMENT**

- A. Test equipment required to perform testing and document results shall be provided by Contractor, Testing Company or System Integrator.
- B. Test instruments shall be calibrated to references traceable to the National Institute of Standards and Technology. Instrument calibration shall be current to one year from date of start-up. Test equipment accuracy shall be at least twice the accuracy of instrument being calibrated. Test instrument certificates of calibration shall be on-hand and provided prior to testing.
- C. All test equipment to be used as part of the testing shall be listed in the submitted testing sheets. Contractor supplying the component or system to be tested shall provide all necessary test equipment.
- D. The overall accuracy of each input and output loop shall be checked to ensure that it is within manufacturer's Specification tolerances. In no case shall the error exceed 0.25% or 0.04 mA.

PART 3: EXECUTION**3.01 FACTORY TESTING**

- A. General Requirements
 1. The System Integrator shall conduct a thorough and complete factory test witnessed by Engineer per the criteria specified herein. Factory test shall be held within 150 miles of project location.
 2. Temporary wiring and equipment shall be provided and connected during these tests to simulate the complete assembled system.
 3. The testing shall not be started until the manufacturer has completed fabrication, wiring, setup, programming; quality control testing; and can demonstrate the system is complete and operational.
 4. The equipment required for factory testing shall consist of, but is not limited to, control panels, MCCs, and/or miscellaneous electrical panels as provided under this contract.
 5. Two digital multimeters/signal generators (minimum +/- 0.1% accuracy) with clip-on leads shall be supplied and utilized during testing for measurement of digital and analog outputs.
 6. All factory tests shall be conducted at the System Integrator's facility.

All factory tests shall be completed prior to shipment to the jobsite. The equipment shall be fully assembled, and connected (and programmed) similar to as it will be installed.

7. The length of the factory testing shall be a minimum of three (3) working day(s) (8 hours per day).
8. If the equipment is not ready for factory testing, the test will be cancelled and rescheduled for a later date. The Contractor shall be responsible for paying liquidated damages for expenses incurred by the Owner Representative to come to a cancelled test. One thousand dollars (\$1000.00) in liquidated damages shall be deducted from his contract each occurrence.
9. Faulty and/or incorrect hardware or software operation of major portions of the system may, at the discretion of the Engineer, be cause for suspension, cancellation, or restarting of the factory test, at no additional cost to the Owner or extension in Contract time.
10. The Systems Integrator shall develop, furnish, and install a test program to be loaded into PLCs to verify all Logic Controller I/O Point to Point Tests prior to start of applications program testing. Systems Integrator shall use a computer running PLC programming software to confirm I/O calibration and status, force outputs and communications configuration.
11. The factory test will be considered complete only when the integrated system has successfully passed all tests. No electrical equipment shall be shipped to jobsite without completed test documentation.
12. During the testing period, under the supervision of the System Integrator, the Owner's Representative shall have unlimited and unrestricted access to the usage and testing of system hardware, configuration, software, meters and tools.
13. The System Integrator shall pay all expenses incurred by his personnel including labor, material, transportation, lodging, daily subsistence, and other associated incidental costs during the factory testing.
14. Acceptance and witnessing of the factory tests does not relieve or exclude the Contractor from conforming to the requirements of the Contract Documents.
15. Upon conclusion of factory testing, and at the request of the Application Programmer, the System integrator shall remove the PLC, OI, and communication equipment for Application Programmer's use and programming. The System Integrator shall provide equipment to Application Programmer immediately or ship unit within 2 working days. The System Integrator shall not be responsible for equipment while in Application Programmer's care.
16. All modifications to documentation as a result of the factory tests shall

16600-6

be corrected and completed before the submittal and delivery of "Operation and Maintenance" Manuals.

17. Copies of the completed and witnessed factory testing forms shall be included in the Operation and Maintenance Manual.

B. Factory Tests

1. Structured Factory Tests: The associated factory tests are to be performed by the System Integrator and witnessed by the Owner's Representative. The associated test forms shall be completed during each stage of the test.
 - a. Visual and Mechanical Inspection Tests
 - b. Wiring Tests
 - 1) Contractor shall confirm correct panel wiring per System Integrator panel shop drawings. Panel shop drawings shall be compared with Contract P&IDs and other Drawings to verify all hardwire logic are accounted for. Panel drawings used in factory tests shall be redlined and inserted into Factory Testing Results submittal.
 - c. MCC and Control Panel Pre-Operational Tests
 - d. Logic Controller I/O Point to Point Tests
 - e. Simulated Alarm Tests
 - 1) Simulate the digital and/or analog signals at the terminals to verify that each PLC I/O point is functional and properly programmed. Verify that all parameters (i.e., setpoints, enable/disable toggle bits, timers, etc.) for the alarms operate according to the Specifications. Multiple alarm states (i.e., LO, LO-LO, HI, HI-HI, etc.) shall be checked.
 - f. Simulated Operational Control Tests
 - 1) Simulate the digital and/or analog signals at the field terminals to verify that each control system is functional and properly configured and programmed.
 - 2) Each line of control logic in the Control Strategies section shall be checked. When the complete control strategy has been checked, it shall be signed and dated by testing person and person witnessing test.
 - 3) Verify that all parameters (i.e., setpoints, runtimers, totalization, etc.) operate according to the Specifications.

2. Unstructured Factory Tests: The various unstructured tests shall include, but are not limited to, the following.
 - a. Simulate the equipment failure and power fail/restart of PLC. Check the effects of each failure on maintaining operations with the remaining equipment.
 - b. The factory tests, as a minimum, shall simulate all normal and abnormal operating conditions including steady state, change of state, variable changes, fluctuations, transients, upsets, start-up, shutdown, power failure, and equipment failure conditions.
 - c. Communications test to devices located within control panel and/or in MCCs.
 - d. Simulation of PLC communication error. Demonstrate error detection, alarming, and recovery.
 - e. Measure and test all power supplies for correct voltage. Operate rechargeable devices under battery power to test run duration, alarms and automatic recovery.

3.02 FIELD TESTING

A. General Requirements

1. Field testing is broken down into 4 components
 - a. Pre-Energization testing
 - b. Pre-Operational Testing
 - c. Operational Testing
 - d. Commissioning
2. Project wide, all Pre-Energization testing must be completed prior to Pre-Operational testing, all Pre-Operational testing must be completed prior to Operational Testing, and all Operational Testing must be completed prior to Commissioning.
 - a. Any deviation of this order, whether on a component level or larger scale, must be approved.
 - b. Out of order testing, if allowed, will be evaluated on a case-by-case basis when brought to the attention of the Owner's Representative. The Owner's Representative may require that the entire system, or portions thereof, be retested once the missing component(s) are installed and functional.
3. All equipment supplied by the Contractor or others shall be tested by Contractor per these specifications.
4. Two digital multimeters/signal generators (minimum +/- 0.1%

16600-8

accuracy) , AC current meters, torque wrench, and other specialized test equipment shall be provided by the Contractor for use during testing.

5. If the equipment is determined not to be ready for testing, the test will be cancelled and rescheduled for a later date.
6. Faulty and/or incorrect hardware or software operation of major portions of the system may be cause for suspension, cancellation, or restarting of the area of testing, at no additional cost or extension in Contract time.
7. During the Operational testing period, under the supervision of the System Integrator, the Owner's Representative shall have unlimited and unrestricted access to the usage and testing of all hardware and software in the system.
8. The System Integrator shall pay all expenses incurred by his personnel including labor, material, transportation, lodging, daily subsistence, and other associated incidental costs during field testing.
9. Acceptance and witnessing of the tests does not relieve or exclude the Contractor from conforming to the requirements of the Contract Documents.
10. All modifications to documentation as a result of the tests shall be corrected and completed before the delivery of "as-built" documentation.
11. Copies of the completed and witnessed field testing forms shall be included in the Operation and Maintenance Manual.
12. The various contractors on this project (General Contractor, Electrical Contractor, Testing Company, and System Integrator) shall assume the lead role in testing activities as listed below. The Contractor shall obtain assistance of suppliers and/or manufacturers representatives for any major equipment testing.
 - a. Electrical Contractor:
 - 1) Pre Energization Tests
 - a) Visual Mechanical Tests
 - b) Wire Insulation and Continuity Tests.
 - c) Panelboard Tests
 - d) Breaker Tests
 - e) Fiber Optic Cables
 - 2) Operational Tests.
 - a) Generator Tests
 - 3) Commissioning.

b. System Integrator:

- 1) Pre-Operational Tests
 - a) Visual Mechanical Tests
 - b) Control panel pre-operational test
 - c) MCC pre-operational test
 - d) Motor Tests.
 - e) PLC I/O point to point tests.
 - f) Instrumentation switch tests
 - g) Instrumentation transmitter tests.
- 2) Operational Tests
- 3) Applications Program Testing
- 4) Communications Testing
- 5) SCADA testing
- 6) Commissioning

c. Testing Company

- 1) Grounding System Tests
- 2) Breaker Device Tests

d. General Contractor

- 1) Test Scheduling
- 2) Operational Tests.
- 3) Commissioning.

e. Application Programmer

- 1) Pre-Operational Tests
 - a) PLC I/O point to point tests.
 - b) Instrumentation switch tests
 - c) Instrumentation transmitter tests.
- 2) Operational Tests
- 3) Applications Program Testing
- 4) Communications Testing
- 5) SCADA testing
- 6) Commissioning

B. Electrical Field Tests – The following test shall be performed within each test category. Complete test forms for each electrical panel, instrument, and/or device. Provide separate form for each component to be tested.

1. Pre-Energization Inspections and Tests:

- a. Visual and Mechanical Inspection Tests
- b. Wire Insulation and Continuity Tests
- c. Grounding System Tests
- d. Panelboard Tests
- e. Breaker Tests

16600-10

- f. Fiber Optic Cables
- 2. Pre-Operational Tests:
 - a. MCC Pre-operational Tests:
 - b. Control Panel Pre-operational Tests:
 - c. Motor Testing:
 - d. Generator Testing (if generator is furnished)
 - e. Harmonic Measurement: (Required for systems with VFDs)
 - f. Instrumentation Switch Calibration Tests
 - g. Instrument Transmitter Calibration Tests
 - h. PLC I/O point tests.
 - i. Communication Tests
 - 1) The Contractor shall verify that all communications via radio, telephone, wireline, fiber optic, or other are functional and ready for operational testing. Revise all configurable parameters without additional cost to the Owner as required for an optimally functional system.
 - 2) Verify that all components of the communication system operate together under all operating and power restart conditions. If faults occur, investigate source of problem and correct. Revise all configurable parameters without additional cost to the Owner.
 - 3) Change setpoints from SCADA and confirm that corresponding field setpoint changes correctly. Check every I/O point on every screen, trend, and database.
- 3. Operational Tests:
 - a. After all the previous tests in this subsection are complete, the test forms are completed and signed-off, the Contractor shall conduct operational testing.
 - b. Representatives from the General Contractor, Electrical Contractor, System Integrator, and Owner's Representative shall be present during testing. Operational testing shall be performed by Contractor in the presence of the Owner's Representative.
 - c. During operational testing the Contractor shall follow the instructions of the Owner. The Owner may place restrictions on operation that must be followed by the Contractor during testing. Any accidents or fines caused by actions of the Contractor where warnings or restrictions were placed, shall be remedied or paid by the Contractor.
 - d. Alarm Tests
 - 1) Generate the digital and/or analog signals at the primary

device to verify that each PLC I/O point is functional and properly programmed. Verify that all parameters (i.e., setpoints, enable/disable toggle bits, timers, etc.) for the alarms operate according to the Specifications. Multiple alarm states (i.e., LO, LO-LO, HI, HI-HI, etc.) shall be checked.

e. Operational Control Tests

- 1) Generate the digital and/or analog signals at the primary device by raising or lowering the actual measured process. Inject signal into the terminals or utilize a "force" function within the device only as necessary. Verify that each control system is functional and properly configured and programmed.
- 2) Each line of control logic in the Control Strategies section shall be checked. When the complete control strategy has been checked, it shall be signed and dated by testing person and person witnessing test.
- 3) Verify that all parameters (i.e., setpoints, runtimers, totalization, etc.) operate according to the Specifications.
- 4) Verify that all data, setpoints, alarms are being received at SCADA correctly and that all I/O points on screen are true and accurate representations of field information.

f. Other Tests

- 1) Force a power failure and power fail/restart of PLC and all other systems. Check the effects of each failure on each piece of equipment and automatic recovery.
- 2) Force a PLC communication error. Demonstrate error detection, alarming, and recovery.
- 3) Perform additional operational testing that has not already been witnessed.
- 4) Perform any additional operational testing as necessary to confirm robust and error free operation under all operational conditions.

4. Trial Period

- a. Station/Equipment shall be activated to automatically run for 5 days, 24 hours per day Monday through Friday.
- b. During the trial period the Owner's Representative will test all modes of operation and will look for errors and malfunctions. A

16600-12

punchlist will be generated to be completed by Contractor and re-tested prior to Commissioning.

- c. If equipment failure occurs during the trial period, the Contractor shall repair or replace the defective equipment and shall begin another trial period, Monday through Friday.
- d. This test shall be repeated until all new equipment functions acceptably and without failure for consecutive days.

C. Commissioning:

- 1. Commissioning shall not commence until Operational testing and System Training are complete with documentation submitted and with prior approval.
- 2. Commissioning period
 - a. The new equipment shall be activated by the Contractor to operate in full automatic for 10 consecutive days, 24 hours per day. Commissioning shall only start on Mondays or Tuesdays.
 - b. During Commissioning, the Owner will monitor and run the station in normal automatic mode. If equipment failure occurs during Commissioning, the Contractor shall repair or replace the defective equipment and shall begin another commissioning period after repairs are complete.
 - c. Parallel, existing and/or back-up systems shall remain in place and functional during commissioning period. Demolition of parallel, existing or back-up systems shall not begin until commissioning is completed.
 - d. This test shall be repeated until the new equipment functions acceptably for a consecutive commissioning period.
 - e. Warranty will begin at the start of a successful commissioning period. However, if major hardware failure occurs during commissioning, the warranty and commissioning will restart once the problem has been identified and repaired.

3.03 WARRANTY:

- A. Provide warranty per Electrical Specifications [Electrical General, Warranty].
 - 1. The completion of the above tests does not relieve the Contractor from any warranties specified in the Electrical Specifications or other sections.
 - 2. Warranty shall begin on the start date of a successful Commissioning period.

3.04 FINAL ACCEPTANCE:

- A. Final Acceptance per Electrical Specifications [Electrical General].

SECTION 16600**TEST FORMS**

Index of Forms:

PC	Power Conductor Test Form
CC	Control Conductor Test Form
IC	Instrumentation Conductor Test Form
FIBER	Fiber Optic Conductor Test Form
GS	Grounding System Test Form
VM	Electrical Equipment Visual and Mechanical Inspection Form
PB	Panelboard Test Form
MCO	MCC Operational Test Form
CPO	Control Panel Operational Test Form
BD	Breaker Device Test Form
GCL	Generator Field Check List
GPT	Generator Performance Test Form
GSLD	Generator Sound Level Data Form
MOTOR	Motor Test Form
HM	Harmonic Measurement Test Form
IOP	Programmable Logic Controller I/O Point-to-Point Test Form
ISC	Instrumentation Switch Calibration Test Form
ITC	Instrumentation Transmitter Calibration Test Form

END OF SECTION

16600-14

THIS PAGE IS INTENTIONALLY BLANK

CONTROL CONDUCTOR TEST FORM

PROJECT NAME: _____
TESTING COMPANY: _____

DATE OF TEST: _____
TEST LOCATION: _____

INSULATION TESTS											
COND. # OF #	COND. TO GROUND	CONDUCTOR TO CONDUCTOR									
1		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X									
2		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X								
3		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X							
4		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X						
5		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X					
6		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X	X				
7		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X	X	X			
8		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X	X	X	X		
9		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X	X	X	X	X	
10		1 TO #	2 TO #	3 TO #	4 TO #	5 TO #	6 TO #	7 TO #	8 TO #	9 TO #	10 TO #
		X	X	X	X	X	X	X	X	X	X

NOTES:

- 1) Use single form for each conduit.
- 2) Disconnect both ends of wiring prior to megger tests.
- 3) Megger insulation resistances of all 600 volt insulated conductors using a 500 volt megger for 10 seconds. Make tests with circuits installed in conduit and isolated from source and load. Each conductor shall be meggered conductor-to-conductor and conductor-to-ground. These tests shall be made on cable after installation with all splices made up and terminations installed but not connected to the equipment.
- 4) Each megger reading shall not be less than 22 Meg-ohms resistive. Corrective action shall be taken if values are recorded less than 10 Meg-ohms. Conductors with low ohm values, that do not match similar lengths of conductors the same size, shall be replaced at no additional cost to the Owner.
- 5) Values of different phases of conductors in the same conduit run showing substantially different Meg-ohm values, even if showing above 22 Meg-ohms shall be replaced.

CERTIFIED BY: _____
SIGNATURE

COMPANY

DATE

WITNESSED BY: _____
SIGNATURE

COMPANY

DATE

THIS PAGE IS INTENTIONALLY BLANK

THIS PAGE IS INTENTIONALLY BLANK

FIBER OPTIC CONDUCTOR TEST FORM

PROJECT NAME: _____
TESTING COMPANY: _____

DATE OF TEST: _____
TEST EQUIPMENT #: _____

CABLE INFORMATION

CABLE LOCATION: TO: _____
WAVELENGTH: 850 1300 1310 1883 1550 1625 nm

FROM: _____
CONNECTORS (TYPE): ST SC LC FC MT-RJ

dB CABLE LOSS (TYPICAL): (CONFIRM WITH SUBMITTAL)

MULTIMODE FIBER (MM) - 62.5/125 μ m

3.0 dB per km at 850 nm

1.0 dB per km at 1300 nm

SINGLEMODE FIBER (SM) - 9/125 μ m

0.5 dB per km for 1300 nm

0.4 dB per km for 1550 nm

CONNECTOR LOSS (TYPICAL):

0.5 dB per connector

0.2 dB per splice

CONDUCTOR # OR COLOR	check one MM SM	LENGTH (km)	CABLE ATTENUATION (dB/km)	CONNECTOR LOSS (dB) from above	EXPECTED NOMINAL (dB)	MEASURED (dB)	PASS/FAIL
1			X	+	=		
2			X	+	=		
3			X	+	=		
4			X	+	=		
5			X	+	=		
6			X	+	=		
7			X	+	=		
8			X	+	=		
9			X	+	=		
10			X	+	=		
11			X	+	=		
12			X	+	=		
13			X	+	=		
14			X	+	=		
15			X	+	=		
16			X	+	=		

NOTES:

1. Use a separate test form for each fiber optic cable segment. Use multiple forms per segment if more than 16 conductors.
2. Check for wavelength that is being used by transceivers and perform test at that wavelength. Fill in cable information.
3. Record the length and type of the cable (length in km)(type in MM - Multimode or SM - Singlemode).
4. Calculate the expected nominal dB loss as a basis for pass/fail.
5. Disconnect cables ends and connect to meter and source.
6. Calibrate and zero test equipment.
7. Turn on the source (network equipment or simulator) and test meter and set to proper wavelength. Record the dB loss.
8. Compare the difference between the expected nominal dB and the measured dB.
9. If the dB measurement is less than or within 1 dB of the expected nominal dB then it is a pass - otherwise fail.
10. Research, correct, and retest any fiber runs that failed.
11. Detach the cables from the meter and source and reconnect the cables to devices.

CERTIFIED BY: _____
SIGNATURE

COMPANY

DATE

WITNESS BY: _____
SIGNATURE

COMPANY

DATE

THIS PAGE IS INTENTIONALLY BLANK

GROUNDING SYSTEM TEST FORM

PROJECT NAME: _____ DATE OF TEST: _____
 TESTING COMPANY: _____ TEST LOCATION: _____
 TECHNICIAN: _____ TEST LOCATION: _____
 EQUIPMENT NAME: _____
 SOIL CONDITION: circle one WET DRY MOIST DAYS SINCE LAST RAIN # _____ OVER 7 _____
 TEST ROD LOCATION RELATIVE TO SYSTEM GROUND UNDER TEST (DISTANCE AND DIRECTION) _____
 COMMENTS: _____

FALL OF POTENTIAL TEST


GRAPH OF MEASURED RESISTANCE VS. DISTANCE FROM TEST PROBE

MEASURED VOLTAGE PROBE	
DIST.	RESIST.
20	
30	
40	
50	
60	
70	
80	
90	

RESIST.

OHMS

1.00
0.90
0.80
0.70
0.60
0.50
0.40
0.30
0.20
0.10
0.00

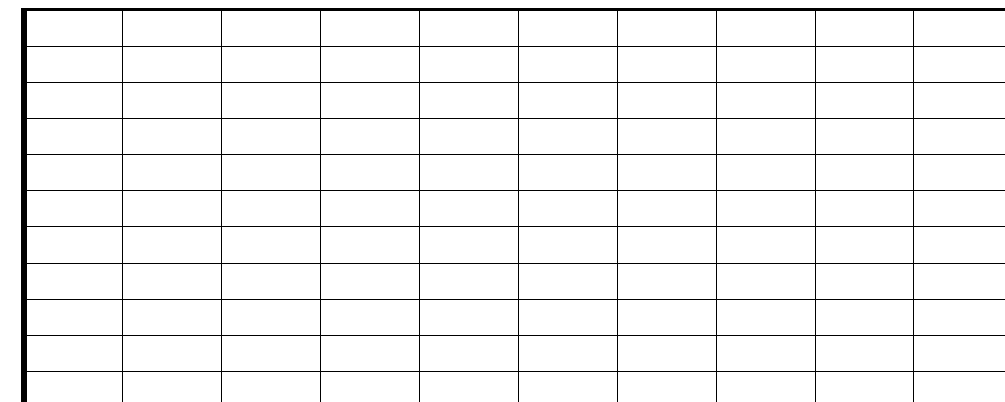

0 10 20 30 40 50 60 70 80 90 100
DISTANCE (FT)

NOTES:

- 1) Use ground resistance test meter and perform separate ground test for each building or independently derived grounding system.
- 2) Verify ground system is in compliance with drawings and specifications.
- 3) Perform the test not less than two days after the most recent rainfall and in the afternoon after any ground condensation (dew) has evaporated.
- 4) Investigate point-to-point resistance values which exceed 1.0 ohm. Correct (by adding additional grounding systems as necessary) and re-test. Consult design engineer if for direction on additional grounding materials and methods.
- 5) Connect all ground electrodes and/or UFER ground together and perform fall of potential test.
- 6) Perform fall-of-potential test in accordance with IEEE Standard 81 and NETA 7.13 on the main grounding electrode or system. Install test electrodes a minimum of 100 feet from system under test.
- 7) Measurements shall be made at 10 feet intervals beginning 20 feet from the test electrode and ending 80 feet from it in a direct line between the system being tested and the test electrode. Plot resistance readings on graphical chart above.
- 8) Perform point-to-point tests to verify low resistance between the main grounding system and all electrical equipment connected to the grounding system. Purpose is to check Cad-Weld connections and continuity point to point.

CERTIFIED BY: _____
 SIGNATURE COMPANY DATE
 WITNESSED BY: _____
 SIGNATURE COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

ELECTRICAL EQUIPMENT VISUAL AND MECHANICAL INSPECTION FORM

PROJECT NAME: _____ DATE OF TEST: _____
TESTING COMPANY: _____ TEST LOCATION: _____
EQUIPMENT NAME: _____ EQUIPMENT #: _____

NAMEPLATE DATA (complete as applicable)

MANUFACTURER: _____ ENCLOSURE: _____
MODEL #: _____ U.L. #: _____
VOLTAGE: _____ PHASE: _____
BUS AMPERAGE: _____ SERVICE: _____
BUS TYPE: _____ BUS BRACING: _____
VERTICAL BUS: _____ HORIZONTAL BUS: _____
GROUND BUS: _____ NEUTRAL BUS: _____
SERIES #: _____

PHYSICAL INSPECTION CHECKLIST

ENTER A-ACCEPTABLE R-NEEDS REPAIR OR REPLACEMENT NA-NOT APPLICABLE

ITEM	CHECK	NOTES
CHECK NON-ELECTRICAL FASTENERS FOR TIGHTNESS		
TORQUE TEST ALL WIRING AND BUS CONNECTIONS		
VERIFY ANCHORAGE IS PER SPECS AND/OR CALCS		
CHECK BUS BRACING AND CLEARANCE		
CHECK MAIN GROUNDING CONNECTION AND SIZE		
VERIFY GROUND BUS BONDING		
VERIFY EQUIPMENT GROUNDS		
VERIFY CONDUIT GROUNDS AND BUSHINGS		
CHECK NEUTRAL BUS AND CONNECTIONS		
VERIFY ALL BREAKERS AND FUSES ARE RATED PROPERLY		
INSPECT FOR BROKEN OR DAMAGED EQUIPMENT		
INSPECT ALIGNMENT OF PANEL AND DOOR		
VERIFY REMOVAL OF ALL DEBRIS AND DUST		
VERIFY WIRE LABELS ARE INSTALLED		
VERIFY ALL WIRE TERMINATIONS		
CHECK FOR PROPER WIRE SIZES		
CHECK FOR PROPER WIRE COLOR CODES		
VERIFY ALL NAMEPLATES		
CHECK FOR PROPER CLEARANCES AND WORKING SPACE		
INSPECT ALL PAINT SURFACES		
CHECK HEATERS AND THERMOSTATS		
CHECK VENTILATION AND FILTERS		
CHECK IF DRAWINGS MATCH EQUIPMENT		
CHECK ACCURACY OF OPERATION & MAINTENANCE		

NOTES:

- 1) Complete checklist above. Note any items that were found out of compliance.
- 2) Torque all electrical connections to values defined by equipment manufacturer or per NEC 110-14.

CERTIFIED BY: _____
SIGNATURE COMPANY DATE

WITNESSED BY: _____
SIGNATURE COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

PANEL BOARD TEST FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 PANEL NAME: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 PANEL TAG #: _____

PANELBOARD NAMEPLATE DATA

UL #: _____
 MAIN BREAKER RATING: _____
 PHASE: _____
 VERTICAL BUS RATING: _____
 NEUTRAL BUS RATING: _____
 GROUND BUS RATING: _____
 ENTRY LOCATION: _____

MANUFACTURE: _____
 MODEL #: _____
 VOLTAGE: _____
 BUS AMPERAGE: _____
 BUS TYPE: _____
 ENCLOSURE: _____
 SERIES: _____

PHYSICAL INSPECTION CHECKLIST

ITEM	CHECK	NOTES
TIGHTEN ALL BOLTS AND SCREWS		
TIGHTEN ALL WIRING AND BUS CONNECTIONS		
VERIFY ALL BREAKERS AND FUSES ARE RATED PROPERLY		
CHECK BUS BRACING AND CLEARANCE		
CHECK MAIN GROUNDING CONNECTION AND SIZE		
VERIFY GROUND BUS BONDING		
VERIFY EQUIPMENT GROUNDS		
VERIFY CONDUIT GROUNDS AND BUSHINGS		
CHECK NEUTRAL BUS AND CONNECTIONS		
INSPECT FOR BROKEN OR DAMAGED EQUIPMENT		
INSPECT ALIGNMENT OF PANEL AND DOOR		
VERIFY ANCHORAGE		
VERIFY REMOVAL OF ALL DEBRIS AND DUST		
VERIFY CIRCUIT BREAKER LEGEND PER CONTRACT		
INSPECT ALL PAINT SURFACES		
VERIFY WIRE LABELS ARE INSTALLED		
VERIFY ALL WIRE TERMINATIONS		
VERIFY PANEL SCHEDULE WITH TERMINATIONS		
VERIFY PROPER WIRE SIZE		

NOTES:

1) Complete checklist above by entering a checkmark for acceptable, R for needs repair or attention

CERTIFIED BY: _____
 SIGNATURE

 COMPANY

 DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY

 DATE

THIS PAGE IS INTENTIONALLY BLANK

MOTOR CONTROL PRE-OPERATIONAL TEST FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 MCC NAME: _____
 MCC TYPE: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 MCC MANUFACTURE _____
 MCC LOCATION: _____

EQUIPMENT NAME	EQUIPMENT TAG #	CUBICLE #	LOCAL DEVICE CHECKS AND TESTS						REMOTE DEVICE CHECKS AND TESTS		
			CONTROL SWITCH	TIME RELAY SETTINGS	METERING & INDICATIONS	OVERLOAD RESET	INTERLOCKS & CONTROL	ALARM & STATUS	CONTROL SWITCH	PUSHBUTTON LOCKOUT & STOP	METERING INDICATIONS

NOTES:

- 1) Verify equipment powers up and operates correctly in hand.
- 2) Perform trip functions and verify equipment returns to normal operation with only necessary operator intervention.
- 3) Enter data for each piece of equipment being served from MCC or Control Panel.
- 4) Enter NA - for non applicable entries.

CERTIFIED BY: _____
 SIGNATURE

 COMPANY

 DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY

 DATE

THIS PAGE IS INTENTIONALLY BLANK

CONTROL PANEL PRE-OPERATIONAL TEST FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 CONTROL PANEL NAME: _____
 CONTROL PANEL MANUFACTURER: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 CONTROL PANEL TAG #: _____
 CONTROL PANEL TYPE: _____

CATEGORY	EQUIPMENT TAG #	DEVICE CHECKS AND TEST								
		CONTROL SWITCHES	OPERATOR INTERFACE	PANEL METERS	PANEL LIGHTS	PANEL NAMEPLATES	PLC POWER SUPPLY	I/O CARDS		
Height										
Voltage										
Function										
CATEGORY	EQUIPMENT TAG #	POWER SUPPLY 1 (V)	POWER SUPPLY 2 (V)	POWER SUPPLY 3 (V)	UPS	PANEL LIGHTS				
Function										
Voltage										

NOTES:

- 1) Set configurable parameters and verify voltage input prior to applying power.
 - 2) Verify equipment powers up and operates correctly.
 - 3) Perform trip functions and verify equipment returns to normal operation with only necessary operator intervention.
 - 4) Complete checklist above by entering a checkmark (CM) for acceptable, or R for needs repair or attention, or NA for not applicable
- Attention Required:

CERTIFIED BY: _____
 SIGNATURE

 COMPANY

 DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY

 DATE

THIS PAGE IS INTENTIONALLY BLANK

BREAKER DEVICE TEST FORM

PROJECT NAME: _____ DATE OF TEST: _____
 TESTING COMPANY: _____ TEST LOCATION: _____
 PANEL NAME: _____ PANEL TAG #: _____
 PANEL TYPE: _____

EQUIPMENT INFORMATION

EQUIPMENT NAME: _____ EQUIPMENT H.P.: _____
 EQUIPMENT TAG#: _____ EQUIPMENT KVA: _____

BREAKER INFORMATION

MANUFACTURE: _____ VOLTAGE: _____ CHARACTER: _____
 PART #: _____ INTERRUPT: _____ CURVE: _____
 FRAME #: _____ RATING: _____ LOCATION: _____

BREAKER TESTS

MFGR TRIP TIME @300% MIN: _____ BREAKER RATING/ RANGE: _____
 MFGR TRIP TIME @300% MAX: _____ FINAL BREAKER SETTING: _____
 MFGR INST. PICKUP AMPS: _____

CONTACT RESISTANCE TESTS - OHMS

INSULATION RESISTANCE TESTS - MEGOHMS

PHASE A	PHASE B	PHASE C	A-GND	B-GND	C-GND

CURRENT TESTS

INSTANTANEOUS CURRENT TRIP TESTS

TRIP TIME IN SECONDS @ 300% AMPS

AMPS

PHASE A	PHASE B	PHASE C	PHASE A	PHASE B	PHASE C

ADDITIONAL TESTS AND SETTING AS APPLICABLE

	PICK UP		DELAY-TIME		
FUNCTION	RANGE	SETTING	RANGE	SETTING	
LONG TIME					
SHORT TIME					
GROUND FLT.					

NOTES:

- 1) All breakers shall be checked for proper mounting, conductor size, and feeder designation. Operate circuit breaker to ensure smooth operation. Inspect case for cracks or other defects. Check tightness of connection with torque wrench in accordance with manufacturer's recommendations.
- 2) Thermal magnetic breakers, 100 amps and above, shall be test per NETA specification 7.6.1.1. Time current characteristic tests shall be performed bypassing 300% rated current through each pole separately. Trip time shall be noted. Instantaneous pickup current shall be determined by run up or pulse method. Clearing times should be within 4 cycles or less. At end of test the thermal breakers shall be set by Contractor.
- 3) Magnetic breakers (MCP), regardless of amperage rating, shall be tested. Instantaneous pickup current shall be determined by run up or pulse method. Clearing time should be within 4 cycles or less. At end of test the breaker trip setting shall be set by Contractor based on the motor locked rotor current.
- 4) Contact resistance shall be measured and be compared to adjacent poles and similar breaker. Deviations of more than 50% shall be reported to Engineer. Insulation resistance shall be measured and shall not be less than 50 megaohms. All trip times shall fall within NETA Table values. Instantaneous pickup current levels should be within 20% of manufacturer's published values.

CERTIFIED BY: _____
 SIGNATURE COMPANY DATE

WITNESSED BY: _____
 SIGNATURE COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

GENERATOR FIELD CHECK LIST

PROJECT NAME: _____ DATE OF TEST: _____
 TESTING COMPANY: _____ TEST LOCATION: _____

No.	Check box	Description
1	_____	Equipment installed in suitable location?
2	_____	Adequate clearance on all sides to allow ease of maintenance?
3	_____	Proper construction and leveling of mounting base?
4	_____	Anchorage installed per seismic calculations?
5	_____	Adequate heating for equipment room?
6	_____	Battery-powered emergency lighting installed in equipment room?
7	_____	Adequate incoming and outgoing air (louver motors adjusted, tested and of proper voltage)?
8	_____	Radiator duct properly sized and connected?
9	_____	Cooling system properly filled?
10	_____	Proper level of specified oil in crankcase?
11	_____	Adequate fuel supply for test?
12	_____	Flexible sections installed in cooling water lines?
13	_____	Manually-operable fuel and cooling water valves open and ready for operation?
14	_____	Flexible fuel lines installed between engine and fuel piping?
15	_____	Fuel tanks and piping installed in accordance with applicable codes and standards?
16	_____	Adequate fuel transfer tank pump lift and pump motor properly wired?
17	_____	Proper size exhaust line and flexible connector(s)? Flexible connector(s) should not be bent.
18	_____	Exhaust line condensate trap with drain installed?
19	_____	Exhaust line installed with proper downward outgoing incline?
20	_____	Proper-specified muffler installed with hangers and mounts tight?
21	_____	Battery(ies) of proper size and voltage?
22	_____	Battery(ies) filled with electrolyte and properly connected to charger?
23	_____	Battery charger AC circuit properly connected and charger operational?
24	_____	Battery(ies) properly mounted with adequate ventilation?
25	_____	Starting cables of proper length and gauge?
26	_____	Starting cables properly connected to battery(ies)?
27	_____	Generator load conductors of proper ampacity, and properly connected to the correct location?
28	_____	Load conductors, engine start leads, battery and heater power source leads installed and in correct conduits?
29	_____	All other wiring, including customer added options, connected properly?
30	_____	Nameplate voltage and frequency of both generator set and transfer switch matching normal/utility source ratings?
31	_____	Has generator phase rotation been checked versus utility?
32	_____	Transfer switch AC conductors properly connected?
33	_____	Transfer switch switching mechanism free from binding? NOTE: Disconnect all AC sources, and operate manually to check.
34	_____	Generator room clean of all loose material not related to Generator?
35	_____	Exhaust stack protected from entry by rain, snow, and animals?
36	_____	Approved heat-isolating thimble(s) installed at points where exhaust line passes through combustible wall(s) or partition(s)?
37	_____	Exhaust system termination located to prevent entry of exhaust gases into structures?
38	_____	Exhaust line free of excessive bends and restrictions? Back pressure under specified limit?
39	_____	Have all manufacturers' start-up instructions been completed?

NOTES: Before start-up, the Contractor and Generator Supplier must make the following installation checks in addition to those recommended by Generator Manufacturer. Some checks may require a running generator and should be checked immediately during first generator run

This form is intended to be used as a general guide. Use the manufacturer's Operations and Maintenance manual for reference in performing each of the following checks

CERTIFIED BY: _____
 SIGNATURE COMPANY DATE

WITNESSED BY: _____
 SIGNATURE COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

GENERATOR PERFORMANCE TEST REPORT

PROJECT NAME: _____ DATE OF TEST: _____
 TESTING COMPANY: _____ TEST LOCATION: _____

NAMEPLATE DATA

MANUFACTURER: _____ S/N: _____ KW: _____ KVA: _____
 GENERATOR MODEL: _____ S/N: _____ VOLTS: _____ PH: _____
 ENGINE MODEL: _____ S/N: _____
 ALTERNATOR MODEL: _____ S/N: _____

PRELOAD TESTS VOLTAGE MEASUREMENTS

L1 TO L2: _____ L1 TO N: _____ BLOCK HEATER VOLTAGE _____
 L2 TO L3: _____ L2 TO N: _____ BLOCK HEATER WATTAGE _____
 L3 TO L1: _____ L3 TO N: _____ BATTERY VOLTAGE _____

PRELOAD TESTS AND SHUTDOWNS

PRE-ALARMS	INDICATOR LIGHT	SHUTDOWNS	INDICATOR LIGHT	SHUTDOWN FUNCTION
GENERATOR RUN LIGHT	_____	OVERSPEED	_____	_____
ALARM HORN & SILENCE	_____	OVERCRANK	_____	_____
SWITCH NOT IN AUTO	_____	EMERGENCY STOP	_____	_____
PRE LOW OIL PRESSURE	_____	LOW OIL PRESSURE	_____	_____
PRE HIGH ENGINE TEMPERATURE	_____	HIGH ENGINE TEMPERATURE	_____	_____
PRE LOW COOLANT LEVEL	_____	LOW COOLANT LEVEL	_____	_____
PRE LOW FUEL LEVEL	_____	LOW FUEL LEVEL	_____	_____
LOW COOLANT TEMP WARNING	_____		_____	_____
LOW/HIGH BATTERY VOLTAGE	_____		_____	_____
AUXILLIARY FAULT	_____	AUXILLIARY	_____	_____

PERFORMANCE TESTS / LOAD ACCEPTANCE

FULL LOAD VOLTAGE DIP _____% FREQUENCY DIP _____%
 RECOVERY TIME _____SEC RECOVERY TIME _____SEC
 WITH SPECIFIED VOLTAGE DIP _____% FREQUENCY DIP _____%
 MOTOR LOAD RECOVERY TIME _____SEC RECOVERY TIME _____SEC

LOAD TEST @ 1.0 POWER FACTOR

TIME STAMP	LOAD	VOLTS	AMPS	HZ	KW	AMB °F	WATER °F	OIL PSI	ENGR HRS
WARM UP	0								
0.1	25								
0.1	50								
0.2	75								
0.2	100								
3.4	100								

NOTES:

CERTIFIED BY: _____
 SIGNATURE COMPANY DATE

WITNESSED BY: _____
 SIGNATURE COMPANY DATE


THIS PAGE IS INTENTIONALLY BLANK

GENERATOR SOUND LEVEL DATA FORM

PROJECT NAME: _____
TESTING COMPANY: _____

DATE OF TEST: _____
TEST LOCATION: _____

SITE CONDITIONS

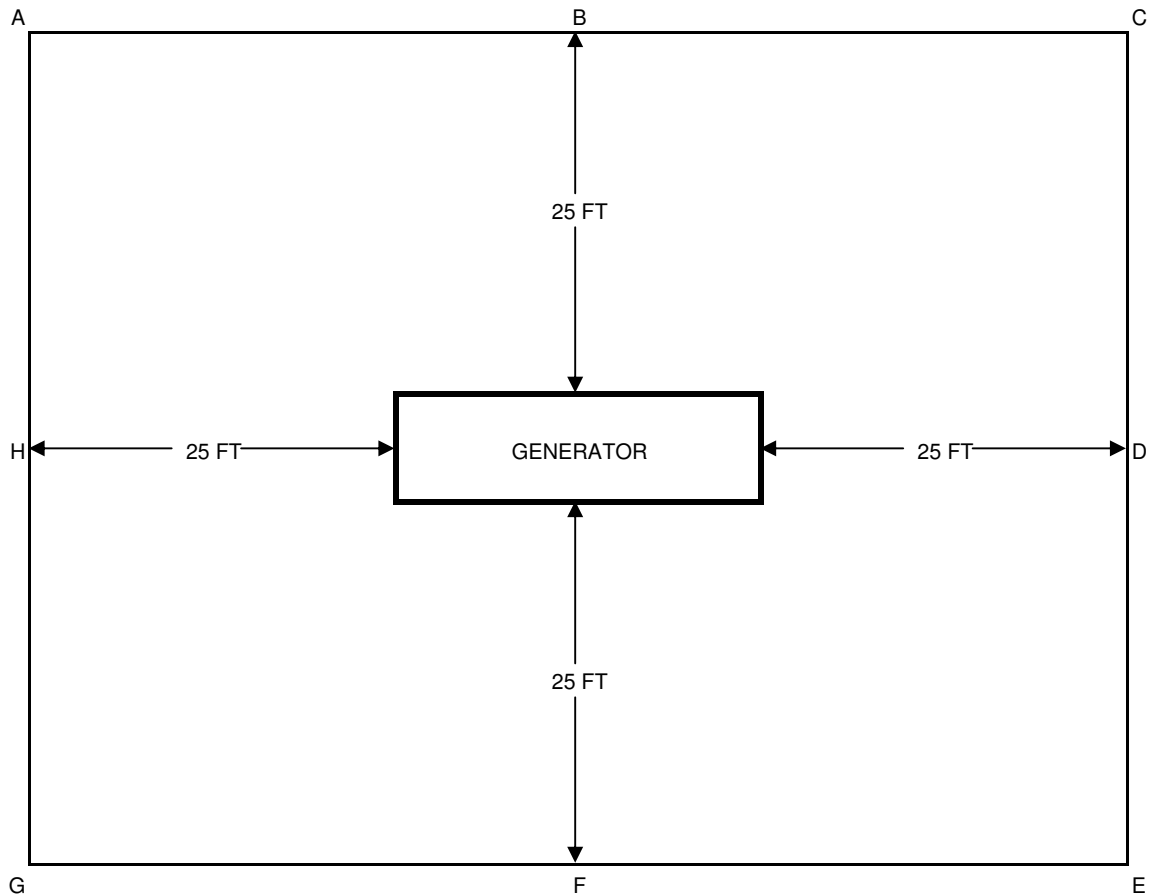

MEASURED NOISE - LOCATION									
	A	B	C	D	E	F	G	H	
NOT RUNNING									
NO LOAD									
EXPECTED MAX LOAD									
FULL LOAD									

NOTES:

- 1) Note permanent obstructions (within 25 FT) as they exist on site on this drawing.
- 2) Measure sound pressure level (dB) using acoustic sound meter on "A" setting.
- 3) Measure SPL background noise, generator at idle, and at full load.

CERTIFIED BY: _____
SIGNATURE

COMPANY

DATE

WITNESSED BY: _____
SIGNATURE

COMPANY

DATE

THIS PAGE IS INTENTIONALLY BLANK

MOTOR TEST FORM

PROJECT NAME: _____ DATE OF TEST: _____
 TESTING COMPANY: _____ TEST LOCATION: _____
 MOTOR NAME: _____ MOTOR TAG: _____
 SERIAL #: _____

MOTOR NAMEPLATE DATA

MFG: _____ PHASE: _____ TYPE: _____ P.F: _____ S.F: _____ NEMA: _____
 VOLTS: _____ HP: _____ DUTY: _____ RPM: _____ CODE: _____ DESIGN: _____
 FREQ: _____ FLA: _____ MODEL: _____ FRAME #: _____ ROTATION (CW/CCW): _____

INSULATION RESISTANCE TEST PHASE-TO-GROUND/PHASE-TO-PHASE

A: _____ / _____ B: _____ / _____ C: _____ / _____

CONTROL SETTINGS AND TESTS

MOTOR HEATER MEASURED AMPS: _____ (AMPS) MOTOR OVERLOAD SETTING: _____ (AMPS)
 MOTOR THERMAL TRIP TEST: _____ OVERLOAD RESET TEST: _____ (YES/NO)
 MINIMUM SPEED (IF VFD): _____ (HERTZ) COIL RESISTANCE: AB BC CA

PHYSICAL MOTOR TESTS - ACTUAL MEASURED VALUES

VOLTAGE (VOLTS)		AMPERAGE (AMPS)		POWER	
AB:	_____ V	A:	_____ A	POWER FACTOR:	_____
BC:	_____ V	B:	_____ A	POWER DRAW:	_____ KW
CA:	_____ V	C:	_____ A	HORSEPOWER:	_____ HP
IMBALANCE:	_____ %	IMBALANCE:	_____ %		

NOTES:

- 1) Perform coil resistance measurements on motor leads with a low-resistance ohmmeter. Note measurements.
- 2) Perform insulation-resistance test utilizing 500 volt megger and/or accordance with manufacturer's published testing procedures. Motors 200 HP and more test duration 10 minutes, 200 HP and less test duration 1 minute.
- 3) Perform DC overpotential tests on motors rated 1000 HP and 4000 volts or greater in accordance with ANSI/IEEE Standard 95.
- 4) Verify that pump/shaft seals are lubricated and that automated lubrication systems are functional.
- 5) Verify that motor protection/monitoring circuits are installed and connected per contract drawings and manufacturer requirements.
- 6) Verify that the motor space heater is functional.
- 7) Perform a rotation test to insure correct shaft direction by "bumping" motor. Reverse as necessary in appropriate place. Phase taping must remain in order on terminals left-to-right once completed.
- 8) Measure running current and evaluate relative to load conditions and nameplate full-load amperes.
- 9) Record the voltage and current on all phases while operating under full-load. If voltage or current imbalance is above 2 percent, or if current is above nameplate FLA or expected level, investigate cause and report on findings. Calculate imbalance by dividing (high minus low measurement) by the average measurement of all 3 phases.
- 10) Vibration tests shall be conducted in cases of discernable abnormal vibration or when ordered by the Engineer (due to perceived excessive vibration). Vibration shall not exceed 0.1 in./sec as measured opposite driven end of motor. Make necessary corrections to reduce vibration below limit at all operational speeds and loads.

COMMENTS:

CERTIFIED BY: _____
 SIGNATURE COMPANY DATE
 WITNESSED BY: _____
 SIGNATURE COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

HARMONIC MEASUREMENT TEST FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 TECHNICIAN _____
 POINT OF MEASUREMENT: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 EQUIPMENT NAME: _____

(If available, take measurements on primary side of main breaker, otherwise, on secondary side of main breaker.)

COMMENTS:

MEASURED HARMONIC VOLTAGE VALUES												
RUNNING CONDITION			TIME	VOLT	AMPS	THD(V)	THD(A)	5TH	7TH	11TH	13TH	15TH
PUMP 1 SPEED	PUMP 2 SPEED	PUMP 3 SPEED										
0	0	0										
70	0	0										
90	0	0										
100	0	0										
70	70	0										
90	90	0										
100	100	0										
70	70	70										
90	90	90										
100	100	100										

NOTES:

- 1) Measure the harmonics with a harmonic analyzer with each combination of pumps shown or as designated by Engineer at start-up in operation on the Utility source. Repeat test on generator (if applicable).
- 2) Use multiple forms and/or attach printouts of harmonic analyzer machine.
- 4) Expand this chart for pump stations/systems with more than 3 VFD pumps.
- 5) All harmonic conditioning equipment shall be on-line and operate other non-VFD loads as normal during test.

CERTIFIED BY: _____
 SIGNATURE

 COMPANY

 DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY

 DATE

THIS PAGE IS INTENTIONALLY BLANK

PROGRAMMABLE LOGIC CONTROLLER I/O POINT-TO-POINT TEST FORM

PROJECT NAME: _____
 TESTING CO: _____
 PANEL NAME: _____
 PLC NAME: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 PANEL TAG #: _____
 RACK # _____ SLOT # _____ I/O TYPE _____

I/O POINT				Scale					Digital	Operator	SCADA	Pass/Fail
I/O #	TYPE	TAG #	Description	@4mA	@8mA	@12mA	@16mA	@20mA	On/Off	Interface	Screen	CM or R
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												

NOTES:

- 1) Connect signal generator to each I/O point for factory testing.
- 2) Utilize actual instrument to generate signals for field pre-operational tests where possible.
- 3) Verify function and accuracy of loop by switching the digital signal or modulating the analog signal from the connected device or instrument
- 4) Field verify all instruments and indicators within loop of signal.
- 4) Confirm polarity of signals and calibration ranges are equivalent for all components in loop.
- 5) Include significant digits past decimal in scale columns
- 6) Complete checklist above by entering a checkmark (CM) for acceptable, or R for needs repair or attention
- 7) Note items that need attention below

Attention Required:

CERTIFIED BY: _____
 SIGNATURE

 COMPANY DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY DATE

THIS PAGE IS INTENTIONALLY BLANK

INSTRUMENTATION SWITCH CALIBRATION TESTS FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 INSTRUMENT NAME: _____
 INSTRUMENT UNITS: _____
 TYPE: _____
 SERIAL #: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 INSTRUMENT TAG#: _____
 NAME: _____
 MODEL: _____

MANUFACTURER			INSTRUMENT		
NAME: _____ TYPE: _____ MODEL: _____ SERIAL #: _____			UNITS: _____		
PROCESS SETPOINT	INCREASING TRIP POINT	DECREASING TRIP POINT	DEADBAND	SETPOINT TIME DELAY	ACTUAL TIME DELAY

NOTES:

- 1) Field test instrumentation and associated control systems in accordance with the specifications and the manufacturer's instructions. Instrumentation shall function as intended under actual process conditions or shall be repaired or replaced at Contractors expense.
- 2) Complete a separate calibration form for each instrument provided.
- 3) Simulate process variable in field by applying known pressure, temperature, opening/closing measured device, raising/lowering actual level, etc. as required to confirm calibration. This step must be witnessed by inspector.

CERTIFIED BY: _____
 SIGNATURE

 COMPANY

 DATE

WITNESSED BY: _____
 SIGNATURE

 COMPANY

 DATE

THIS PAGE IS INTENTIONALLY BLANK

INSTRUMENTATION TRANSMITTER CALIBRATION TEST FORM

PROJECT NAME: _____
 TESTING COMPANY: _____
 INSTRUMENT NAME: _____

DATE OF TEST: _____
 TEST LOCATION: _____
 INSTRUMENT TAG#: _____

MANUFACTURER				INSTRUMENT			
NAME: _____				RANGE: _____			
TYPE: _____				SCALE: _____			
MODEL: _____				UNITS: _____			
SERIAL #: _____				TRANSMITTER OUTPUT: _____			
REMOTE SENSOR TYPE: _____				FACTORY SPECIFIED ACCURACY: _____			
(If Applicable)				REMOTE SENSOR OUTPUT: _____			
(If Applicable)				(If Applicable)			
DESIGNED VALUE				ACTUAL VALUE			
INPUT SIGNAL	OUTPUT	ENG VALUE	CALCULATED TOLERANCES	INSTRUMENT DISPLAY	INSTRUMENT OUTPUT SIGNAL	PROCESS INDICATOR	LOGIC VALUE

NOTES:

- 1) With this form, attach and submit factory calibration forms for flowmeters and transmitters that are available from factory.
- 2) Field test and calibrate instrumentation and associated control systems in accordance with the specifications and the manufacturer's instructions. Instrumentation shall meet specified accuracy or shall be repaired or replaced at Contractor's expense.
- 3) Complete a separate calibration form for each instrument provided.
- 4) Simulate process variable in field by applying known pressure, temperature, pH, etc. as required to confirm calibration. This step must be witnessed by inspector.
- 5) Provide parameter value for each parameter changed from factory default.

CERTIFIED BY: _____
 SIGNATURE

COMPANY

DATE

WITNESSED BY: _____
 SIGNATURE

COMPANY

DATE

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16905
CONTROL PANELS

PART 1: GENERAL

1.01 SCOPE OF WORK

- A. Provide and install Control Panels per Drawings.
- B. Provide complete wired and tested panel with all devices installed per the contract Drawings and as stated herein.
- C. Provide all necessary hardware, conduit, wiring, fittings, and devices to connect the control panel to equipment provided under other Sections.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General].
- B. Electrical Specifications [Low Voltage Wire & Data Cable]
- C. Electrical Specifications [PLC & OI Hardware]
- D. Electrical Specifications [PLC & OI Application Programming]
- E. Electrical Specifications [Instrumentation]

1.03 SUBMITTAL REQUIREMENTS

- A. Provide submittals and Drawings as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Submit shop construction Drawings for the Control Panel. The following Drawings shall be provided as a minimum:
 - 1. Scaled drawings of the Control panel elevation, baseplan. The dimensions and locations of the cutouts shall be dimensioned from the bottom left corner of the door(s).
 - 2. Scaled drawings of the backpan including all mounted components and wireways.
 - 3. Wiring diagrams for AC and DC power distribution, I/O for each card in the PLC and communications block diagrams.
 - 4. Interconnection diagrams per Electrical Specifications [Electrical General].
- C. Calculations for environmental controls. Environmental controls (including air conditioners, exhaust fans, heaters and circulation fans) shall maintain interior panels temperatures within ratings of all internal equipment given the intended installation location.

16905-1

1. Design and install environmental control systems to meet requirements herein and prevent premature failure of panel internal components.
2. Environmental controls may be shown in the Drawings and shall be considered the minimum level required. Additional components or systems shall be provided to meet internal temperature requirements.
3. Environmental control systems shall prevent and control intrusion of dust and bugs through the use of filtration systems.
4. Environmental control systems shall maintain humidity below that of the external ambient air and without condensation within panel.

1.04 OPERATING AND MAINTENANCE INSTRUCTIONS

- A. Provide operating instructions as specified in Electrical Specifications [Electrical General].

PART 2: PRODUCTS

2.01 ENCLOSURE

- A. The enclosure for the control panel shall be (at minimum) sized as shown in the Contract Drawings.
 1. Arrangement: Where so indicated, the instruments mounted in the panels shall have the nominal size and general arrangement shown. Panel layouts and nameplates shall conform to the approved submittal.
 2. Assembly: Mount all equipment on 12 ga. painted white backpan(s) that is bolted to rear (and sides) of the enclosure. Use drill and tap method for machine thread screws for all internal components on mounting panels. Provide extra mounting bolts through the rear of the structure if equipment weight exceeds backpanel mounting stud capacity.
 3. Hardware: Provide door latch and accessories as detailed in the Contract Drawings or as required to meet NEMA area ratings.
 - a. Provide one or two single point latches for panels up to 36" height.
 - b. Provide 3 point latching mechanisms for panels over 36" height consisting of rotating handle with latch, extension bars with plastic wheels at ends and guide slots at top and bottom of door, or as otherwise shown on drawings.
 - c. Hinges, pins, bolts and screws shall be of 316 stainless steel only.
 4. When physical size requirements for individual components are

different than that detailed on the Control Panel backpan drawing, the wiring diagrams and specifications herein shall supersede the elevation drawing and the Contractor shall furnish additional panel width as needed to fit the electrical equipment. Deviations with sufficient evidence for the change shall be submitted for approval. The Contractor is required to provide for all equipment including spares and spaces as shown in the wiring diagrams.

2.02 CONTROL PANEL CIRCUIT BREAKERS

- A. Furnish circuit breakers and accessories as required per Drawings and application.
 - 1. Copper busbar systems, up to 480VAC, 115A, 1, 2 or 3 phase as needed for application
 - 2. Trip rating per Drawings or as needed for protected device. Trip curves as selected by System Integrator.
 - a. B curve magnetic trip point: 3 to 5 times the rated current, typically used for computers and electronic equipment with very low inrush loads (PLC wiring).
 - b. C curve magnetic trip point: 5 to 10 times the rated current, typically used for small transformers, pilot devices, etc.
 - c. D curve magnetic trip point: 10 to 20 times the rated current, typically used for transformers or loads with very high inductive loads.
 - 3. Quantity of pins and feed in lugs as required.
 - 4. Auxiliary contact, shunt trip as required in Drawings.
 - 5. DIN rail mounted, 18mm width per pole, finger safe pressure plate terminals.
- B. Motor applications:
 - 1. UL489 for branch circuit protection up to 40A, 1 to 3 pole.
 - 2. 5 kAIC interrupting capacity @ 480 VAC
 - 3. Alltech, Eaton FAZ, or equal.
- C. Control circuit transformers and other Non-motor applications:
 - 1. UL1077 supplementary protection up to 63 amps, 1 to 2 pole, AC or DC.
 - 2. Used where a UL489 protective device is upstream powering the circuit (from a panelboard or other source).

16905-3

3. Used within control circuits for power supplies, control power transformers, relays and PLC I/O points.
4. Used in place of fuses that are applied as supplementary protection.
5. Eaton FAZ, or equal.

2.03 FUSES AND FUSE HOLDER

- A. Fuses shall not be used in branch or control circuits unless specifically shown in the Drawings. Circuit breakers shall be furnished and utilized where possible.
- B. Fuses used in circuits 200 VAC and above shall be time- delay, 13/32" x 1-1/2", and have an interrupting rating of 10,000 AIC at 500 VAC. Fuses shall be Bussman type FNQ or approved equal. Fuse holders shall feature open fuse indication lights and shall be rated 30A at 600 VAC. Fuse holders shall be Bussman Optima Series OPM or equal.
- C. Fuses used in 120 VAC shall be time-delay, 1/4" x 1-1/4", and have a rating of 250 VAC. Fuses shall be Bussman type MDA or approved equal. Fuse-holders shall be of the same manufacturer, series and color as the adjacent terminal blocks and have blown fuse neon indicators. Fuse holders shall be Entrelec ML 10/13.SFL, Allen Bradley 1492-H4 or equal.
- D. Fuses used in signal and 24 VDC circuits shall be fast acting, 5mm x 20mm and have a rating of 250 VAC. Fuses shall be Bussman type GMA or approved equal. Fuse-holders shall be of the same manufacturer, series and color as the adjacent terminal blocks and have blown fuse LED indicators. Fuse holders shall be Entrelec M 4/8.SFDT, Allen Bradley- 1492-H5 or equal
- E. Fuses shall be sized in conformance with the NEC.

2.04 TERMINAL BLOCKS AND ACCESSORIES

- A. General
 1. Terminal blocks to be clamp type, 5 spacing, 300 volt, minimum rating of 20 amps, and mounted on DIN rail. DIN rail shall be same type as used for the relays. Install extra DIN rail on each type of terminal strip with 10% spare terminals for future additions.
 - a. Provide larger terminal as necessary based on gauge of connected wiring. Those terminals with 10 gauge larger gauge wiring or more than one 12 gauge wire should be evaluated and changed.
 2. Provide terminal blocks with "follower" plates that compress the wires and have wire guide tangs for ease of maintenance. Terminal blocks that compress the wires with direct screw compression are unacceptable. All power, control and instrument wires entering and leaving a compartment shall terminate on terminal blocks with wire

numbers on terminals and on both ends of the wires.

3. Provide end clamps, separators, din rails, and jumpers to complete terminal block system. See example PLC I/O drawing for additional information. Engineer can provide on request if not available in plans.
4. Terminal Tags and Markers: Each terminal strip shall have a unique identifying alphanumeric code at one end (i.e.: TB1, TB2, etc.) or as shown in Drawings.
5. Plastic marking tabs shall be provided to label each terminal block. These marking tabs shall have a unique number/letter for each terminal which is identical to the "elementary" and "loop" diagram wire designation. Numbers on these marking strip shall be machine printed and 1/8" high letters minimum.
6. Terminal blocks shall be physically separated into groups by the level of signal and voltage served an by PLC I/O card. Power and control wiring above 100 volts shall have a separate group of terminal blocks from terminal blocks for wiring below 100 volts, intermixing of these two types of wiring on the same group of terminal blocks is not allowed.
7. Terminal blocks shall be gray in color unless otherwise shown on the Drawings.
8. Provide a ground terminal or connection point for each grounding conductor.
9. Provide a separate signal, common, and/or neutral terminal for every wire and PLC or remote device connection at minimum.

B. CP – Control Panel Terminal Blocks

<u>Description</u>	<u>Model number, Allen Bradley or equal</u>
General Purpose Terminal Block, 20A	1492-W3
Disconnecting Terminal Block, 20A	1492-JKD3
Grounding Terminal Block	1492-JG4
PLC AI Sensor Block, 4 Level with GND	1492-WTS3
PLC Digital Output Relays, 120VAC, 6A, SPDT	700-HLT1U1

Note 1: General purpose relays are defined in ELECTRICAL – GENERAL

Note 2: Accessories are not listed such as end caps, anchors, jumpers, bridges, marking strips, or other items necessary to make up a complete terminal block layout. Furnish all parts necessary per manufacturer's intended solution.

Note 3: Provide terminal block colors as noted below:

DC Control - Blue

16905-5

DC Common - Grey

AC Control - Red

Analog Signals - Beige

White -Neutral

Unswitched 120 VAC - Black

Foreign Voltage - Yellow

Isolated Ground – Green

Grounded terminal – Yellow/green

C. MCC – Motor Starter Cubicle Terminal Blocks

1. MCC cubicle terminal blocks shall be pull apart as supplied standard by MCC manufacturer.

D. Power – Power terminal Blocks

1. Backpan mounted termination blocks shall be rated for 600V (min). The power termination blocks shall be rated to accept Copper or Aluminum cable and rated as shown on Contract one-line diagrams. Termination blocks shall be insulated with molded plastic covering and finger safe cover. Each termination block shall be provided with quantity and size of primary and secondary cable connections as required per installation. The power termination blocks shall be Erico UD, UDJ, BD, TD, or SB series or equal.
2. Unmounted termination blocks shall be constructed of aluminum and suitable for use with Aluminum and copper wire. Size and quantity of cable connections shall be as required for installation. Termination blocks shall be insulated with molded high-dielectric strength plastic covering and eliminate the need for tape insulation of electric connection. The termination block shall have removable access plugs over the wire entry and hex screw ports. Provide NSI Polaris IPL or IPLD Series terminal blocks or equal.

E. Panel Ground

1. Each electrical enclosure shall have a copper ground bus. Screw type fasteners shall be provided on all ground busses for connection of grounding conductors. Ground bus shall be a Challenger GB series, ILSCO CAN series or equal.
2. A 12ga. copper ground wire shall be attached between the ground bar and the panel enclosure, and between the ground bar and the mounting panels. The ground connection to the enclosure and panel shall be made by sanding the paint finish off a small area, drilling a

16905-6

hole for a 0.25 inch bolt and mounting a 0.25-20 bolt to the panel to serve as grounding stud. The grounding stud shall be attached with a nut and flat washers on both sides of the enclosure/panel, and with an inside tooth star lock washer next to the panel surface. The star lock washer shall be on the inside surface of the enclosure, and the front surface of the mounting panel. The grounding wire shall be secured to the stud with a nut and inside tooth star lock washer. These grounding points shall be located within 12 inches of the bottom to the grounding bar. Each terminal strip rail shall be individually grounded by means of a #12 AWG wire to the ground bus.

3. Components within the panel shall be grounded according to the manufacturer's recommendations.

2.05 POWER SUPPLIES

A. Uninterruptible Power Supply (UPS)

1. The UPS shall be installed within the control panel and power all process related 120 VAC devices and DC power supplies.
2. The UPS capacity/size shall be as shown in the contract Drawings. The battery capacity shall be such that it may provide nameplate power for 10 minutes (min) from a fully charged battery(s).
3. The UPS shall provide surge protection and filtering: 0.3% IEEE surge let-through, zero clamping response time to meet UL 1449. The inverter shall provide true sine wave output.
4. When the Utility power voltage is outside of a preset range (approx. $<100 < V < 130$ VAC) then the UPS shall power the load from storage batteries and a solid state inverter.
5. The power supply shall be wired into the control panel power circuit per the contract Drawings.
6. The UPS operating ambient temperature range shall be 32 deg F to 122 deg F minimum.
7. The inverter shall be self resetting and continuously on-line regardless of the Utility power existence. Configure the UPS to restart automatically upon restart of utility power without operator intervention. The rectifier/charger shall recharge and maintain float charge on the batteries automatically.
8. The UPS shall be listed UL 1778 and be specifically built for industrial applications. Provide Allen Bradley bulletin 1609, Sola SDU, or equal.

B. DC Power Supply (PS)

1. The DC power supply shall utilize a switching power stage, rectifier and voltage regulator. The power supply case shall be DIN rail mountable.

16905-7

2. The power supply shall operate on 120V AC and provide DC output voltage and current as shown in the Contract Drawings.
3. The power supply shall be wired and fused per manufacturer instructions and Contract Drawings. Power supply output shall include self resetting overcurrent protection.
4. Power supplies below 101 Watts output power shall be Class 2 rated.
5. The power supply shall provide 2% voltage regulation for a change of 10% load to 100% full load.
6. The DC power supply shall be Sola SDN-C, Phoenix Contact Quint Power, or equal.

C. DC Power Redundancy Module

1. The external redundancy module shall allow two power supplies to exist in a parallel redundant configurations. The external modules purpose is to increase the reliability by isolating the power supplies and providing a single output. If either of the power supplies was to fail, the output would not be impacted. The redundancy module shall include monitoring contacts for each input power supply and for the output. Provide the redundancy module with capacity rating equivalent or larger than the power supply rating.
2. The DC power redundancy module shall be Sola SDN xx RED, Phoenix Contact Trio Diode, Weidmuller Pro RM, or equal.

2.06 INTRINSICALLY SAFE BARRIER AND RELAY

A. Intrinsically Safe Barrier

1. Intrinsic safe barrier terminal blocks shall utilize a zener barrier that is negative-earth-ground for intrinsic safety. Apply IS barrier to 4-20 mA loop powered circuits that extend into the hazardous area. Terminal block shall be rated for Class 1, Division 1 for potentially hazardous atmospheres. Intrinsic safe barrier terminal blocks shall be Pepperel and Fuchs KFD0-CS-EX1.50P, Gems Series A65800 or equal.

B. Intrinsically Safe Relay

1. Intrinsically safe relay shall be UL listed for use where the probes and/or wiring is located in Class I or II, Division 1, Groups A-G hazardous atmospheres. The sensor circuit shall be incapable of igniting flammable gasses or dust. The relay shall be 120 VAC powered and have one 8 amp SPDT relay output. The relay shall be capable of single level or differential level service. The relay shall be wired to use two probe devices (latch device and unlatch device) for differential level service. The relay shall be wired to use a single probe device for single level service. Provide UL listed Warrick Series 27 or equal.

16905-8

2.07 ETHERNET SWITCH

- A. The unmanaged Ethernet switch shall have minimum 8 ports. Ports shall be 10/100 Base-Tx with RJ-45, 8 pin female connectors. Switch shall be suitable for power from 10 - 30 VDC. Switch shall be N-Tron 108TX, Allen Bradley Stratix 2000, or equal.
- B. The Fiber Optic Ethernet switch shall have 8 100base TX ports with automatic uplink detection and two 100base FX ports. Copper Ports shall be auto-sensing 10/100 Base-Tx with RJ-45, 8 pin female connectors, meeting IEEE 802.3 standards. Two additional fiber optic 10/100 Base-FX port with type SC connectors shall be provided. Coordinate fiber optic type (single-mode, multi-mode, segment length) with specifications for fiber optic cable or existing systems). Case shall be ventilated steel with provisions for wall or DIN rail mounting. Switch shall be suitable for power from 10 - 30 VDC. Switch shall be N-TRON 110FX2, Allen Bradley Stratix 5700, or equal.

2.08 IP SERVICE ROUTER

- A. Acceptable products: Netgate SG-3100 or equal.
- B. Provide shelf for panel mounting of router.
- C. General Specifications
 - 1. 2x 1 Gigabit WAN/LAN ports plus a 4 port switch provide high-speed wired connectivity
 - 2. PF-Sense firewall to support stateful packet filtering, firewall, and pure router capability.
 - 3. Routing policy per gateway and per-rule for multiple WAN, failover, load balancing.
 - 4. Supports IPsec, OpenVPN, PPTP, IPv6, NAT, BGP, RADIUS
 - 5. ARM v7 Cortex-A9, 2 GB DDR4L memory, M.2 expansion for SSD, or LTE.

2.09 BROADBAND WIRELESS CELLULAR MODEM

- A. Acceptable products: Sierra Wireless Airlink Raven RV50X, or equal.
- B. General Specifications
 - 1. Internet Connections Supported: 1
 - 2. Networks Supported for Embedded Modem: Verizon 3G, and 4G LTE
 - 3. Ethernet ports: 1 LAN, 10/100.
 - 4. AC wall pack power supply

- 5. Size approximate: 5.6" x 3.8" x 1.7"
 - 6. Din-Rail Mounting bracket
 - C. Security:
 - 1. Onboard IPSec SSL VPN client
 - 2. VPN pass-through (All protocols)
 - 3. MAC address filtering
 - 4. SSH
 - 5. HTTPS
 - D. Environmental:
 - 1. Operating Temperature: -30°C to +70°C (-22 to 158°F)
 - E. Interfaces:
 - 1. 10/100 Base-T RJ45 Ethernet
 - 2. Expansion Card Slot for Additional Options
 - 3. 2 SMA/Female Antenna Connectors (RF, Rx Diversity)
 - 4. LED Indicators for Network, Signal strength, Activity, Power
 - F. Warranty:
 - 1. 3 year manufacturer warranty.
 - G. Minimum Requirements:
 - 1. SIM card with active mobile broadband plan from Verizon
 - 2. 1 year prepaid unlimited data service with each modem to begin at field testing.
 - H. Antenna:
 - 1. 700-1900 MHz Magnet Mount Antenna
 - 2. SMA Male Connector and 10-Foot RG174 Coax Cable
 - 3. Wilson Electronics, or equal
- 2.10 MISCELLANEOUS COMPONENTS
- A. Wireway: Manufactured from light gray rigid PVC suitable for continuous use

at temperatures up to 50 deg C. Wireway shall be 2" height, width as required with 0.5" slot spacing with removable covers. Provide Panduit type "F" or equal.

- B. Intrusion Switch: The intrusion switch shall have a pin plunger that is depressed when the door is closed. The form C contacts shall be rated 2A at 120 VAC. Provide Hoffman A-LFSWD, Microswitch 1AC2 or equal.
- C. LED Strip Light: The LED light shall be an "under cabinet" style with multiple LED lamps and acrylic diffuser. Lamp shall be switched on/off from integral switch or PIR motion sensor. Light housing shall be capable of magnet mount to top or side of enclosure or will include mounting tabs for mounting to brackets. Lamp shall be powered from 120VAC or from 24~48 VDC or shown in the contract Drawings. LED Strip Light shall be Stego 02540, or equal.
- D. Circulation Fans: The control panel temperature shall be maintained 10 deg. F below lowest internal device's temperature rating. The fans shall be 4" or 6" unless otherwise noted on Contract Drawings. The Contractor shall calculate the heat generation of all internal components and determine if the fans submitted will meet the cooling requirements of the internal components. Circulation fans shall include louver with filter and bug screen for outdoor installations.
- E. Thermostats: The air circulation fans shall be controlled by adjustable thermostat. The thermostat shall be mounted near the top of the panel and easily accessible by a technician. The thermostat shall be capable of control of a heater or cooling fan(s) by selecting the proper contact logic. The thermostat range shall be adjustable from 30 to 140 deg F. Thermostat shall be Hoffman A-TEMxx, or equal.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 FABRICATION

- A. Equipment Mounting:
 - 1. Mount all equipment using manufacturers mounting tabs/holes or brackets where possible. Where not possible, construct custom brackets to panel mount or backpan mount components as shown in the Contract Drawings.
 - 2. Equipment or laptop shelves shall be provided where shown on the Contract Drawings. Equipment shown on shelves shall not be placed on the bottom of the panel after field installation.
 - 3. All nuts, bolts, screws, washers and hinges used in the panel shall be stainless steel. All components shall be mounted using bolts or screw

fasteners only which are drilled and tapped into the backpan. Pop rivets shall not be allowed within panel except for enclosure support arms.

B. Environmental:

1. Control panel environmental accessories including fans, louvers, filters, bugscreens, air conditioners, etc. shall be provided as noted in the Drawings and as necessary for a complete environmental solution.
2. Panels environmental controls shall be designed during shop drawing submittal and fabricated to maintain temperatures 10 degrees F below lowest internal equipment maximum temperature rating.
3. Contractor shall provide [additional] fans, louvers, screens, sunshades, air conditioners, etc. as necessary to prevent equipment malfunction or premature failure. Provide associated wiring and thermostats as needed.
4. Environments:
 - a. NEMA 4X rated panels shall be cooled/heated with closed loop type conditioning systems to include air conditioners, internal panel circulation fans and resistive heaters.
 - b. NEMA 3R rated outdoor panels shall be cooled/heated with open loop type conditioning systems to include air conditioners, exhaust fans and louvers, internal panel circulation fans and resistive heaters. All exhaust fans and louvers shall include filters and bugscreens.
 - c. NEMA 12 or 1 rated indoor panels shall be cooled/heated with open loop type conditioning systems to include air conditioners, exhaust fans and louvers, internal panel circulation fans and resistive heaters. All exhaust fans and louvers shall include filters and bugscreens.

C. Wiring:

1. Panel Wiring: All wiring shall be installed in wireways between terminal blocks, PLC, and devices. Reference Contract Drawings for control panel power distribution diagram and control panel elementary diagrams.

3.03 INSTALLATION

A. Wiring:

1. Install all equipment per Electrical Specifications [Electrical General].
2. All internal and field wiring shall be per Electrical Specifications [Low Voltage Wire].

16905-12

3. Panel Wiring: All wiring shall be installed in wireways between terminal blocks and devices. Reference Contract Drawings for Control panel power distribution diagram and control panel elementary diagrams.
 4. Field Wiring: Wireways shall be provided for field wiring. Reference Contract Drawings for control panel power distribution diagram and control panel elementary diagrams.
- B. Cleaning:
1. The Contractor shall clean the inside of the control panel of any dust or debris remaining at the completion of installation and testing.
 2. The Contractor shall exercise care when using a vacuum cleaner or compressed air such as not to damage any component within the panel.
 3. Many electrical and computer components are open for ventilation. Falling debris can penetrate the openings and cause equipment failure. Equipment with debris inside shall be removed, cleaned and/or replaced.

3.04 FIELD ASSISTANCE

- A. Provide testing as specified in Electrical Specifications [Factory and Field Testing].

3.05 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

3.06 FINAL ACCEPTANCE

- A. Final Acceptance per Electrical Specifications [Electrical General].

END OF SECTION

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16910**PLC & OI HARDWARE****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Providing and installing Programmable Logic Controller (PLC) and Operator Interface Hardware and all supporting hardware, wiring and devices as specified in Electrical Specifications.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Low Voltage Wire and Data Cable]
- C. Electrical Specifications [PLC and OI Application Programming]

1.03 SUBMITTAL REQUIREMENTS

- A. Provide submittals per Electrical Specifications [Electrical General, Submittal Requirements].
- B. Submit documentation showing the number and type of I/O modules required to meet the I/O requirements specified herein. Include complete manufacturer's part and model numbers.
 - 1. PLC I/O points are determined by the P&ID Drawings. The Contractor shall count and total the PLC I/O points per PLC controller and per type of I/O required based on the P&ID diagrams. Provide 25% spare I/O points per I/O type per PLC.
- C. Submit calculations showing that the power supply meets the specified requirements and the requirements of the devices powered. Confirm PLC power supply is sufficient for all possible operable conditions.
- D. Submit shop drawings showing physical backpan layout of equipment in Control Panel.
- E. Submit communications block diagram including PLC, OI, motor controls, power supplies, switches, routers, radios, and any other connected components.
- F. Submit hardware Operations and Maintenance Manual per Electrical Specifications [Electrical General].

PART 2: PRODUCTS**2.01 GENERAL**

- A. Provide PLC modules from a single family of products, using the same

software and interchangeable I/O cards, that can be configured for a range of applications from small, uncomplicated sites to large, complex sites with a variety of equipment.

- B. Provide a PLC that will meet the following requirements:
 - 1. Size and provide a CPU and power supply to accommodate the CPU, I/O cards, communication devices, etc. as specified herein.
- C. Provide a PLC that can be expanded in the field by the addition of the following types of plug-in modules or cards and interface cables without rendering the originally furnished PLC components obsolete.
 - 1. Digital Inputs
 - 2. Digital Output
 - 3. Analog Input
 - 4. Analog Output with PID control
- D. Size the PLC enclosure such that local I/O modules and supporting hardware required to meet the ultimate point count, as specified herein, will fit into the space of a single enclosure.

2.02 MECHANICAL

- A. Provide modular PLC consisting CPU, power supply, communications, and I/O modules.
- B. Provide I/O modules with removable terminal strips so that I/O modules can be removed without disconnecting field wiring.

2.03 PLC COMPONENTS

- A. The following components (Allen Bradley, no equal) shall be provided to complete the PLC(s). Only major components are listed. Multiples of some components are required- see Drawings.
- B. Compact Logix 5380 (Main and Backup PLCs, Station PSA and PSB)

1. Processor – (2MB)	5069-L320ER
2. Power Supply	5069-FPD
3. Digital Input Module (AC)	5069-IA16
4. Digital Input Module (DC)	5069-IB16 (As needed for low voltage field or internal contacts)
5. Digital Output Module (Relay)	5069-OW16
6. Analog Input Module	5069-IF8
7. Analog Output Module	5069-OF8
8. Extension Cable	5069-CRRx
9. Ethernet Adapter	5069-AENTR
10. Serial Comm Card 2 port	5069-SERIAL
11. Address Reserve Module	5069-ARM
12. Terminal Block 6 point	5069-RTB6
13. Terminal Block 18 point	5069-RTB18

16910-2

14. Terminal Block 6-4 point 5069-RTB64

C. Micro Logix (PLC Bridge Sump Level Monitor only)

1. Processor – 1100 1763-L16DWB
 - a. 24VDC power
 - b. 10 – 24 VDC DI, 6 relay DO, 2 Analog inputs

2.04 ISOLATION/INTERFACE RELAYS

- A. Provide output isolation relays on all digital outputs that operate devices external to the control panel and on spare outputs or as otherwise shown in the Drawings. The relay coil connection shall be on one side of the relay base and form-C output contacts on the other.
- B. Relays shall be 6A SPDT, coil voltage as required, indicating, plug in style as manufactured by Allen Bradley 700-HLT1U1 or equal. Provide jumper bars for common buss connections, Allen Bradley 700-TBJ20G, or equal.

2.05 OPERATOR INTERFACE (OI)

1. Maple systems HMI5150P no equal.
2. Touch Screen
 - a. 15 inch screen size with 1024 x 768 resolution, 65536 colors.
 - b. TFT color touchscreen with LED backlight and 300nits brightness.
 - c. Alarm history screen with present status and acknowledge functions.
3. Communications
 - a. Modbus RS232, RS485 and Ethernet communication options. Provide cables for connection to PLC.
 - b. Built in Web server for remote access and viewing screens on a network Windows computer.
 - c. Remote control of process through web server interface.
 - d. Allen Bradley IP Tag Based protocol.
 - e. Type B USB port for programming.
 - f. Type A USB port for data logging and alarm history.
4. Data storage
 - a. 82MB backed up RAM for program, Two SD RAM slots for data.
 - b. Furnish one 32GB SDHC card for data storage.
 - c. Trending for up to 16 pens (colors) with historical data access from USB RAM drive.
5. Environmental conditions:
 - a. Operating Temperature: 32 to 122 degrees F
 - b. Storage Temperature: -4 to 140 degrees F

16910-3

- c. Humidity Rating: 10 to 90%, non-condensing at 32° F to 86° F
- d. Rating: NEMA 12, 13, 4X (indoor only)
- e. Power: 1.2A at 24 VDC.

PART 3: EXECUTION**3.01 WORKMANSHIP**

- A. All work in this Section shall conform to the codes and standards specified in Electrical Specifications [Electrical General, Workmanship].

3.02 INSTALLATION

- A. Fabrication
 - 1. Mount, wire and Ground PLC and OI per manufacturer's recommendations.
 - 2. Organize equipment on control panel backpan per Backpan Layout detail in Contract Drawings.
 - 3. Locate and install PLC(s) and OI(s) per Contract Drawings.
- B. Wiring
 - 1. Terminate status, control and analog wiring on terminal blocks.
 - 2. Label and wire PLC to terminal blocks per Electrical Specifications [Wire, Fuses & Terminal Block] and Example I/O Wiring Diagram in the Drawings.
 - 3. All spare I/O points shall be wired to terminal blocks.
 - 4. Install communication cables to connect the PLC to external devices.
 - 5. Bundle and tie down wires in a neat and orderly manner.
 - 6. Terminate drain wire of shielded cables at backpan terminal block only.

3.03 FIELD ASSISTANCE

- A. Provide testing as specified in Electrical Specifications [Factory and Field Testing].

3.04 WARRANTY

- A. Provide warranty per Electrical Specifications [Electrical General, Warranty].
- B. Perform the following services during the warranty period:
 - 1. Repair or replace damaged modules returned for service within 24 hours.
 - 2. Determine and report the cause of failure of modules returned for service.
 - 3. Resolve design or implementation problems discovered.

3.05 FINAL ACCEPTANCE

16910-4

- A. Final Acceptance per Electrical Specifications [Electrical General].

END OF SECTION

16910-5

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16915**PLC & OI APPLICATIONS PROGRAMMING****PART 1: GENERAL****1.01 SCOPE OF WORK**

- A. Programming of the PLCs, OIs and SCADA to control the sewer lift station functions. LSA and LSB.
- B. Programming of the PLC and SCADA to monitor the bridge sump level.

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Project Drawings

1.03 QUALIFICATIONS

- A. Services furnished under this specification shall be performed by qualified programmers meeting requirements specified in Electrical Specifications [Electrical General, Qualifications].

1.04 SECTION INCLUDES

- A. Control descriptions for Programmable Logic Controller(s) (PLCs) and Operator Interface(s) (OIs).
- B. SCADA system graphics, database, and configuration to support remote control of lift stations and monitor bridge sump level. SCADA system is existing.
- C. Application Programmer shall perform all PLC and OI programming requirements as defined in this section.
- D. Related work as specified in Electrical Specifications [Electrical General].

1.05 SUBMITTAL REQUIREMENTS

- A. Provide submittals per Electrical Specifications [Electrical General, Submittal Requirements].
- B. Submit software operations manual including the following as a minimum.
 - 1. Program Code
 - a. Program code demonstrating function in compliance with descriptions herein.
 - 2. Setpoint listing with description

3. Program description
 - a. Provide written description of program operation. Description shall cover all aspects of normal operation and alarm shutdowns. Describe all alarms and their effect on operation. Describe alarms that require manual reset.
 4. Register cross reference listing
 - a. The listing shall be in table format and include all program constants and variable registers with their functions.
 - b. The listing shall show (block and rung number) where the register is used within the program code.
 5. Configuration and Set-up
 - a. The configuration of the processor and hardware selections shall be summarized.
 - b. The configuration of the communication ports shall be shown.
 6. Data Tables
 - a. Print data tables with initial register values shown.
 7. Special files
 - a. Include any special files that are particular to the manufacturer. All files pertinent to programming or configuration shall be submitted.
- C. Submit software documentation demonstrating understanding of control software requirements and compliance with Portability and Maintainability requirements specified in this Section.
1. Submit OI graphic layout and PLC program listing with cross-references for approval 4 weeks prior to factory test.
 2. Provide two (2) sets of SCADA and OI graphic screens and PLC applications programs on flash drives, in native file format with each software submittal and at the end of the project for as-programmed final documentation for O & M manuals. Each drive shall have a typed label clearly stating the contents, date, filenames, and submittal (i.e., initial or as-programmed final).
 3. A hard copy listings of SCADA and OI graphic screens and PLC applications programs (with comments) shall be printed with standard laser print 8½" x 11" paper and supplied with the initial submittal and for as-programmed final documentation for O&M manuals. Copy and binding method shall not cut off any parts of program logic and comments. Print shall be sized so that the complete program logic run fits on one sheet, rungs extending to multiple sheets will not be accepted and will be returned without review.

1.06 PROGRAMMING METHODS

16915-2

- A. Design and code programs per the following:
1. Utilize ladder logic programming language as available in the PLC manufacturer's configuration software. Other software languages such as function block, flow charts, and structured text shall not be used unless approved through RFI/submittal process.
 2. Clearly comment each line of program logic code. Include module headers detailing the purpose of the module, programmer name, date of last revision, revision history, and description of sequence of events.
 3. Comment for each block of code explaining purpose of program block.
 4. Code shall use the P&ID device names as the prefix to the names or tagnames throughout the program logic. Reference tag formation below. If PLC does not use tagnames as data reference, then provide tagname in symbol name or in comment areas at minimum.
 5. Data arrays may be used in tagname aliases for communication data transfers.
 6. Provide program file for each type of program logic. The following are types that should be used, as applicable and at minimum.
 - a. Analog input scaling
 - b. Analog output scaling
 - c. Analog alarms
 - d. Digital alarms
 - e. PLC clock, midnight and today/yesterday control
 - f. Flow totalizations
 - g. Equipment runtimes
 - h. Equipment starts
 - i. Communications
 - j. Each individual piece of controlled equipment (digital control)
 - k. Each individual piece of controlled equipment (analog control)
 - l. Each individual process system (digital control)
 - m. Each individual process system (analog control)
 - n. Miscellaneous systems
- B. All custom software, including diagnostic, configuration and applications programming software shall become the sole property of the Owner for their use on this and future Owner projects.
- C. No software or documentation shall be labeled proprietary.
- D. Provide complete hardware and original manufacturer software manuals describing how to use the configuration software.
- E. Provide two (2) disks copies and two (2) hard copies of all as-installed programs at the end of the project.
- F. Furnish and maintain 256MB (min) USB RAM stick on site and within control

panel so that latest program files are always available and up-to-date. Upon conclusion of each downloaded program change, the USB RAM stick shall be updated.

1.07 APPLICATIONS PROGRAMMER

- A. All programming shall be performed by an application programmer with prior experience on similar PLC & OI projects. The Engineer will judge if the application programmer assigned to this project is adequate for the task. If the programming performed is deemed inadequate by Engineer, then the System Integrator shall replace the application programmer for one with more experience and skill to meet these requirements.

PART 2: PRODUCTS

2.01 APPLICATIONS PROGRAMMING SOFTWARE

- A. The Contractor is responsible for obtaining PLC & OI configuration software to program and configure the PLC & OI for testing purposes.

2.02 APPLICATIONS PROGRAM CODE

- A. The Application Programmer will provide, install and test (with Contractor assistance) application programming. The descriptions provided herein are not final and may have modifications made to them during construction that may change the nature of operation.
- B. The descriptions are provided to give the Contractor an insight as to the level of testing effort that will be required in the later stages of the project. Minor modifications should be expected and will not constitute a change in project testing assistance scope unless those modifications cause significant additional testing time or materials by Contractor. Significant time shall be defined as 4 hours and only time or materials related to program modifications since bid may be accounted.
- C. The PLC program, OI and SCADA screens shall be modeled after a similar station. Modify I/O layouts as needed and adjust programming as needed to meet requirements herein.
- D. The program code shall be written without any "hard-coded" constants that would effectively require a program change to modify the value. All function blocks shall contain variable registers only.

2.03 CONTROL STRATEGIES

- A. General Requirements:
 - 1. The following requirements (General and Specific) are intended to be used as a guideline for application programming of the PLC. They are the major functions and are not intended to be completely comprehensive of all requirements of the station operation and do not attempt to cover all necessary program routines for an operational

system. Additional features, functions and registers will be required for an operational system.

2. The following general program functions shall be provided:
 - a. Enable/disable toggle bits and variable time delays for all alarms.
 - b. Analog input noise filtering -- software or firmware.
 - c. SCADA Auto-Off-Manual controls for all equipment controlled by the PLC. These control buttons shall also be accessible via the OI(s).
 - d. All equipment to have a Remote Reset feature available from SCADA and OI(s). Remote Reset signal to be held on until cleared by Reset Feedback signal.
 - e. Normal operations shall continue with loss of SCADA connection. The PLC code shall act on I/O connections, PLC to PLC communications, and non-SCADA communications only to control the system. Only in the event of SCADA override, shall the system not act on PLC I/O connections and non-SCADA communications. None of the program code to control the system shall reside in the SCADA system.
 - f. Time of day clock synchronization with SCADA system. PLC shall have registers defined for SCADA system clock write. The PLC shall have code written to recognize that the register(s) have been written to, stop the real time clock, set the clock, and restart it, with the value in the register(s). Date and time of day shall be set.
 - g. Resettable and non-resettable operation hour meters for all equipment and resettable starts counters for all equipment.
 - h. Scaling to engineering values of all variables. Minimum of 3 significant digits required.
 - 1) Level in 1/10th Feet or Inches
 - 2) Pressure in 1/10th PSI.
 - 3) Flow in GPM.
 - 4) Flow totalization
 - a) Total non-resettable flow displayed in MGD with 9999999.999 presentation layout.
 - b) Total resettable flow displayed in MGD with 9999999.999 presentation layout.
 - c) Total yesterday flow displayed in KGAL with 99999.9 presentation layout.
 - d) All registers shall roll over to zero automatically.
 - 5) Speed in percent %.
 - 6) Motor current in 1/10 amps.

16915-5

- a) Convert current input to power (in KW) where shown on drawings. Assume voltage to be 480 and power factor to be 0.85.
- i. Data register types:
 - 1) Any register that requires precision past the decimal shall be floating point type.
 - 2) Integer registers may be used where decimal precision is not required.
 - 3) Boolean registers shall be used for all statuses and on/off controls.
- j. All set point registers, enable/disable toggle bits and settable variable time delays shall be adjustable from the OI direct to program data table.
- k. Provide communications messaging as required to share data information and interlocks between PLCs. Message structure shall be fail safe as to keep overflows or other improper operation from occurring.
- l. A power fail shall reset all routines.
- m. Pumps and equipment shall have backspin delays and power fail sequential re-start delay routines.
- n. All powered equipment and devices shall have an assigned essential / non-essential status for purposes of generator load shedding.
- o. Programming code shall have automatic error checking and proper initialization to prevent illegal operations such as negative values being placed in timer presets or mathematical out of range functions which could cause a processor fault.
- p. PLC shall be programmed so that, in the event of a power interruption, the equipment controlled shall resume normal operation upon power restoration without requiring a manual reset unless otherwise shown.
- q. Set points
 - 1) Minimum required set points for Lead / Lag pumping scenario.
 - a) Lead Pump start level
 - b) Lag Pump start level
 - c) Lead Pump stop level
 - d) Lag Pump stop level
 - e) Pump Start delay time

- f) Pump Stop delay time
 - g) Backspin delay time
 - h) Sequential Start delay time
 - i) Pump rotation selection (0=auto rotate, 1=P1 Lead, 2=P2 Lead)
 - 2) Additional minimum required set points for Lead / Lag pumping scenario when variable speed control is used.
 - a) Minimum Lead Pump speed to start Lag Pump
 - b) Minimum Lag Pump speed to stop Lag Pump
 - c) Maximum Pump Speed
 - d) Minimum Pump Speed
- 3. Analog Scaling:
 - a. All analog values shall be adjusted (if necessary) prior to scaling for required offsets due to hardware / firmware conditions.
 - b. All analog input values shall be scaled into real world engineering units and presented in REAL (floating point) format for use by SCADA and the OI(s).
 - c. All analog output values shall be scaled from real world engineering units into INT (decimal) format to control current or voltage output from an analog output device.
- 4. Alarms General:
 - a. Common alarms: Provide all applicable alarms per device based on available P&ID inputs and outputs.
 - 1) Motor power or amperage alarms shall be disabled when the motor is not running.
 - 2) If a device is called to start or move and the associated run status does not confirm start or move after a time delay then post a device "Run fail" alarm. (*YNRFA).
 - 3) All equipment (as marked on P&ID drawings) shall have a non-running alarm. (*YNRNA)
 - 4) Not in Auto alarm: All devices (valves, gates, pumps) with auto switch monitoring shall have associated "Not in auto" alarms. (*HNAFA).
 - 5) Moisture / Temperature alarms: All submersible pumps shall have "Moisture" and "Over temperature" alarms. (*SMFA and *SOTFA)
 - 6) Seal Water Fail alarm: All sludge type pumps shall have

"Seal water fail" alarms. (*SWFA).

- 7) Pressure alarm: All sludge type pumps shall have "Inlet and Outlet pressure" alarms. (*IPFA and *OPFA).
- 8) Temperature alarm: All sludge type pumps shall have a pump body "Over Temp" alarm. (*OTFA).
- 9) Differential pressure alarm: All filters shall have "Differential pressure" alarms. (*DPFA)
- 10) Low oil alarm: All lubricated mechanical devices (gearboxes etc.) shall have a "Low oil" alarm. *LOFA)
- 11) Vibration alarm: All moving mechanical devices (gearboxes, aerators, pumps etc.) shall have a "Vibration" alarm. (*VFA).
- 12) Over torque alarm: All geared mechanical devices (clarifiers etc.) shall have an "Over torque" alarm. (*OTQFA)
- 13) VFD Fault: All VFDs shall have a common fault alarm as a minimum. Further breakdown of alarms shall be provided based on data available from the VFD. All VFDs shall have a manual reset available from the OI(s) and SCADA. (*UAFA).
- 14) Flow, level, pressure, analytical and other analog alarms: All analog values will have at a minimum an associated alarm structure as defined in section 2.03.A.4.b.5 below.
- 15) All digital alarm values will have at a minimum an associated alarm structure as defined in section 2.03.A.4.c.3 below.

b. Analog Alarms:

- 1) If an analog value is above/below the associated set point, and the associated time delay has exceeded the time delay set point, then the alarm shall be generated / annunciated.
- 2) Transducer out of range alarms. If the scaled value of the analog input exceeds 21 mA or falls below 3.5 mA, an out of range alarm shall be triggered for that input.
- 3) The alarm shall automatically reset unless a latch is required to keep the process from resuming and re-creating the alarm. A latching alarm requires either a reset set point for hysteresis or a manual reset.

16915-8

- 4) The low flow alarms (and pressure alarms if applicable) shall only be enabled when the associated pump or system is running.
 - a) Provide low flow alarm for pump operation where flow is expected above setpoint continuously when running. Alarm shall shutdown system and fail pump. If other pumps are available, they shall be called in its place.
- 5) Example analog alarm display structure (Units per alarm type). ENABLE / DISABLE shall be a toggle switch. DELAY to be editable timer base value for associated alarm delay timer. SET POINT column to contain current analog value in Transducer Fail Alarm row. Other alarm rows to contain editable alarm set point value with REAL (floating point) data type. LATCH to be either reset set point value for reset of alarm or manual reset toggle (blank if alarm is not latching).

<u>Description</u>	<u>Status</u>	<u>En / Dis</u>	<u>Delay</u>	<u>Set Point</u>	<u>Latch</u>
Transducer Fail Alarm	ALARM	Enable	10 sec.	28.4 GPM	Reset
High Alarm	OK	Enable	5 Sec.	xxx.x GPM	OK
High Warning	ALARM	Enable	5 Sec.	xxx.x GPM	
Low Warning	OK	Enable	5 Sec.	xxx.x GPM	xxx.x GPM
Low Alarm	OK	Disable	5 Sec.	xxx.x GPM	xxx.x GPM

c. Digital Alarms:

- 1) If the digital alarm state is TRUE and the associated time delay timer has exceeded the time delay set point, then the alarm shall be generated / annunciated.
- 2) The alarm shall automatically reset unless it is designated as "latch". A latching alarm requires a manual reset.
- 3) Example digital alarm Structure. ENABLE / DISABLE to be a toggle switch. DELAY to be editable timer base value for associated alarm delay timer. LATCH to be a manual reset toggle (blank if alarm is not latching).

<u>Description</u>	<u>Status</u>	<u>En / Dis</u>	<u>Delay</u>	<u>Latch</u>
Generic Digital Alarm 1	OK	Disable	10 sec.	
Generic Digital Alarm 2	ALARM	Enable	10 sec.	Reset

16915-9

d. Communications Alarm:

- 1) The SCADA and connected PLC(s) shall monitor for communications between controllers and they shall post an alarm if any PLC fails to respond to message queries.

5. Totalization:

a. Flow totalization (Example):

- 1) If an analog flow input value (Fxxxx) is positive, then increment the flow totalizers (FxxxxNRTOT, FxxxxRTOT and FxxxxTTOT) for each 1000 gallons of accumulated flow.
- 2) If internal flow reset status (FxxxxRST) is set, then set resettable flow totalizer (FxxxxRTOT) to zero and reset FxxxxRST.
- 3) Similar for all flowmeters / totalizers.

b. Hour Meters (Example):

- 1) If Generic Pump #1 running (PxxxxYNR) is set, then start hour timers PxxxxHRS, PxxxxRHRS and PxxxxTHRS.
- 2) If internal run time hours reset status (PxxxxRHRSRST) is set, then set resettable run time hours (PxxxxRHRS) to zero and reset PxxxxRHRSRST.
- 3) Similar for all device run time hours.

c. Starts Counters (Example):

- 1) If Generic Pump #1 running input (PxxxxYNR) is set or Generic Pump #1 start command (PxxxxXCS) is set (if running input is not available), then increment starts counters PxxxxS, PxxxxRS and PxxxxTS.
- 2) If internal starts reset status (PxxxxSRST) is set, then set resettable starts counter (PxxxxRS) to zero and reset PxxxxSRST.
- 3) Similar for all device starts.

d. Intrusion Alarms (Example):

- 1) Provide intrusion alarms for panels and buildings with intrusion switches.
- 2) Alarm shall be generated after an adjustable time delay

to SCADA.

- 3) If an OI or SCADA is present, then provide a way for an operator to reset and disable the intrusion alarm for a setpoint period of time.
- 4) After that time elapses, then the alarm shall be re-activated automatically.
- 5) If no SCADA or OI, then the alarm shall reset automatically once the condition is returned to normal state.

B. SPECIFIC REQUIREMENTS – SLS Pump Stations A and B Operation

1. To be further defined by System Integrator and submitted for review. Include all operations to provide a fully functioning system.
2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
3. Consists of programming function for the following:
 - a. SLS Pumps P101, P201, P301
 - b. SLS Pump stations A and B shall each have main and backup PLCs for station control. The main PLC shall assume control of the station at all times EXCEPT when the following conditions occur. At such times the backup PLC shall take control of the station.
 - 1) When there is greater than a setpoint percent difference in level between the primary and backup level transmitters for a setpoint delay time (with no level transmitter fail alarms active).
 - 2) If primary level transmitter generates a transmitter fail alarm the backup PLC shall immediately take station control.
 - 3) If backup level transmitter generates a transmitter fail alarm the main PLC shall retain station control regardless of difference between level transmitter values. High or low float sensor alarms shall override this condition.
 - 4) Where there is a high or low float sensor level alarm.
 - 5) A status bit shall be messaged between the main and backup PLCs continuously indicating which processor is controlling the station. All PLC outputs for the processor

NOT in control of the station shall be set to OFF. Status bit equals 0 indicates main PLC controls station. Status bit equals 1 indicates backup PLC controls station.

- c. SLS Pump stations A and B operate to maintain a constant level in their respective wetwells. Pumps station A delivers waste water to pump station B and pump station B delivers waste water to the water reclamation facility.
 - 1) Interlock individual pump operation with alarms:
 - a) SLS Pump fail to start
 - b) SLS Pump VFD fail
 - c) SLS Pump not in auto
 - d) SLS Pump high temperature
 - e) SLS Pump seal leak
 - f) SLS Pump motor high power lockout
 - g) 480VAC power fail
 - h) Discharge pressure high lockout
 - i) Discharge flow high lockout
 - j) Discharge flow low lockout
 - k) Wetwell level low lockout
 - l) Wetwell B level high lockout (locks out pump station A)
 - m) Water reclamation facility disable (locks out pump station B)
 - n) MV106 and MV107 closed
- d. SLS Pump Station Enable
 - a) Operator enable/disable is enabled.
 - b) Water Reclamation Facility Enable/Disable is enabled.
- e. Pump Start Sequence
 - 1) In automatic mode with no interlock alarms present, the SLS pumps will start based on level in the pump station

wetwell. The SLS pumps will start and stop as required to maintain a setpoint level in the pump station wetwell. Pumps will rotate operation based on setpoints selected by the operator.

- a) Start lead pump when wetwell level is greater than lead pump start level setpoint for delay setpoint time.
 - b) Start lag1 pump when calculated pump speed is greater than lag1 pump start speed setpoint for delay setpoint time.
 - c) Start lag2 pump when calculated pump speed is greater than lag2 pump start speed setpoint for delay setpoint time.
 - d) Stop lag2 pump when calculated pump speed is less than lag2 pump stop speed setpoint for delay setpoint time.
 - e) Stop lag1 pump when calculated pump speed is less than lag1 pump stop speed setpoint for delay setpoint time.
 - f) Stop lead pump when calculated pump speed is less than lead pump stop speed setpoint for delay setpoint time or wetwell level is less than stop lead pump level setpoint for delay setpoint time.
 - g) Provide algorithm for 3 pumps.
- 2) In manual mode the SLS pumps will start and stop based on calls from the SCADA manual start / stop switches. These switches are to be duplicated on all local operator interfaces.
- f. Pump Speed Calculation
- 1) Pump station shall maintain level utilizing a Z-curve algorithm to calculate pump speed. All operating pumps to run at same speed.
 - a) Provide minimum and maximum pump speed and level setpoints for Z-curve calculations.
- g. Wetwell Cleaning Cycle
- 1) SLS Pump station shall provide a wetwell cleaning cycle function. Station shall pump down to wetwell cleaning level setpoint based on setpoint elapsed pump runtime.

- a) Elapsed runtime setpoint shall be in hours.
- b) All level and flow based alarms shall be suspended during the cleaning cycle pump down of the wetwell. All alarms shall reactivate at the end of the cleaning cycle pump down.
- c) Start cleaning cycle pump down when pump runtime is greater than elapsed pump runtime setpoint since last cleaning cycle.
- d) End cleaning cycle when wetwell level is less than cleaning cycle stop level setpoint for delay setpoint time OR discharge flow is less than cleaning cycle low flow setpoint for delay setpoint time.
- e) Reset elapsed pump runtime counter after each cleaning cycle pump down ends.

C. SPECIFIC REQUIREMENTS – Odor Control Blower

- 1. To be further defined by System Integrator and submitted for review. Include all operations to provide a fully functioning system.
- 2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
- 3. Consists of programming function for the following:
 - a. Odor Control Blower B401
 - b. The odor control blower eliminates noxious odors from the pump station.
 - 1) Interlock blower operation with alarms:
 - a) Blower fail to start
 - b) Blower not in auto
 - c) 480VAC power fail
 - c. Blower start sequence:
 - 1) In automatic mode with no interlock alarms present, the odor control blower shall operate continuously to eliminate odors from the pump station wetwell.
 - a) Run odor control blower continuously.

- 2) In manual mode the odor control blower will start and stop based on calls from the SCADA manual start / stop switches. These switches are to be duplicated on all local operator interfaces.

D. SPECIFIC REQUIREMENTS – Primary Effluent Valves

1. To be further defined by System Integrator and submitted for review. Include all operations to provide a fully functioning system.
2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
3. Consists of programming function for the following:
 - a. Primary Effluent Valves MV106, MV107
 - b. The primary effluent valves control effluent flow from the pump station.
 - 1) Interlock valve operation with alarms:
 - a) 480VAC power fail
 - c. Valve open sequence:
 - 1) In automatic mode with no interlock alarms present, the primary effluent valves shall normally be open. The valves shall close when the pump station is disabled.
 - a) Open the primary effluent valves when the SLS pump station is enabled to operate.
 - b) Close the primary effluent valves when the SLS pump station is disabled.
 - 2) In manual mode the primary effluent valves will open and close based on calls from the SCADA manual open / close switches. These switches are to be duplicated on all local operator interfaces.

E. SPECIFIC REQUIREMENTS – Level Transmitters

1. To be further defined by System Integrator and submitted for review. Include all operations to provide a fully functioning system.
2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
3. Consists of programming function for the following:

- a. Level Transmitters LT051, LT053
- b. Level transmitters act a primary and backup level transmitters for the wetwell level.
- c. Primary level transmitter connected to main PLC. Backup level transmitter connected to backup PLC. Provide message function to communicate both levels to both PLCs at all times.

F. SPECIFIC REQUIREMENTS –Surge Tank Air Valve

- 1. To be further defined by System Integrator and submitted for review. Include all operations to provide a fully functioning system.
- 2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
- 3. Consists of programming function for the following:
 - a. Surge Tank Air Valve V045
 - b. The surge tank air valve allows air to enter the surge tank at pump station B.
 - 1) Interlock valve operation with alarms:
 - a) 480VAC power fail
 - c. Valve open sequence:
 - 1) In automatic mode with no interlock alarms present, the air tank surge valve shall control level in the surge tank. Valve shall open to increase air pressure in the tank and lower level.
 - a) Open the surge tank air valve when the surge tank level is greater than the air valve open level setpoint for delay setpoint time.
 - b) Close the surge tank air valve when the surge tank level is less than the air valve close level setpoint for delay setpoint time.
 - 2) In manual mode the surge tank air valve will open and close based on calls from the SCADA manual open / close switches. These switches are to be duplicated on all local operator interfaces.

G. SPECIFIC REQUIREMENTS – Bridge Sump Level Monitor

- 1. To be further defined by System Integrator and submitted for review.

16915-16

Include all operations to provide a fully functioning system.

2. Must comply with general requirements.
 - a. Provide time delays and time delay setpoints for all functions.
3. Consists of programming function for the following:
 - a. Bridge Sump Monitoring PLC
 - b. The sump level switch monitors level in the bridge collection sump.
 - c. Sump level monitoring.
 - 1) The sump level switch shall switch state with rising level in the bridge sump. Status of the switch will be reported to SCADA on a continuous basis.
 - a) Generate a high sump level alarm upon switching of sensor state if switched state is greater than delay setpoint time.
 - 2) Provide battery voltage value to SCADA on a continuous basis.
 - a) Generate battery voltage alarms per directive in programming general specifications.

2.04 OPERATOR INTERFACE (OI) and SCADA

A. Operator Interface

1. Full manual and automatic control interface to be provided on each OI. Group controls logically to provide intuitive navigation through display screens for operators.
2. Include all setpoints and controls on each OI to allow full station operation independent of SCADA.

B. SCADA

1. Provide SCADA display screens similar to existing screens for other associated facilities. Submit all new displays for review.
2. Include sufficient displays to incorporate all controls, statuses, alarms, setpoints and trends required for station operation.
3. Provide status and alarm indication of communications from SCADA to all PLC(s).

PART 3: EXECUTION

16915-17

3.01 WORKMANSHIP**3.02 SOFTWARE DEVELOPMENT**

- A. The programming, setup and configuration of the PLC & OI shall be done by the System Integrator.
- B. The PLC & OI shall be ready to be placed in operation at the time of Operational Testing.
- C. Do not enable or set any passwords on the PLC software or hardware for this project.
- D. Additional Programmer Labor Hours
 - 1. The Contractor shall include in his bid price an additional 32 hours of PLC/OI program configuration changes to be designated by the Engineer or Owner during testing and start-up.

3.03 MEDIUM

- A. Provide PLC & OI applications programs on USB Flash Drive media with each submittal. Clearly label drive with station name and contents. Flash drive shall contain the following:
 - 1. Application program, configuration and data tables.
 - 2. OI software with graphics and all support files.
 - 3. These disks and all copyrights shall become the property of the Owner, for its use on this and future projects.
- B. In addition, one USB Flash drive of the application PLC & OI programs shall remain on site in the control panel. All programs and files shall be updated each time the System Integrator modifies the PLC program.
- C. Provide two (2) copies of as-installed applications programs printed with standard laser print 8 1/2" x 11" paper at end of project. Insert new print-outs into the Operations and Maintenance manuals. Provide number of copies as specified in 16010 Operations and Maintenance Instructions.

3.04 FIELD ASSISTANCE

- A. Provide testing as specified in Electrical Specifications [Factory and Field Testing].

3.05 WARRANTY

- A. Troubleshoot and correct all program abnormalities, glitches and bugs uncovered during the warranty period. Provide phone and/or on-site support as required to correct problem(s).

- B. Software support which shall be provided by the System Integrator:
1. Free technical PLC / OI software and hardware configuration phone support for a period of one year. PLC / OI phone support shall be provided directly from the person(s) that configured the PLC / OI. Phone support shall be available between 8 a.m. and 4 p.m. Pacific Standard Time Monday through Friday.
 2. The System Integrator shall correct any PLC / OI software configuration error that is discovered within the warranty period, at no additional cost to Owner. Updated documentation for each "operation and maintenance" manual and new USB flash drives of updated software shall be provided for each correction.

**** END OF SECTION ****

THIS PAGE IS INTENTIONALLY BLANK

SECTION 16940

INSTRUMENTATION

PART 1: GENERAL

1.01 SCOPE OF WORK

- A. The major components in the instrumentation scope of work are:
 - 1. Furnish, configure, test, commission, and warrant instrumentation as shown in the P&IDs, plans, and/or listed in specification section.
 - 2. Include necessary piping, valves, pressure reducers, mounting brackets or flanges, supports, and anchors to complete installation.
 - 3. Provide sunshades for instrumentation for all instruments that are exposed to direct sunlight.
- B. System Integrator selection of instrumentation shall be per manufacturer's recommendation for the application and per specifications. If a manufacturer's recommendation or installation instructions are inconsistent with the Contract installation details or specifications, then the Contractor shall submit an RFI describing the inconsistency. If the inconsistency is due to substitution from the first named equipment, then the responsibility of coordination and any additional cost shall be borne by the Contractor.
- C. Projects that come into contact with drinking water: (NSF-61 certification)
 - 1. Furnish NSF/ANSI 61 certified products that have undergone testing for any device, valve, instrument, or assembly that will come into contact with drinking water.
 - 2. The certification determines what contaminants may migrate or leach from the product into drinking water and confirms if they are below the maximum levels allowed to be considered safe.
 - 3. Flowmeters, pressure transmitters, and chemical analyzers are a few of the products that may fall into this category requirement.
- D. Provide all devices, valves, tubing, fittings, wiring, terminal blocks, calibration consumables, initial calibration equipment, accessories, sunshades and enclosures as specified herein and as shown on Contract Drawings.
- E. The Contractor shall furnish all tools, calibration equipment, calibration materials, specialized parts and incidentals necessary to integrate the instrument to the application.
- F. Contractor shall furnish labor for installation, verification, start-up, calibration, testing and commissioning. Contractor shall prove proper function of instrument prior project completion.

16940-1

1.02 REFERENCES

- A. Electrical Specifications [Electrical General]
- B. Electrical Specifications [Factory and Field Testing]

1.03 SUBMITTALS AND DRAWINGS

- A. Submit shop documents and drawings for approval in accordance with this subsection and as specified in Electrical Specifications [Electrical General, Submittal Requirements].
- B. Submit Operating Instructions (O&M Manuals) for each instrumentation device prior to equipment installation.

1.04 OPERATING AND MAINTENANCE INFORMATION

- A. Provide operating instructions as specified in Electrical Specifications [Electrical General, Operating and Maintenance Instructions].

PART 2: PRODUCTS**2.01 QUALITY**

- A. Electrical Specifications [Electrical General, Quality].
- B. All equipment shall be designed and constructed so that in the event of a power interruption, the equipment specified hereunder shall resume normal operation without requiring a manual reset.
- C. Signal transmission from remote or field electric and electronic devices shall be 4-20 mA, sourced by a 24 VDC supply internal to the instrument or from a 24 VDC power supply located within the panel that is to receive the signal. Nonstandard transmission methods such as impulse duration, pulse rate, and voltage regulated will not be permitted except where specifically noted.
- D. Transmitters or devices located in Class 1, Division 1 hazardous areas shall be rated for hazardous location installations per NEC and UL. Explosion proof enclosures and raceways or current/spark limiting devices located inside or outside of the classified area shall be furnished to comply with code requirements.
- E. Outputs of equipment that are not of the standard signals as outlined, shall have the output immediately converted to 4-20 mA signals for remote transmission.

2.02 INSTRUMENT IDENTIFICATION

- A. All major instrumentation and equipment items or systems specified in this Division and/or on the P&IDs are identified by tag numbers. Tag field equipment with assigned instrumentation tag number and functional description.

16940-2

1. Tags shall be 1/2" stainless steel DYMO impressed tape with 3/16"(minimum) height characters.
 2. Metal tape embosser shall feature a built in hole punching device and scissor cutoff tool.
- B. Attach tags to equipment with a 4" long, 20-gage stainless steel wire leash for small devices, or two stainless steel screws for larger instruments; however, such permanent attachment shall not be on an ordinarily replaceable part or in an area that will be subject to unintended overuse fatigue. Make the tag plainly visible.

2.03 LEVEL COMPONENTS

A. Float Switch

1. Tilting float level switches shall be a mercury free float switch, whose specified weight is less than that of the process liquid displaced, to actuate switches as the level changes. The non-mercury hermetically sealed snap action switch is actuated by a steel ball rolling back and forth within a switching tube in plastic float housing. The SPDT switch shall be rated 16A at 250 VAC shall be integrally mounted in the float and connected to a control box by a PVC jacketed waterproof electric cable with three finely stranded No.17 conductors. The weight shall be integrally mounted so that no metals shall contact the process liquid. Tilting type level switch shall be MJK Model 7030, or equal.

B. Radar Level Transmitter:

1. The radar level transmitter shall utilize non-contacting radar signal reflection technology to provide level monitoring for up to 200 ft range.
2. The transmitter shall feature advanced echo processing algorithms that can be configured to ignore selected echos.
3. The level indicating transmitter (LIT) shall have the following features:
 - a. Rated for Class 1, Div. 2 hazardous atmospheres.
 - b. 6" Flange connection, 4" antenna cone, 8 degree beam angle with antenna extension as required to enter tank completely.
 - c. NEMA 4X / IP65 enclosure.
 - d. 2 wire 24 vdc loop powered, ground isolated, 4-20 mA output, max load of 750 ohm.
 - e. Integral 3 button keypad for configuring parameters.
 - f. Integral 1" x 3" (min) backlit LCD display.
 - g. Operating temperature range from -40 to 140 deg. F in full sunlight.
4. The calibration of the level transmitter shall be as shown in the instrument schedule.
5. Coordinate with Contractor for antenna length extension as required

such that it extends below installation pipe tube completely.

6. The radar level transmitter shall be Endress and Hauser Micropilot FMR240, or equal.

C. Ultrasonic Level Transmitter:

1. The ultrasonic level transmitter shall utilize non-contacting ultrasonic signal reflection technology to provide level monitoring for up to 50 ft range.
2. The transmitter shall feature advanced echo processing algorithms that can be configured to ignore selected echos.
3. The transmitter shall be capable of controlling two pumps in a lead/lag configuration or using outputs for high and low level alarm outputs.
4. The transducer level element (LE) shall have the following features:
 - a. Corrosion resistant plastic body, completely submergence rated.
 - b. Rated for Class 1, Div. 1 hazardous atmospheres.
 - c. Operating temperature of -40 to 200 deg F.
 - d. Beam angle (degrees) as required for the application and to avoid obstructions.
 - e. Beam range as required for the application.
5. The level indicating transmitter shall have the following features:
 - a. NEMA 4X / IP65 enclosure.
 - b. Ground isolated 4-20 mA output, max load of 750 ohm.
 - c. Two 5 amp at 120V AC, SPDT relays.
 - d. Integral 4 button keypad for configuring parameters.
 - e. Integral 1.5" x 4" (min) backlit LCD display.
 - f. Operating temperature range from -40 to 140 deg. F.
 - g. Provide transmitter with integral OCM flow curves for various open channel flumes and weirs with 1 or 2 ultrasonic sensors.
 - h. Flow totalization with pulse output.
6. The calibration of the level transmitter and cable length shall be as shown in the instrument schedule.
7. Provide one hand held or integral programming interface with each transmitter provided.
8. The ultrasonic level transmitter shall be Endress and Hauser Prosonic S FMU90, Siemens Hydromat 200, or equal.

2.04 PRESSURE COMPONENTS

A. Gauge, Absolute, or Differential Pressure Transmitter:

16940-4

1. The pressure indicating transmitter shall be a loop powered, two wire, 4-20 mA signal transmitting device with signal derived from the applied sensor pressure. Transmitter shall be capable of driving 0 to 500 ohm loads with 24 VDC supply.
 2. The transmitter shall have the following features:
 - a. Programmable 4-digit Liquid Crystal Display (LCD) process indicator.
 - b. HART programming with programming selections for square root extraction, output calibration, and adjustable dampening 0.0 to 36.0 seconds, minimum.
 - c. Integral microprocessor based circuitry with RFI filtering and shielding.
 - d. The transmitter shall have accuracy of +/- 0.1% of span over a range of minimum 10 to 1 turndown. Elevated zero setting capable of 0-30% upper calibration limit.
 - e. Operating temperature range shall be -40 to 185°F (minimum). Process wetted materials shall be compatible with fluid being measured with minimum hastalloy or ceramic diaphragm and 316 stainless steel wetted parts.
 - f. Process connection shall be as follows:
 - 1) Low solids content - 1/2" MNPT with calibration valve.
 - 2) High solids content - 1-1/2" or 2" flange with flushing ring and valve.
 - 3) And as required per installation detail.
 - g. The transmitter shall be scaled as shown in the instrument schedule.
 3. Provide mounting bracket per mounting requirements shown in Contract drawings.
 4. The gauge pressure transmitter shall be Endress and Hauser Cerabar M PMC 71, Rosemount Smart 3051, or equal.
- B. Calibration Valve:
1. Calibration valve for use with gauge transmitters shall have the following features:
 - a. Stainless steel body with integral blocking valve and calibration valve and port.

- b. Calibration port shall be 1/4" FNPT with 1/4" MNPT x 1/2" FNPT adapter.
 - c. Valve shall have a non-rotating stem tip and a fully backseated bonnet.
 - d. Process and transmitter connections shall be 1/2" MNPT. Include 1/2" stainless steel close nipple as required.
 - 2. Calibration valve shall be Hex HB59, Anderson Greenwood, or equal.
- C. Pressure Switch:
 - 1. Each pressure switch shall be SPDT rated minimum of 15 amps @ 120VAC. Pressure switch shall consist of a pressure sensing mechanism and the switch itself enclosed in a NEMA rated housing. Pressure switch shall be diaphragm type with stainless steel wetted parts and mechanical snap action switch. Switch shall have two setpoint adjustments (trip & reset setpoints) with setpoint indicator calibrated in engineering units. Pressure switch shall be UL listed. The pressure switch shall be Static-O-Ring 66 Series, Ashcroft B series; ASCO or equal.
- D. Pressure Gauge:
 - 1. The pressure gauge shall be 1% accurate with C-type bourdon tube. The bourdon tube, socket and connection tube of the gauge shall be 316 stainless steel. The case and bezel ring shall be constructed of type 304 stainless steel. The dial shall be 4" in diameter with a black pointer and a white gauge face with black print. The gauge shall be filled with liquid glycerin. A bottom mount process connection shall include a snubber as a separate component. The process connection shall be 1/2" stainless steel. The pressure gauge shall be Ametek gauge model 1550, Ashcroft 1009, or equal.
- E. Isolation Seal:
 - 1. Diaphragm Seal (316SS) -- shall be factory assembled and filled prior to shipment. The fill fluid shall be silicone oil and suitable for the application. The diaphragm seal shall be designed for continuous duty, and shall prevent loss of process fluid if pressure instrument is removed or fails. The diaphragm seal shall feature a flushing connection and flushing ball valve. The diaphragm materials shall be suitable for contact with the measurement liquid without corrosion. The body of the diaphragm seal shall all welded made of 316 stainless steel with removable diaphragm. Instrument connection shall be 1/2-inch NPT. Furnish Ashcroft diaphragm seal Type 203 or equal.

2.05 FLOW COMPONENTS

- A. Magnetic Flow Meter:

16940-6

1. The magnetic flow meter shall consist of a flow tube FE and a converter FIT, complete with interconnecting cables.
2. The magnetic flow meter shall be of the low frequency electromagnetic induction type and shall produce a DC pulse signal directly proportional and linear to the flow rate, with the duration not less than 100 milliseconds. Complete zero stability shall be an inherent characteristic of the metering system. Meters requiring field zero adjustment will not be acceptable. The meter accuracy shall not be affected by changes in fluid pressure, temperature, viscosity, or conductivity.
3. Accuracy
 - a. The maximum error of the complete metering system including flow element and flow indicating transmitter shall be 0.30% of actual flowrate (in specified units) and readout over the range of full scale velocity settings from 1 to 30 feet per second. Variations in temperature, voltage, and frequency within the ranges listed herein shall not affect the overall measuring accuracy.
 - b. The flow meter shall not require more than three diameters of straight pipe length from the center of the meter to upstream or downstream obstructions to obtain specified accuracies.
 - c. Lack of straight pipe or obstructions to straight length pipe requirements shall not cause overall flowmeter inaccuracies to exceed more 0.5% of actual flowrate over the range of full scale settings from 1 to 30 feet per second.
4. Flow Element (FE)
 - a. The flow element shall be based on a pipe spool with ANSI class 150 flange connections or be flangeless construction as required by mechanical drawings. Class 300 flanges shall be provided where shown or when the pressure and temperature of the process fluid exceeds the rating of a 150 lb flange. The flow element size shall be as shown in the mechanical drawings and listed in the Instrumentation Schedule. Flange type and bolt pattern shall be coordinated with the mechanical Contractor prior to submittal.
 - b. The flow element shall have Hastalloy C4 coil and grounding electrodes.
 - c. Stainless steel grounding rings shall be provided at both ends of the flow element for all flowmeter applications. Grounding rings shall be manufactured from stainless steel, 2 mm thickness with grounding tab for electrical wire connection, and fit within the flange bolt circle. Grounding ring shall be self centering within pipe.

16940-7

- d. The flow element internal liner material shall be Teflon, polyurethane or hard rubber, unless recommended otherwise by the manufacturer for the application and approved.
 - e. Nema rating as defined in the Instrumentation Schedule.
5. Flow Indicating Transmitter (FIT)
- a. The electronic flow indicating transmitter shall be mounted remotely from flow tube as shown on Contract drawings.
 - b. The electronic transmitter shall be provided in a NEMA rated enclosure per the Instrumentation Schedule.
 - c. The transmitter shall be interchangeable with all sizes of flow elements and shall be field replaceable (without replacing flow element) in the event of transmitter failure.
 - d. The transmitter shall be microprocessor controlled, utilizing digital signal processing with automatic zero correction to provide a linear 4-20 mA signal proportional to flow rate.
 - e. The transmitter shall incorporate a high impedance amplifier of 100,000 Megohms or greater, eliminating the need for electrode cleaning systems.
 - f. The transmitter shall contain a self test mode to allow the operator to manually simulate the output 4-20 mA signal to any value between 0% and 100% to check out any driven devices in the loop.
 - g. Rate indicator and totalizer: An alphanumeric LCD backlit display shall be provided to continuously display the flowrate and totalizer with units and all programming functions.
 - h. All programming configuration of the Flowmeter shall be completed through the transmitter's pushbutton interface. A communication device shall not be necessary to configure the flow transmitter.
 - i. PC based software shall be available and included for configuration and troubleshooting. Connection to flowmeter shall be via computer USB port and include interface cables as required.
 - j. The transmitter shall be designed for operation from a power source of 120 volts AC, with a power consumption of less than 20 watts. The flow element shall be powered from the transmitter.
 - k. The transmitter shall operate continuously without fault in an ambient temperature range from 14 to 140 °F. The flowmeter

shall be suitable for operation in direct sunlight without the use of a sunshade. If a sunshade becomes required after installation for any operational reason, one shall be furnished and installed free of charge.

- I. The following configurable parameters shall be provided at a minimum:

- 1) Field adjustable flow signal dampening.
- 2) Low flow cutoff (forces zero flow signal) between 0.0-5.0% of full scale rate.
- 3) Empty pipe detection (forces zero flow signal) if the pipe is not full.
- 4) Selection for forward/reverse/both flow directions.

6. Flow Indicating Transmitter (FIT) I/O Interface

7. If the flow indicating transmitter (FIT) is shown in the Contract drawings to be mounted remotely from the flow element (FE), the manufacturer shall provide all cabling between flow element and flow indicating transmitter.

8. All mounting hardware and/or devices necessary to complete the installation shall be provided by the manufacturer at no additional cost to the Owner.

9. The meter shall be hydraulically calibrated at a facility located in the United States and the calibration shall be traceable to the National Bureau of Standards. A certified copy of the calibration test results shall be submitted to the Owner prior to shipment of the meter.

10. The magnetic flowmeter shall be Endress and Hauser Promag W, Endress and Hauser Promag 53W, Rosemount 8705, or equal.

2.06 ANALYTICAL ELEMENTS

- A. Not used.

2.07 TEMPERATURE DEVICES

- A. Not used:

2.08 EVENT, STATE OR POSITION DEVICES

- A. Position Switch:

1. Door switch – door intrusion switch shall have a wide gap magnetic sensor with S.P.S.T. contacts mounted in an aluminum housing with integral jacketed cable for wiring to a junction box. Switch contacts

shall have 0.1A at 120VAC minimum capability. When attaching to a ferrous metal surface, space sensor components away from metal by minimum ¼" using plastic spacer in order to maintain magnetic gap. Intrusion door switches shall be Sentrol 151-6Z-12K or equal.

B. Smoke Detector:

1. General

- a. The smoke detector shall detect smoke produced by fire and signal an alarm system. The detector shall be housed in a flame retardant plastic housing and shall be unaffected by vibration. Detector shall be sealed against dirt, insects and back pressure
- b. Detector shall utilize photoelectronic sensor technology.
- c. The detector/base shall be 120V, four-wire operation with built-in Form A and Form C dry contacts. Form A contact shall be rated for 2.0A at 30VAC/DC. Form C contact shall be rated for 2.0A at 30VAC/DC and 1.0A at 120VAC.
- d. The detector shall have an operating temperature 32 to 120°F and an operating humidity of 10 to 93% relative humidity.
- e. The detector shall have built-in test switch (magnetic proximity actuation) and 360 degree view angle of built-in alarm LEDs.
- f. The detector shall be approved by UL and Factory Mutual and meet requirements of NFPA 72.

2. The fire alarm smoke detector shall be photoelectric type. The smoke detector shall be System Sensor 100 Series model 2151 with B114LP base, Gentex 8000 Series with 120VAC base, or equal.

2.09 INSTRUMENTATION SUN PROTECTION

B. Instrument Sunshade

1. Provide wall mount bracket or pole mounted sunshade where instruments are exposed to direct sunlight. Sunshades shall be fabricated from stainless steel with hinged rubber flap on front for viewing of displays and performing calibrations. Sunshade shall be custom manufactured for the instrument protected and sized such that there is 3" free space around sides and front of instrument.

2.10 INSTRUMENTATION SCHEDULE

- C. The Instrumentation Schedule spreadsheet (located at the end of this section) is intended to be a summary of instrumentation equipment required for this project. Not all instrumentation details are shown on the schedule. Some requirements may be shown in the Instrumentation Schedule such as

enclosure rating and instrument span that are not described in the specifications. Both are required for a complete specification.

- D. If an instrument is shown in the P&IDs or on the site plan, then the device shall be provided whether or not it is shown on the Instrumentation Schedule.

PART 3: EXECUTION

3.01 WORKMANSHIP

- A. Instrumentation work shall conform to workmanship standards specified in Electrical Specifications [Electrical General, Workmanship].
- B. The Contractor shall employ personnel who are skilled and experienced in the installation and connection of equipment defined in this section. Contractor qualifications are specified in Electrical Specifications [Electrical General].
- C. Verify that all equipment and materials fit properly.
- D. All instrumentation configuration, programming and calibration shall be completed prior to the start of field tests.
- E. Equipment without approved submittals shall not be installed.
- F. All equipment shall be properly stored indoors while awaiting installation. Protect installed equipment from construction debris or mishaps. The Contractor will replace any equipment that is not in new condition at the time of installation and/or start-up.
- G. Perform work to remedy non-compliant installations after inspection.

3.02 INSTALLATION

- A. Install and supply all products necessary to provide an operational instrumentation system. This shall include the following:
 - 1. Contract Drawings are intended to show the basic functional requirements of the instrumentation system. Insufficient detail does not relieve the Contractor from the responsibility to provide a complete and functioning system. If additional detail or clarification is required, the Contractor shall request such information prior to installation.
 - 2. Provide relays, signal converters, isolators, boosters, power conditioners, circuit cards, and other miscellaneous devices as required for the compatible and functional interface.
 - 3. Provide analog loop isolators where required to eliminate "ground loops."
 - 4. The instrumentation and accessory equipment shall be installed in accordance with the manufacturer's instructions and located as shown on the Drawings or as approved. When manufacturer's installation

literature specifies a particular location or orientation in a process line due to measurement accuracy considerations, the installation shall be in conformance with the manufacturer's instructions.

B. Instrument installation methods.

1. Install instruments at the location shown on the Plans or approved. Instruments enclosures shall be NEMA rated for the installed location.
2. Install level and plumb.
3. All instruments shall be provided with floor stands or wall brackets as shown in installation details or as required for functional installation.
4. Mounting stands shall be custom manufactured of aluminum channel with base plate unless otherwise noted in installation detail.
5. Mounting channels (unistrut), and spacers shall be galvanized steel above ground outdoors and stainless steel below ground (wetwell), unless otherwise noted in installation details.
6. All screws, bolts and anchors shall be stainless steel.

C. Wiring and raceway installation methods:

1. Terminal blocks shall be provided at all instrument cable junctions and all wires shall be identified at such junctions.
2. Instrumentation wiring shall be run without splices between instruments, terminal boxes, or panels.

D. Wiring, grounding, and shielding: The following practices shall be observed unless modified by manufacturer's standards.

1. Each electronic equipment chassis shall be grounded to power ground.
2. Shielded twisted pair, shielded triad, or manufacturer supplied cables only shall be used for analog signals and communications signals.
3. Drain wire of shielded cables used for analog inputs to the PLC shall be connected at the PLC unit only. Shield shall be isolated from ground at all other termination points including transmitters.
4. Drain wire of shielded cables used for analog outputs from the PLC shall be connected at signal receiving device only. Shield shall be isolated from ground at all other termination points.
5. If electrical interference noise is imposed on DC status and alarm signals, then they shall be re-routed or wire changed to shielded twisted pair cables.
6. Each shield drain wire which is not connected to ground shall be cut off

covered with a heat shrink insulating boot at cable jacket end. Shields shall be connected together at each transition from one cable to another for an effectively continuous shield circuit.

3.03 SUPPLIER SERVICES

- A. The Contractor shall be responsible for each supplier of equipment to provide the following minimum services for each type of instrument supplied. Each supplier shall provide a qualified instrumentation field technician to perform services listed herein. Contractor shall supply all calibration materials necessary to commission unit and shall not use any consumable materials that are intended to be furnished for the first period of use.
 - 1. Advise and instruct Contractor on proper installation requirements.
 - 2. Inspect, calibrate, test, and place equipment in operation. Calibrate instruments to values as shown in the instrument index or as noted herein. If instrument spans are required to change (within instrument range) during startup for process reasons, the Contractor shall change them as directed by the Engineer.
 - 3. Programmable devices shall be programmed and tested prior to startup. Programming shall be adjusted or changed as directed by the Engineer at any time prior to final acceptance.
 - 4. Perform testing in the presence of Engineer.
 - 5. Visit the project site as often as required and spend as much time as necessary to ensure accurate and operational instrumentation.
 - 6. Provide training as specified in FIELD ASSISTANCE.
- B. The Contractor shall coordinate with each supplier of instrumentation to confirm that primary elements are provided in a timely manner, meeting critical path scheduling. The Contractor shall coordinate process connection size, equipment size, and material type when applicable and oversee the installation, calibration, and acceptance testing.

3.04 FIELD ASSISTANCE

- A. The instrument supplier shall provide a minimum of one (1) hour of field training to instruct Owner's personnel in the use, operation, calibration, programming, and maintenance on each type of "field" instrument.

3.05 SPARE PARTS

- A. Provide spare parts as described in each products section herein and specified in Electrical Specifications [Electrical General, Spare Parts].
- B. Contractor shall supply all calibration materials necessary to commission unit and shall not use any consumable materials that are intended to be handed over to the Owner as defined in the instrument specifications.

3.06 WARRANTY

- A. Provide warranty as specified in Electrical Specifications [Electrical General, Warranty].

3.07 FINAL ACCEPTANCE

- A. Final Acceptance per Electrical Specifications [Electrical General].

END OF SECTION

16940 INSTRUMENTATION INDEX

DWG # P&ID	Tag No.	DESCRIPTION	Type	Specification Section	Min. NEMA Rating	Size	SP/ Range	Units	DWG. DET. Reference	Notes
Pump Station A										
10-I-01	FIT 10071	Flow Indicating Transmitter	Magnetic	16940-2.05 A	4X	16"	0-3000	GPM	FM/FLG	
10-I-01	LSH 10052	Level Switch	Float	16940-2.03 A	-	-	-	-	FLTS	100 Ft. Cable
10-I-01	LSL 10052	Level Switch	Float	16940-2.03 A	-	-	-	-	FLTS	100 Ft. Cable
10-I-01	LIT 10051	Level Indicating Transmitter	Sonic	16940-2.03 C	-	-	0-35	FT	ULS	100 Ft. Cable
10-I-01	LT 10053	Level Transmitter	Radar	16940-2.03 B	-	-	0-35	FT	ULS	100 Ft. Cable
10-I-01	PI 10061 A	Pressure Gauge	Gauge	16940-2.04 D	4	-	0-160	PSI	Pipe	Diaphragm Seal
10-I-01	PIT 10061	Pressure Indicating Transmitter	Gauge	16940-2.04 A	4X	-	0-150	PSI	PIT	Calibration Valve
10-I-01	PSH 10161	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
10-I-01	PSH 10261	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
10-I-01	PSH 10361	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
10-I-01	SS 10098	Smoke Detector	ION	16940-2.08 B	1	-	-	-	Ceiling	
10-I-01	ZS 10093 A	Intrusion Switch	Magnetic	16940-2.04 D	1	-	-	-	Door	
10-I-01	ZS 10093 B	Intrusion Switch	Magnetic	16940-2.04 D	1	-	-	-	Door	
10-I-01	ZS 10096 A	Intrusion Switch	Magnetic	16940-2.04 D	3R	-	-	-	Gate	
Pump Station B										
20-I-01	FIT 20071	Flow Indicating Transmitter	Magnetic	16940-2.05 A	4X	16"	0-3000	GPM	FM/FLG	
20-I-01	LSH 20052	Level Switch	Float	16940-2.03 A	-	-	-	-	FLTS	100 Ft. Cable
20-I-01	LSL 20052	Level Switch	Float	16940-2.03 A	-	-	-	-	FLTS	100 Ft. Cable
20-I-01	LIT 20051	Level Indicating Transmitter	Sonic	16940-2.03 C	-	-	0-35	FT	ULS	100 Ft. Cable
20-I-01	LT 20053	Level Transmitter	Radar	16940-2.03 B	-	-	0-35	FT	ULS	100 Ft. Cable
20-I-01	PI 20061 A	Pressure Gauge	Gauge	16940-2.04 D	4	-	0-160	PSI	Pipe	Diaphragm Seal
20-I-01	PIT 20061	Pressure Indicating Transmitter	Gauge	16940-2.04 A	4X	-	0-150	PSI	PIT	Calibration Valve
20-I-01	PSH 20161	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
20-I-01	PSH 20261	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
20-I-01	PSH 20361	Pressure Switch	Diaphragm	16940-2.04 C	4X	-	20-200	PSI	Pipe	
20-I-01	LIT 20455	Level Indicating Transmitter		Surge Tank						Furnished with Surge Tank
20-I-01	PIT 20461	Pressure Indicating Transmitter		Surge Tank						Furnished with Surge Tank
20-I-01	PIT 20462	Pressure Indicating Transmitter		Surge Tank						Furnished with Surge Tank
20-I-01	SS 20098	Smoke Detector	ION	16940-2.08 B	1	-	-	-	Ceiling	
20-I-01	ZS 20093 A	Intrusion Switch	Magnetic	16940-2.04 D	1	-	-	-	Door	
20-I-01	ZS 20093 B	Intrusion Switch	Magnetic	16940-2.04 D	1	-	-	-	Door	
20-I-01	ZS 20096 A	Intrusion Switch	Magnetic	16940-2.04 D	3R	-	-	-	Gate	
Bridge Crossing										
05-I-01	LSH 05151	Level Switch	Float	16940-2.03 A	-	-	-	-	FLTS	100 Ft. Cable